






KIP 940 Parts Manual


Version 1.1




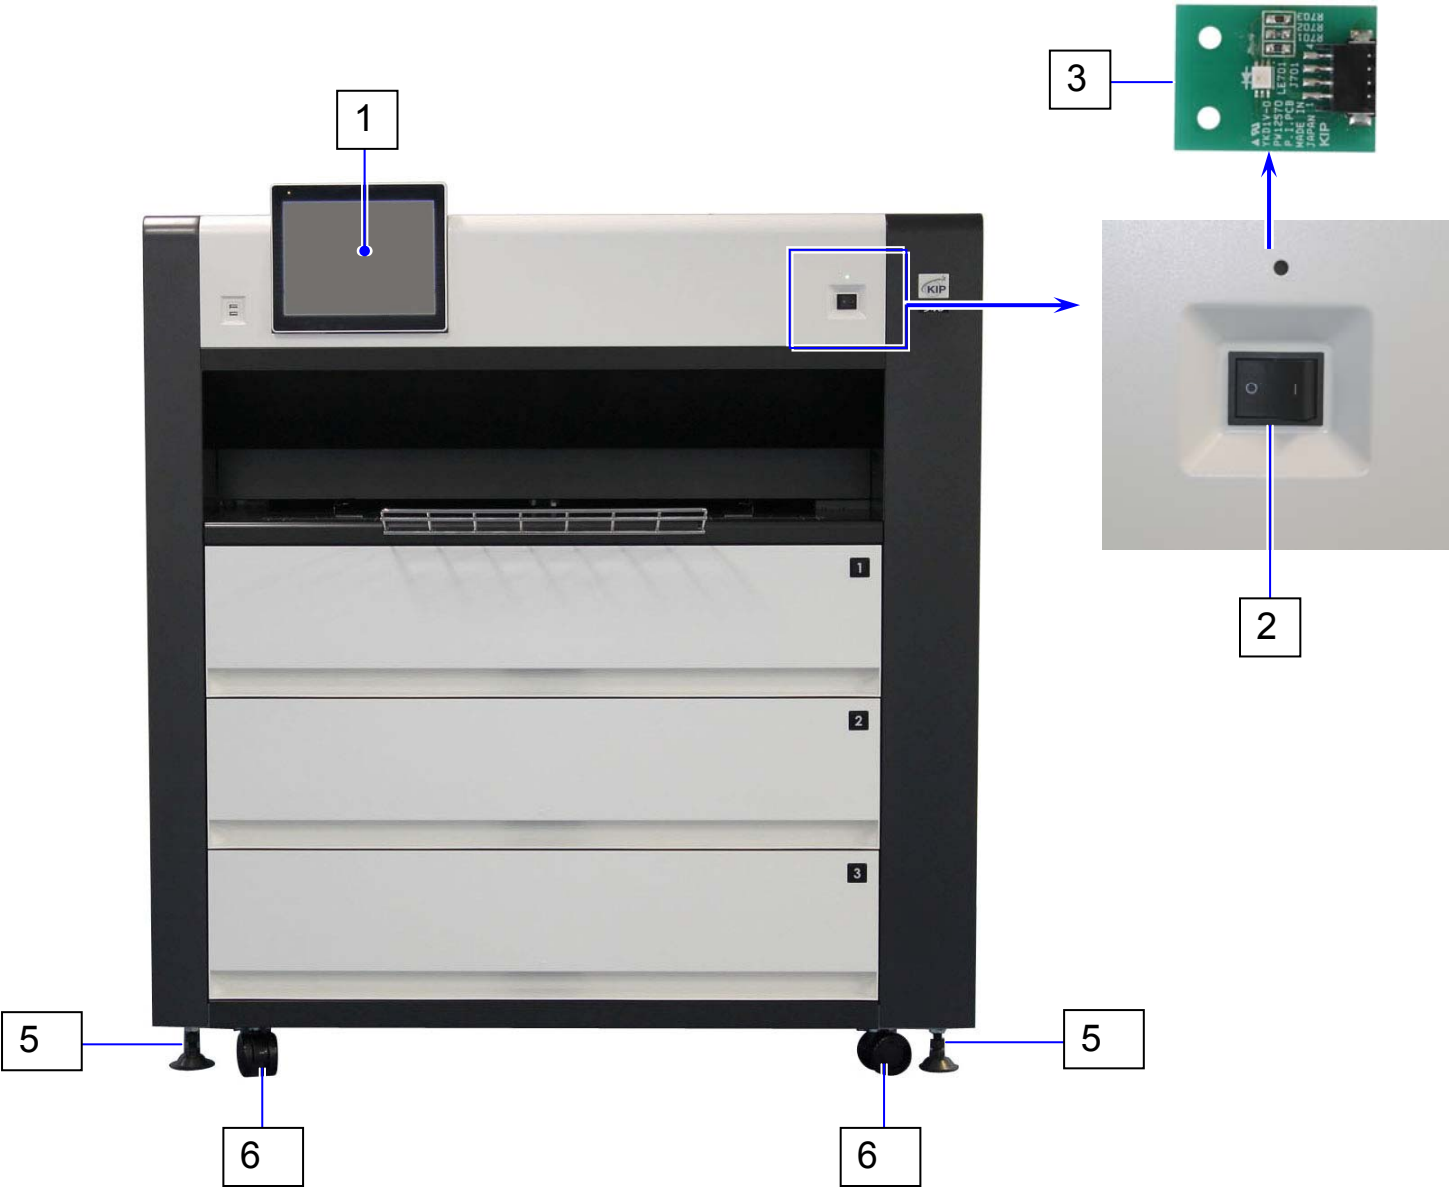


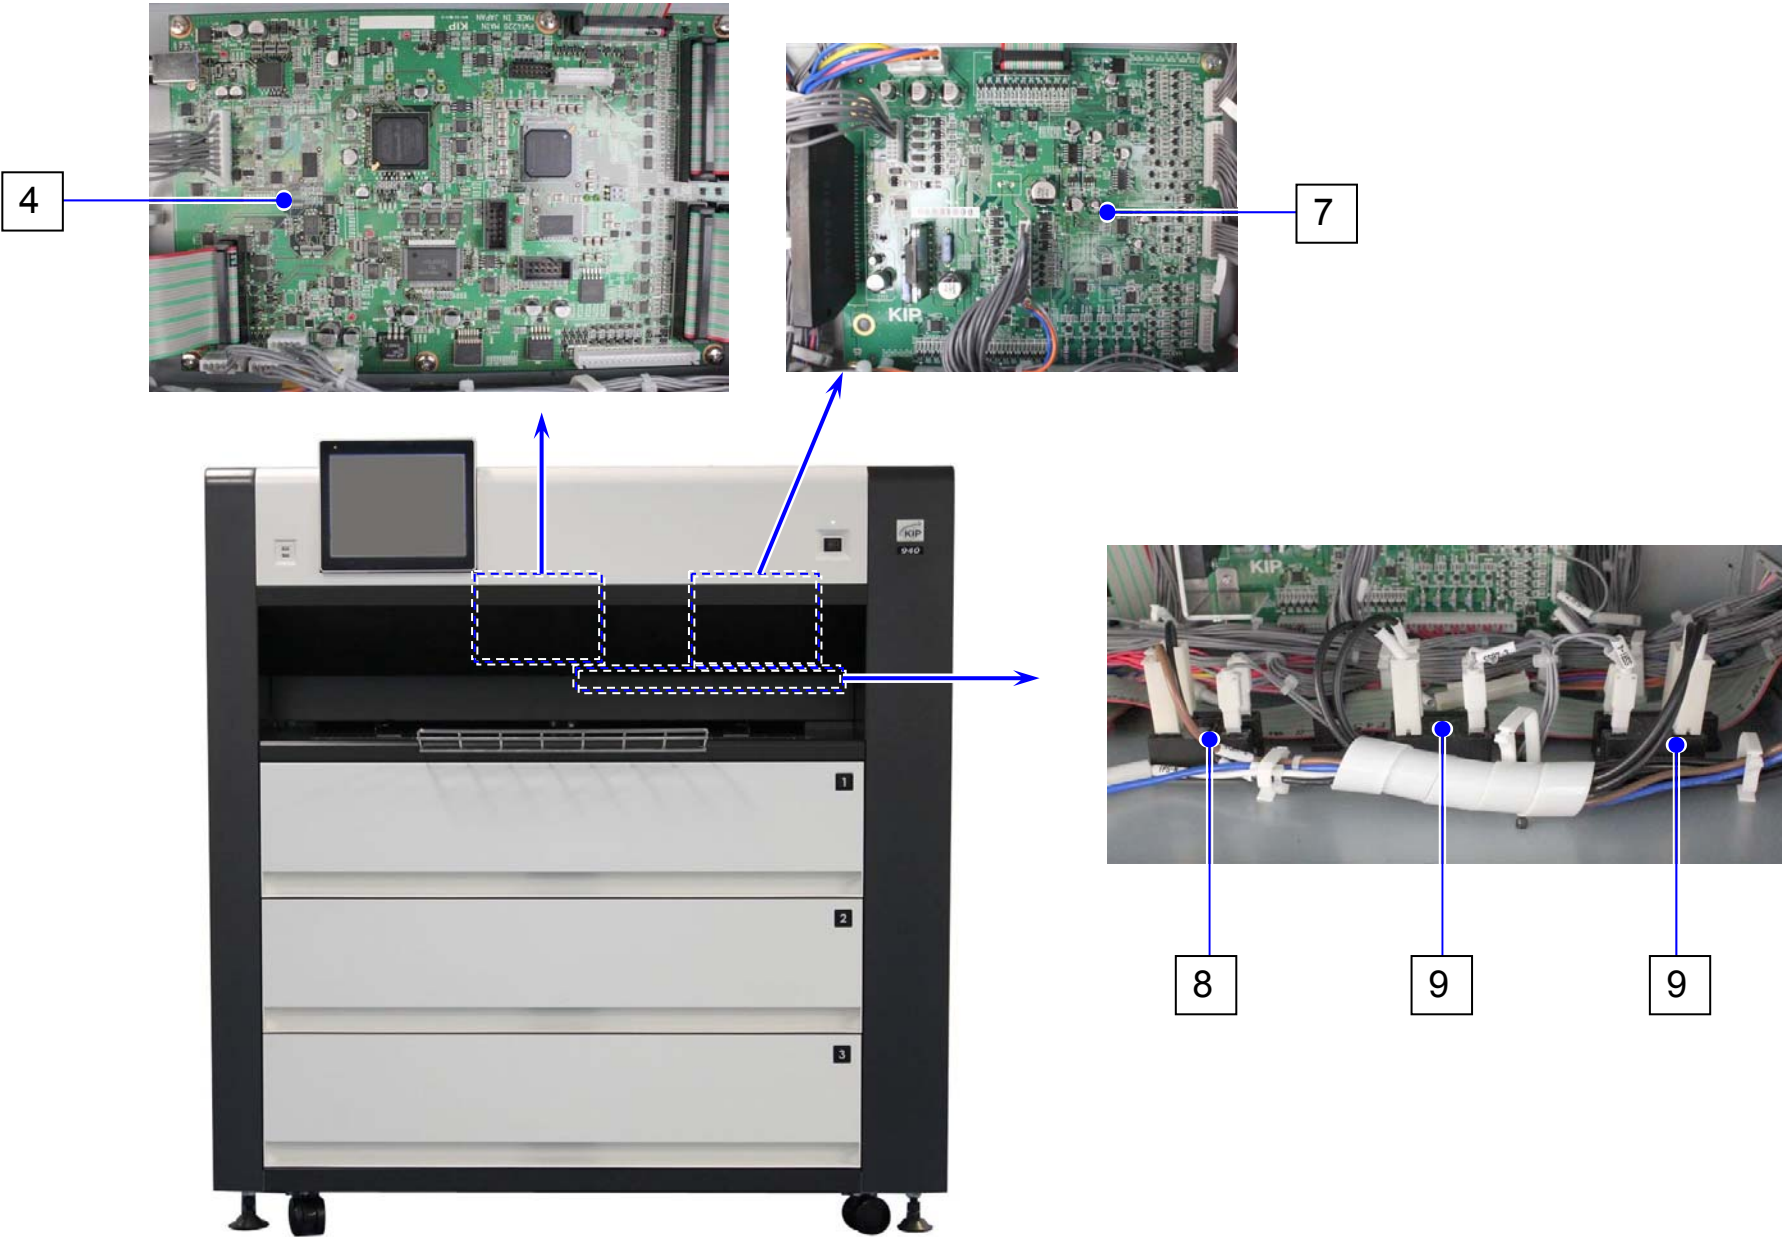



Item		Part Number	Part Description	Type	Qty	SP
1		Z346500010	12.1INCH LCD UNIT WITH TOUCH	12.1 Inch	1	B
2		9000310229	POWER SWITCH	AJ8S701BBC	1	C
3		Z256260100	INDICATOR PCB ASSY	PW12570	1	C
4	*	Z426260011	MAIN CONTROL PCB ASSY	PW14220	1	D
5		Z251000190	ADJUSTER		4	D
6		Z251000150	CASTER		4	D
7		Z256260050	FUSER DRIVE PCB ASSY	PW12556	1	B
8		9000400026	SOLID STATE RELAY (AQJ112V)	AQJ112V	1	C
9		9000400024	SOLID STATE RELAY (AQJ426V)	AQJ426V	2	C

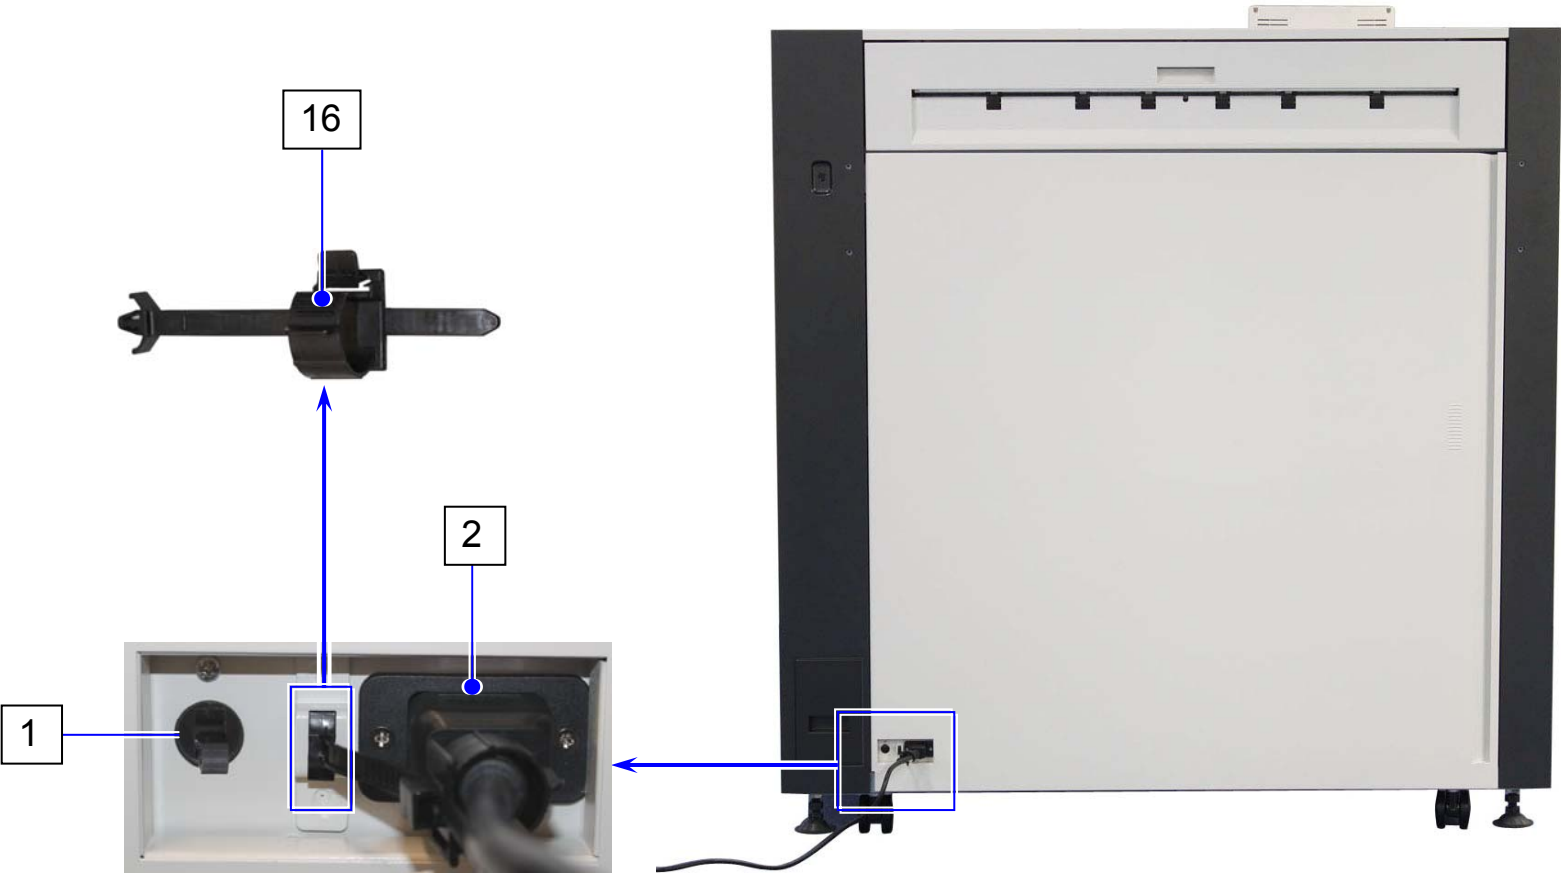


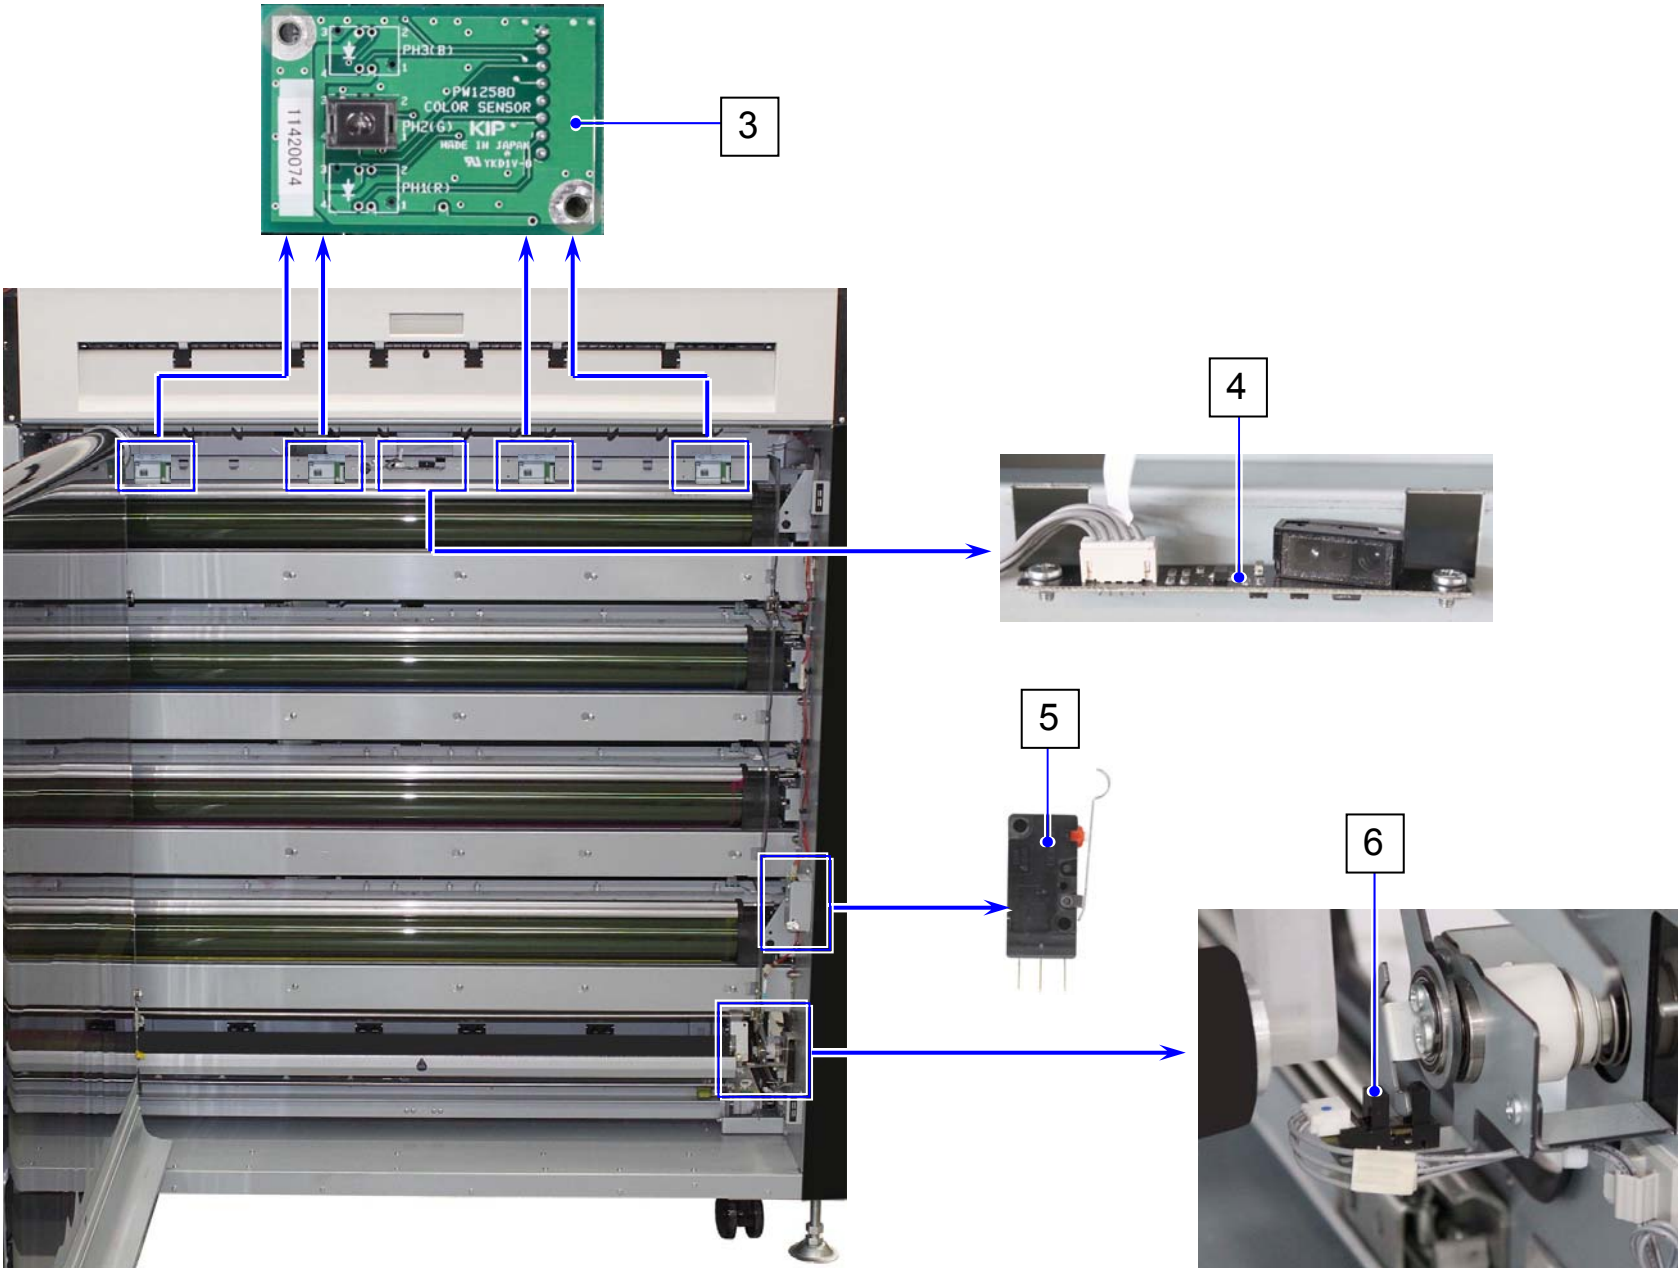

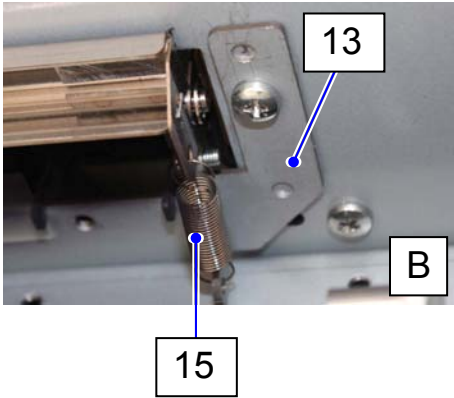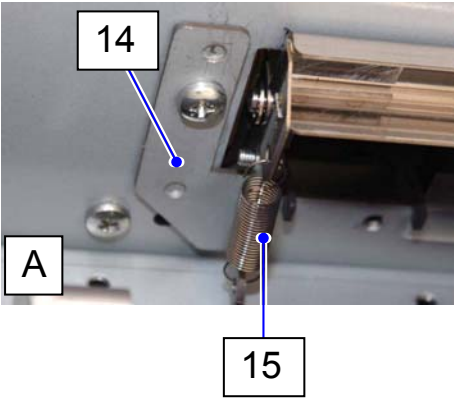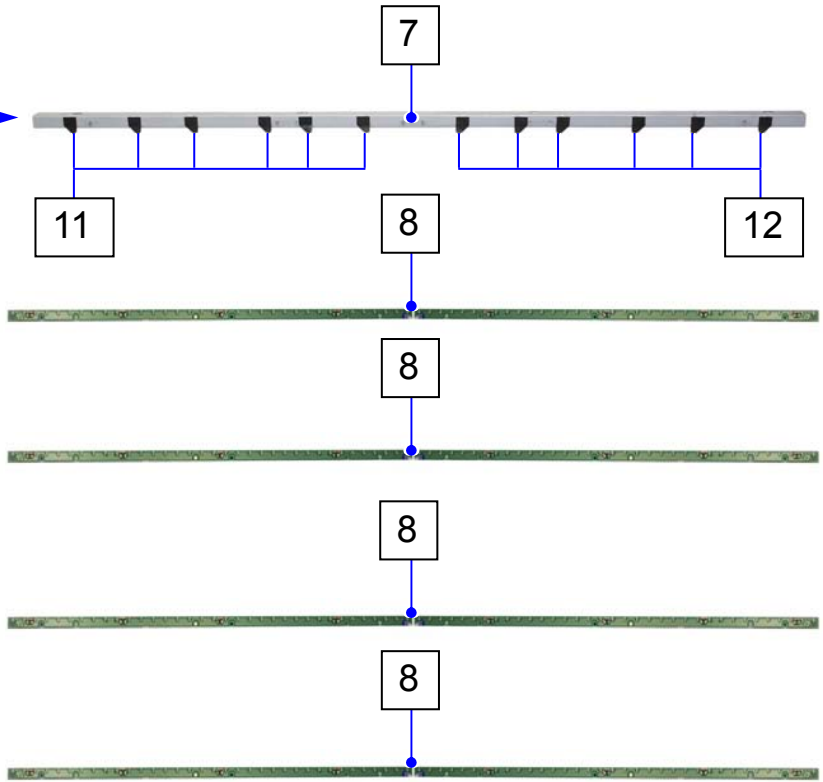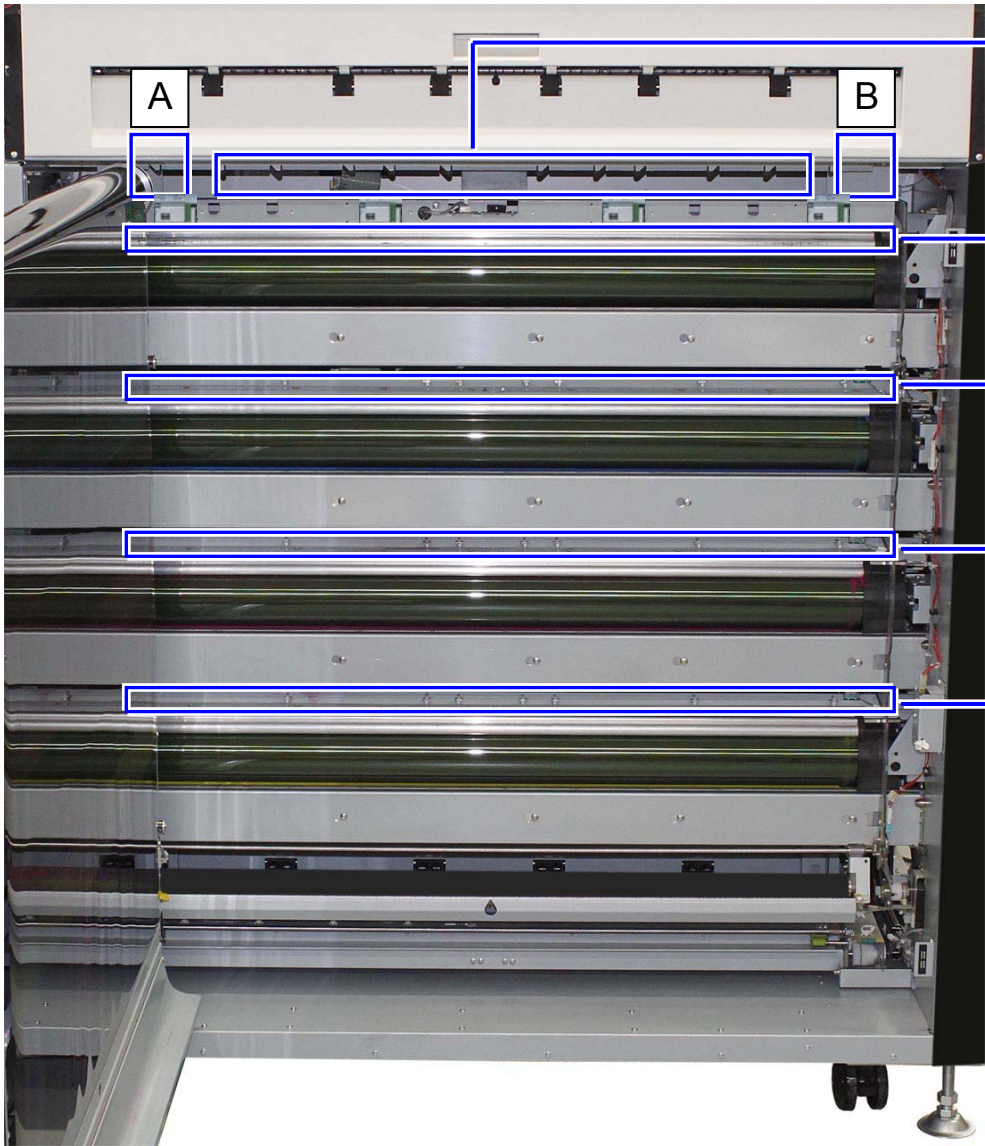


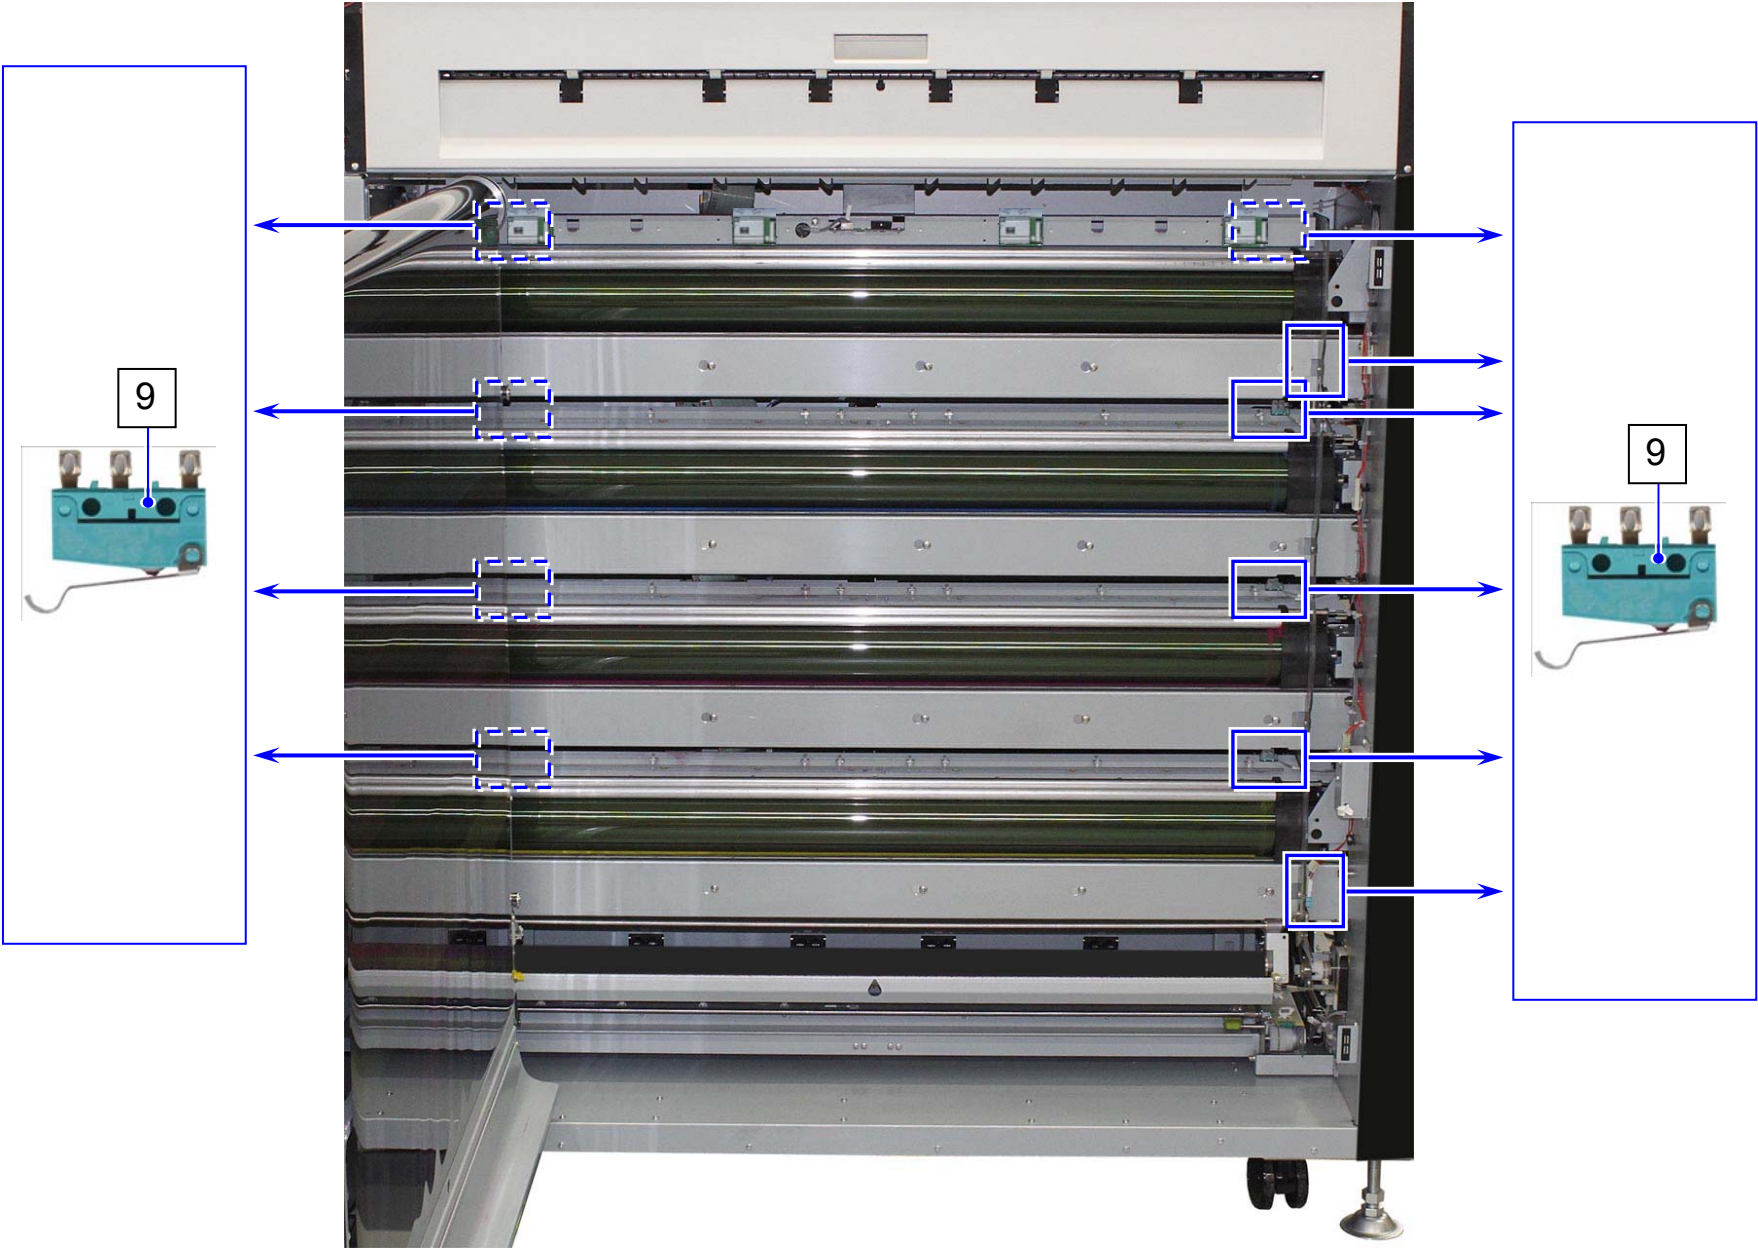


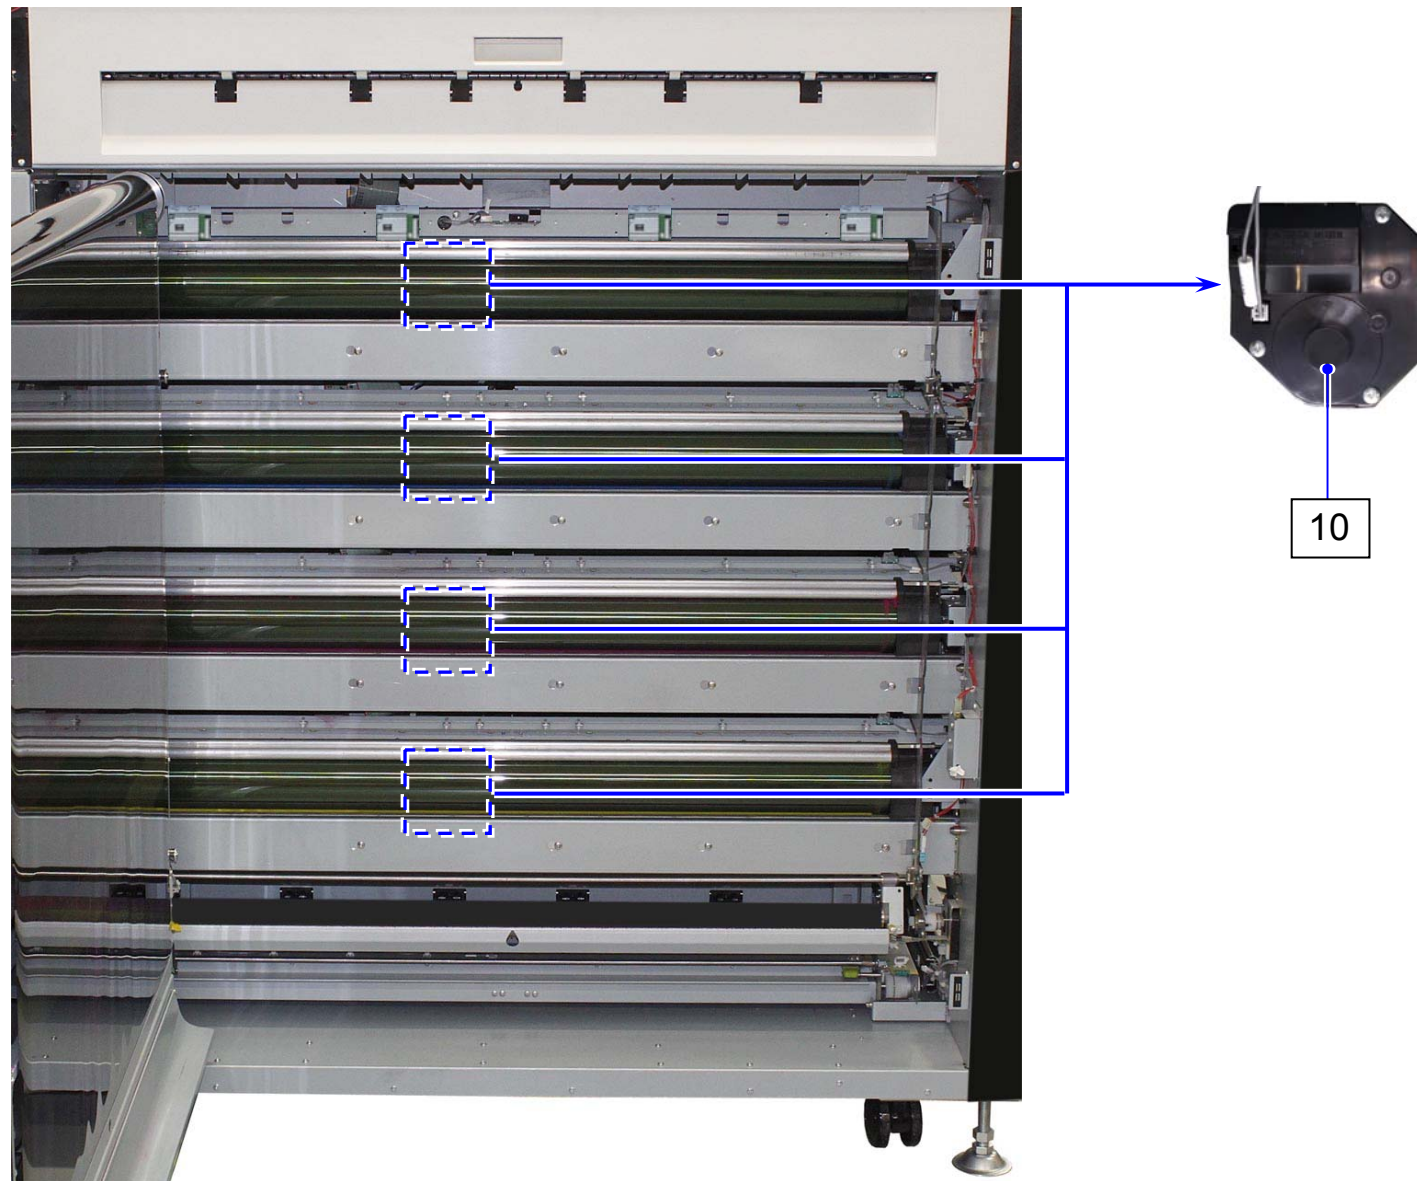


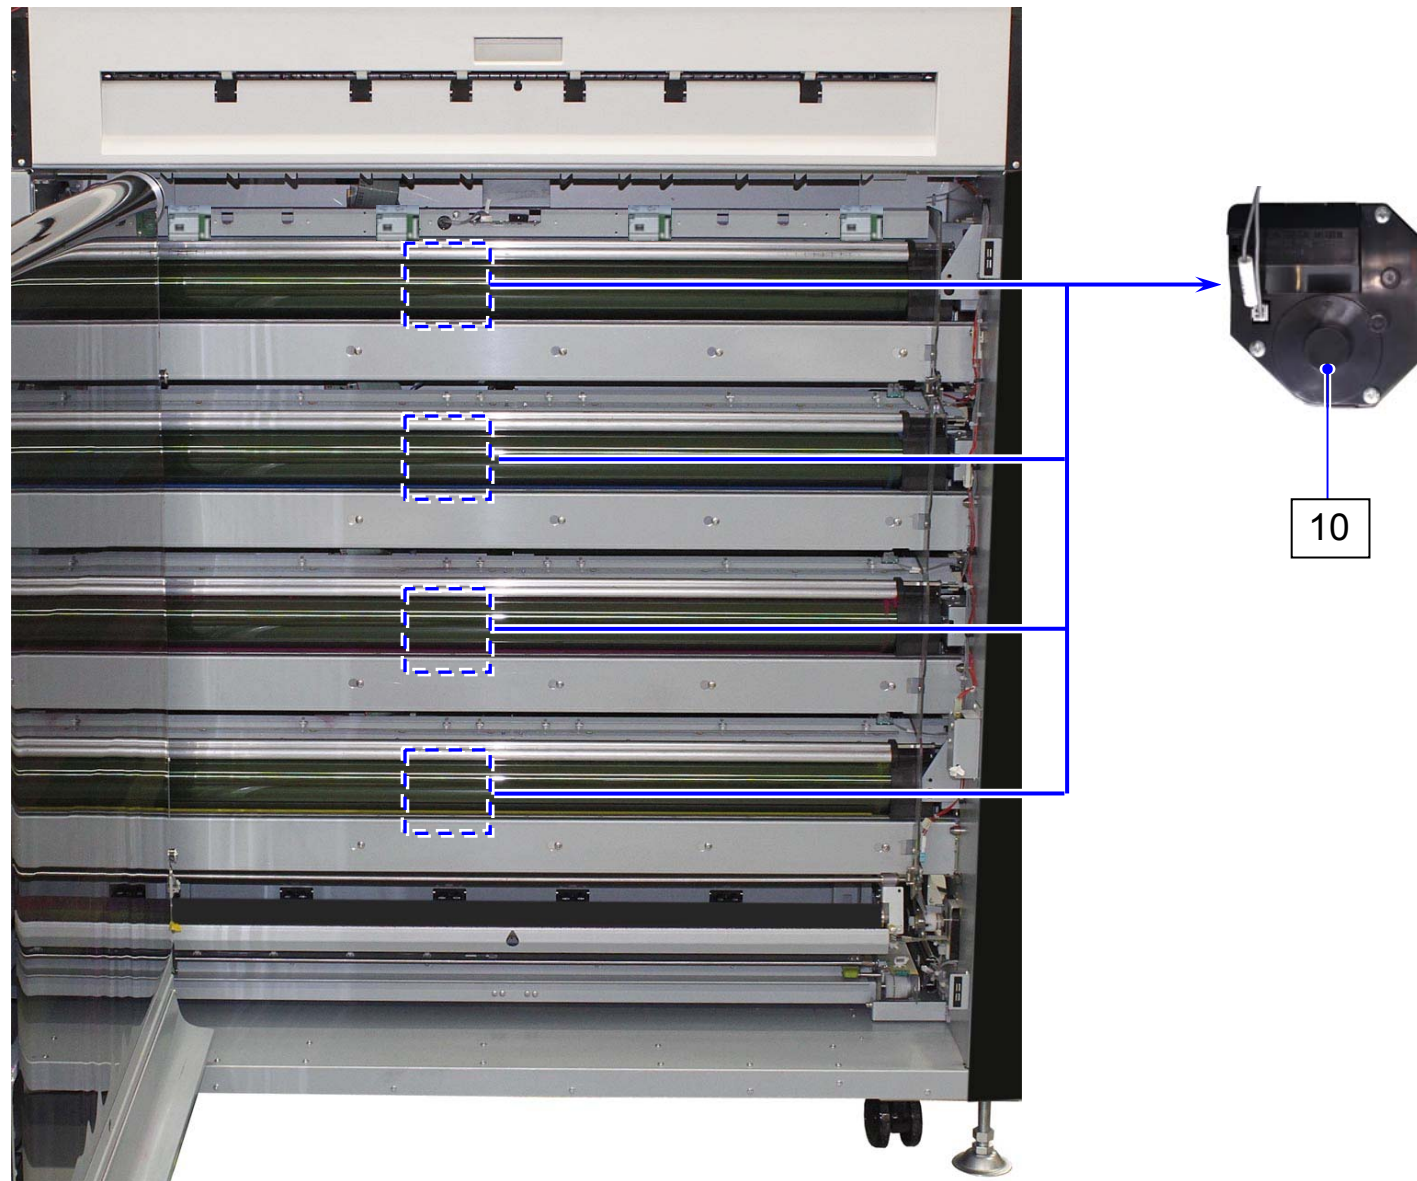



Item	Part Number	Part Description	Type	Qty	SP
1	9000360070	CIRCUIT PROTECTOR	CP32VM/20	1	C
2	Z036160010	INLET ASSY		1	D
3	Z256260090	COLOR SENSOR PCB ASSY	PW12580	4	B
4	Z076160030	SENSOR ASSY	GP2TC2	1	B
5	9000310208	SWITCH	D2VW-5L3-1HS-191	1	C
6	9000101103	SENSOR (LG248NL1)	LG248NL1	1	B
7	Z251120200	SEPARATE GUIDE		1	C
8	Z256260081	ERS PCB ASSY	PW10730	4	C
9	9000310221	MICRO SWITCH	ABS111441	10	C
10	9000380122	MOTOR LIFT	MA-D04-003	4	C
11	Z251101690	SEPALATE MYLAR R		6	C
12	Z251101700	SEPALATE MYLAR L		6	C
13	Z421100090	GUIDE BRACKET		1	D
14	Z421100100	GUIDE BRACKET 2		1	D
15	Z251101830	GUIDE SPRING		2	D
16	9000450645	A.C.CORD CLAMP	ACCD86AS	1	C

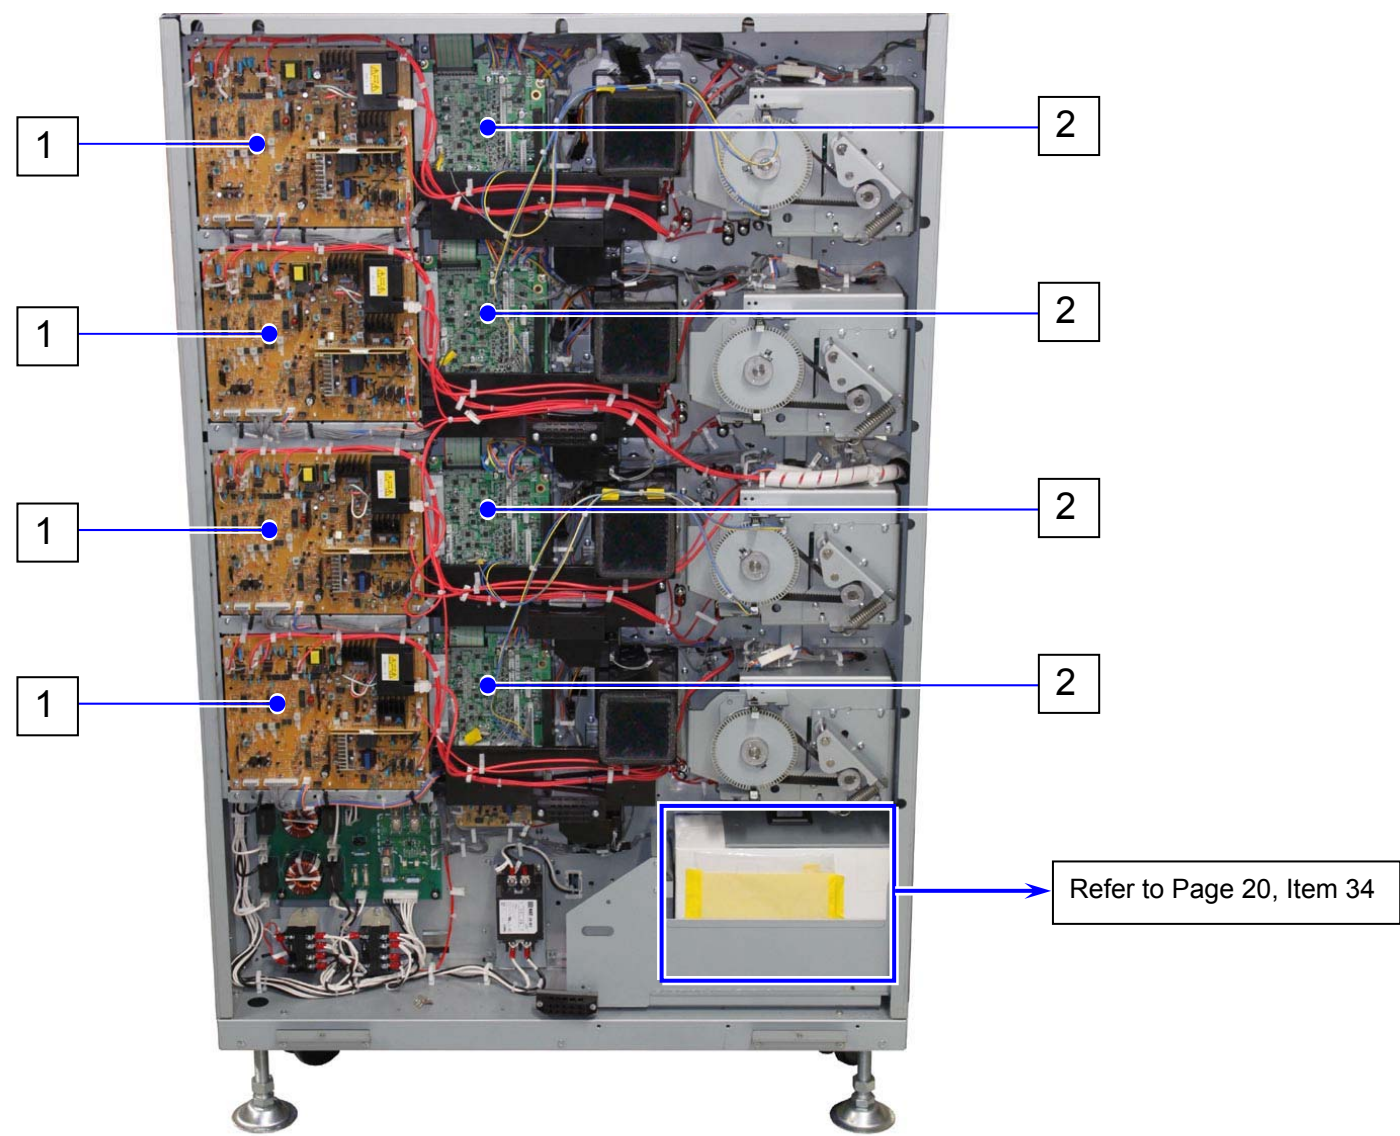

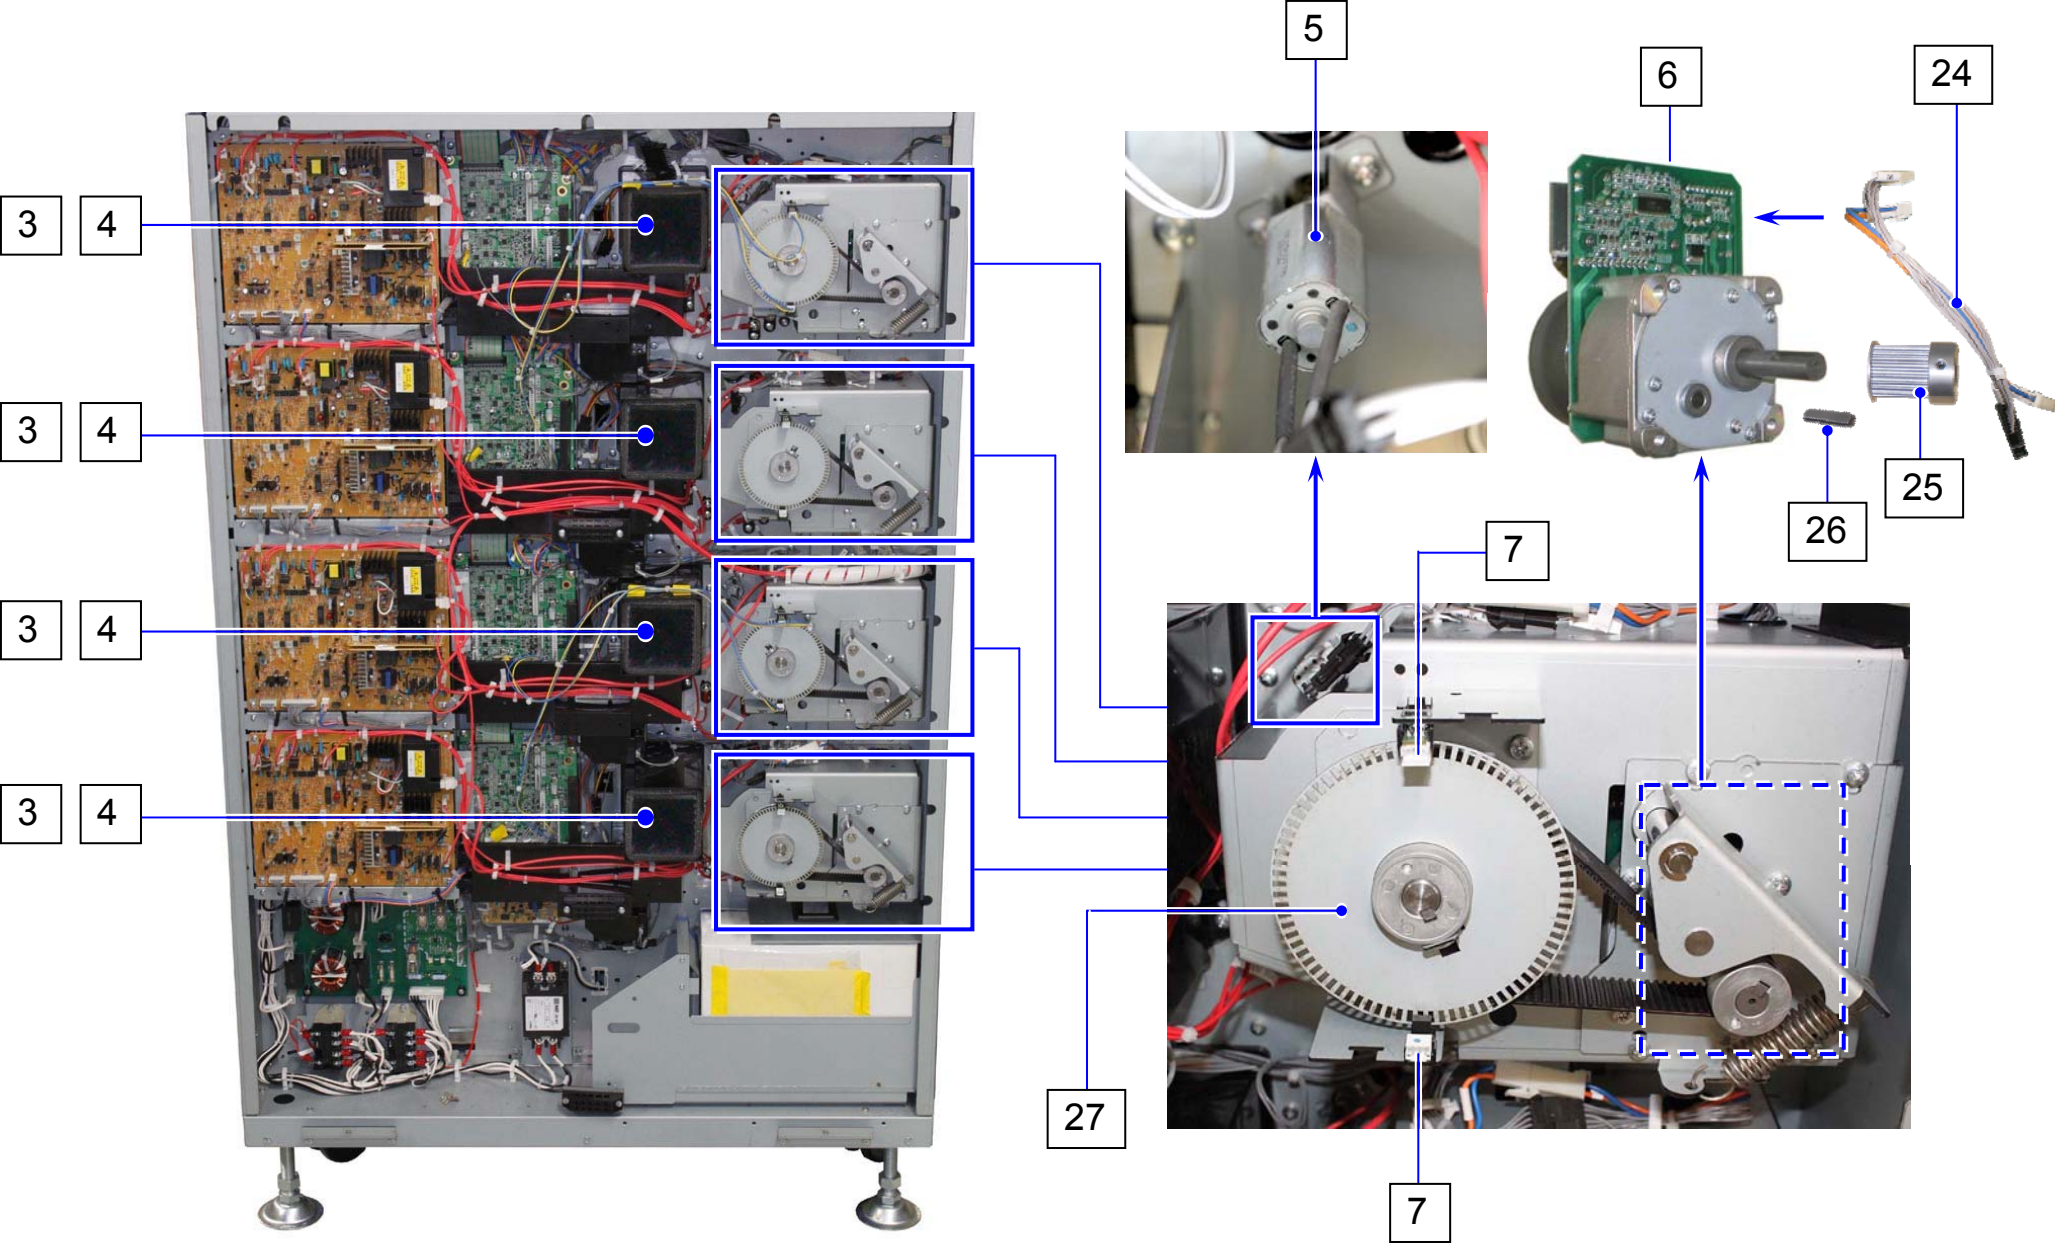

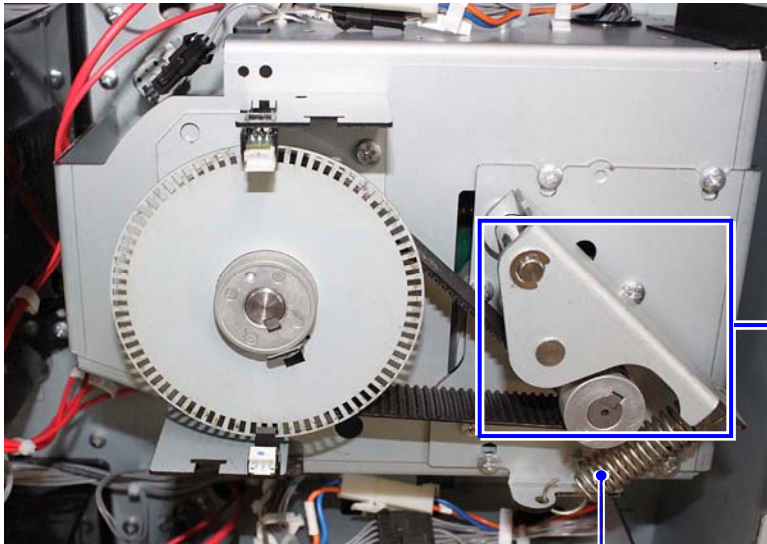


23

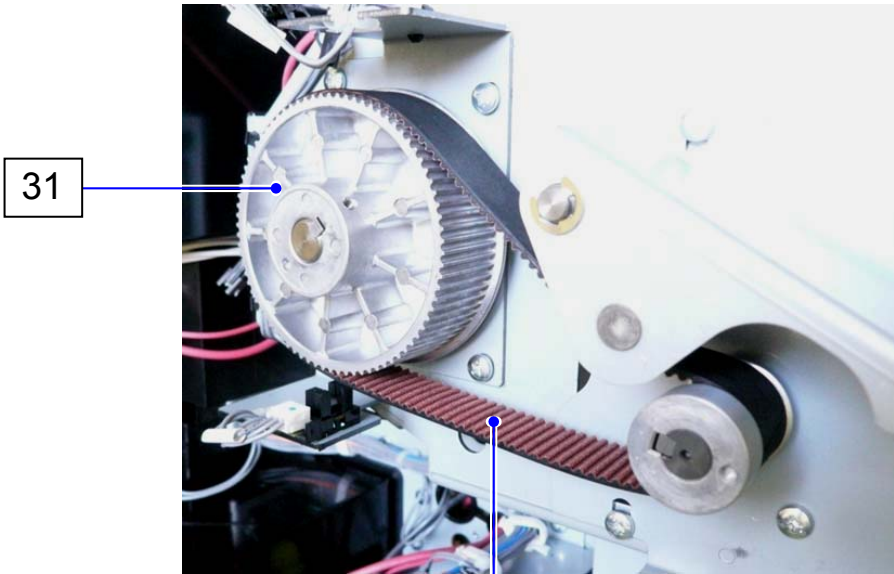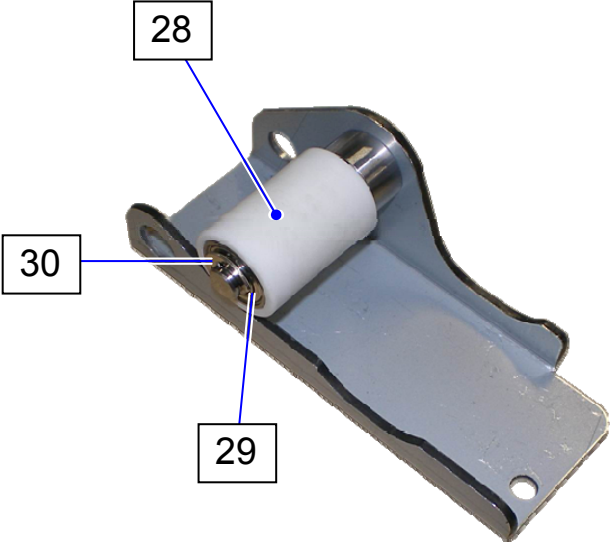

31


22

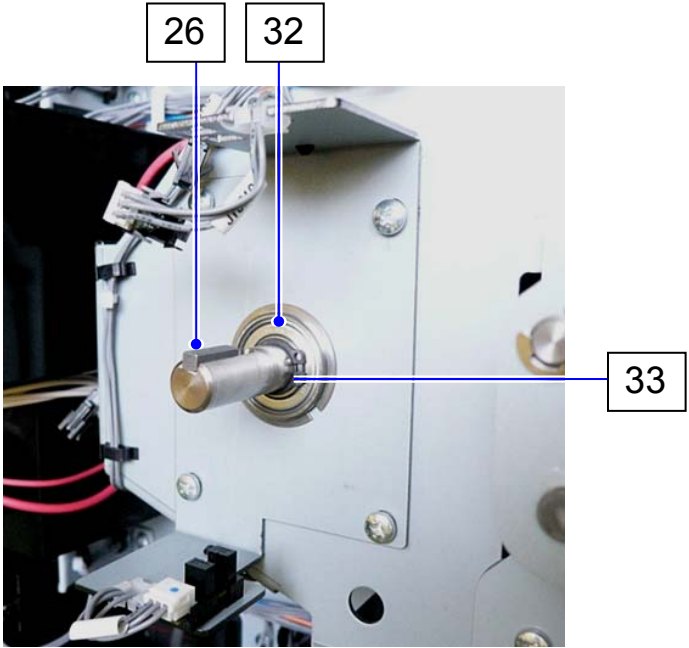



26

32


33

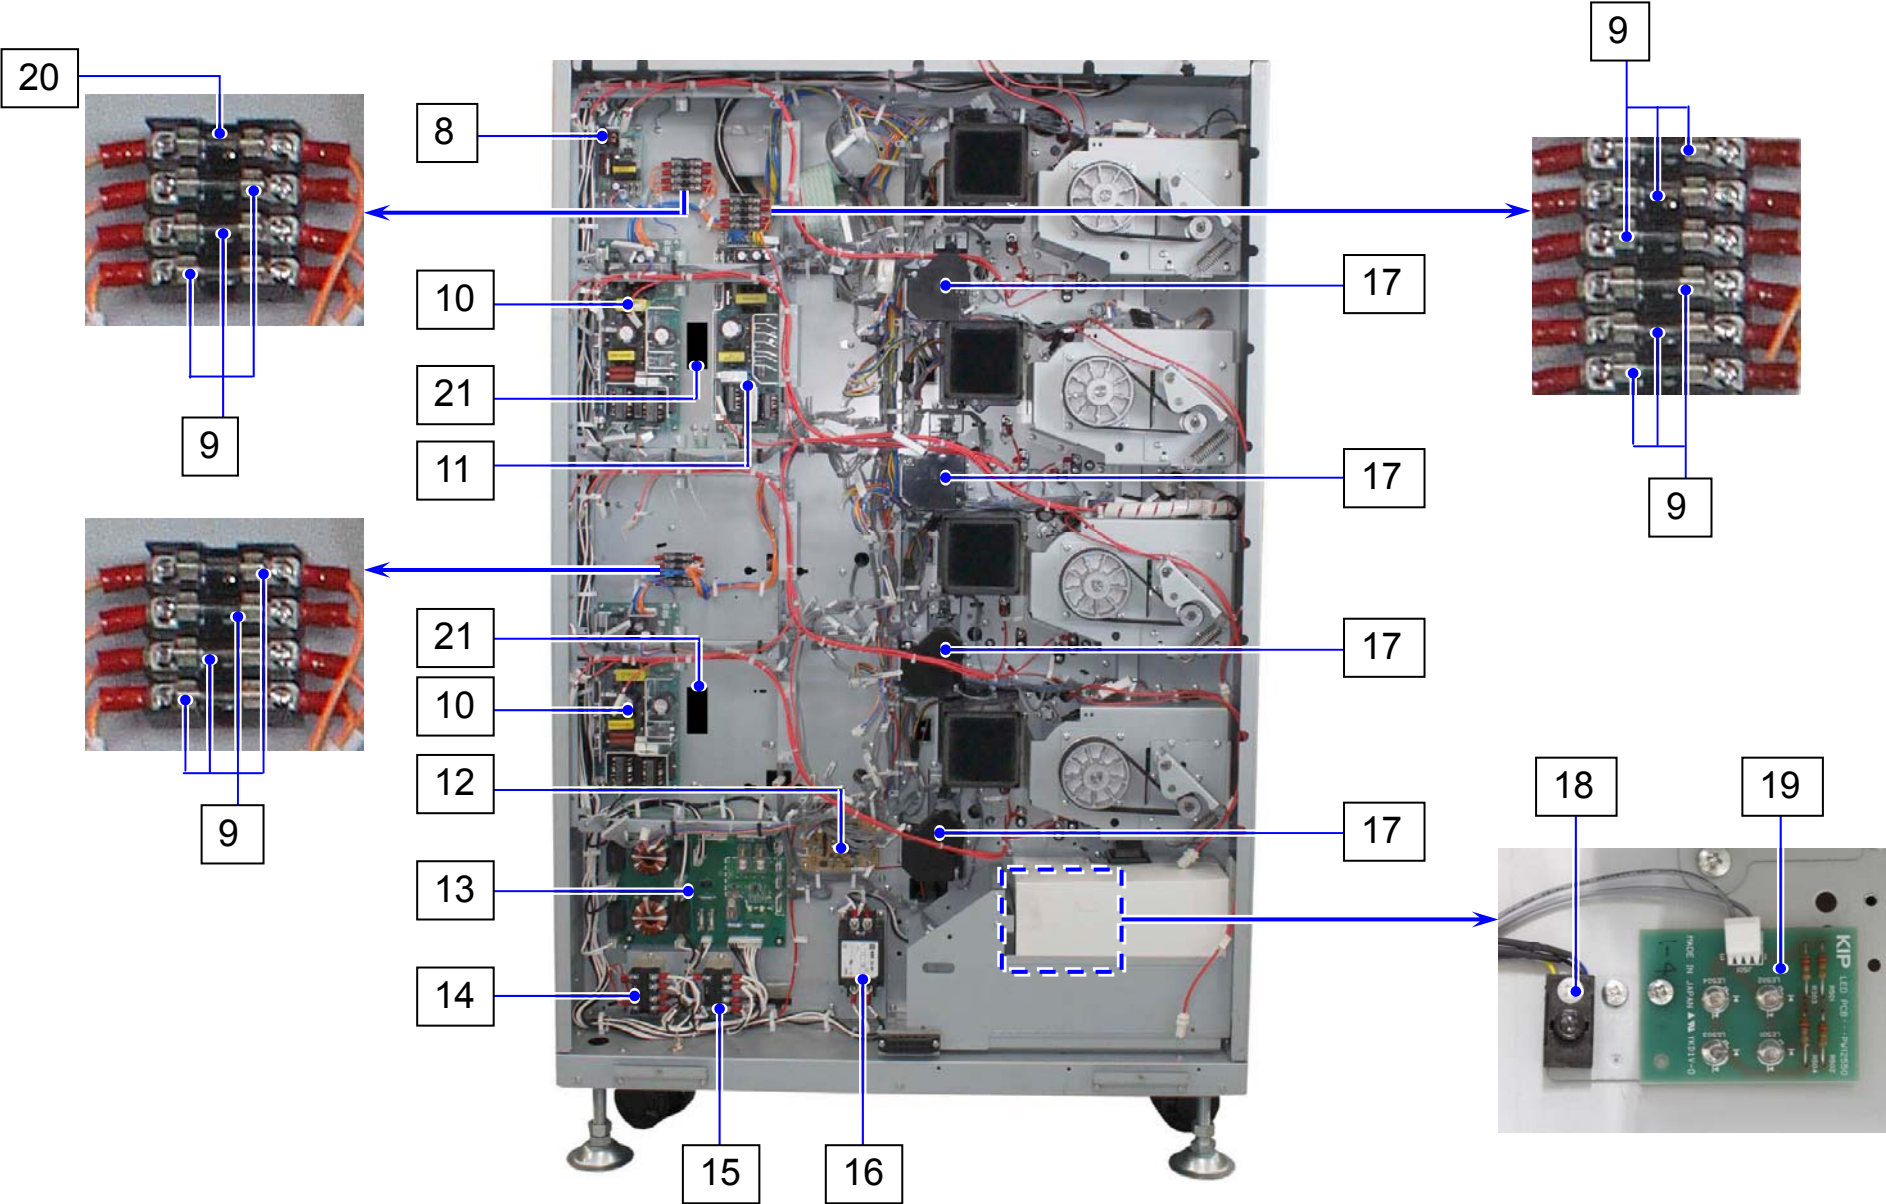

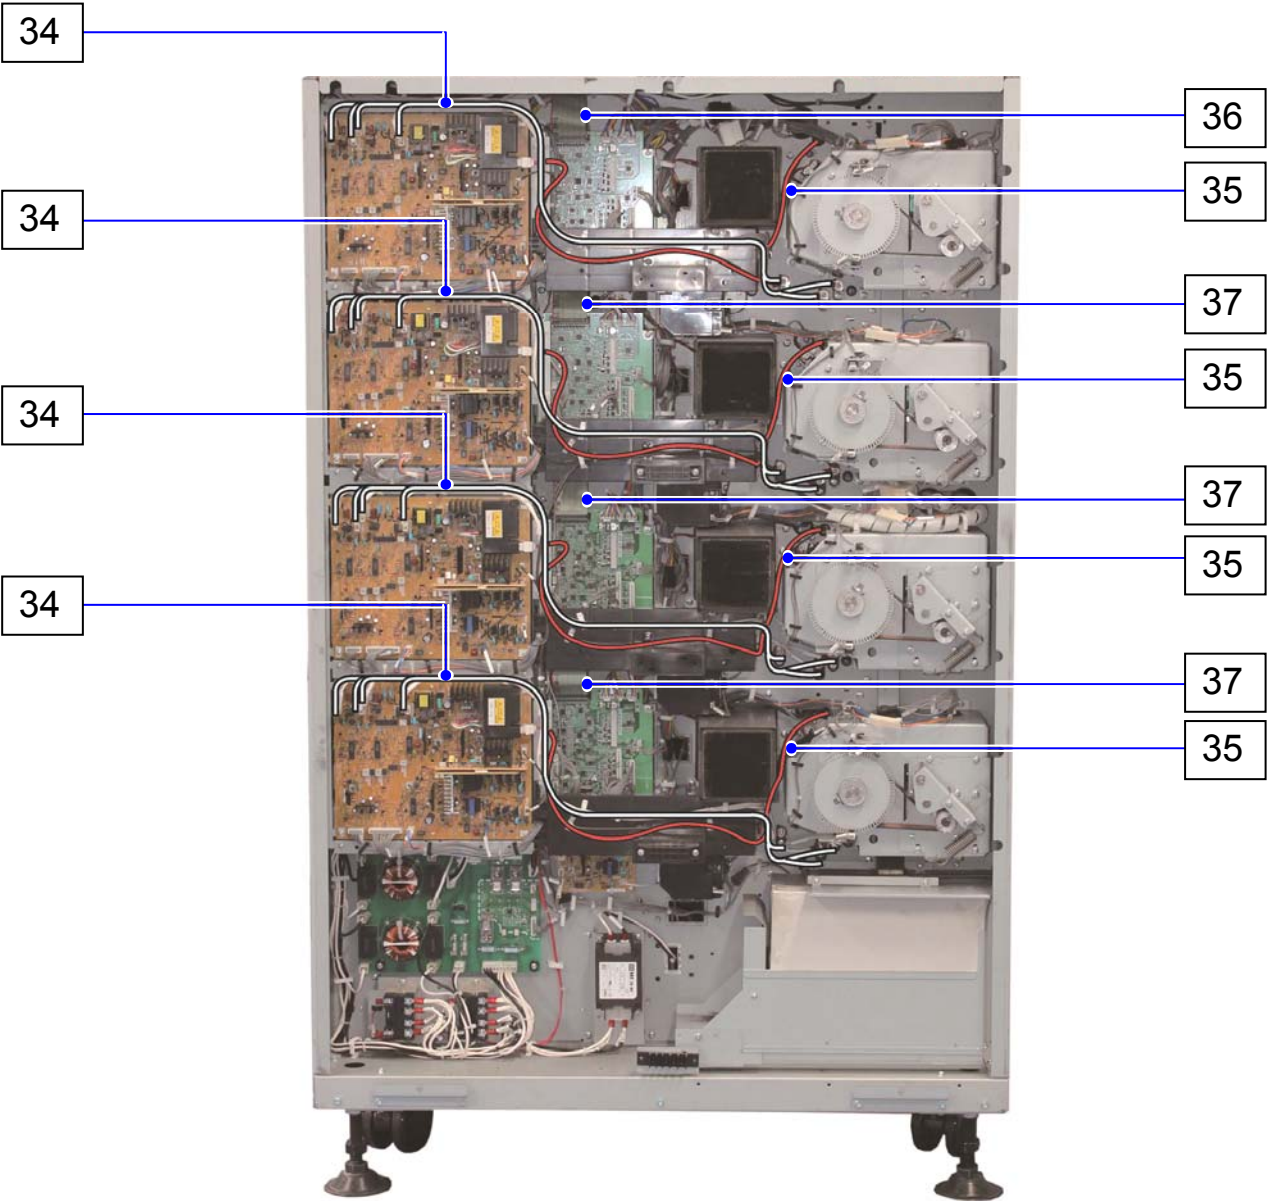

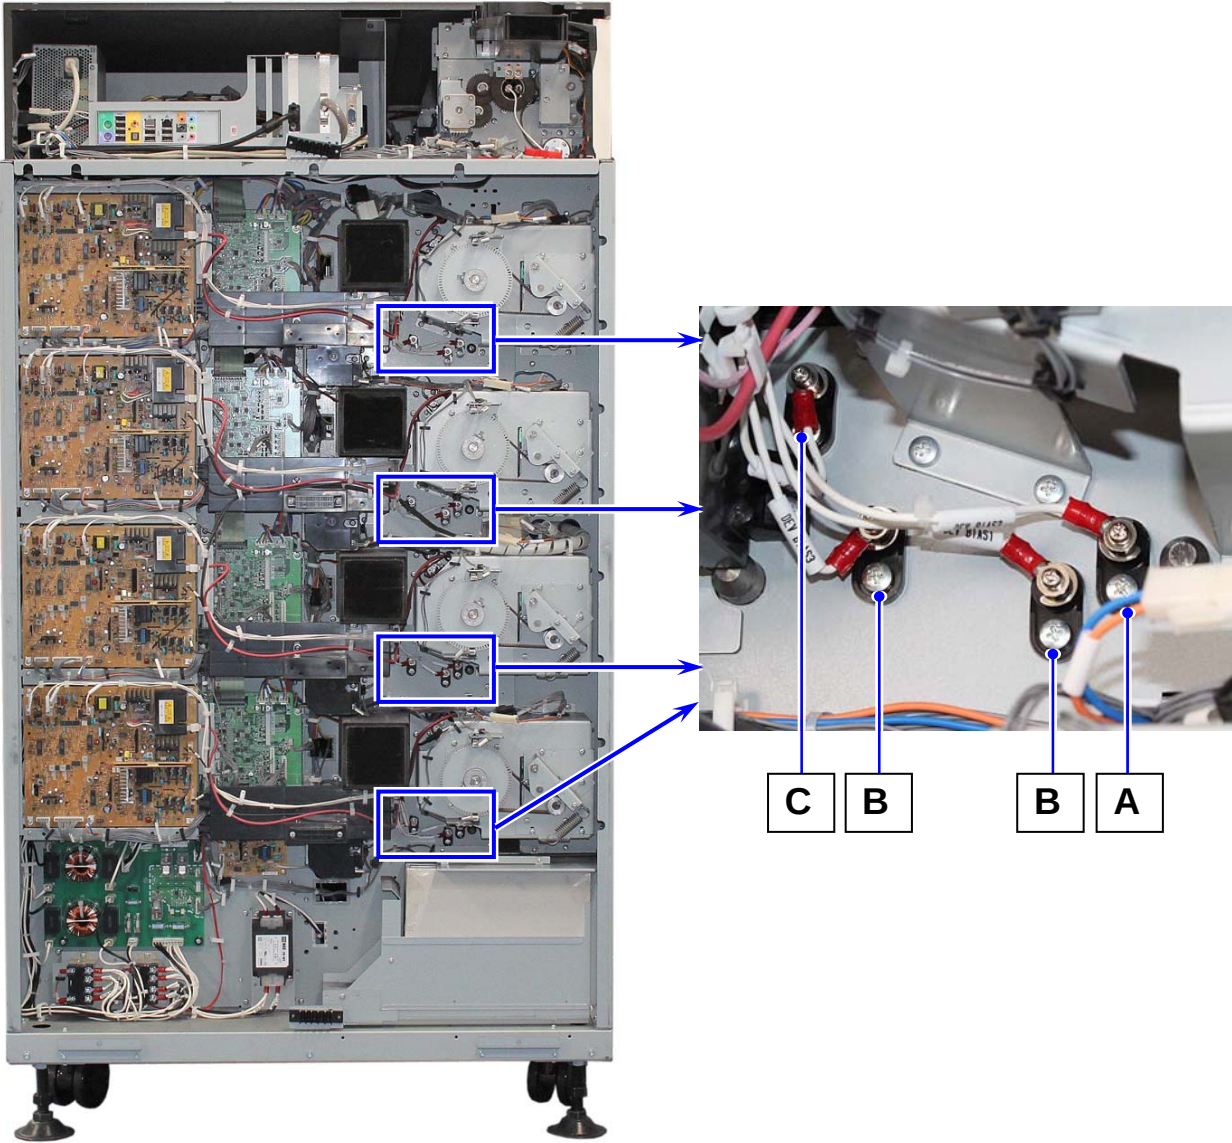


3. MAIN FRAME ASSY (RIGHT SIDE) (6/6)

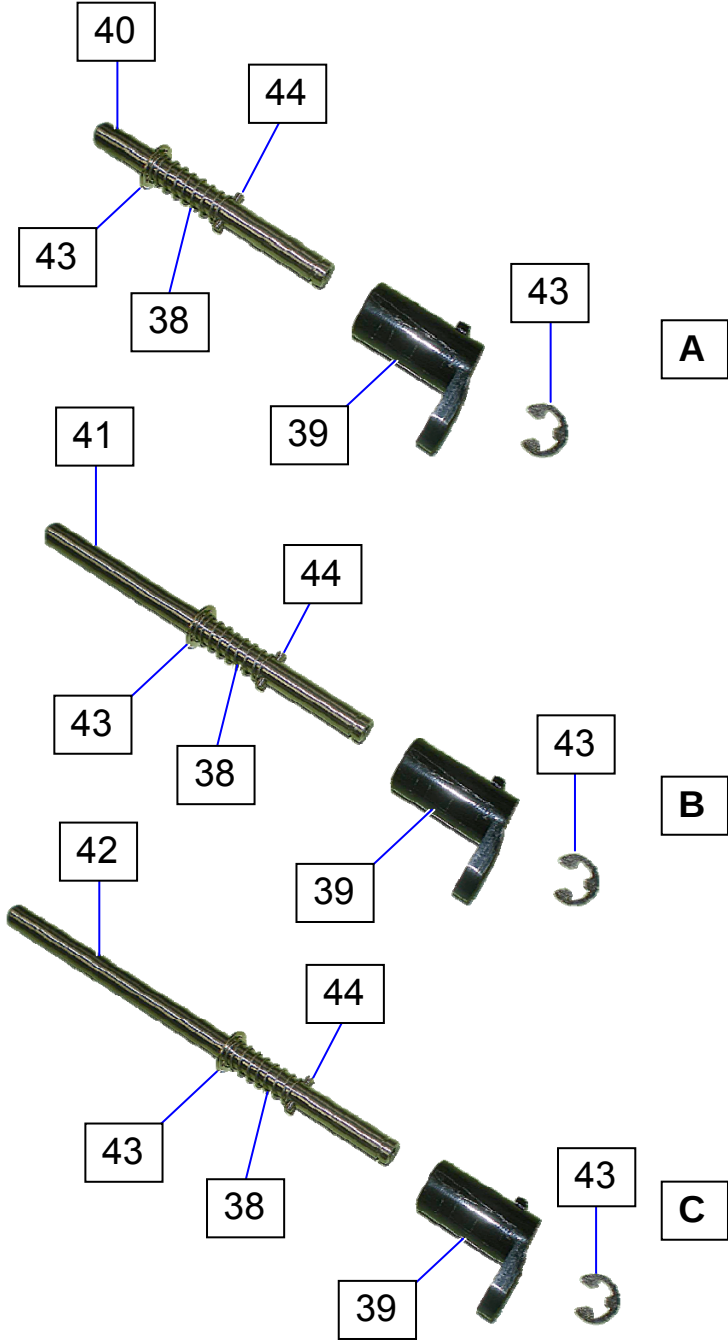




Item	Part Number	Part Description	Type	Qty	SP
1	Z256600010	H.V. POWER SUPPLY	KHKG-080	4	B
2	Z256260030	DEVE DRIVE PCB ASSY	PW12555	4	B
3	Z251101110	FILTER		4	A
4	9000470153	FAN MOTOR	9GA0824P1H63	4	C
5	Z255160010	1st MOTOR ASSY	SE15K0TTMM	4	C
6	Z166700010	GEARED MOTOR	DGR-6236-226	4	C
7	9000101103	SENSOR (LG248NL1)	LG248NL1	8	B
8	9000500470	DC POWER SUPPLY	LFA30F-12-J1Y	1	B
9	9000340042	FUSE	218005.MXP	13	B
10	9000500373	DC POWER SUPPLY	LEP240F-24	2	B
11	9000500224	DC POWER SUPPLY	LEA150F-5	1	B
12	Z256600020	H.V. POWER SUPPLY	KHKG-081	1	B
13	Z426260020	AC TERMINAL PCB ASSY	PW14210	1	C
14	9000370128	RELAY	G7L-2A-BUB DC12	1	C
15	9000370074	RELAY G7L-2A-BUB(AC200-240V)	G7L-2A-BUB AC200-240	1	C
16	9000090046	LINE FILTER	NAC-20-102	1	D
17	9000380119	MOTOR LIFT	DMA-3150A	4	C
18	9000101152	SENSOR (Receiver)	KB874-KD24LF	1	B
19	Z256260110	LED PCB ASSY	PW12550	1	C
20	9000340089	FUSE	021806.3 MXP	1	B
21	9000470155	FAN MOTOR	9A0624G413	2	C
22	Z251600090	GT BELT		4	D
23	Z251600170	SPRING		4	D
24	Z256400480	MTR LEAD		4	D
25	Z251600060	GT 23T PULLY		4	D
26	9000800160	PARALLEL KEY		8	D
27	Z251101530	PLATE PULSE		4	D
28	Z071600590	PULLY		4	D
29	9000780011	BALL BEARING	φ8×φ16×5t	4	D
30	6807033309	RETAINING RING-E	E6,Ni	4	D
31	Z251600080	GT 80T PULLY		4	D
32	9000780009	BALL BEARING	φ12×φ28×8t	4	D
33	6813032315	RETAINING RING-C,S	C12	4	D


Item	Part Number	Part Description	Type	Qty	SP
34	Z256400640	DEV BIAS LEAD		4	D
35	Z251800310	H.V SOCKET		4	D
36	Z256400050	DEV DRIVER IF CABLE 1		1	D
37	Z256400060	DEV DRIVER IF CABLE 2		4	D
38	Z251100150	SPRING		16	D
39	Z251100160	BIAS HOLDER		16	D
40	Z251100170	BIAS PIN		4	D
41	Z251100180	BIAS PIN 2		8	D
42	Z251100190	BIAS PIN 3		4	D
43	6807033308	RETAINING RING-E	E5,Ni	32	D
44	6817114030	PARALLEL PIN	2×10 SUS	16	D

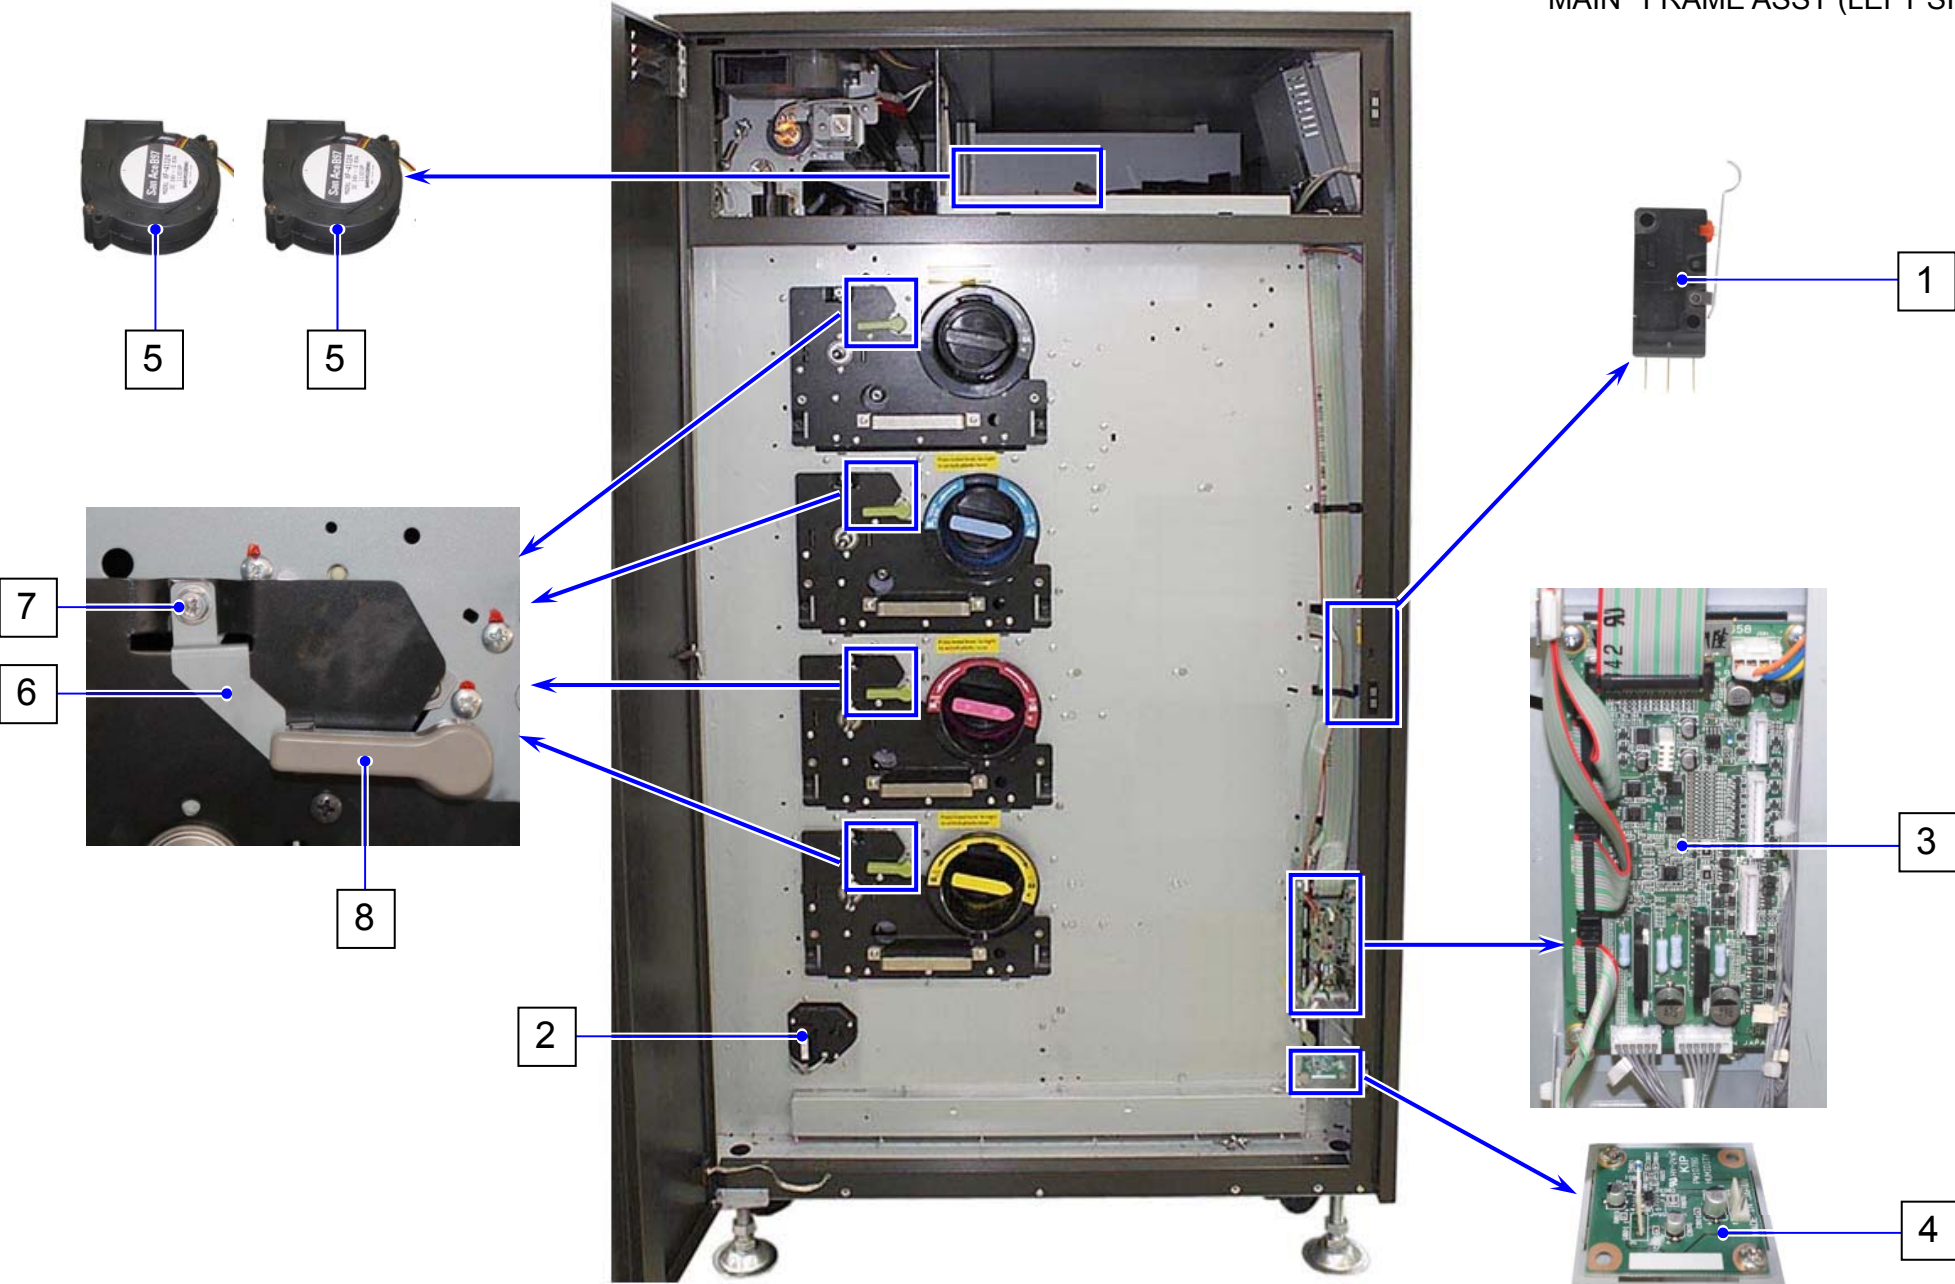



Item	Part Number	Part Description	Type	Qty	SP
1	9000310208	SWITCH	D2VW-5L3-1HS-191	1	C
2	9000380123	MOTOR LIFT	MA-D04-004	1	C
3	Z256260060	DECK TERMINAL PCB Assy	PW12558	1	C
4	Z256260120	HUMIDITY SENSOR PCB 3 ASSY	PW10780	1	C
5	9000470152	DC BLOWER	9BMB24P2G04	2	C
6	Z251101930	LEVER STOPPER		4	D
7	6947203323	CRS.HEX.HEAD BOLT,W/SW FW	M4×10,Fe+ZC	12	D
8	Z253800910	HANDLE		4	D


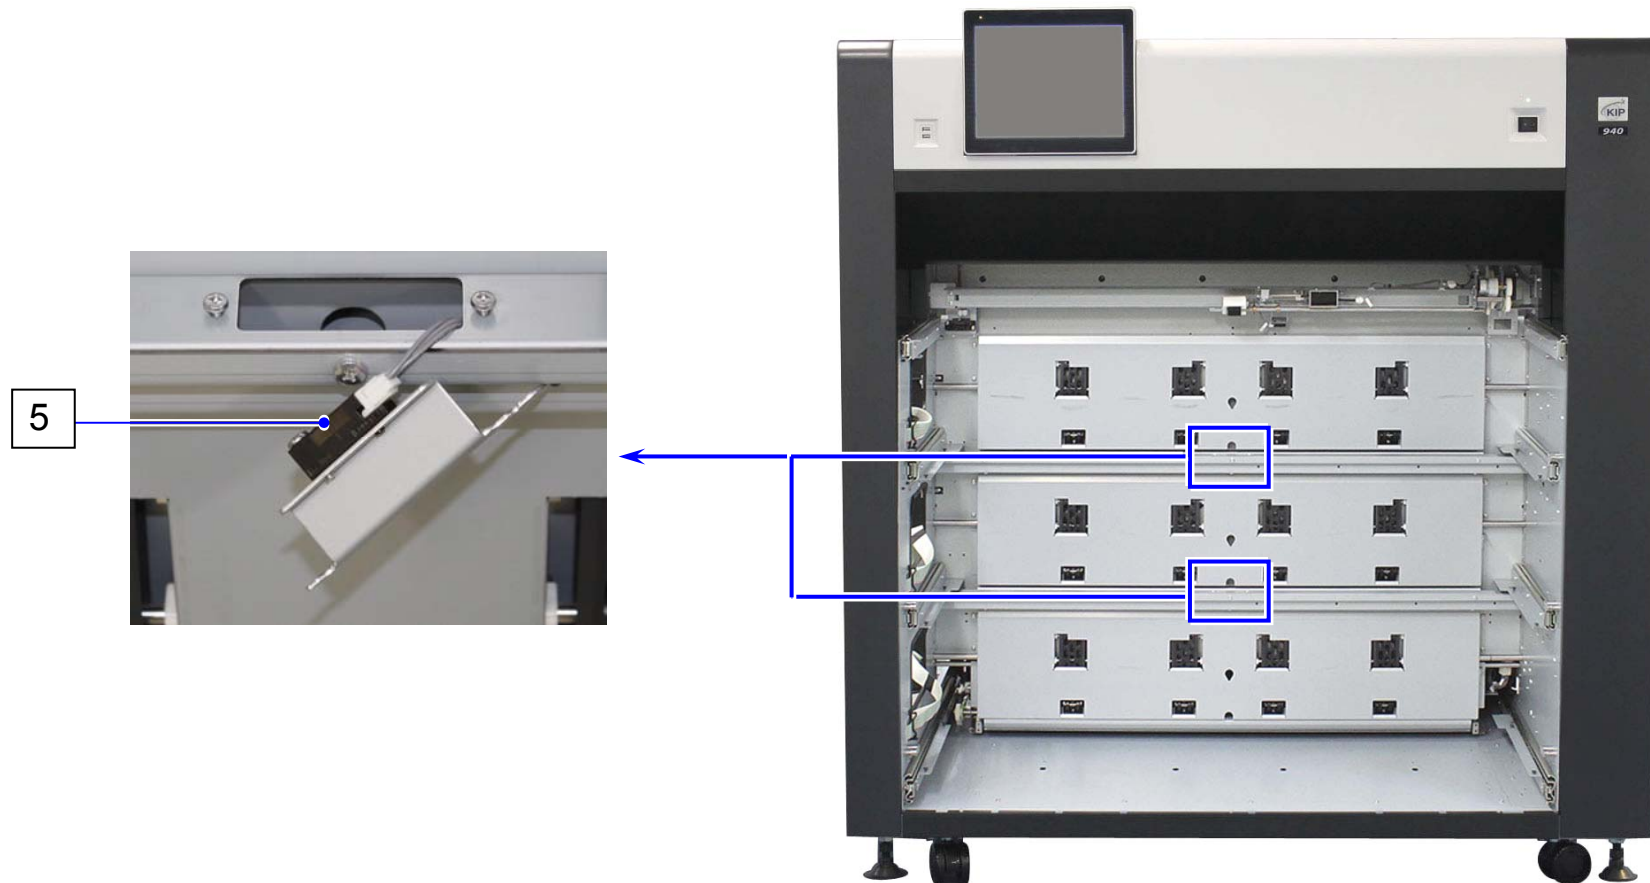


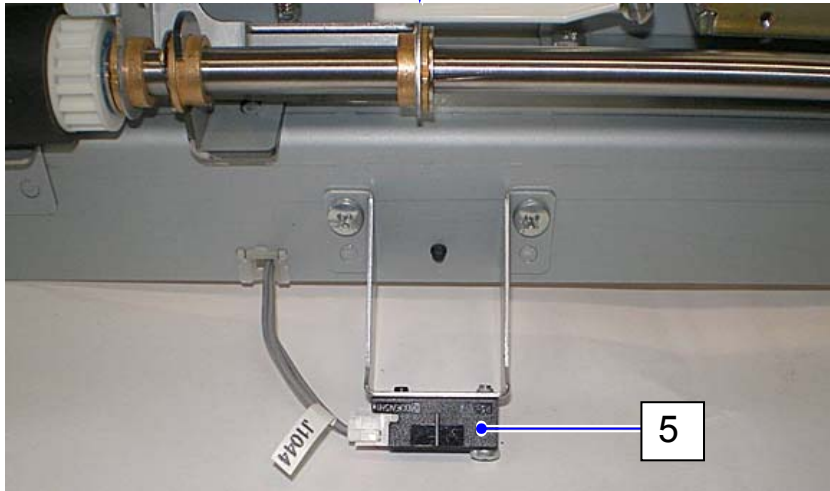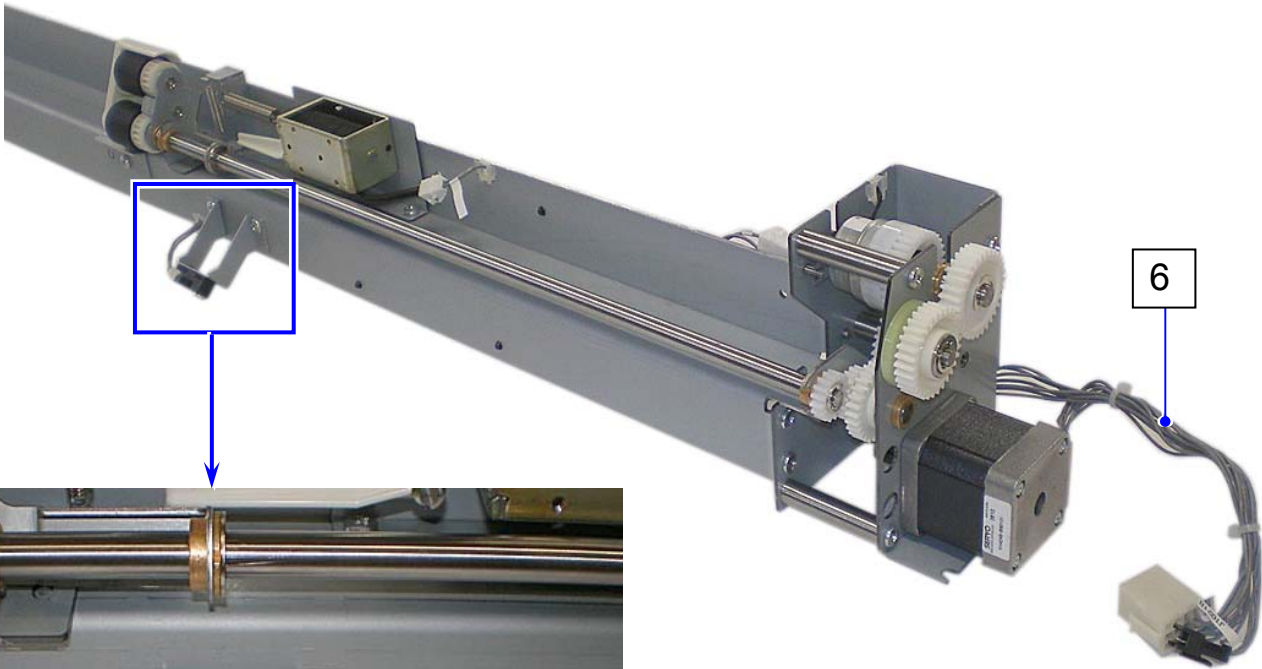


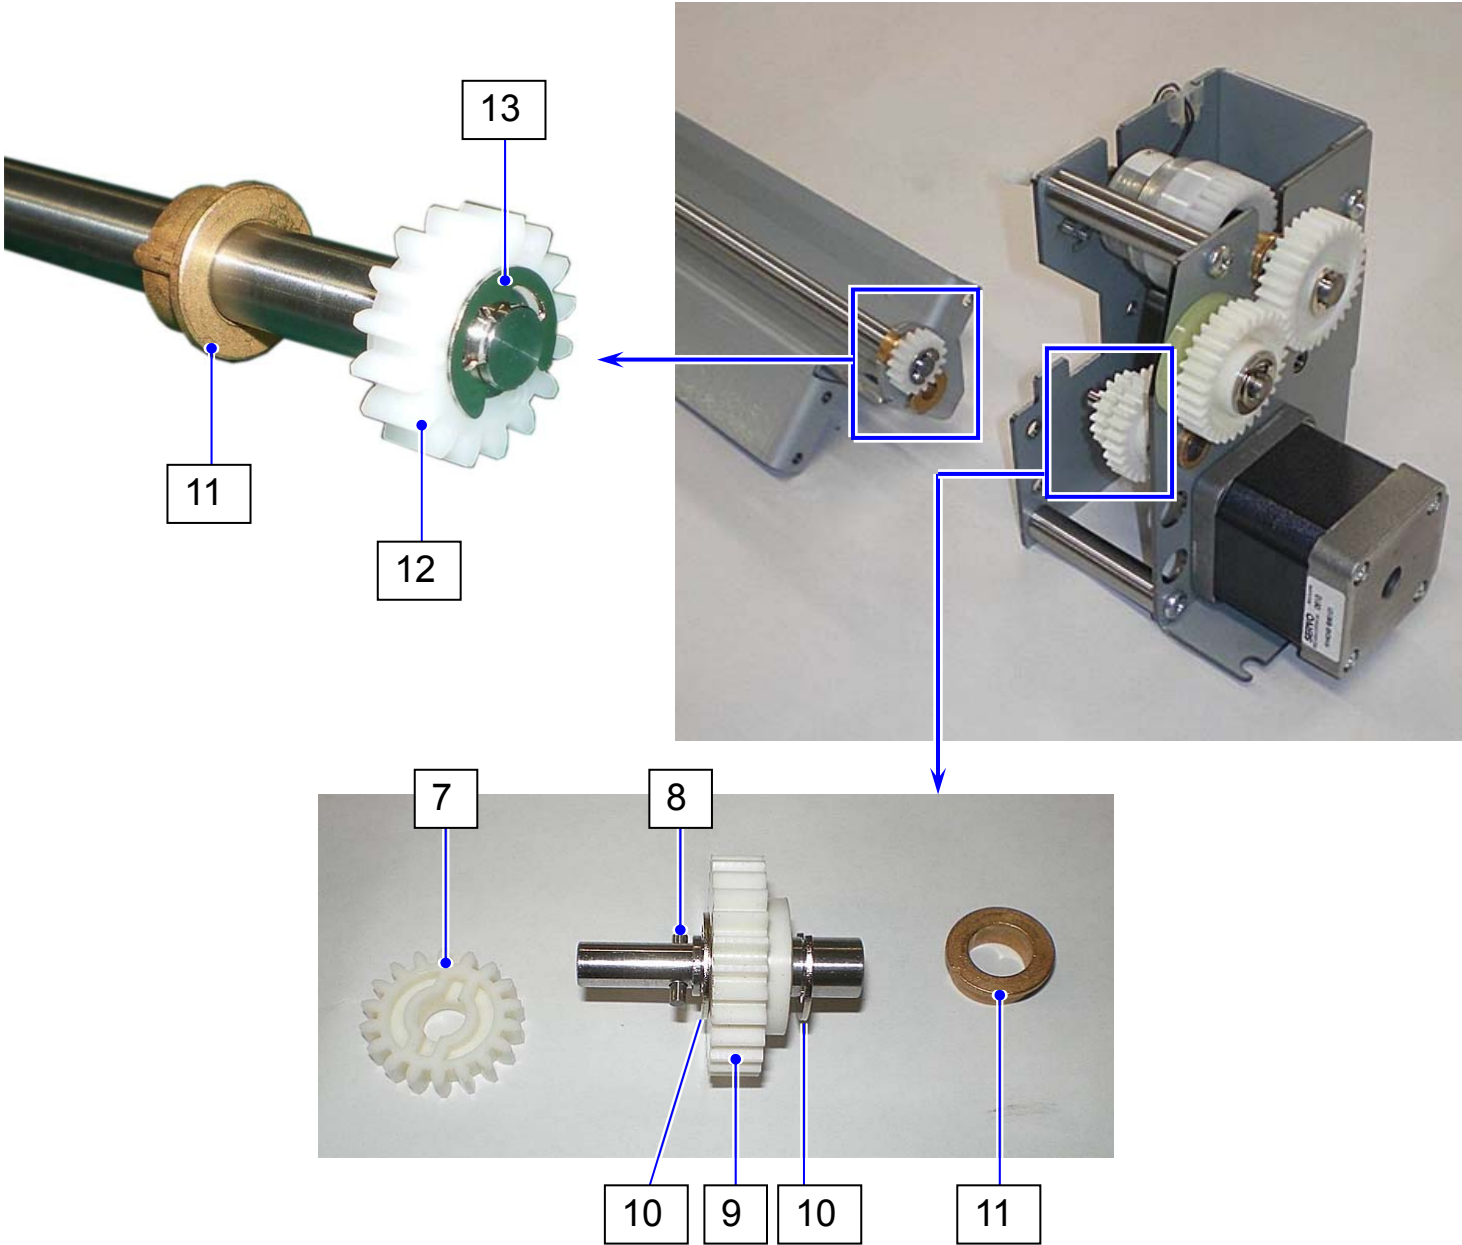

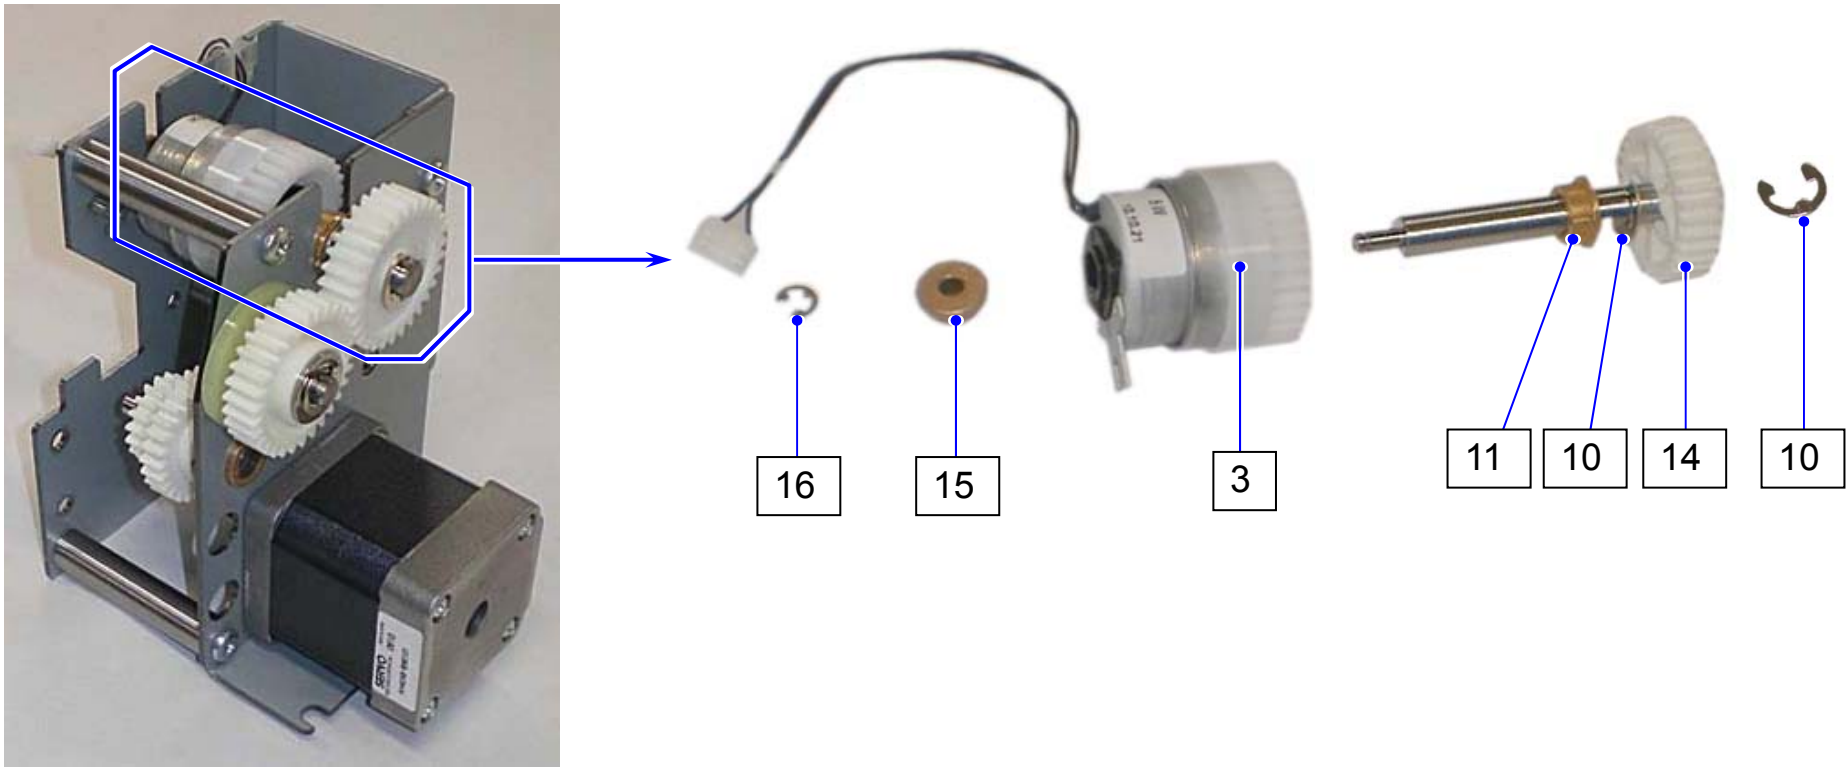


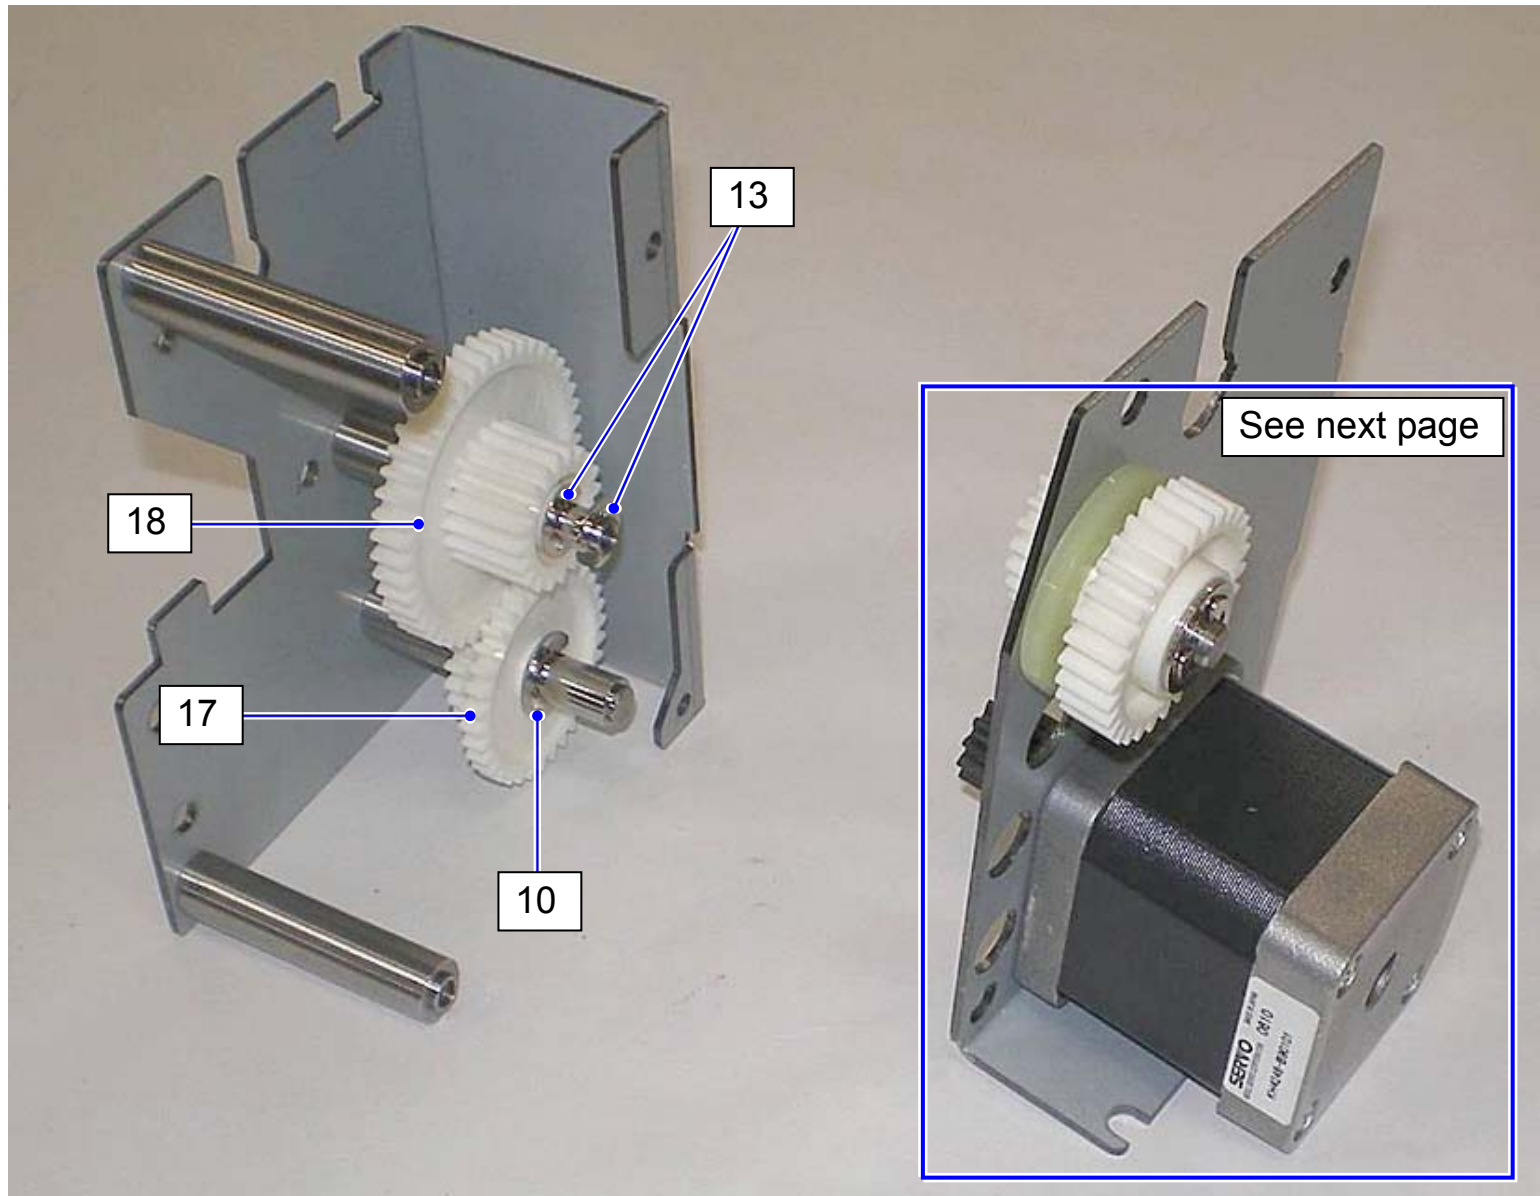


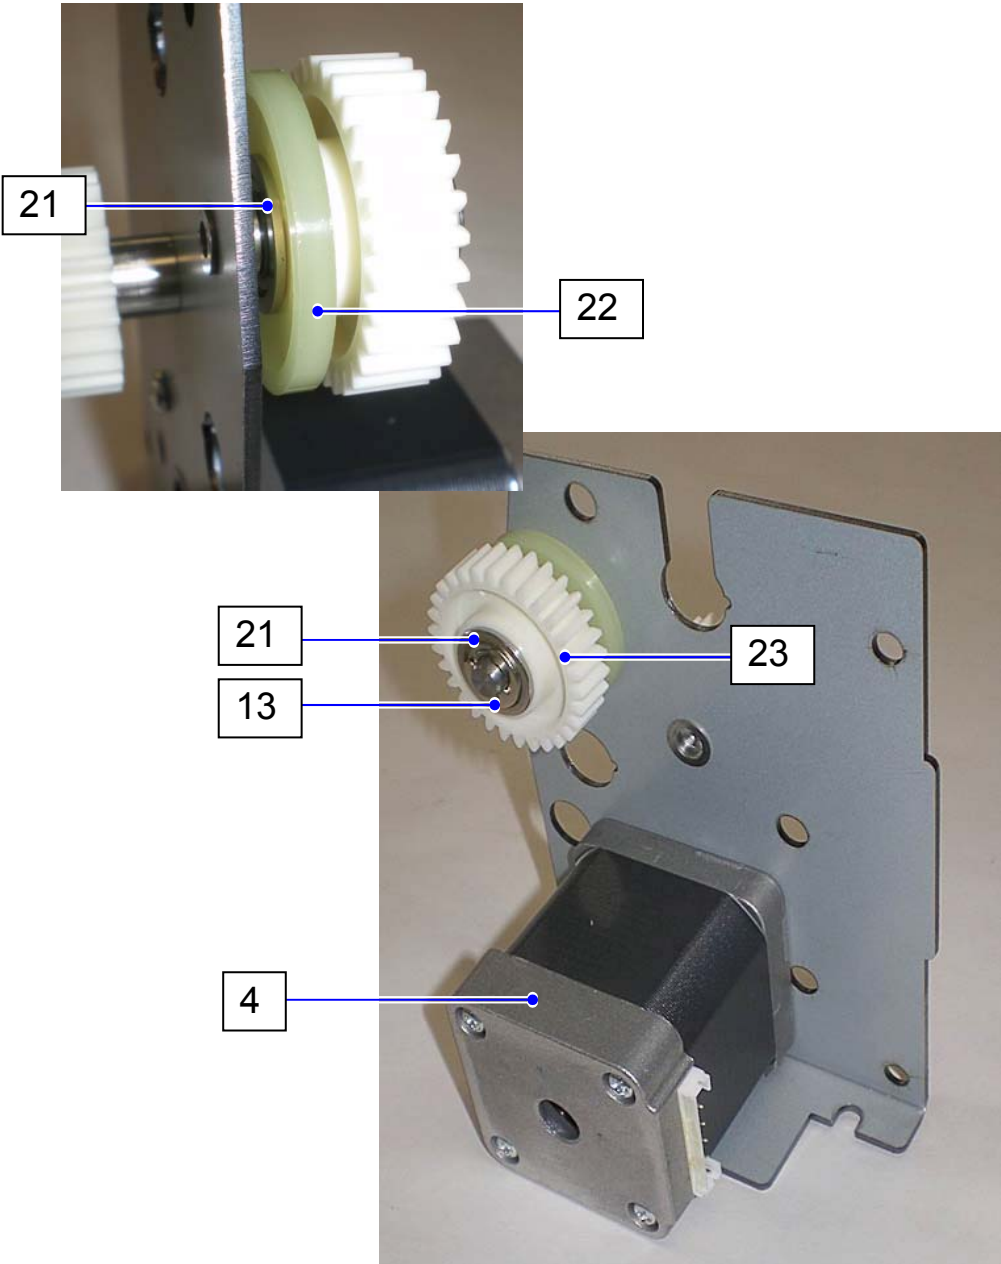
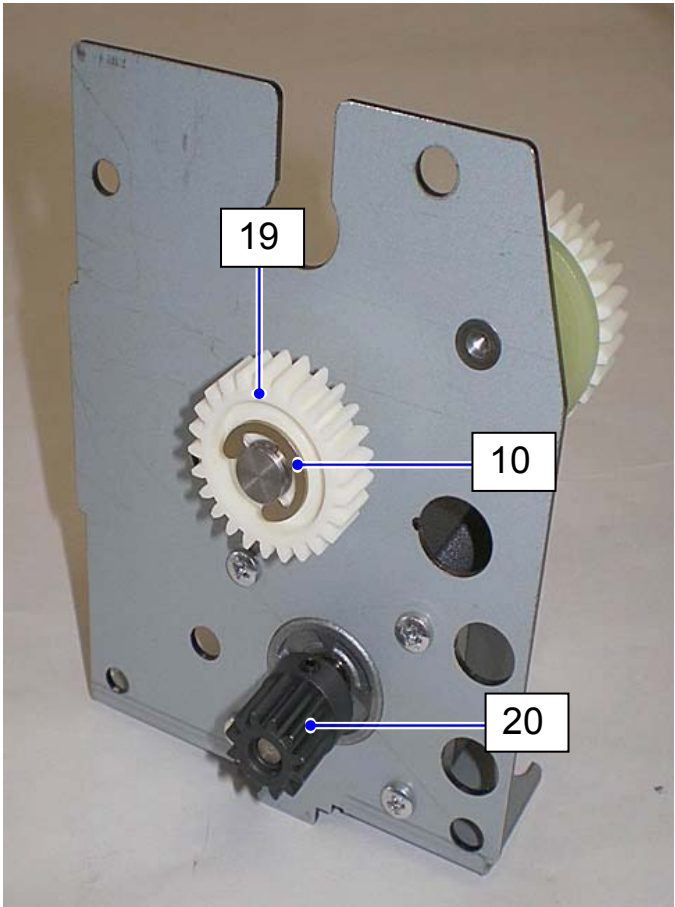



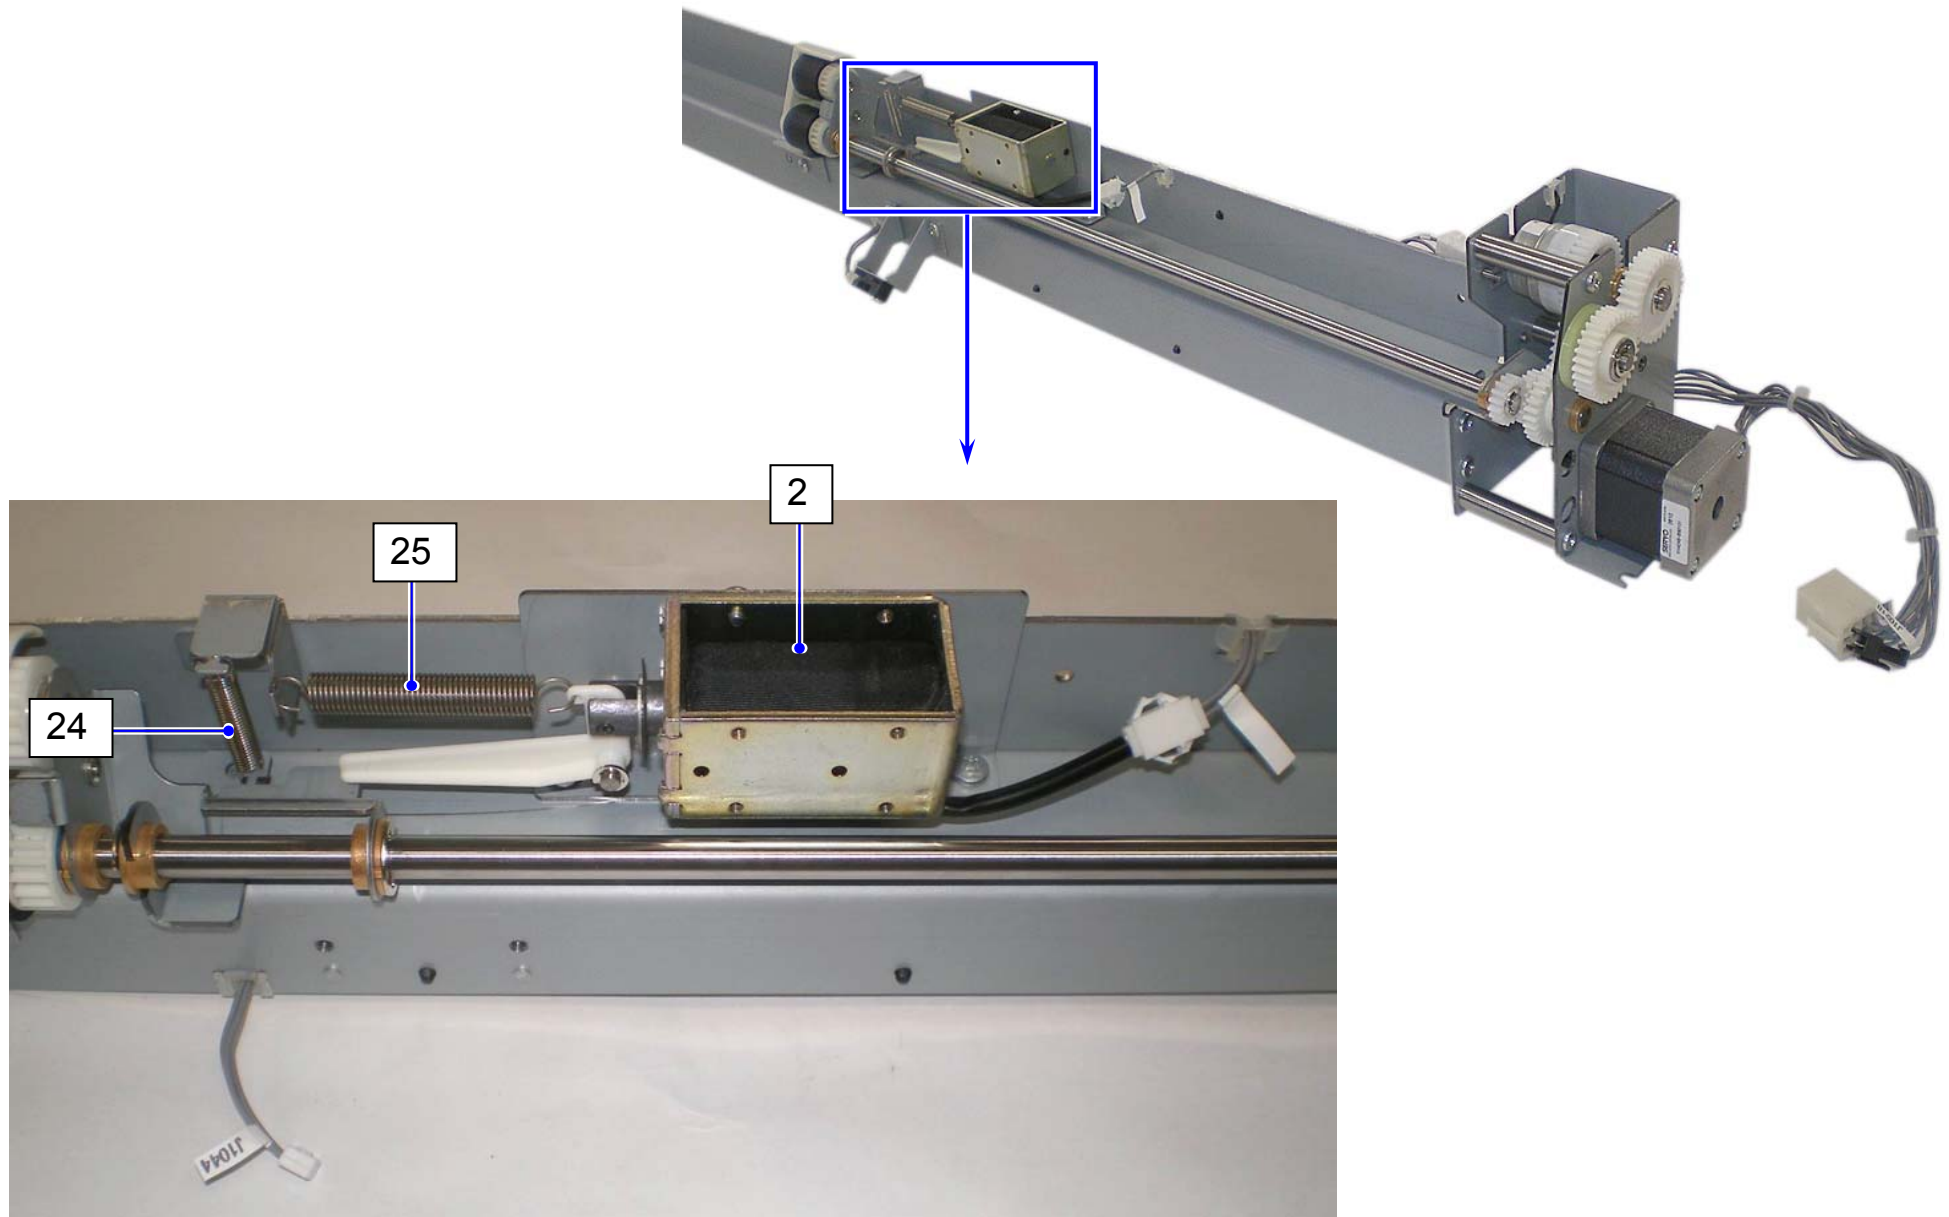




See next page

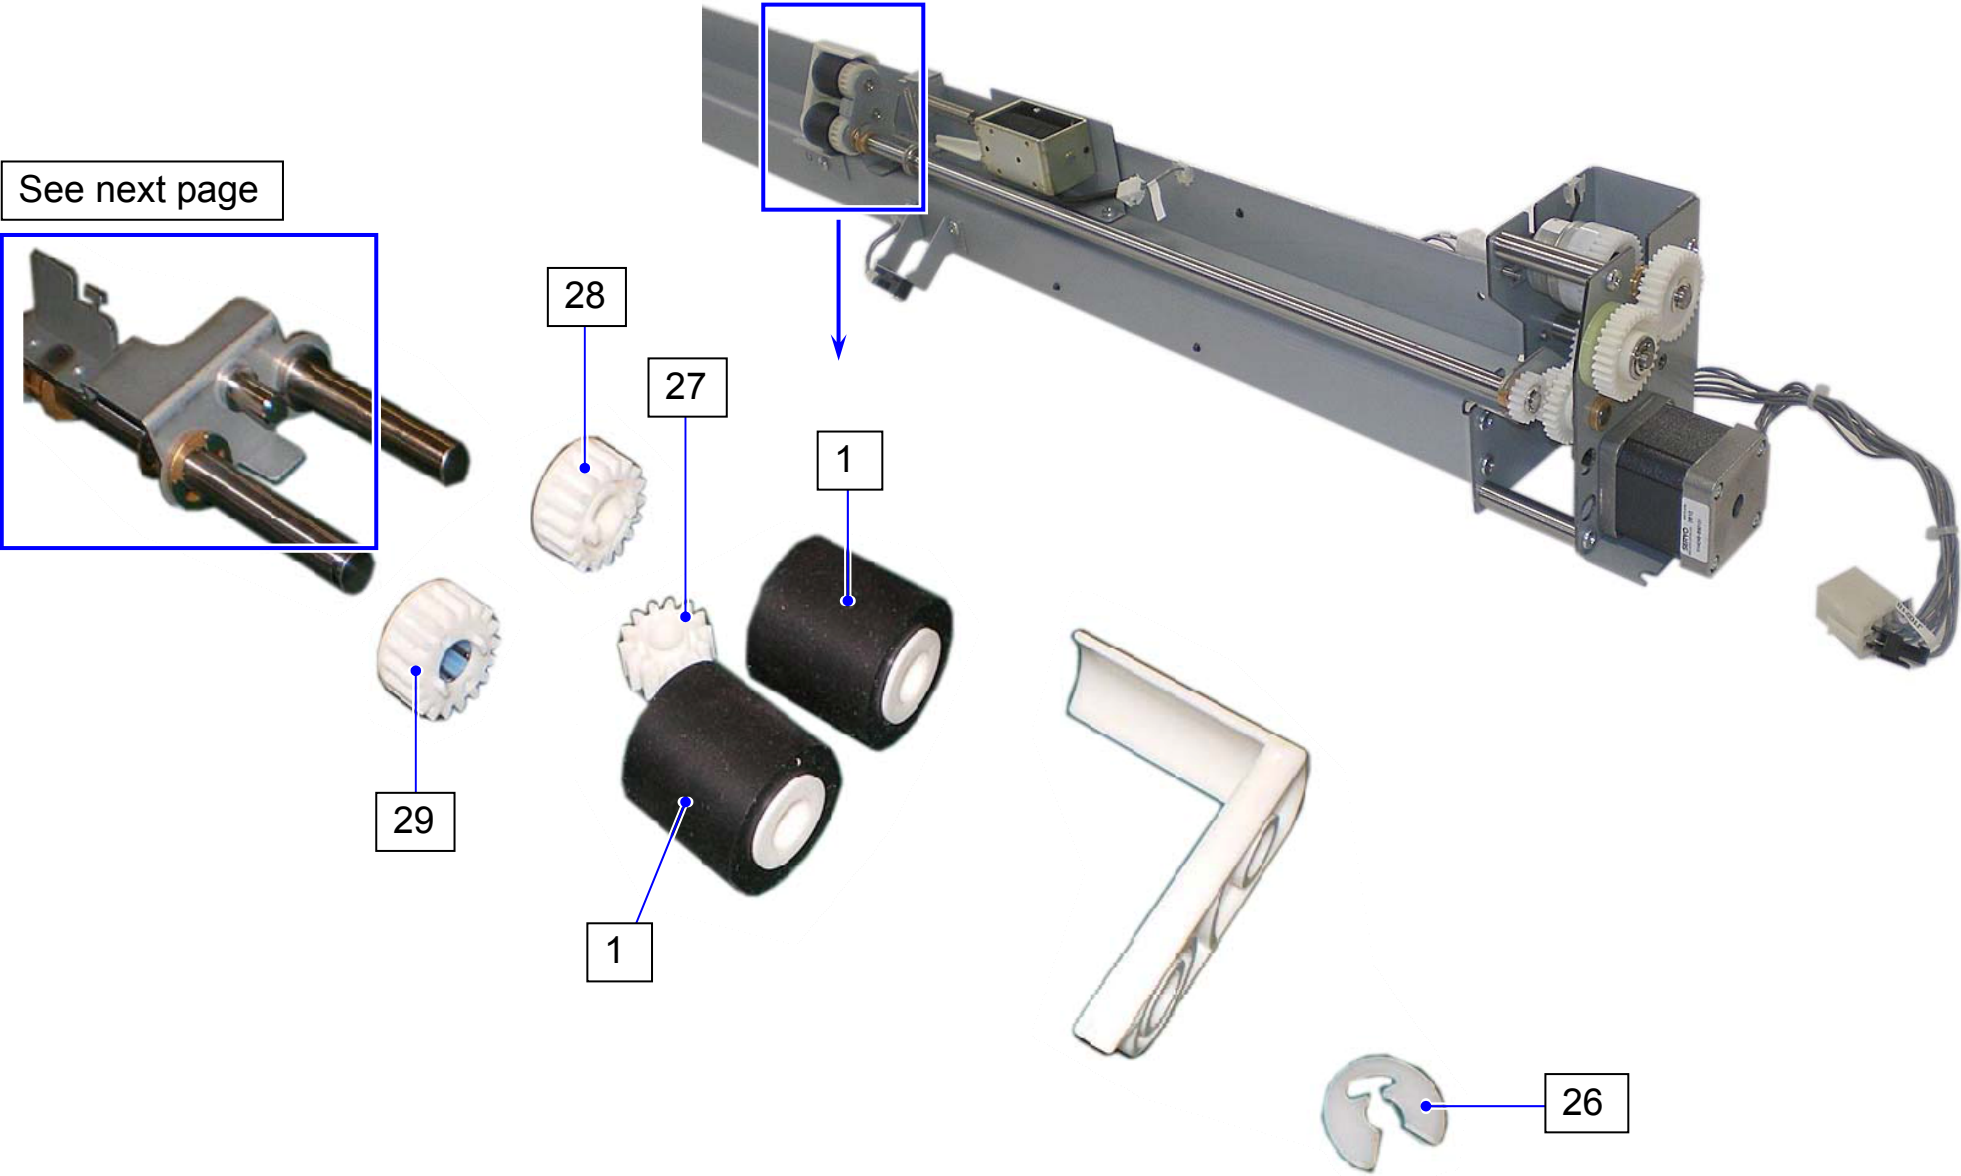




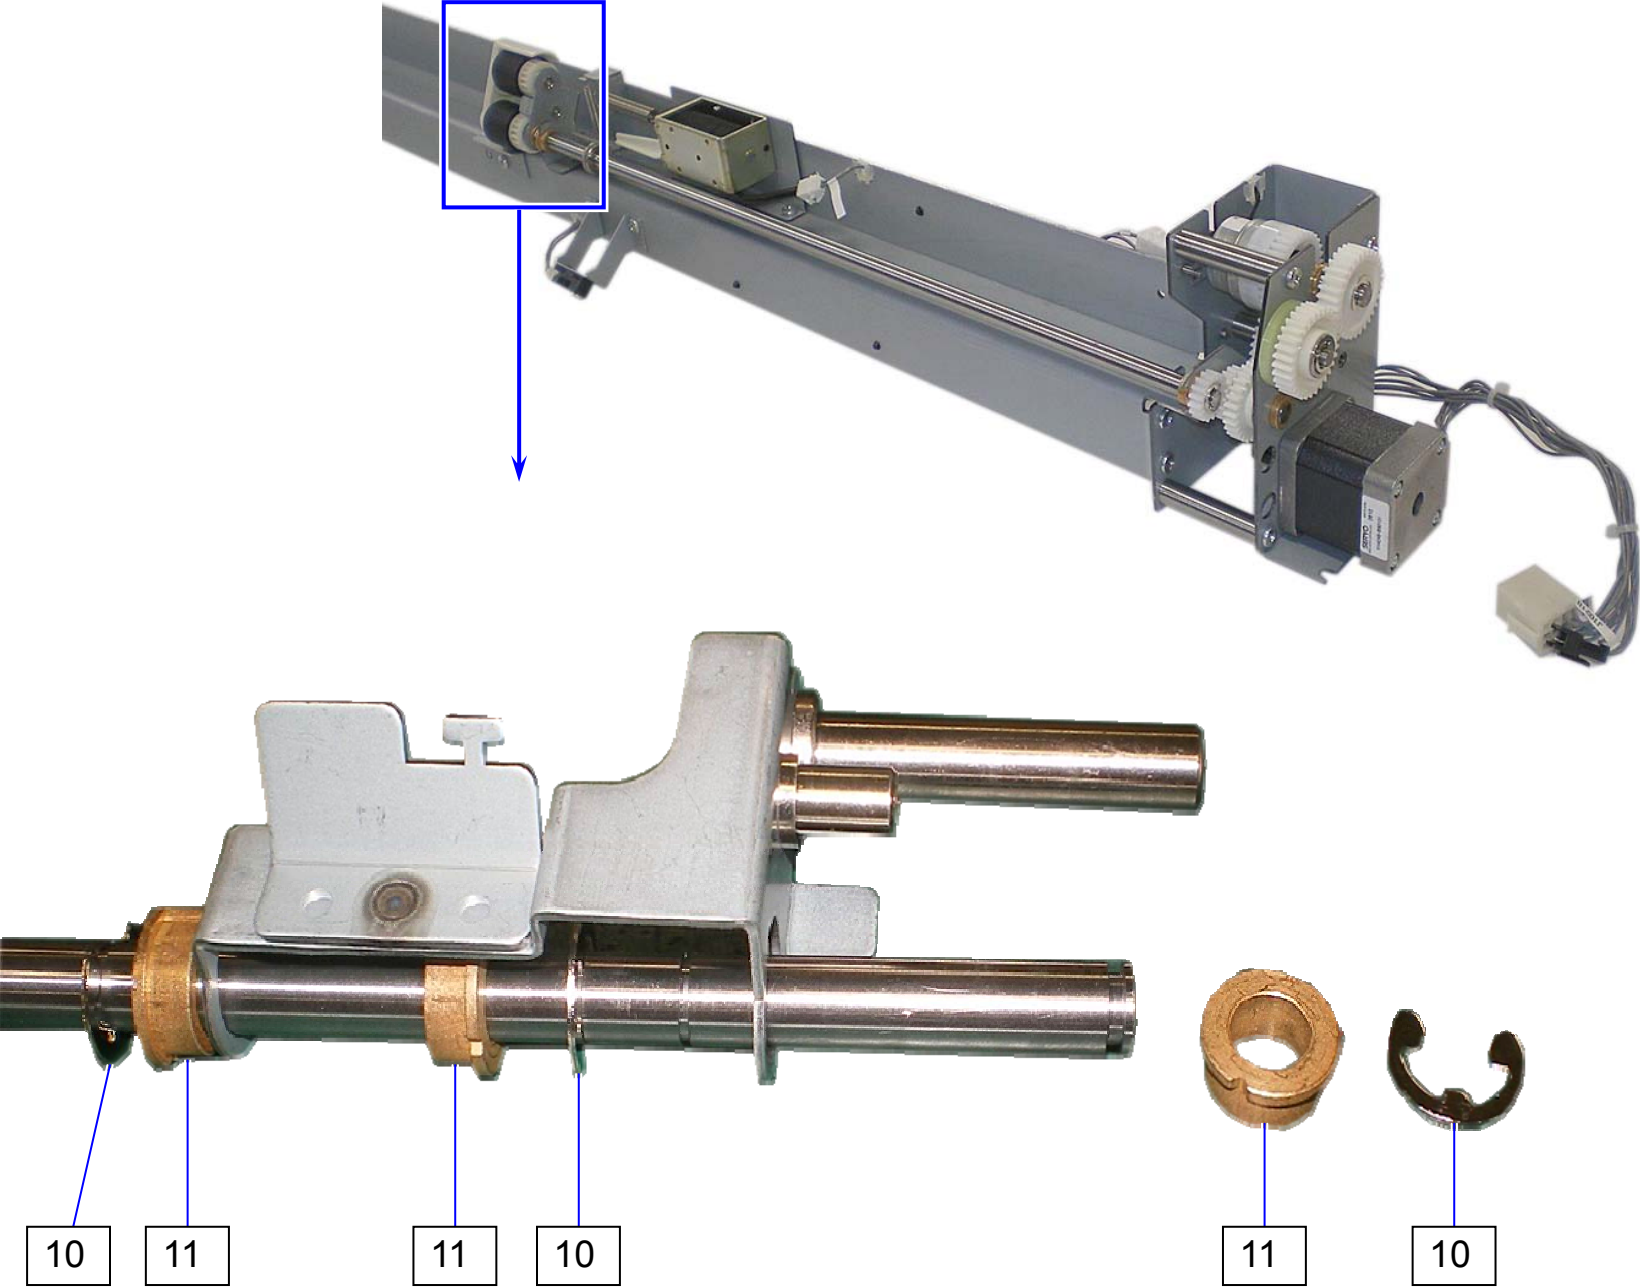


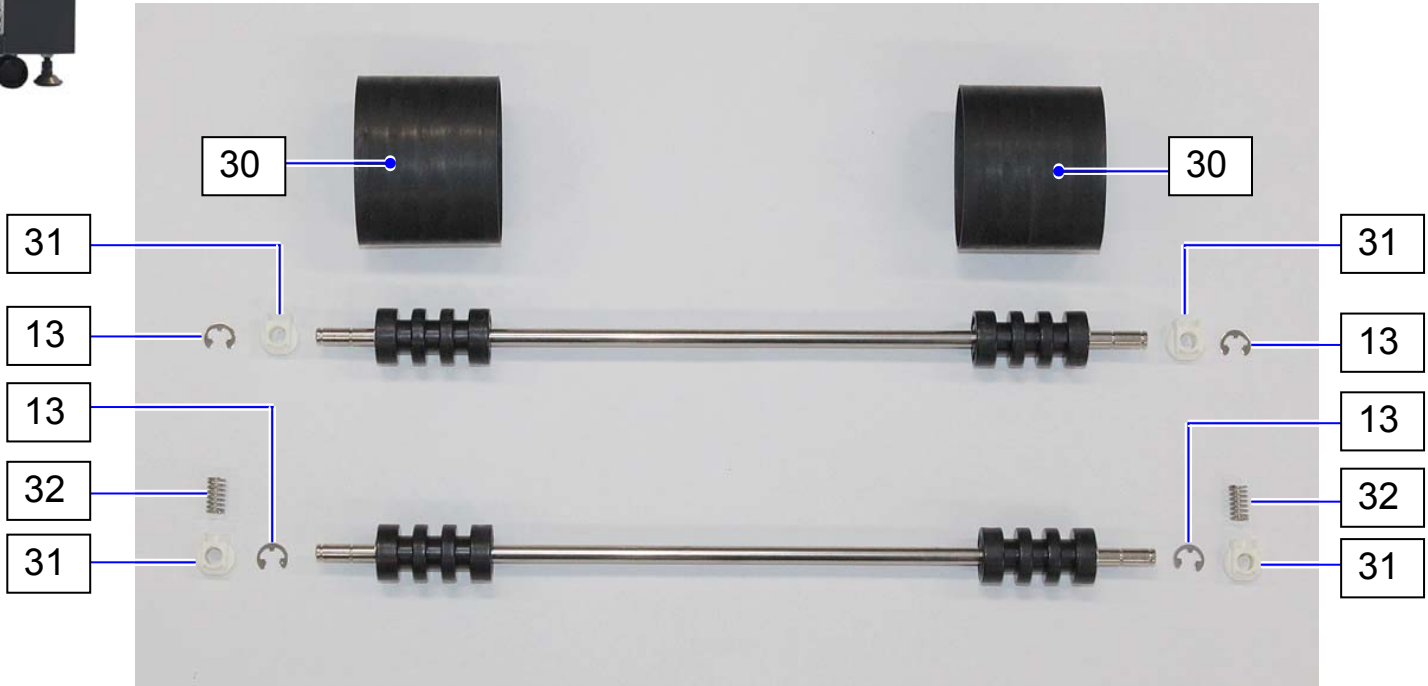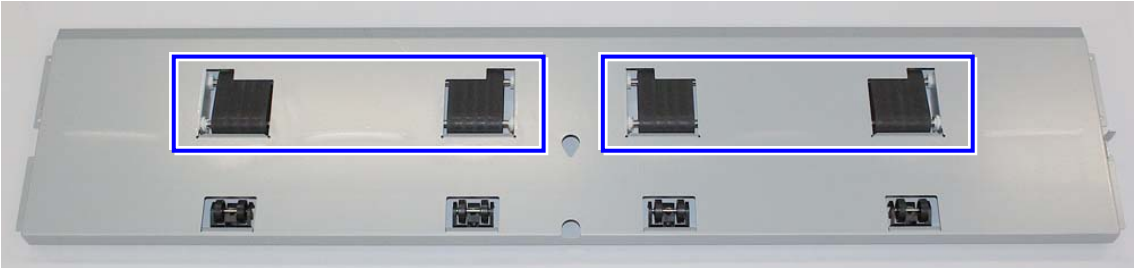

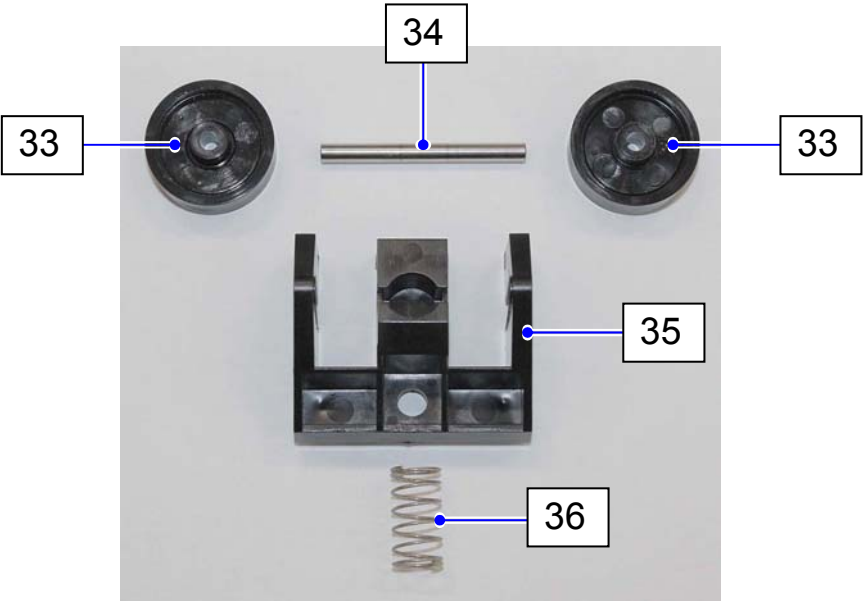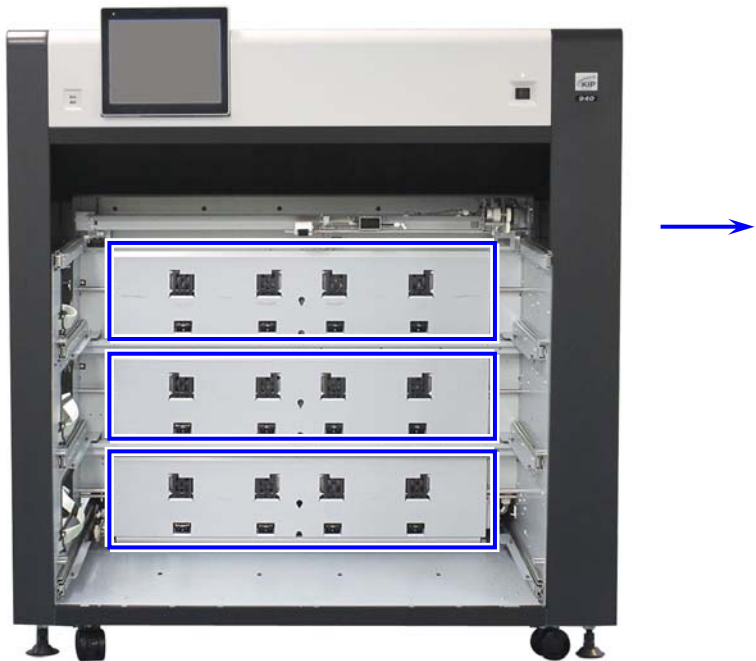

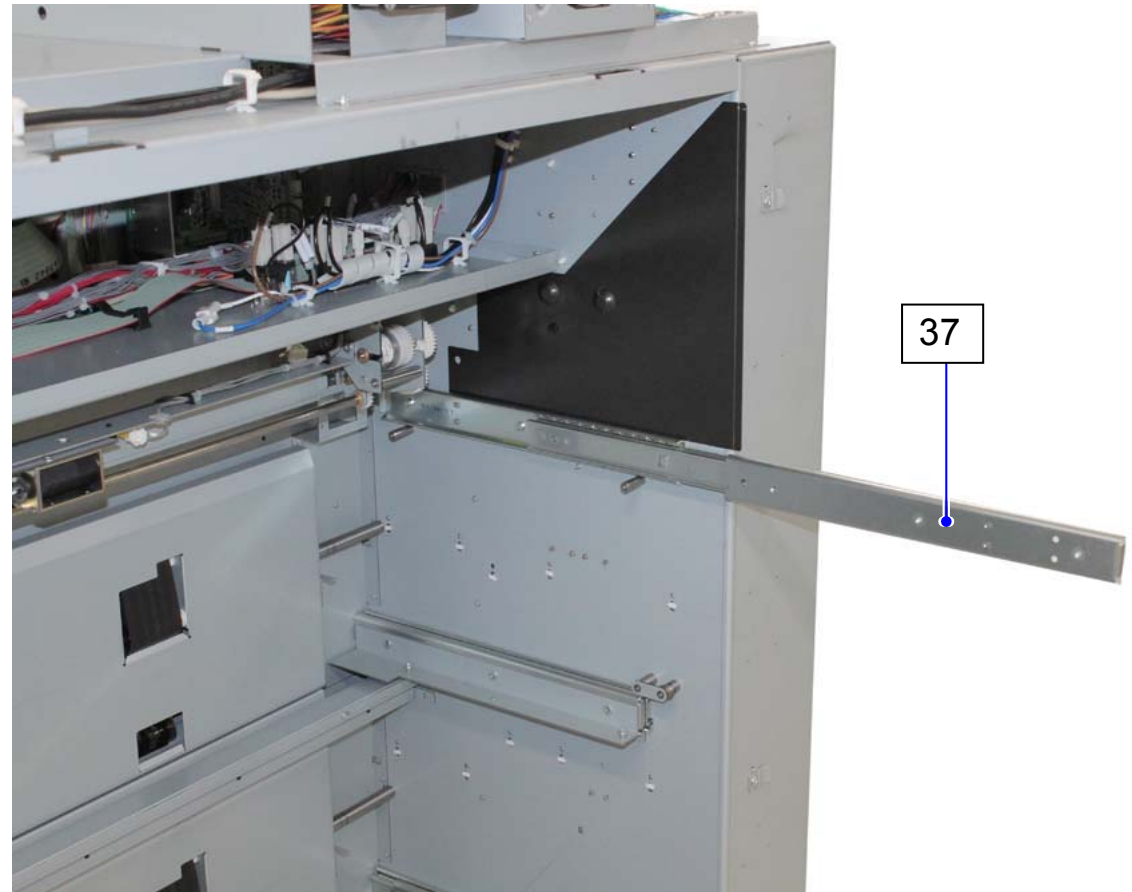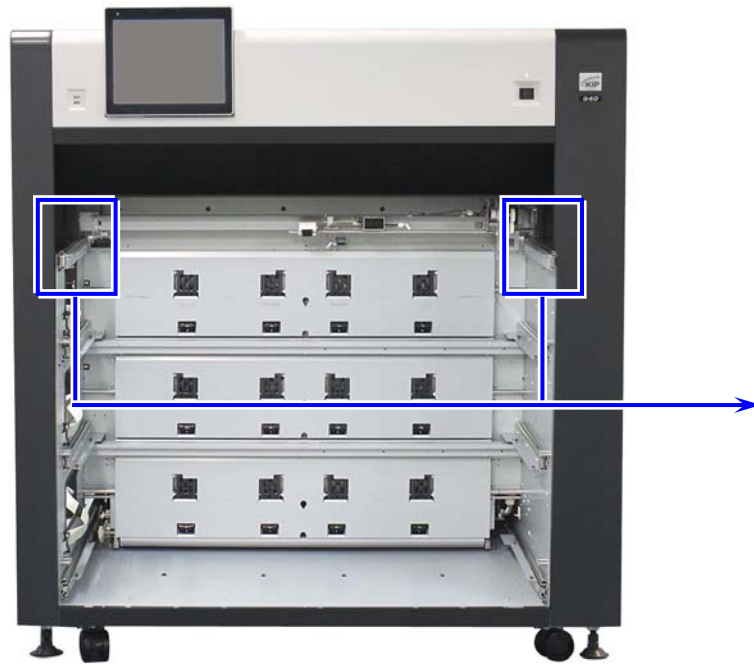


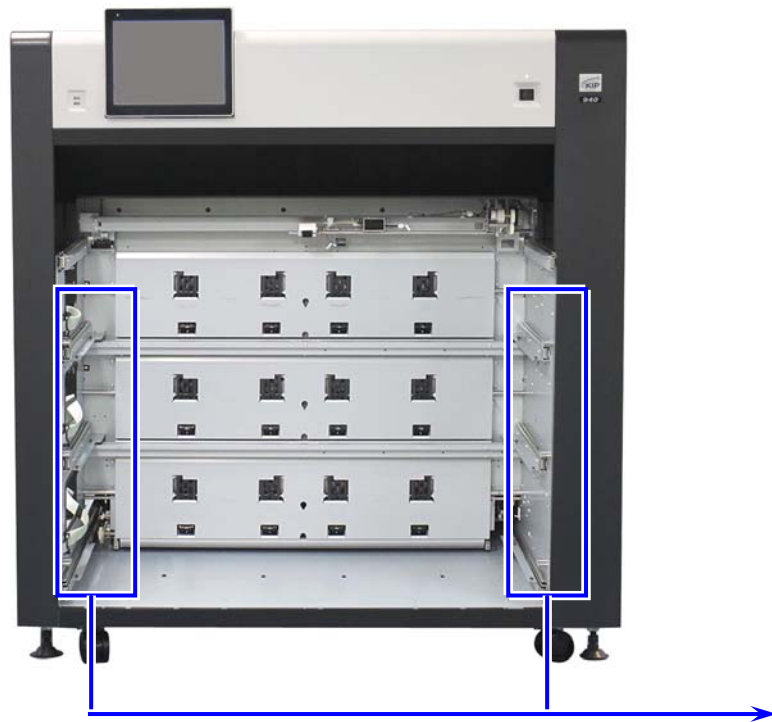


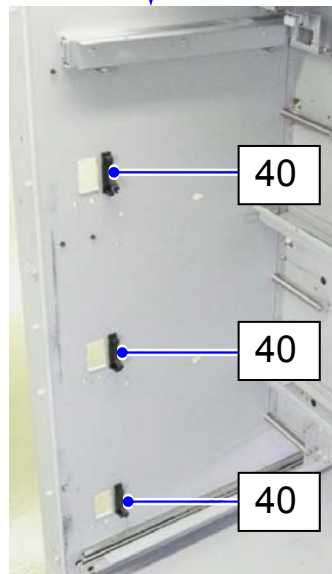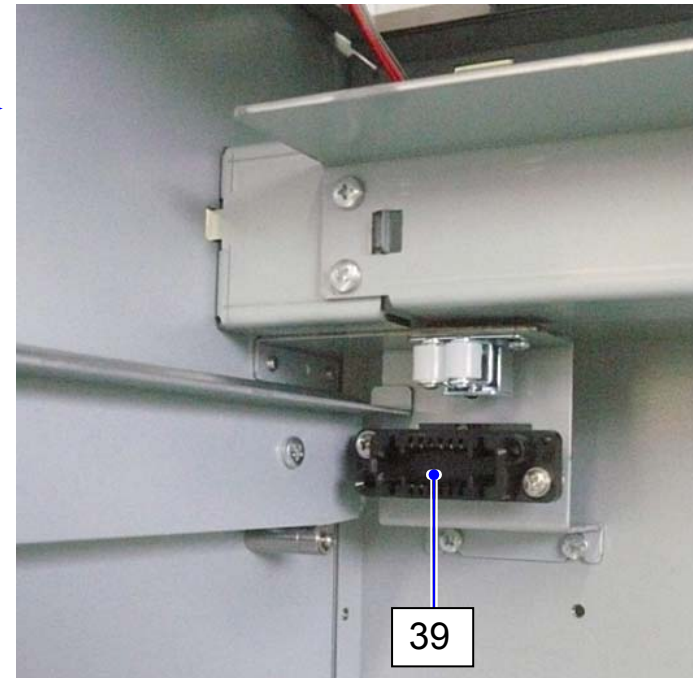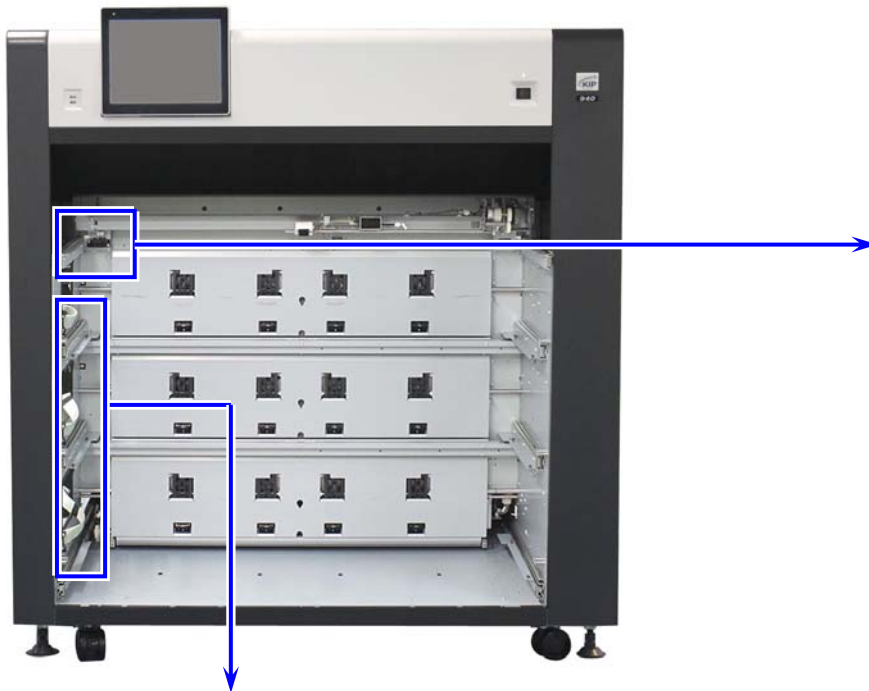




Item	Part Number	Part Description	Type	Qty	SP
1	7101007240	ROLLER, PAPER PICK-UP		2	D
2	7101404170	SOLENOID	G-1053-K12	1	D
3	9000370124	MICRO CLUTCH	MCA-30A	1	C
4	9000380118	STEPPING MOTOR	KH4248-B90101	1	C
5	9000100982	SENSOR (PS117ED1)	PS117ED1	3	B
6	Z256400590	MF UNIT TERMINAL LEAD		1	D
7	7101403690	GEAR, 18T		1	D
8	6817114030	PARALLEL PIN	2×10 SUS	1	D
9	Z251500250	27T GEAR		1	D
10	6807033310	RETAINING RING-E	E7,Ni	9	D
11	9000790066	BUSHING	FS1-1189	6	D
12	4204600450	SPUR GEAR 16T		1	D
13	6807033308	RETAINING RING-E	E5,Ni	28	D
14	3101300760	SPUR GEAR 30T		1	D
15	9000790081	OILLESS METAL		1	D
16	6807033306	RETAINING RING-E	E3,Ni	1	D
17	3001000120	SPUR GEAR.20/34T		1	D
18	3004500180	SPUR GEAR.45/20T		1	D
19	3001400090	SPUR GEAR 25T		1	D
20	Z251400400	GEAR 12T		1	D
21	9000780041	BEARING (F-FLW686T2ZZ1/5K)	F-FLW686T2ZZ1/5K	2	D
22	4201600040	SPACING PLATE		1	D
23	4201600050	30T GEAR		1	D
24	7101402580	SPRING,TENSION		1	D
25	7101402610	SPRING,TENSION		1	D
26	7101004250	RING,RETAINING		1	D
27	7101403200	GEAR,14T		1	D
28	7101003480	GEAR,18T		1	D
29	7101003620	GEAR,18T		1	D
30	Z251101310	PAPER FEED BELT		12	D
31	7101403240	COLLAR		24	D
32	7101402960	SPRING,COMPRESSION (0.8)		24	D
33	3103500590	COUNTER ROLLER		24	D


Item	Part Number	Part Description	Type	Qty	SP
34	6817114060	PARALLEL PIN	3×32 SUS	12	D
35	2603100270	COUNTER ROLLER HOLDER		12	D
36	1710430310	COUNTER ROLLER SPRING		12	D
37	2210130430	RFM SLIDE	3531-12-352	6	D
38	Z051100710	RAIL	C3601-20A	2	D
39	Z426400120	PROCESS 1 MAIN HARNESS		1	D
40	9000450574	CLIP		3	D


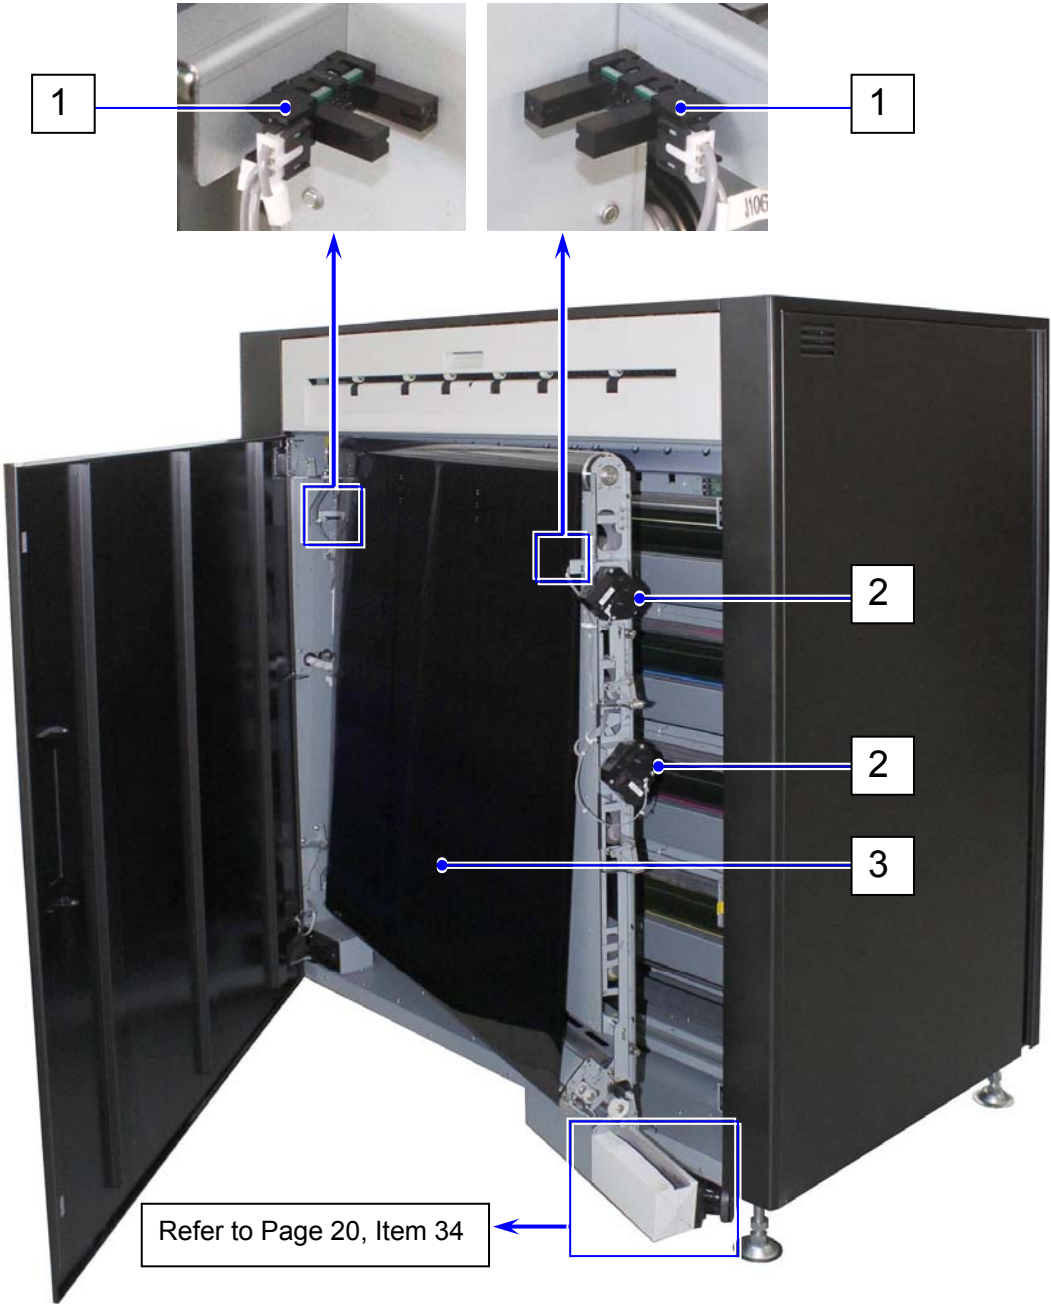


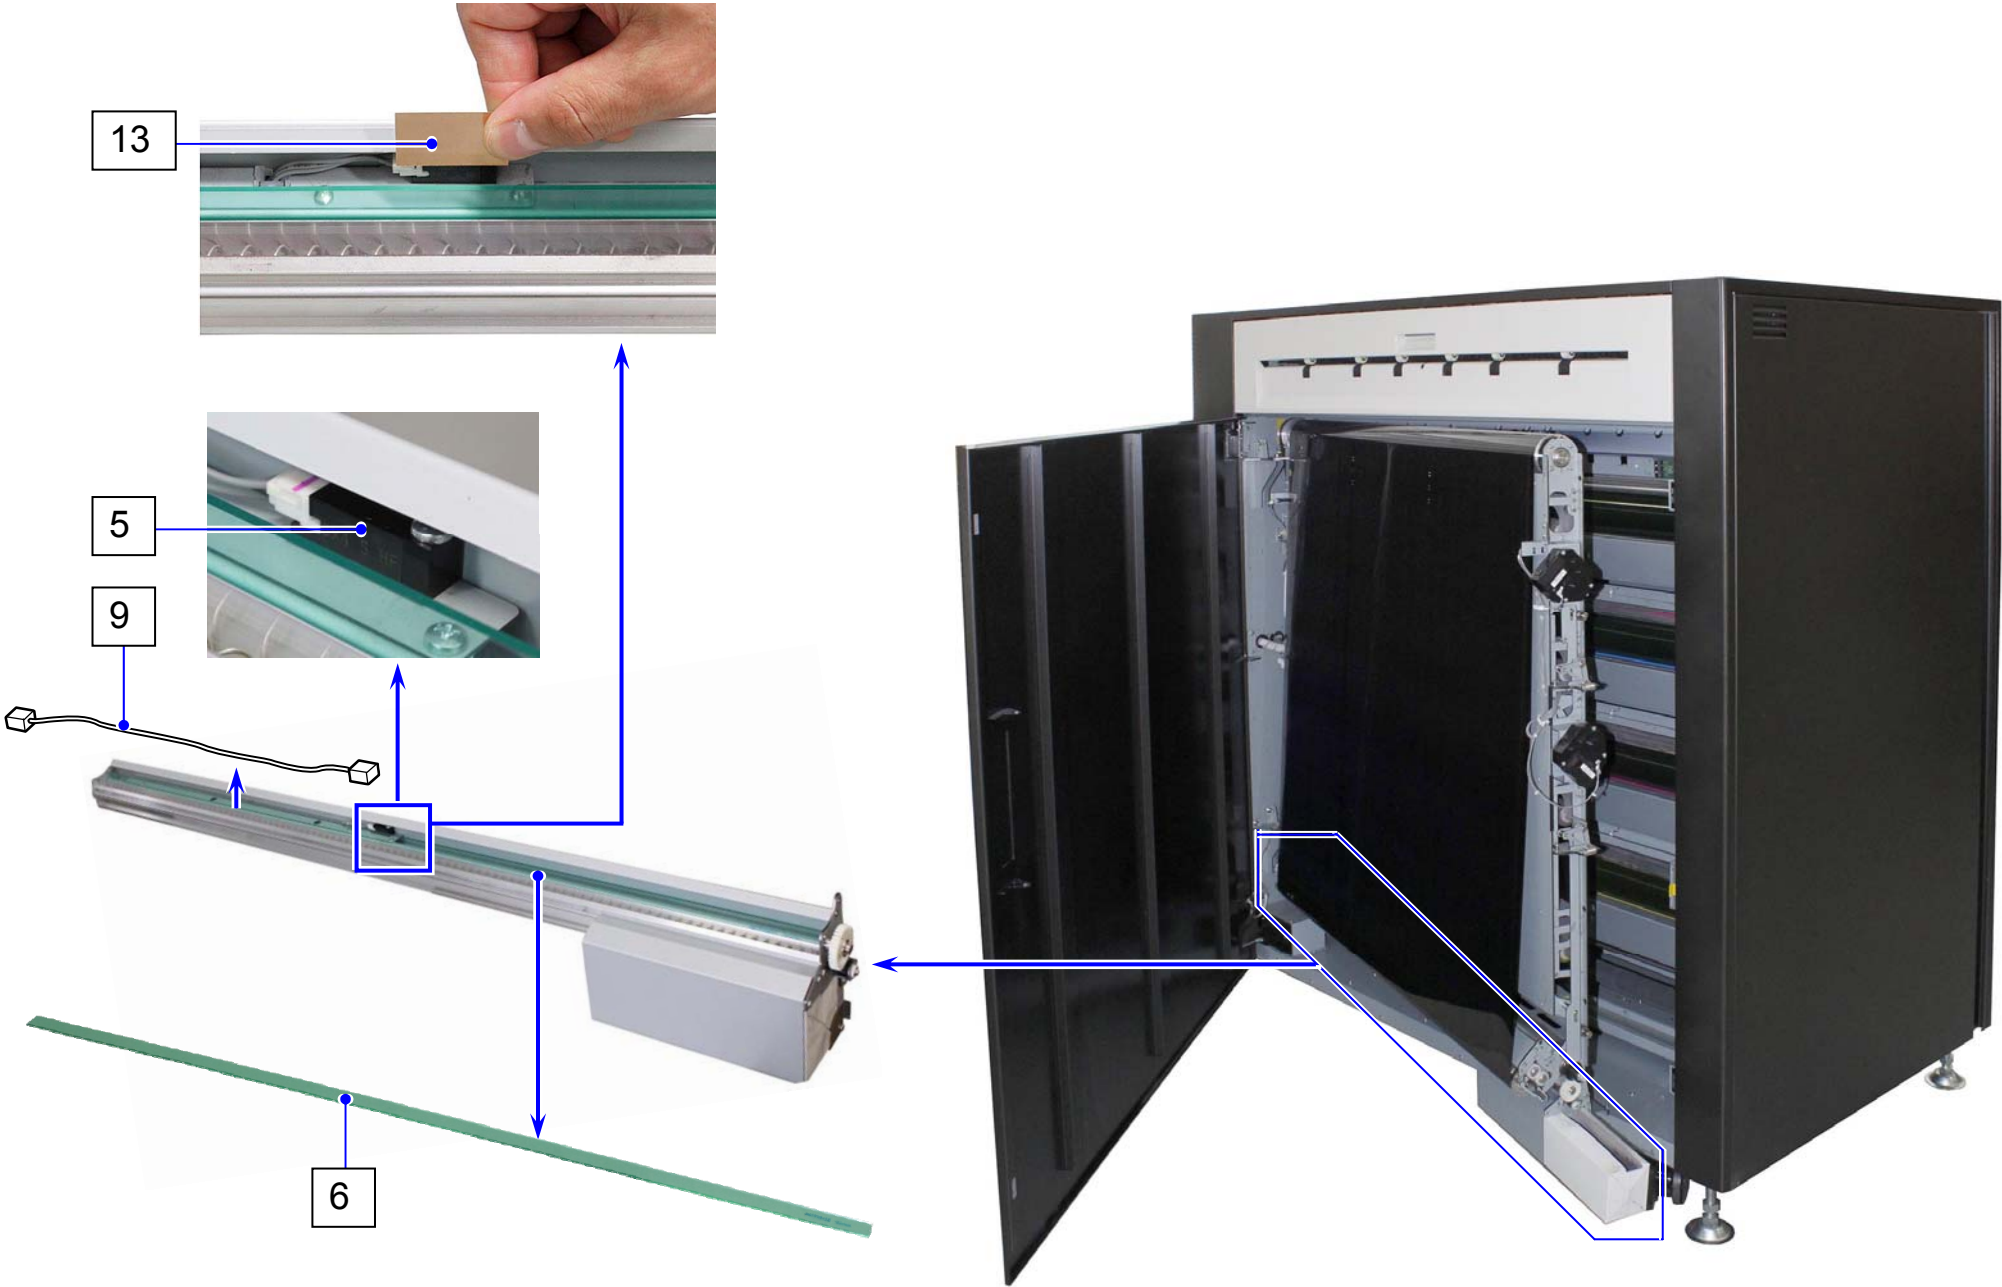

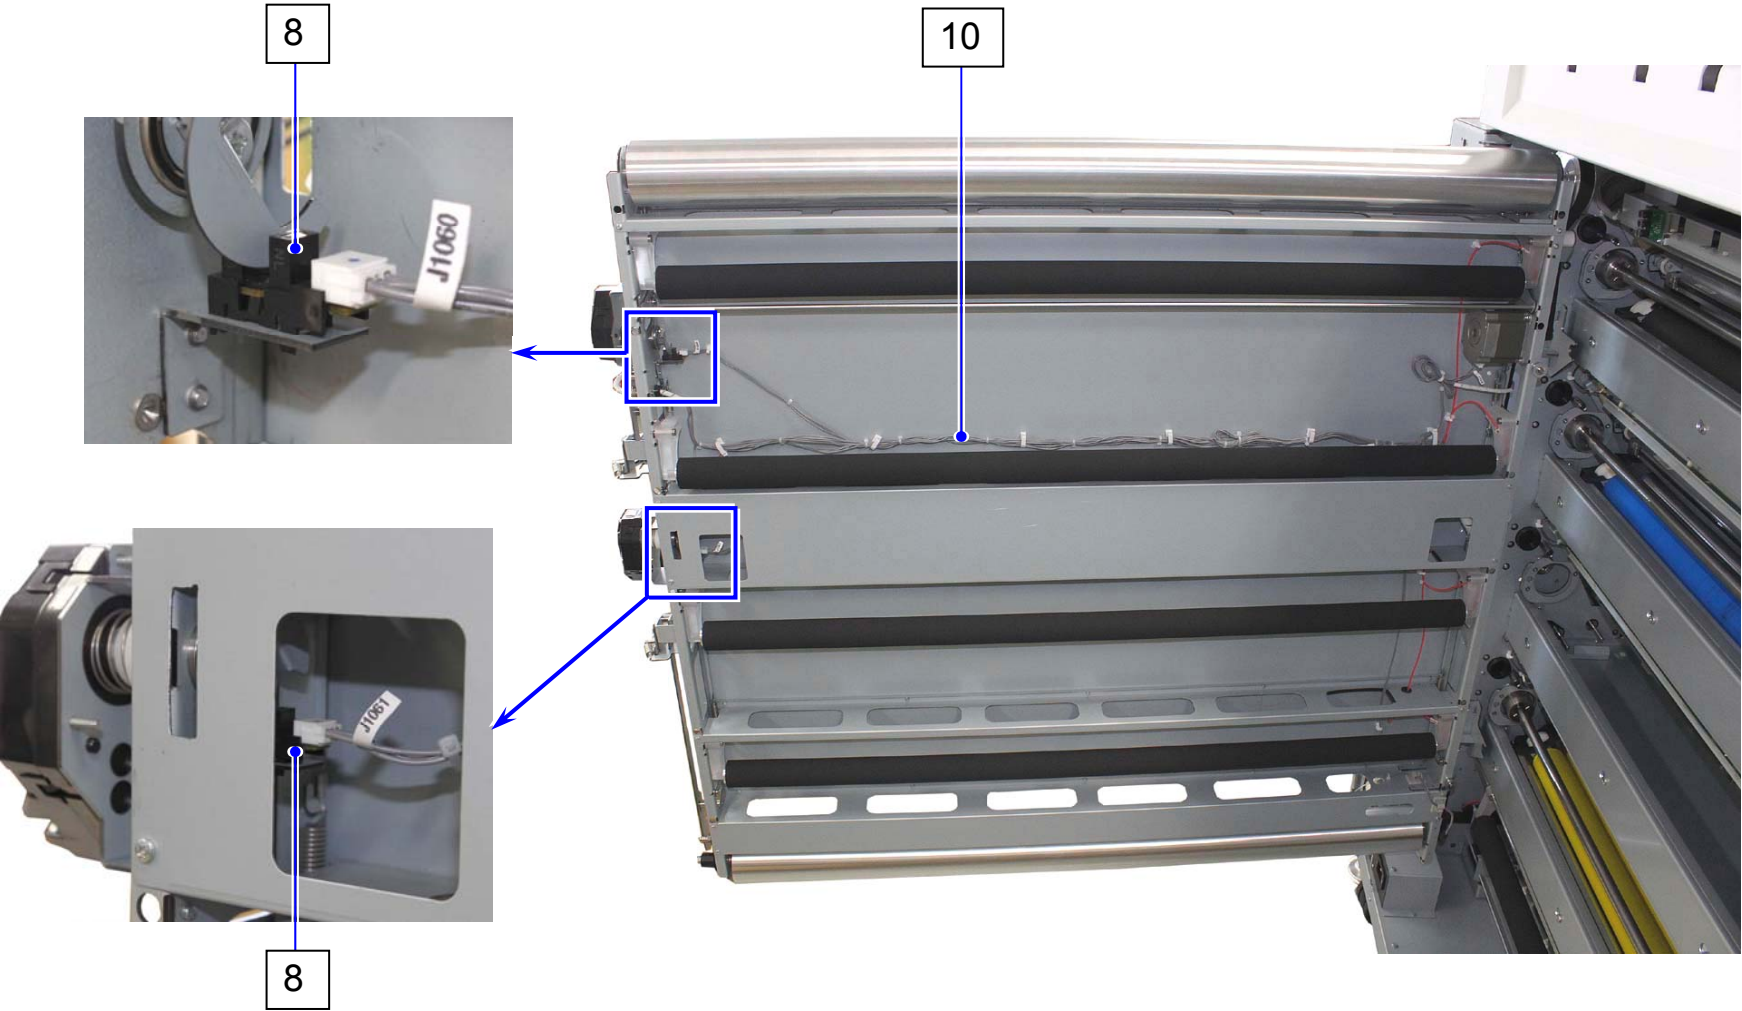


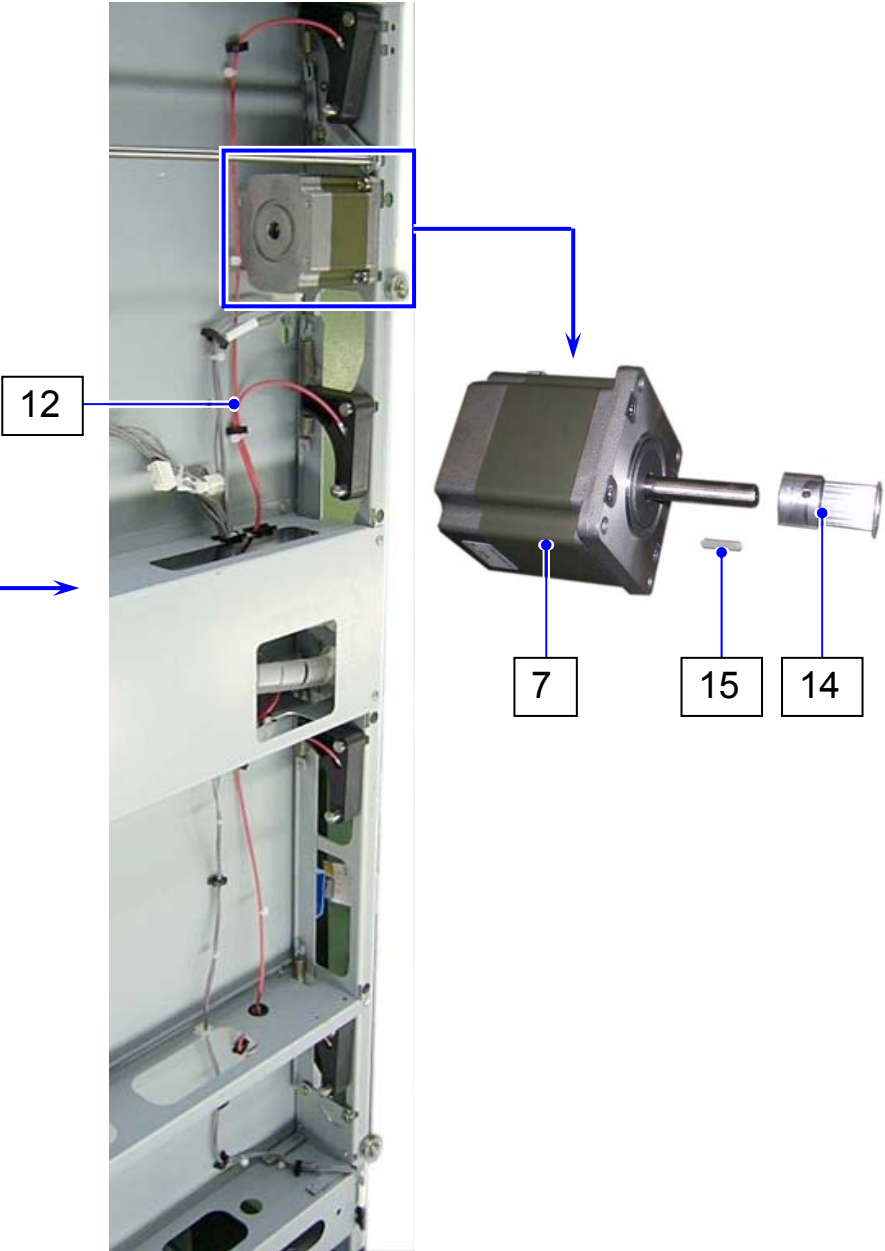
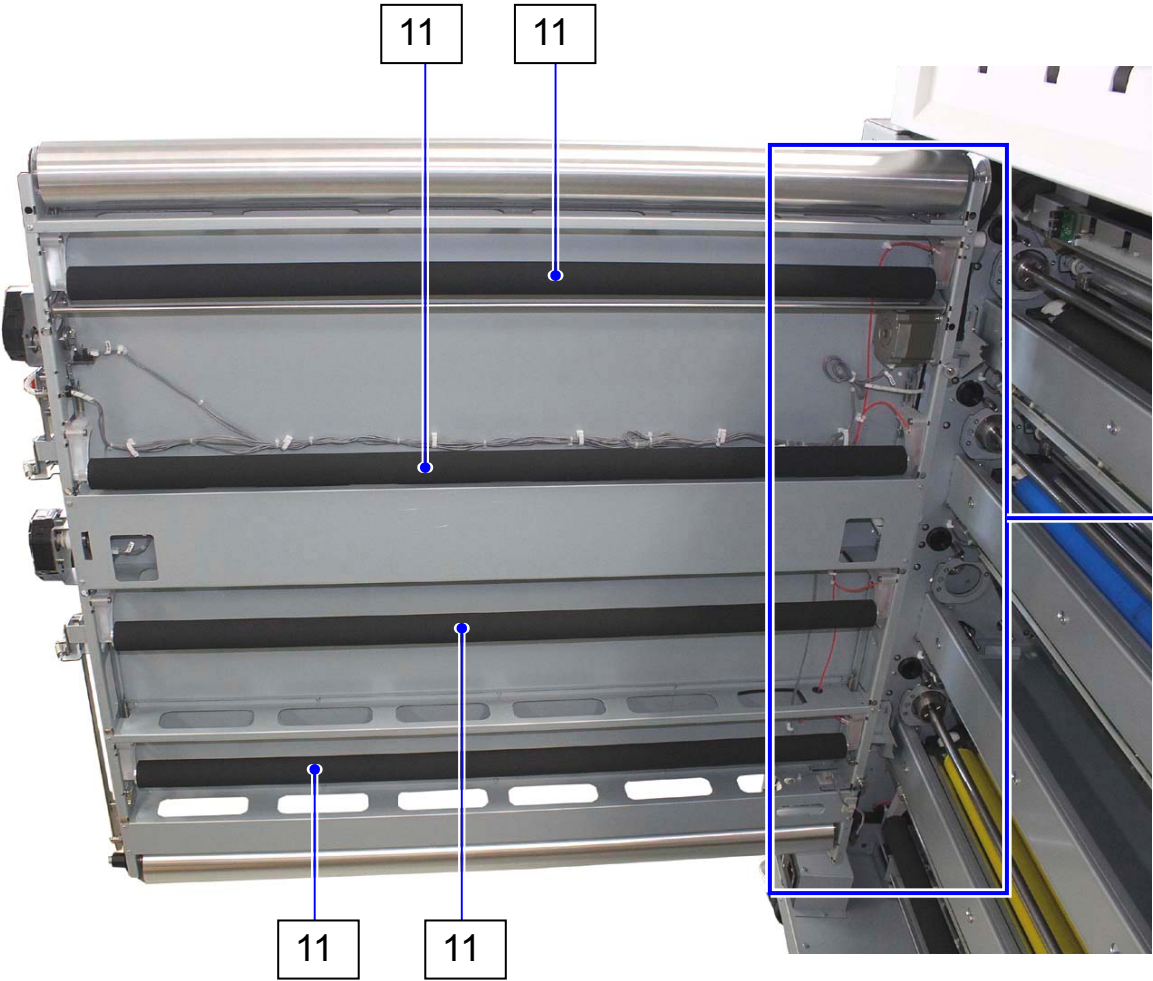



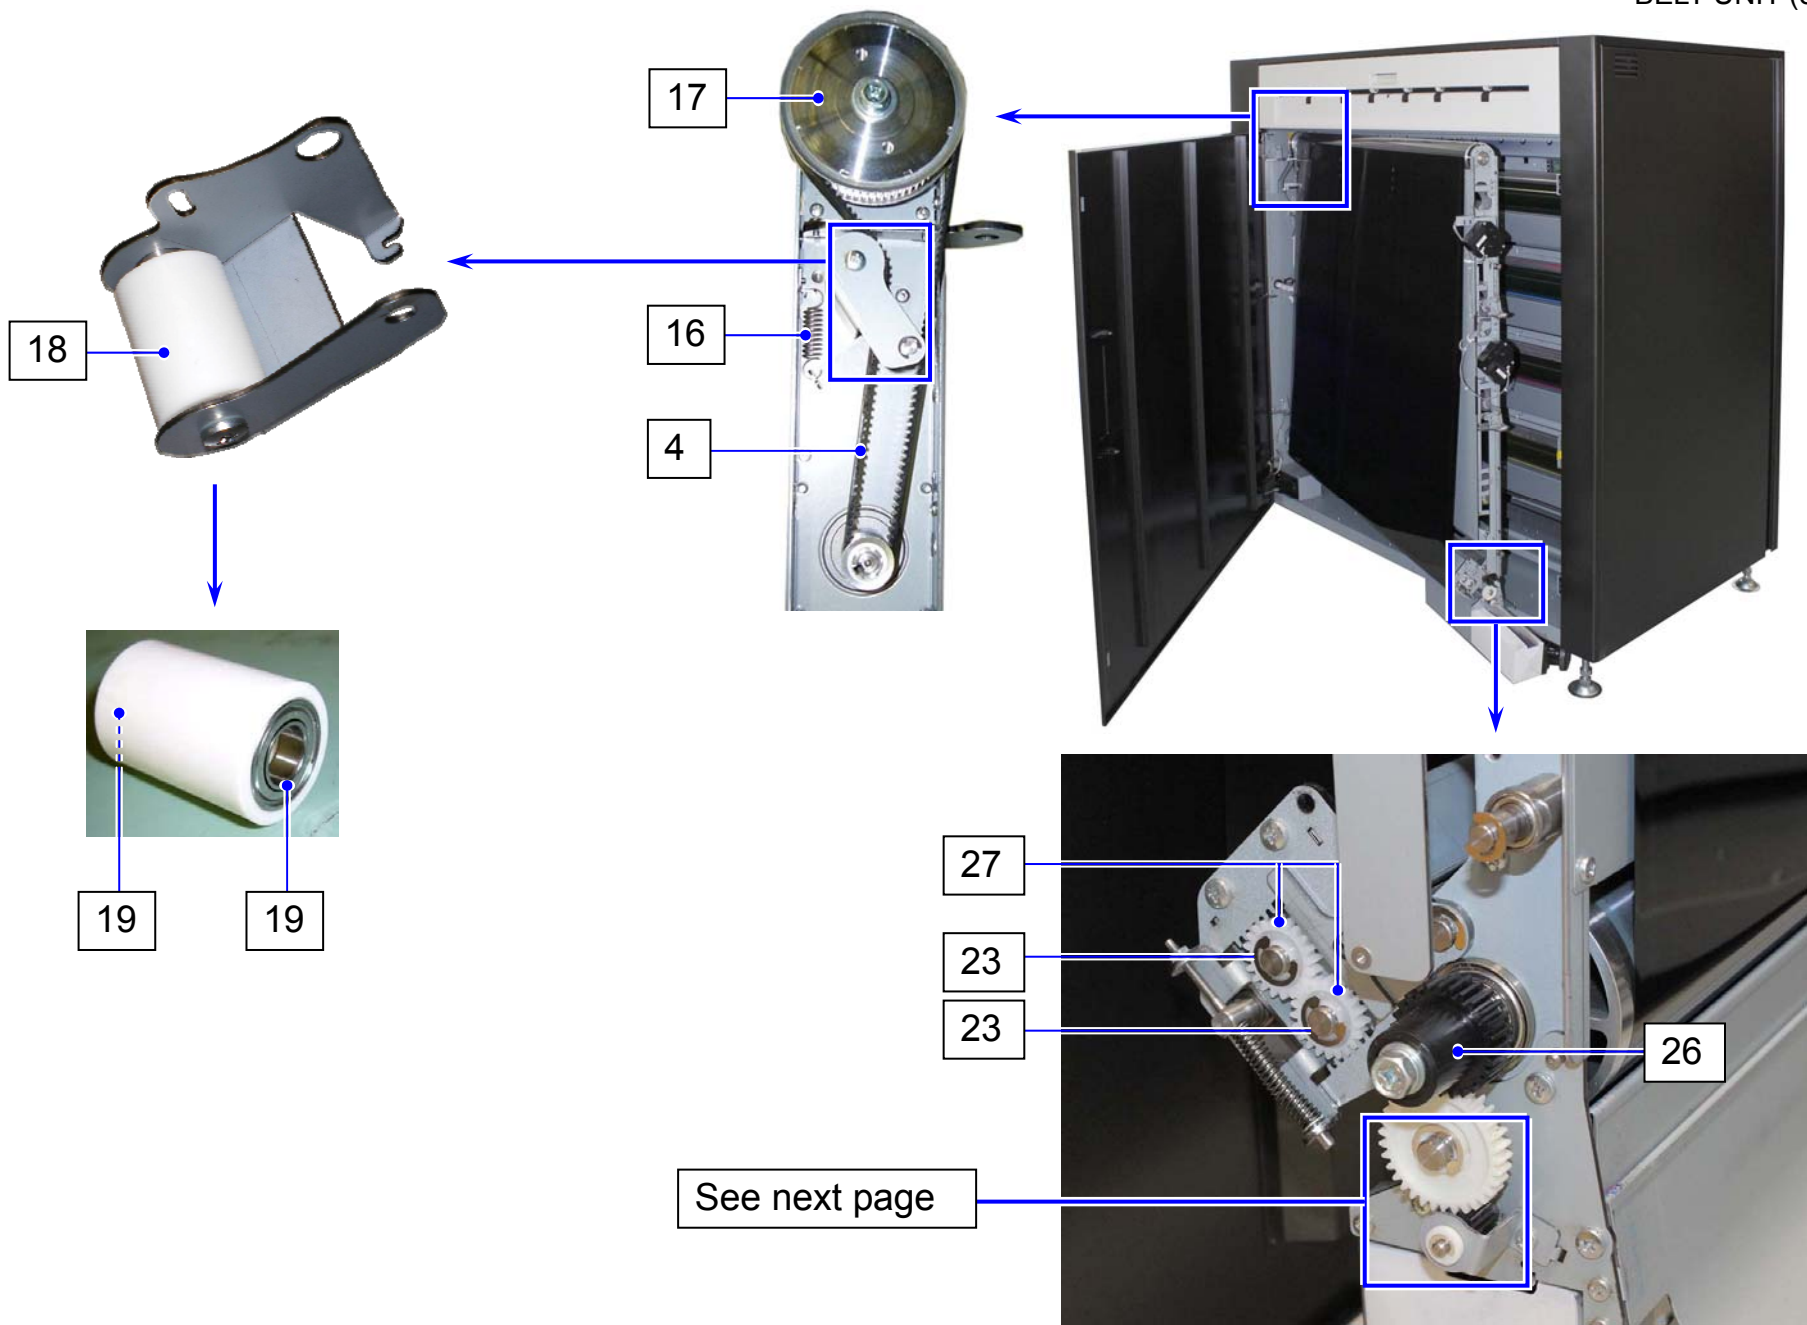


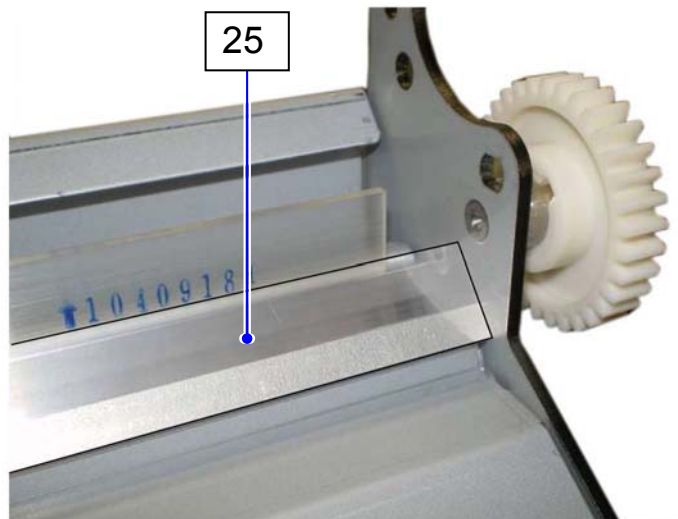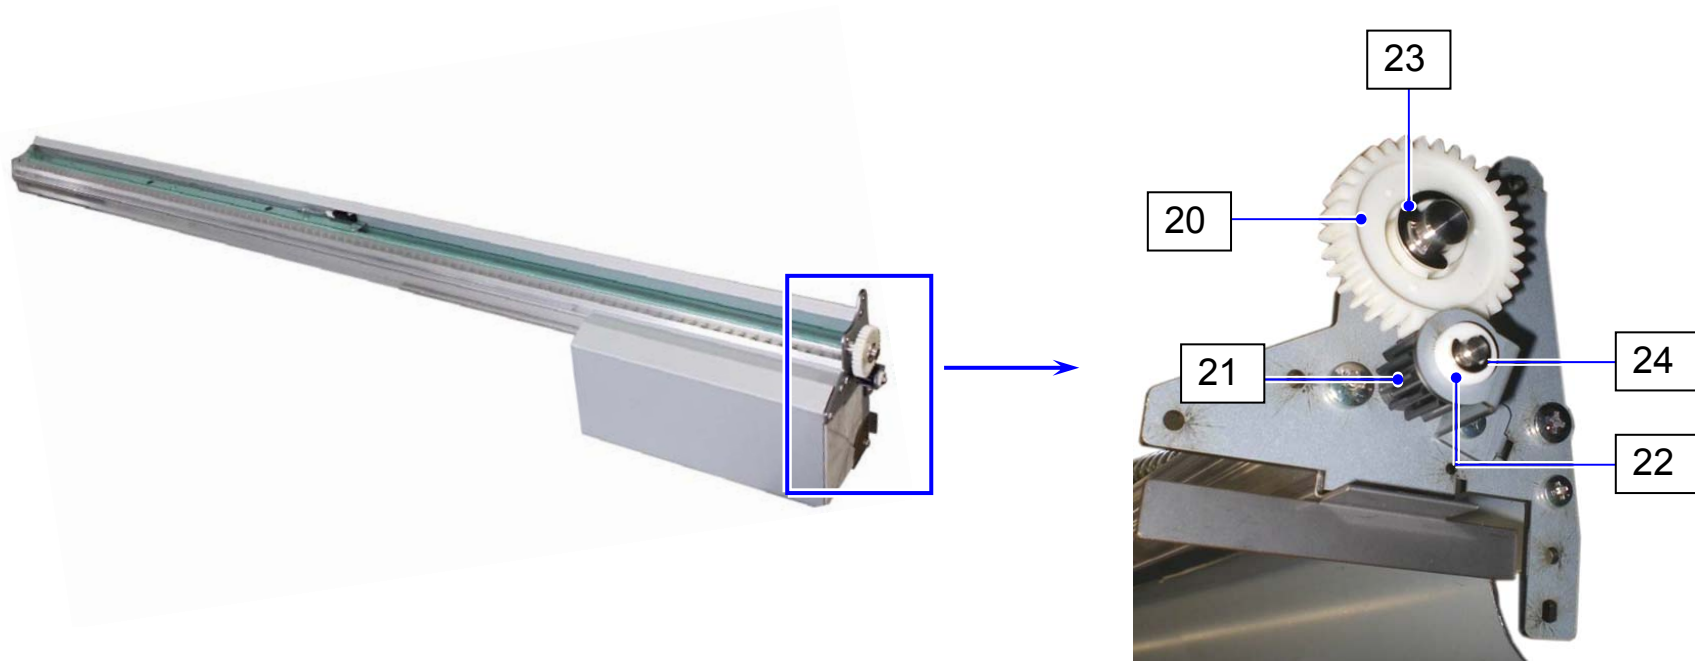


Item	Part Number	Part Description	Type	Qty	SP
1	9000101137	SENSOR	KI1306-AALF	2	B
2	9000380123	MOTOR LIFT	MA-D04-004	2	C
3	Z252000030	BELT		1	B
4	Z252000830	165 BELT		1	D
5	9000100982	SENSOR (PS117ED1)	PS117ED1	1	B
6	Z254300890	BC BLADE		1	B
7	9000380111	STEPPING MOTOR	KT60LM06-017	1	C
8	9000101103	SENSOR (LG248NL1)	LG248NL1	2	B
9	Z256400271	REGIST SENSOR LEAD		1	D
10	Z256400262	BELT TERMINAL HARNESS		1	D
11	Z252060020	TR ROLLER ASSY		4	D
12	Z256400760	TRANS BIAS LEAD		1	D
13	Z254301110	BC BLADE BONE		1	D
14	Z252000190	16 PULLY		1	D
15	9000800174	PARALLEL KEY	3×3×15 S45C	1	D
16	Z252000260	IDOLER SPRING		1	D
17	Z252000180	72 PULLY		1	D
18	Z071600590	PULLY		1	D
19	9000780011	BALL BEARING	φ8×φ16×5t	2	D
20	3004600300	S33P DRIVE GEAR		1	D
21	Z254300070	13T GEAR		1	D
22	Z025101200	HOLDER (331)		1	D
23	6807033310	RETAINING RING-E	E7,Ni	3	D
24	6807033306	RETAINING RING-E	E3,Ni	1	D
25	Z254301030	BC SEAL		1	D
26	Z254300860	BC DRIVE GEAR 27T		1	D
27	4204600440	20T GEAR		2	D

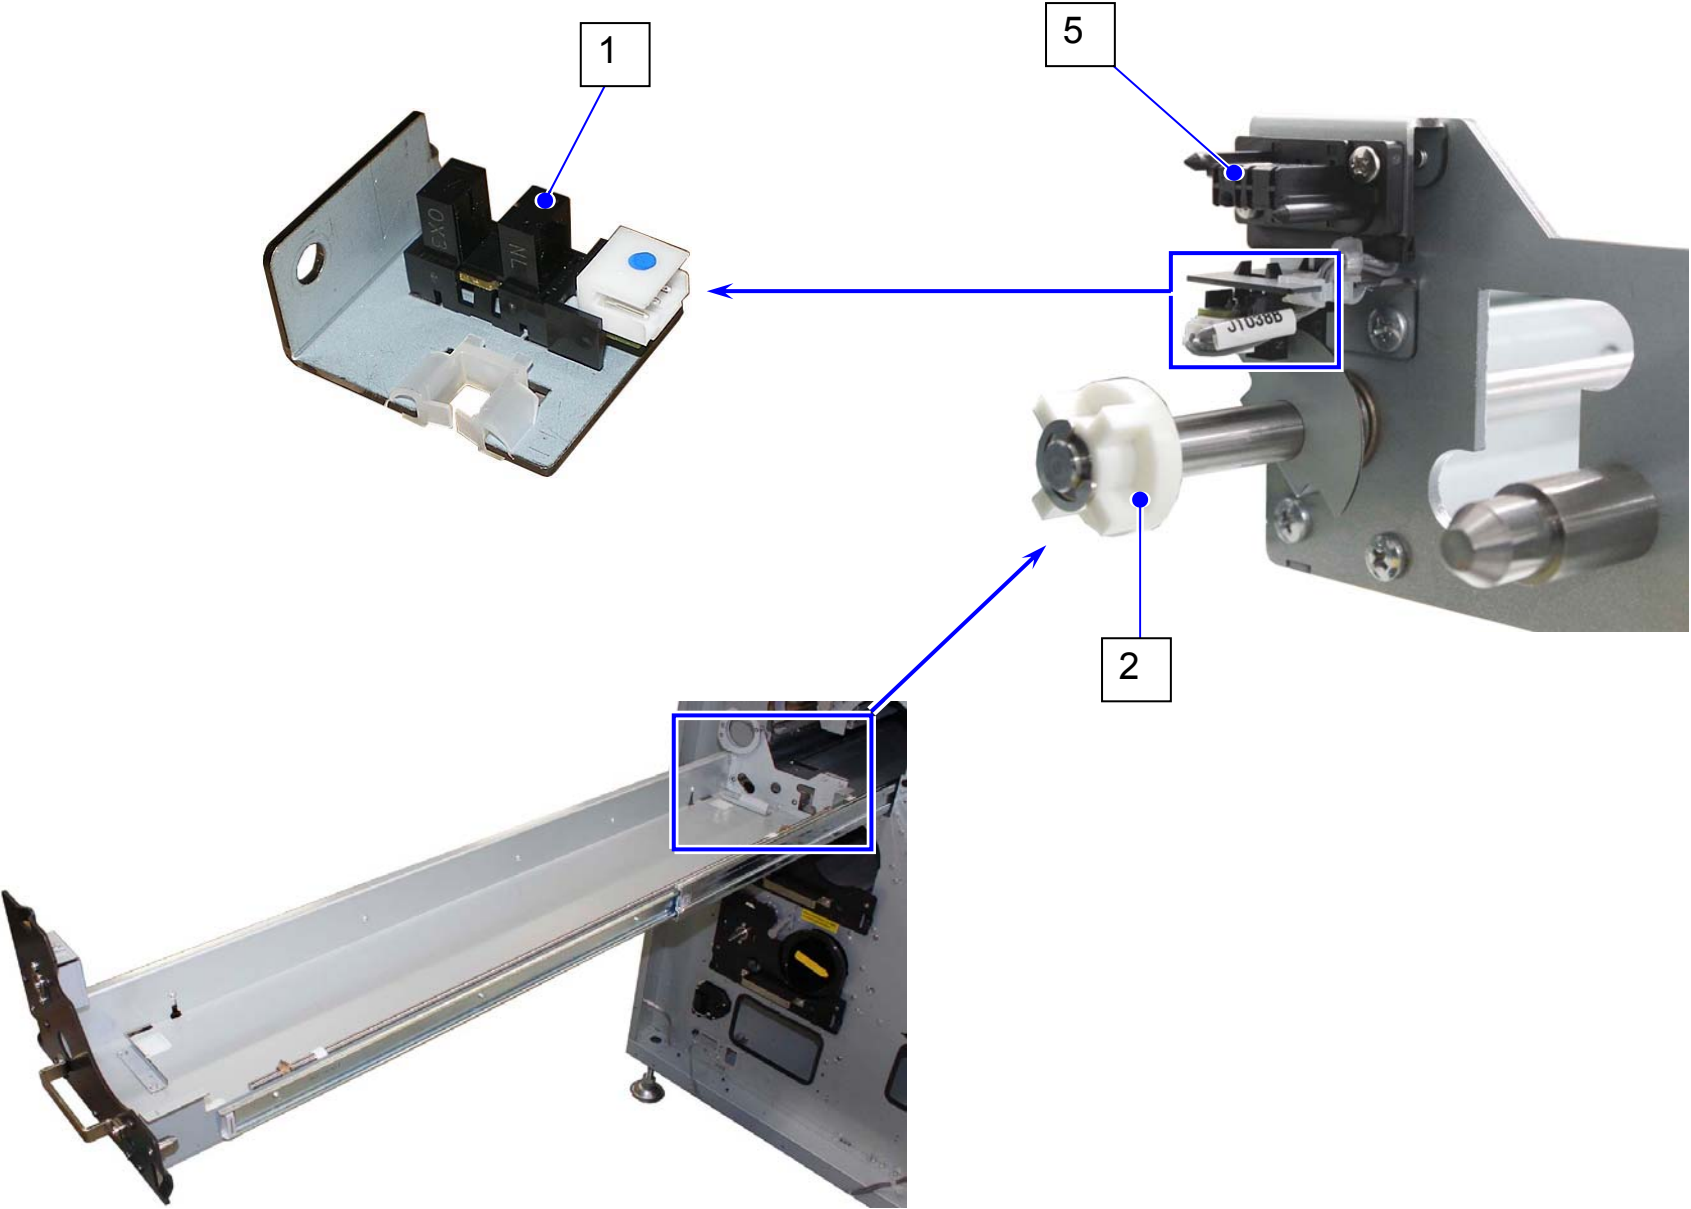


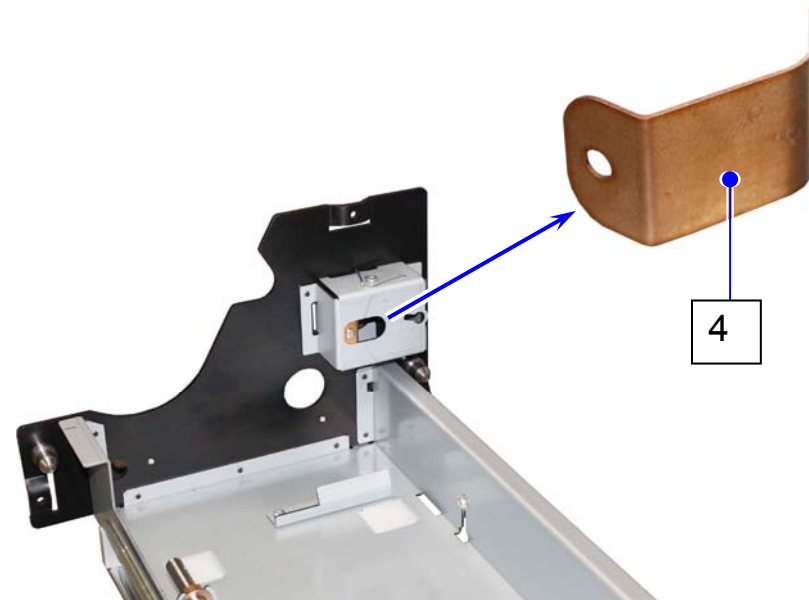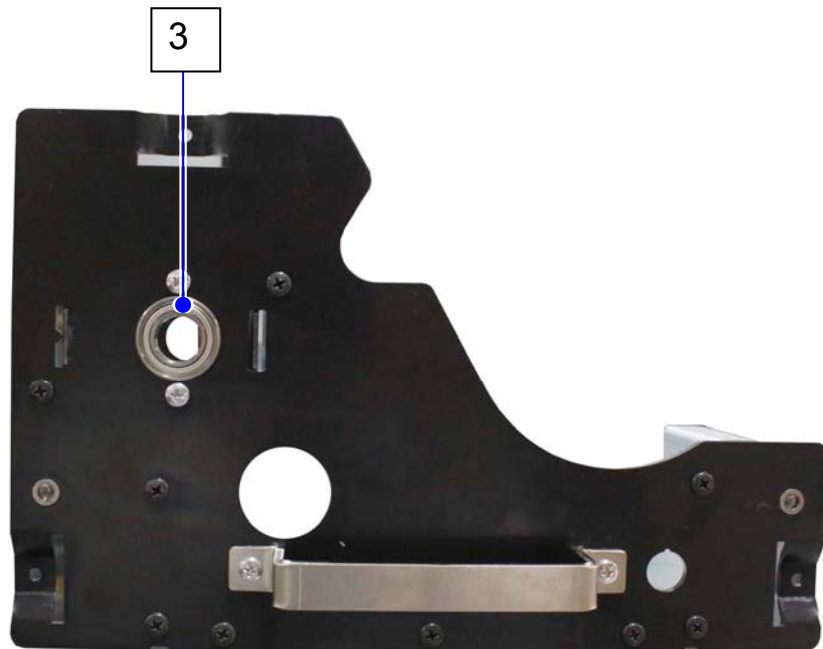

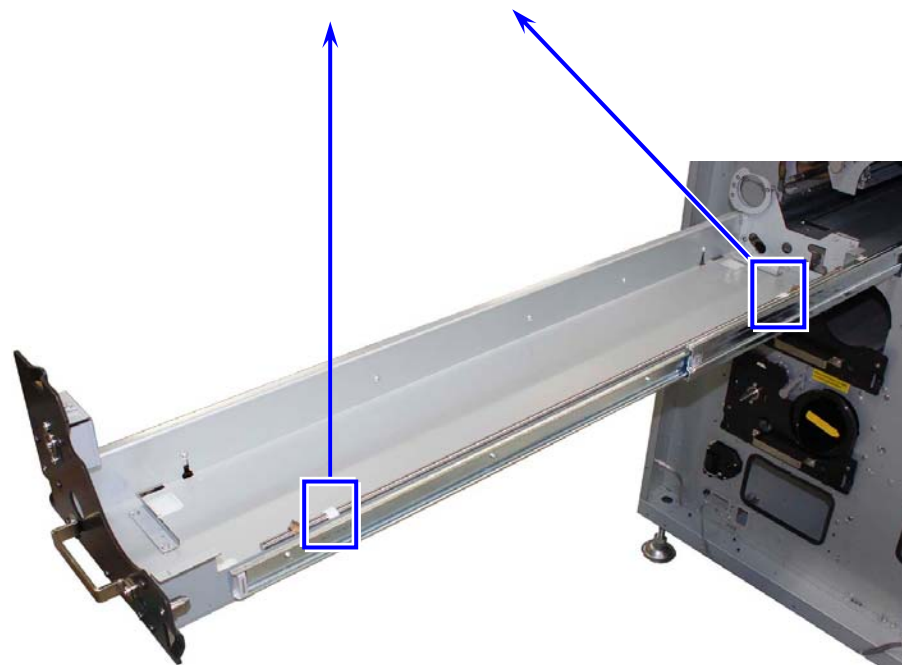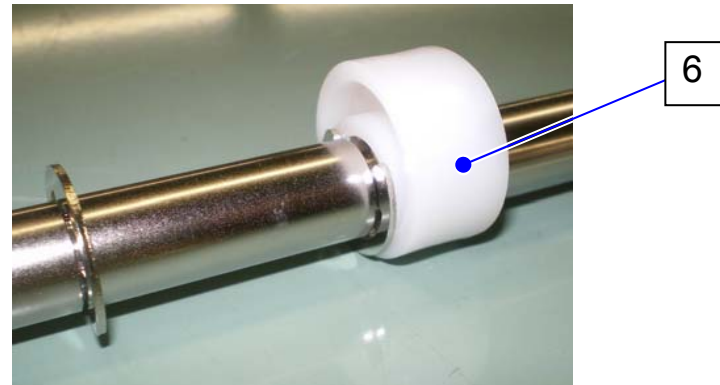

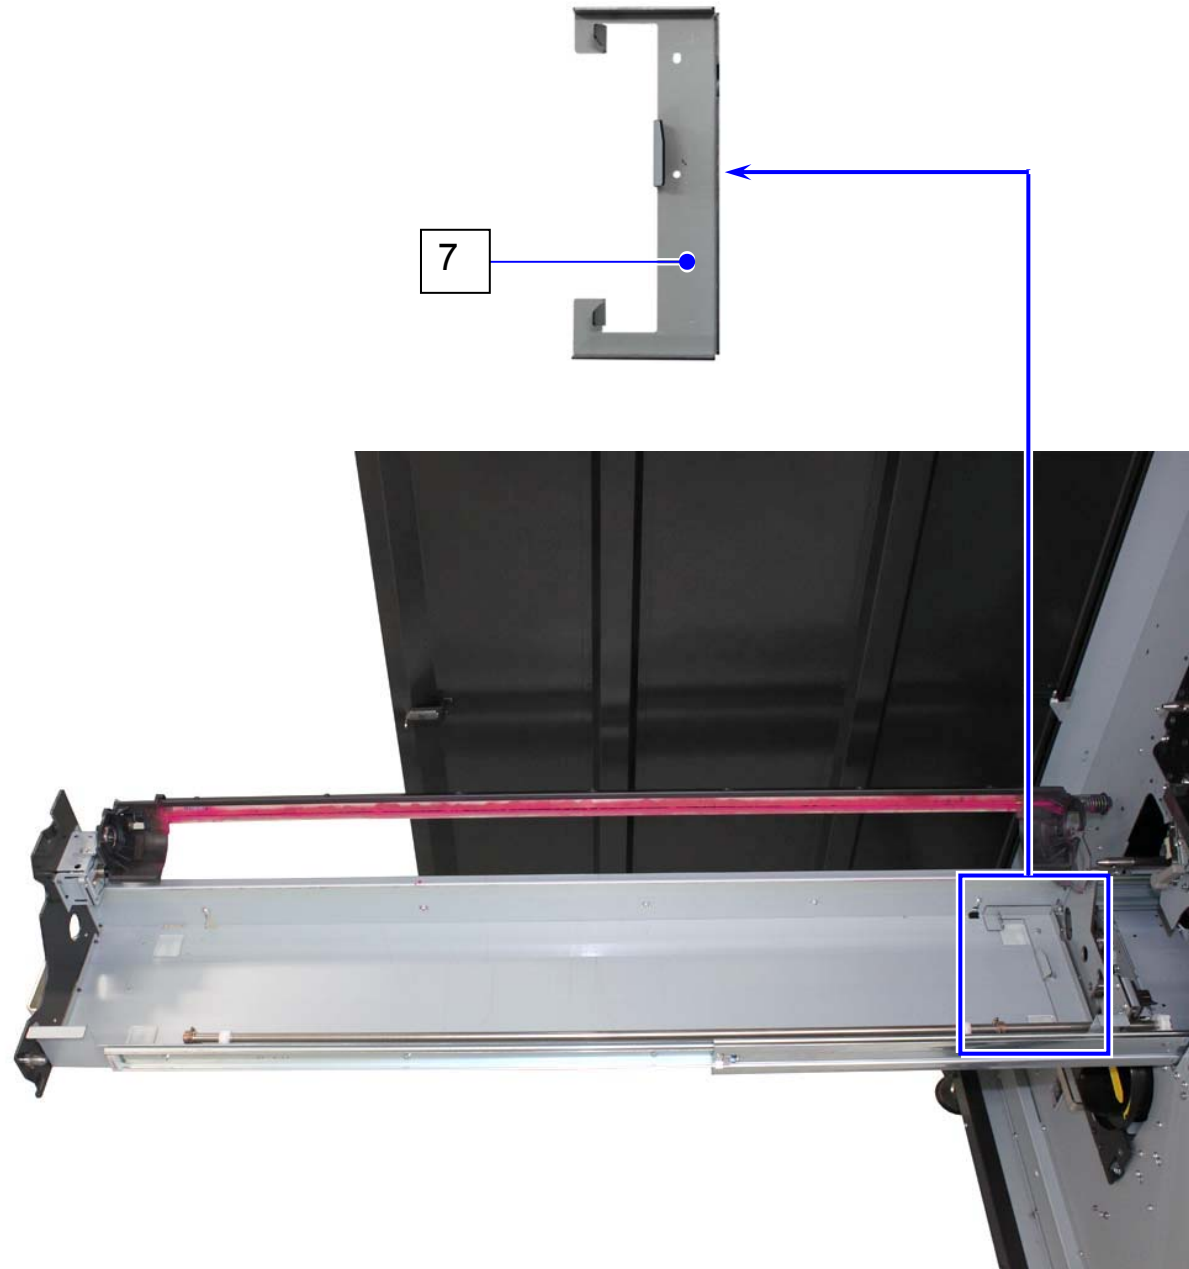



Item	Part Number	Part Description	Type	Qty	SP
1	9000101103	SENSOR (LG248NL1)	LG248NL1	1	B
2	7101703210	COUPLING		1	D
3	9000780009	BALL BEARING	φ12×φ28×8t	1	D
4	Z251700420	PLATE CONDUCTION 2		1	D
5	Z256400440	PROCESS UNIT LEAD		1	D
6	Z251700060	CAM		2	D
7	Z251700101	UNIT GUIDE		1	D

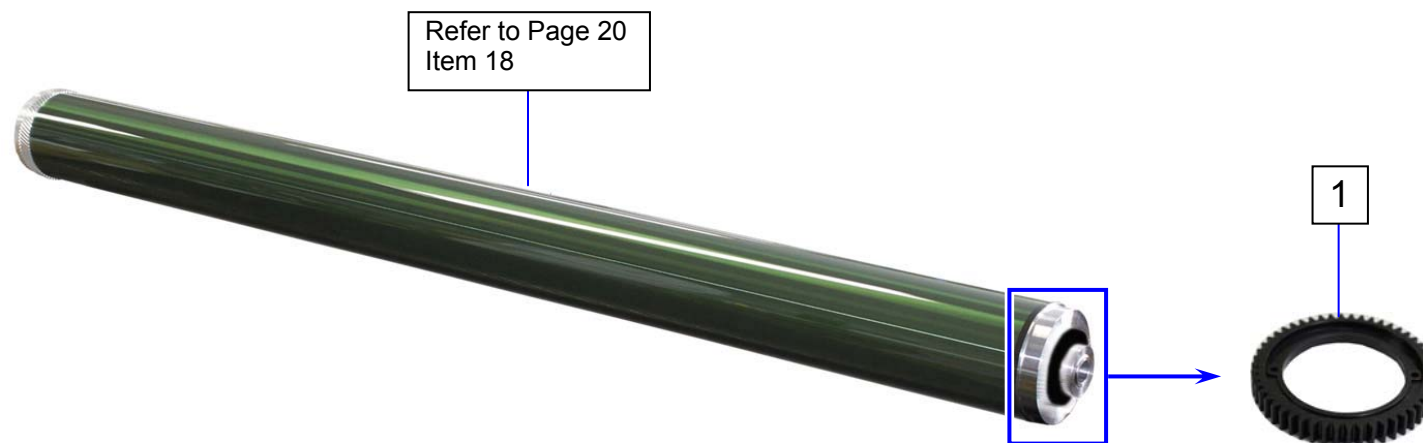


For the kit (DRUM KIT) for "DRUM ASSY", please see the page "20. CONSUMABLE KIT".

Item		Part Number	Part Description	Type	Qty	SP
1		Z254700090	GEAR 50T		1	C

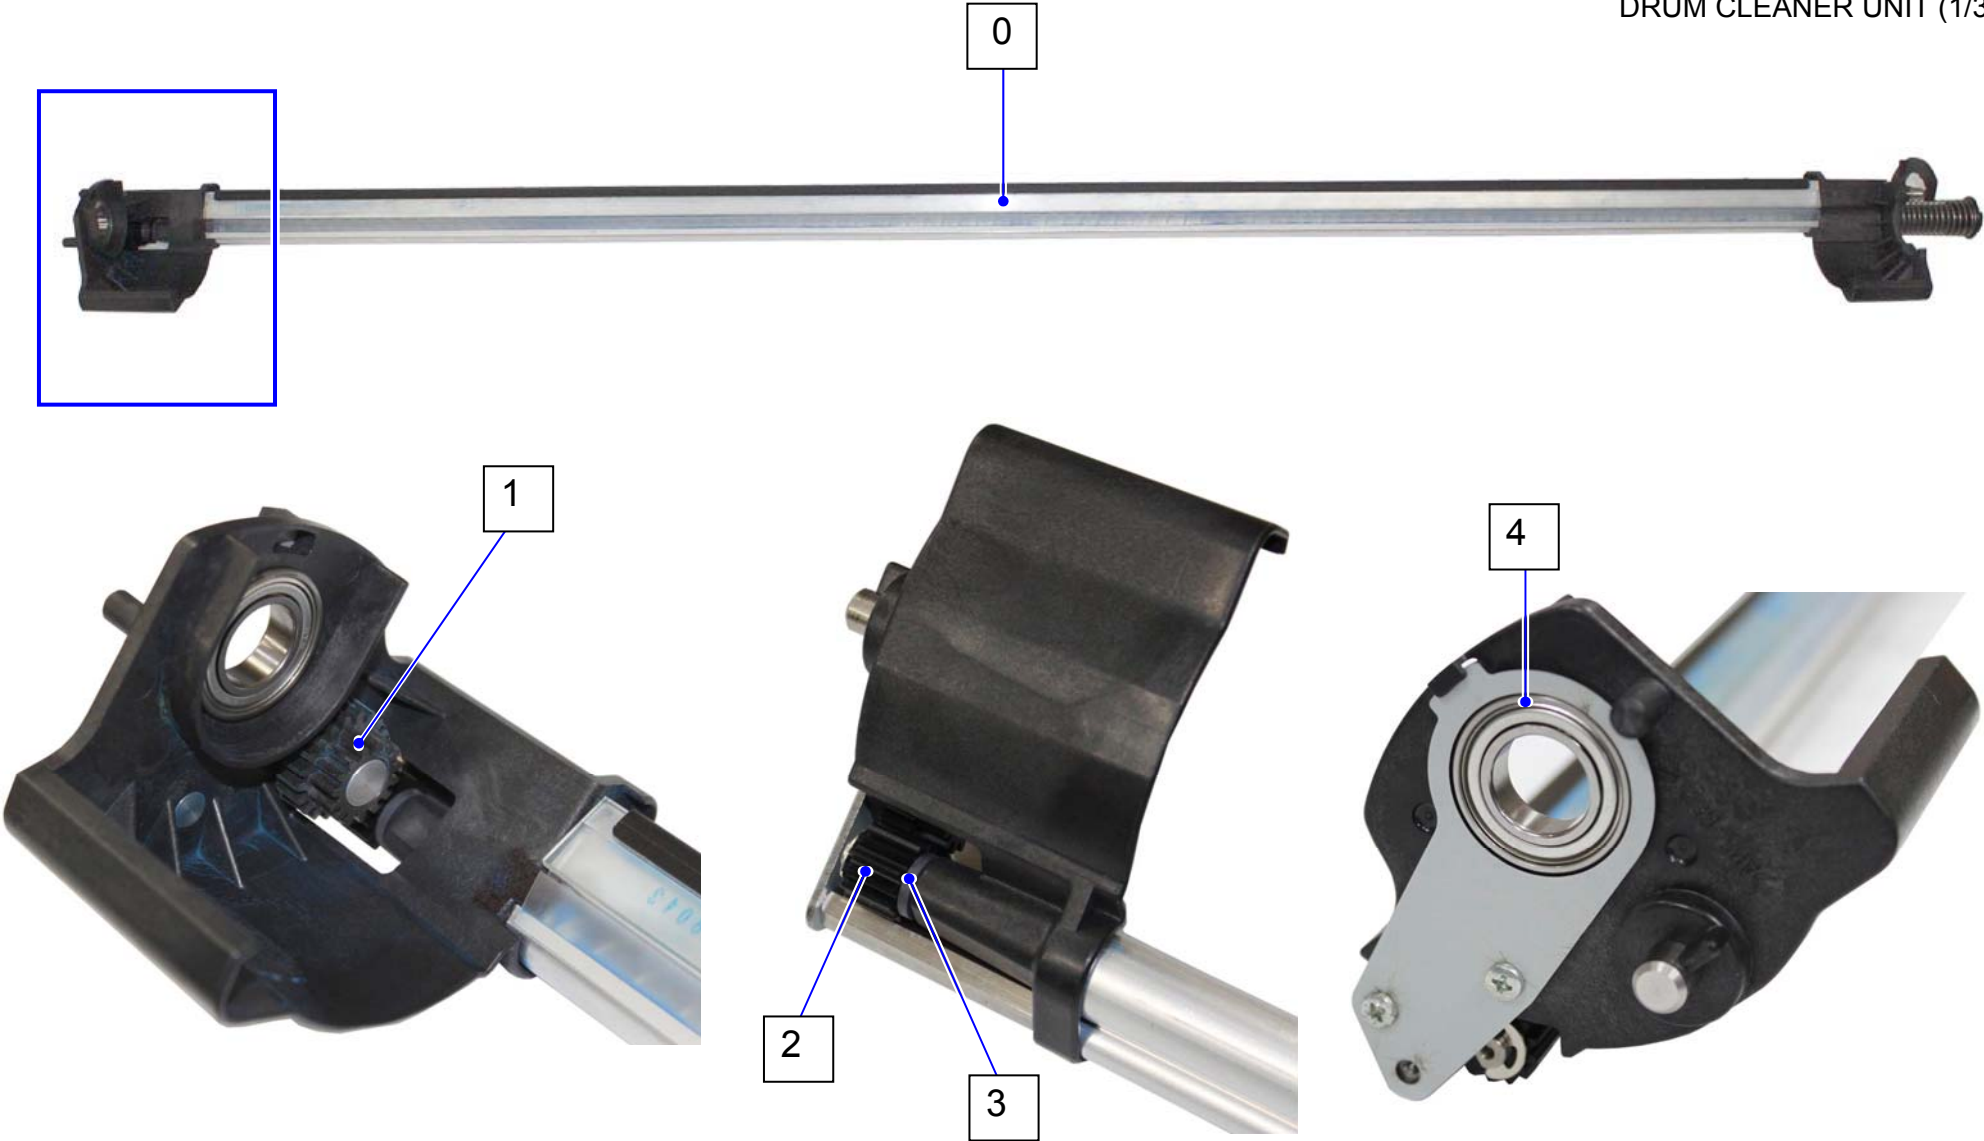

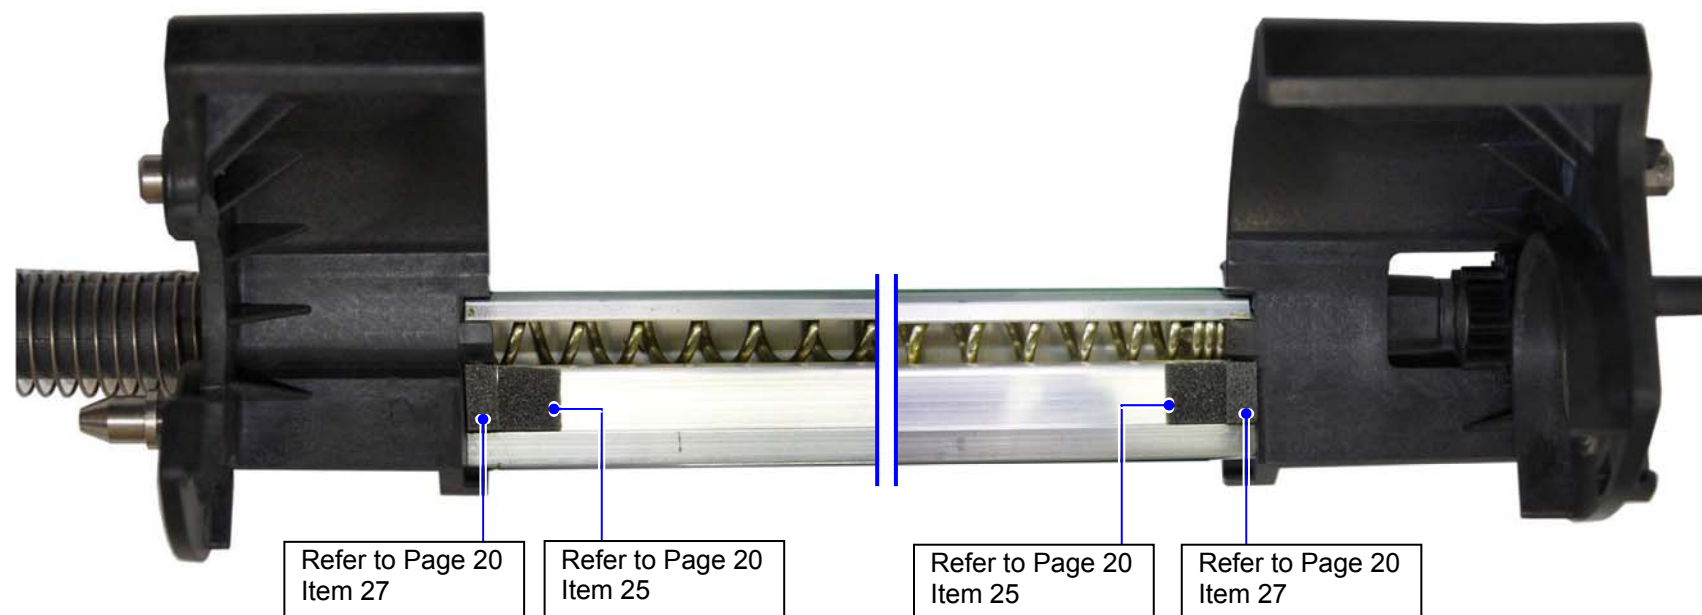


For the kit (DRUM KIT) for " CLEANER UNIT ", please see the page "20. CONSUMABLE KIT".

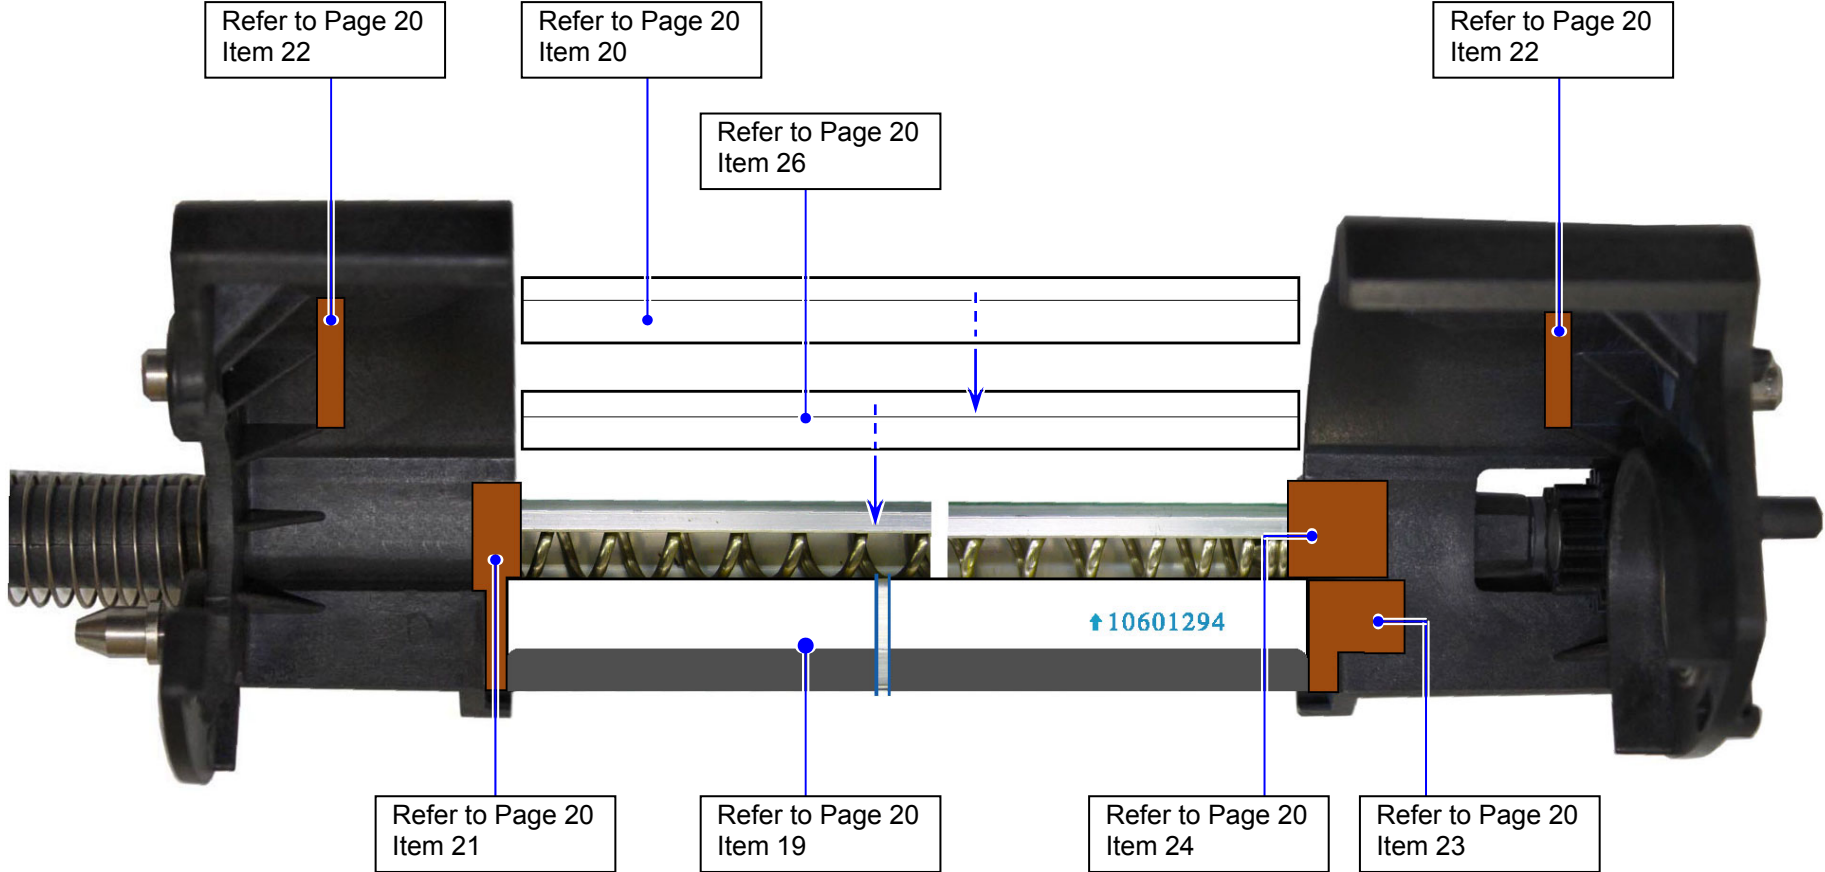



For the kit (DRUM KIT) for " CLEANER UNIT ", please see the page "20. CONSUMABLE KIT".

Item		Part Number	Part Description	Type	Qty	SP
0		Z254370010	CLEANER UNIT		1	D
1		Z254300080	GEAR 15-20		1	D
2		Z254300070	13T GEAR		1	D
3		Z074301210	BUSH		1	D
4		9000780009	BALL BEARING	φ12×φ28×8t	1	D

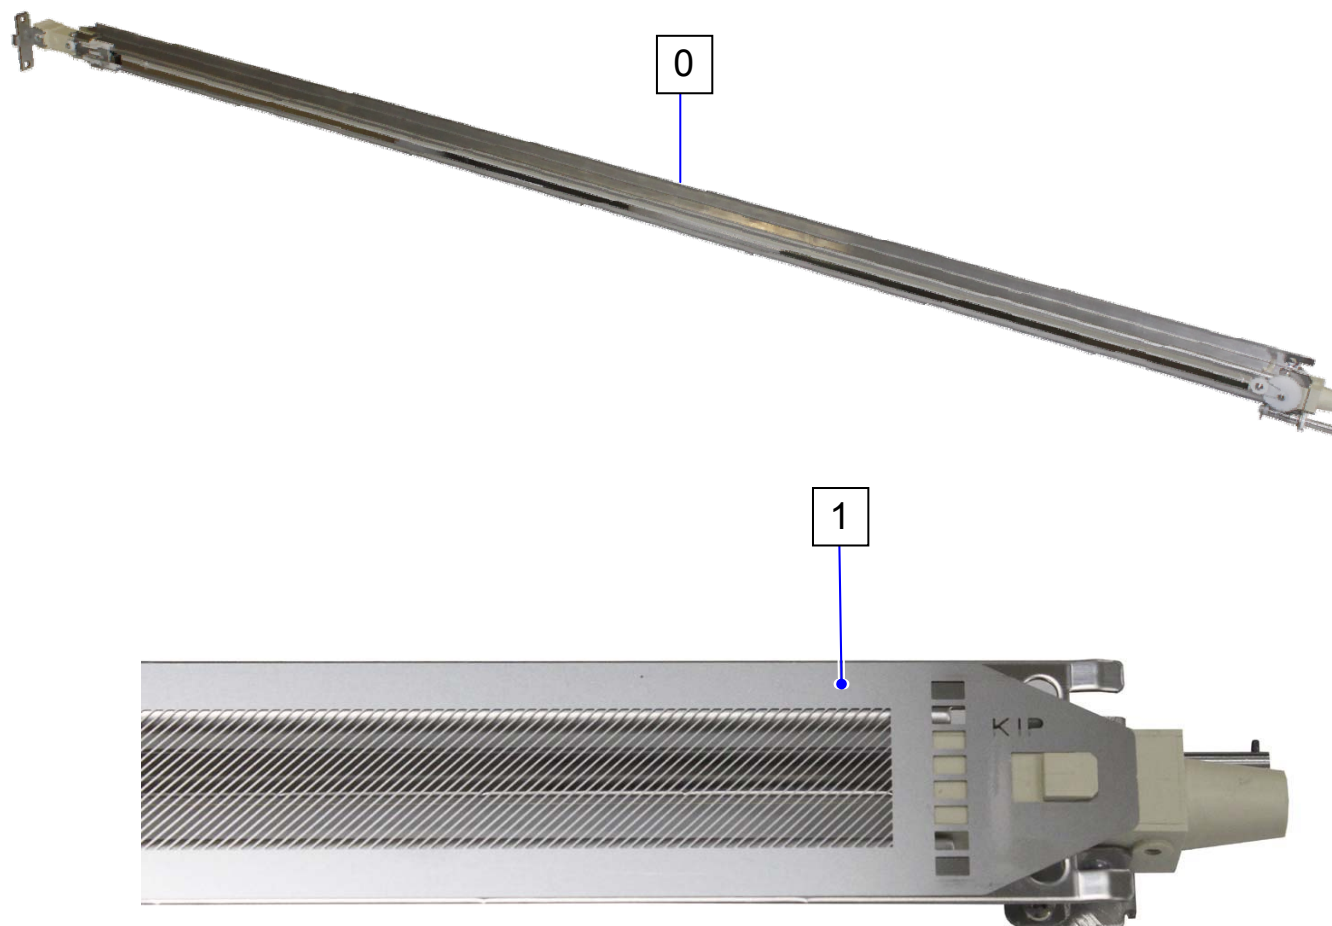


For the kit (1ST KIT) for "1ST CHARGING UNIT", please see the page "20. CONSUMABLE KIT".

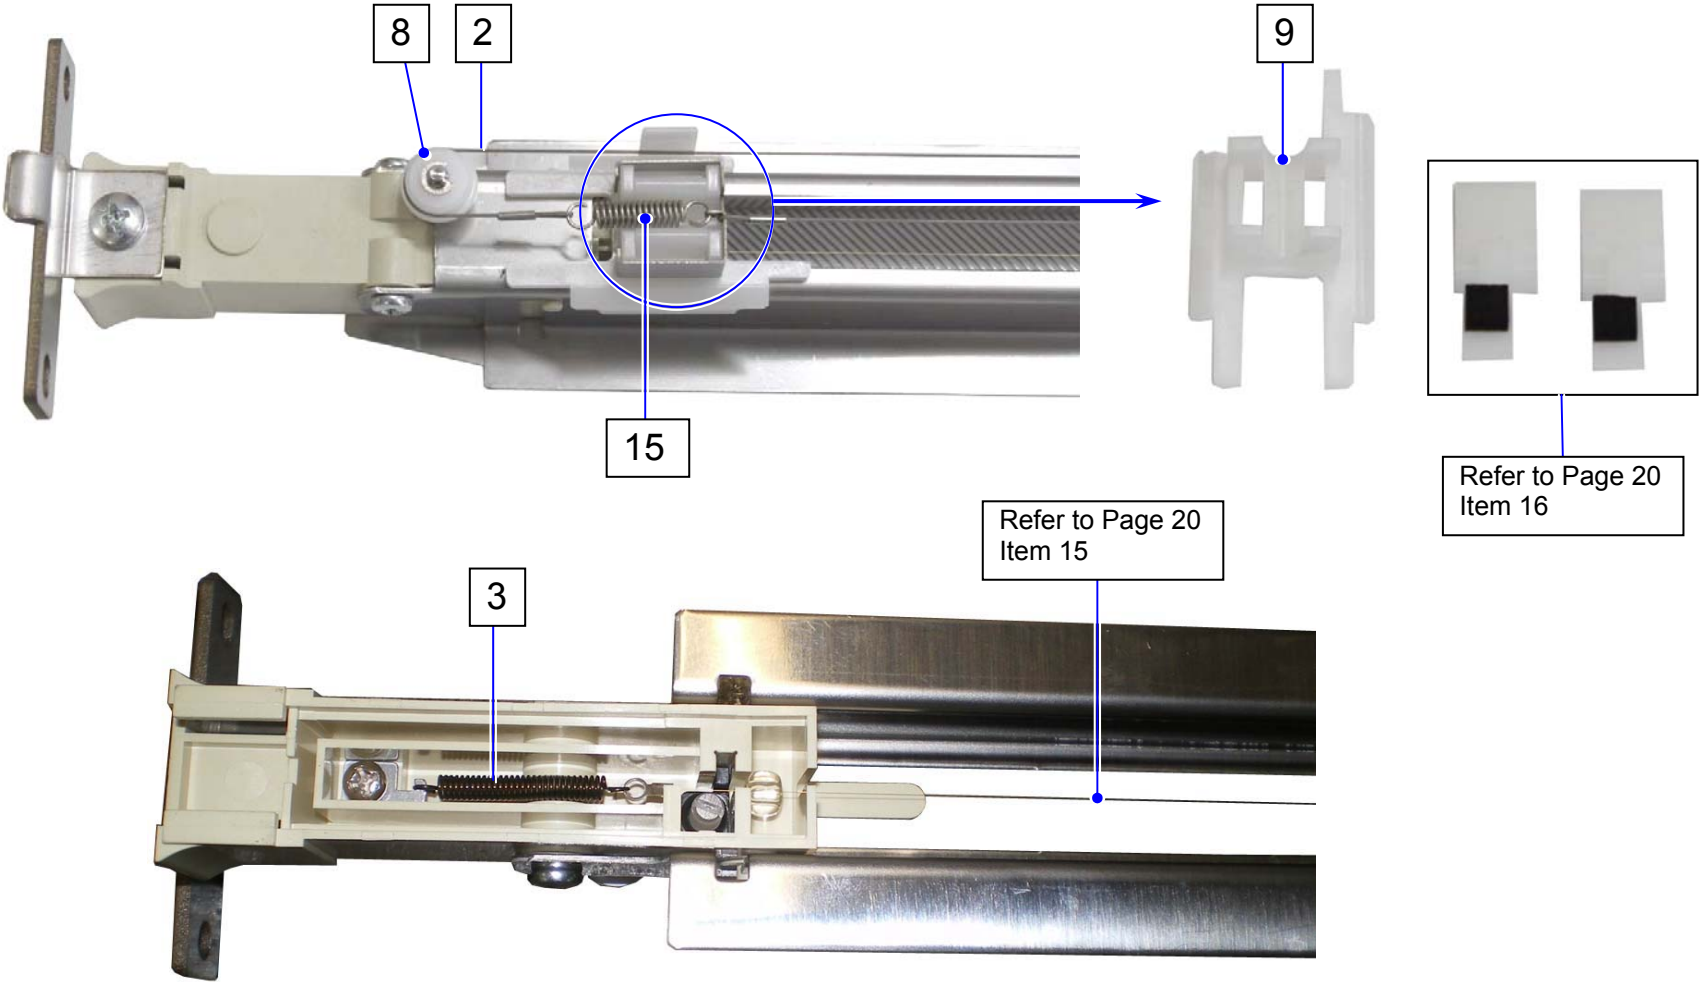

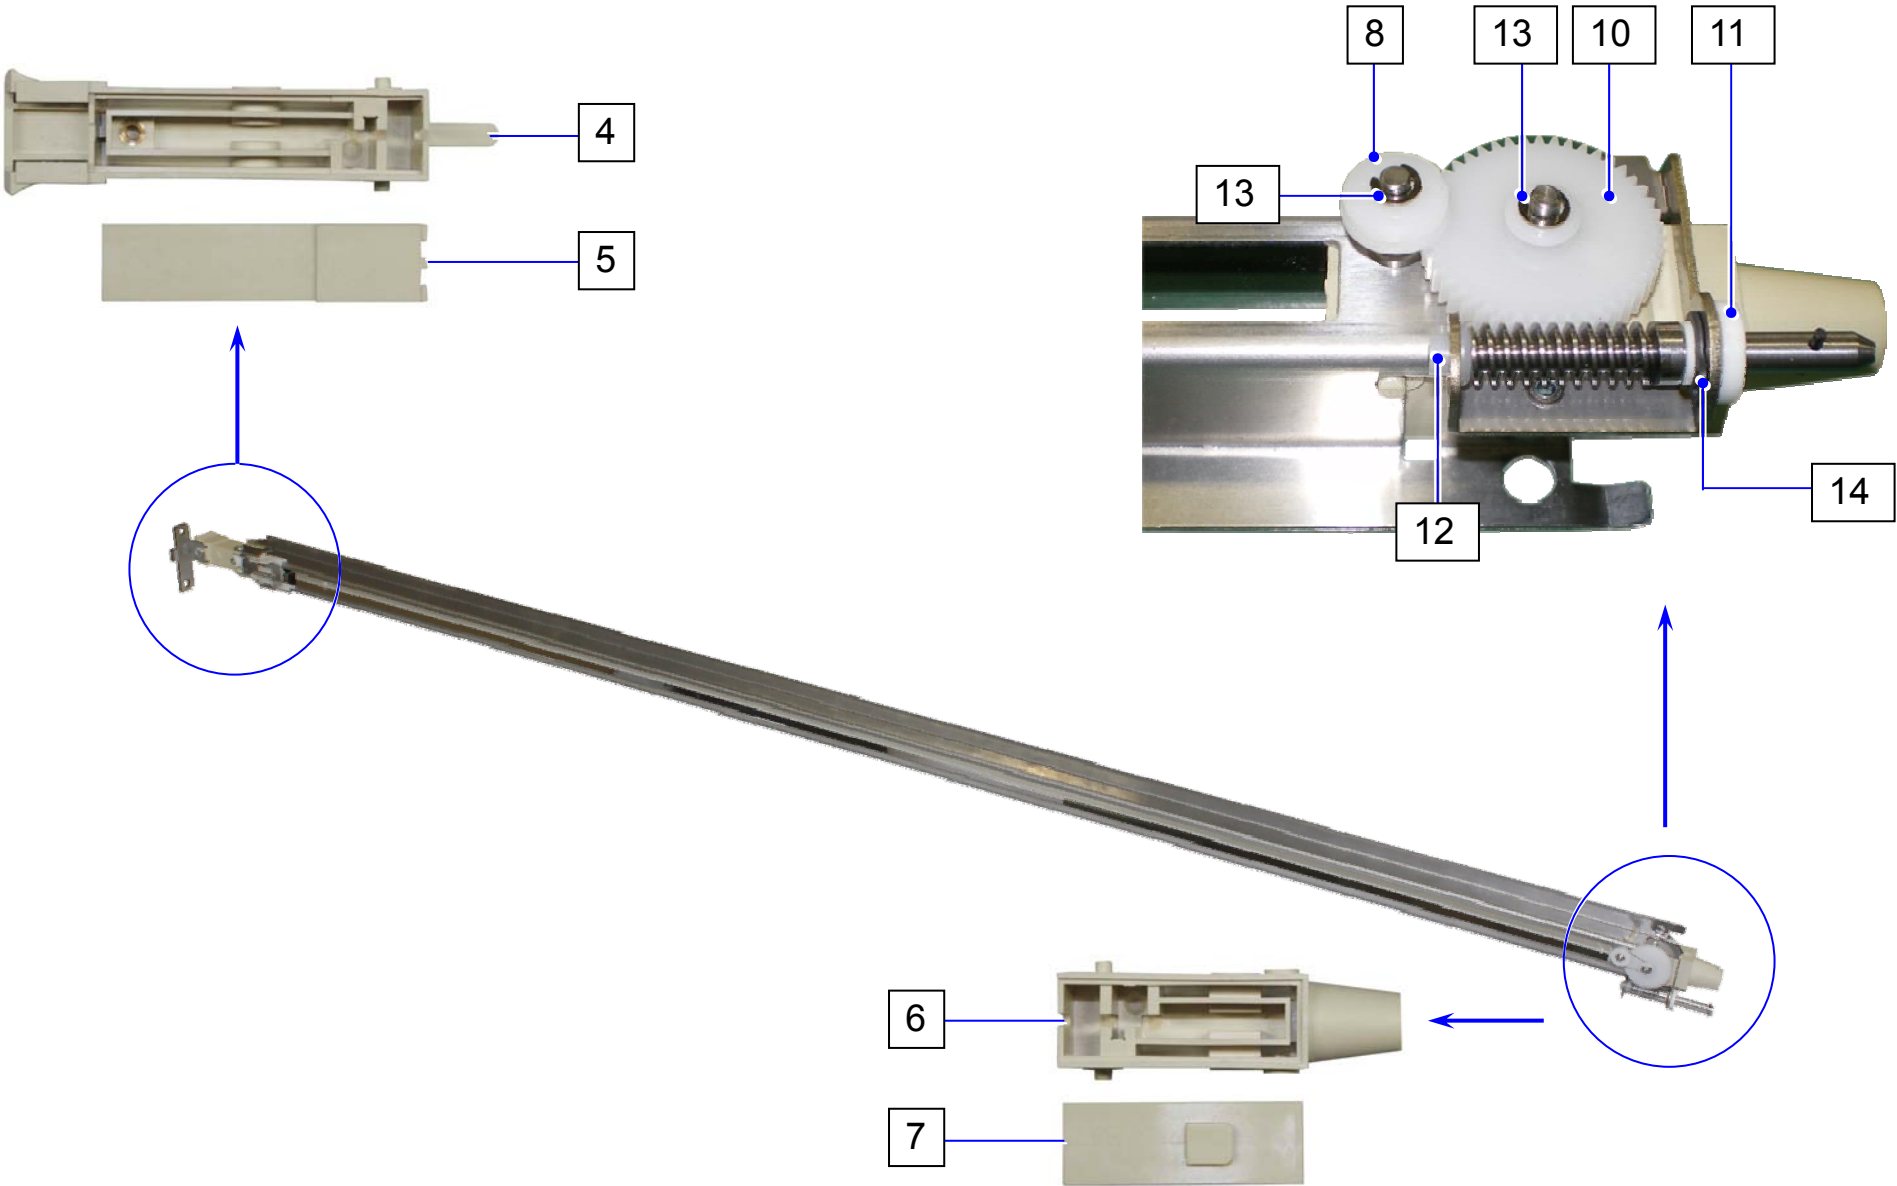



Item	Part Number	Part Description	Type	Qty	SP
0	Z255170010	1st CHARGING UNIT		1	C
1	Z075100150	GRID PLATE		1	C
2	Z255100330	WIRE		1	D
3	Z075100140	WIRE SPRING		1	D
4	Z075100010	HV HEAD FRONT		1	C
5	Z075100030	HV HEAD COVER FRONT		1	C
6	Z075100020	HV HEAD BACK		1	C
7	Z075100040	HV HEAD COVER BACK		1	C
8	Z255100290	IDLER 2		2	D
9	Z255100510	SLIDER		1	D
10	Z255100480	WORM WHEEL 46		1	D
11	Z025101200	HOLDER (331)		1	D
12	Z255100500	WORM HOLDER		1	D
13	6807033304	RETAINING RING-E	E2,Ni	1	D
14	6813032309	RETAINING RING-C,S	C6	1	D
15	Z255100340	ROPE SPRING		1	D

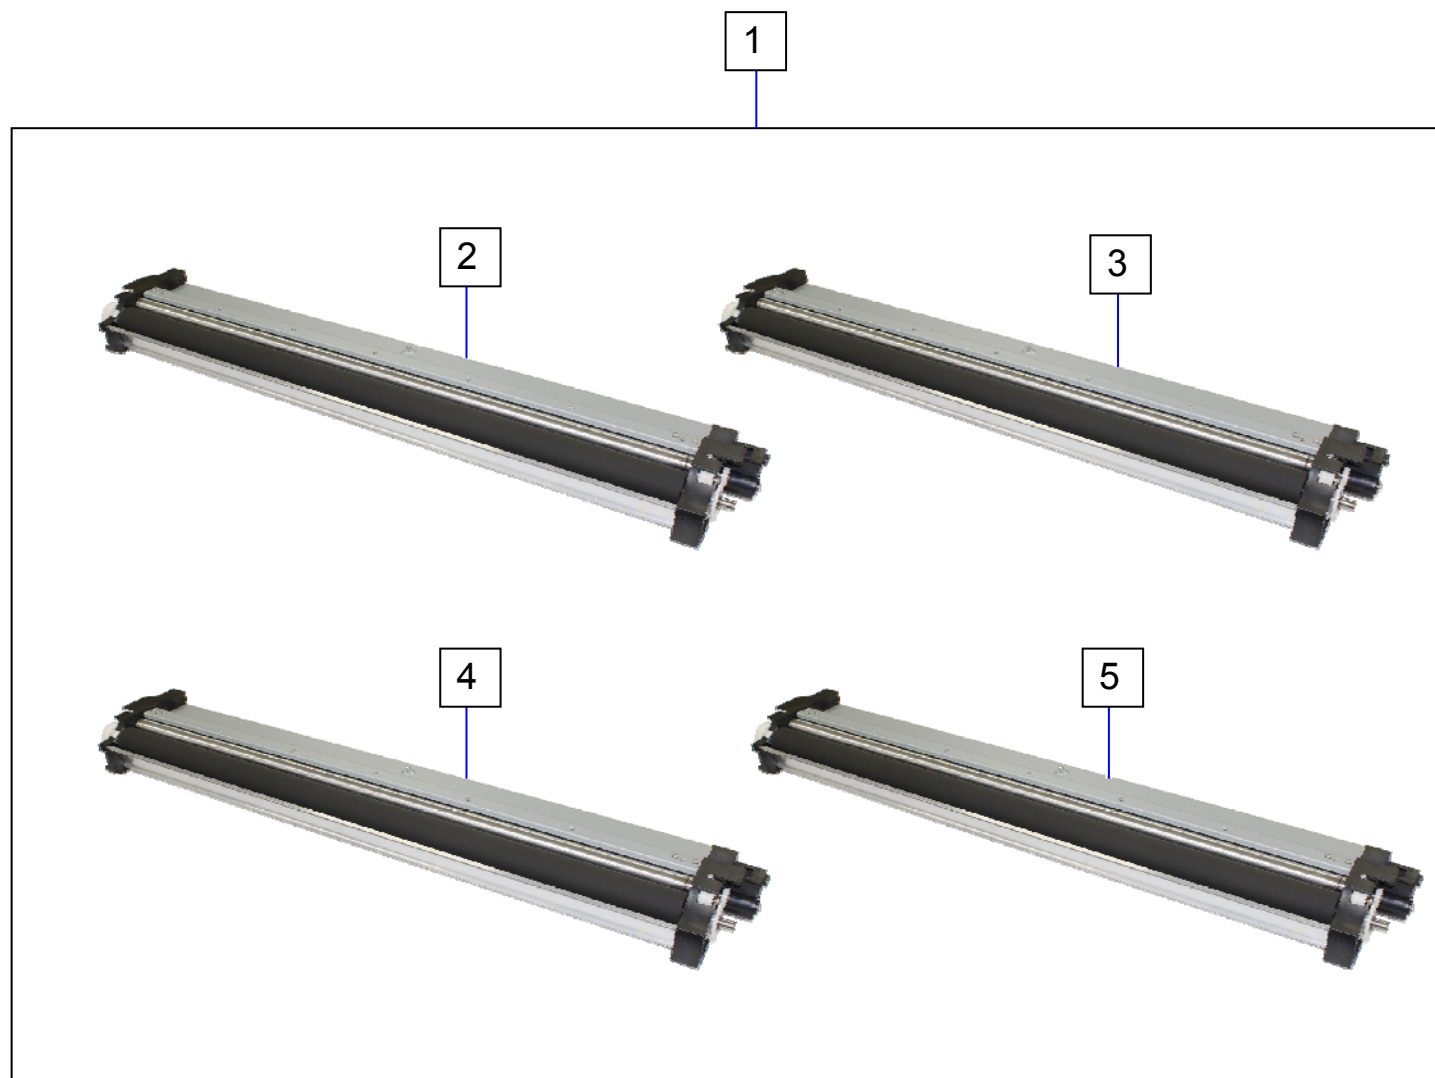



For the kit (ROLLER DEVELOPER KIT) for "DEVELOPER UNIT", please see the page "20. CONSUMABLE KIT".



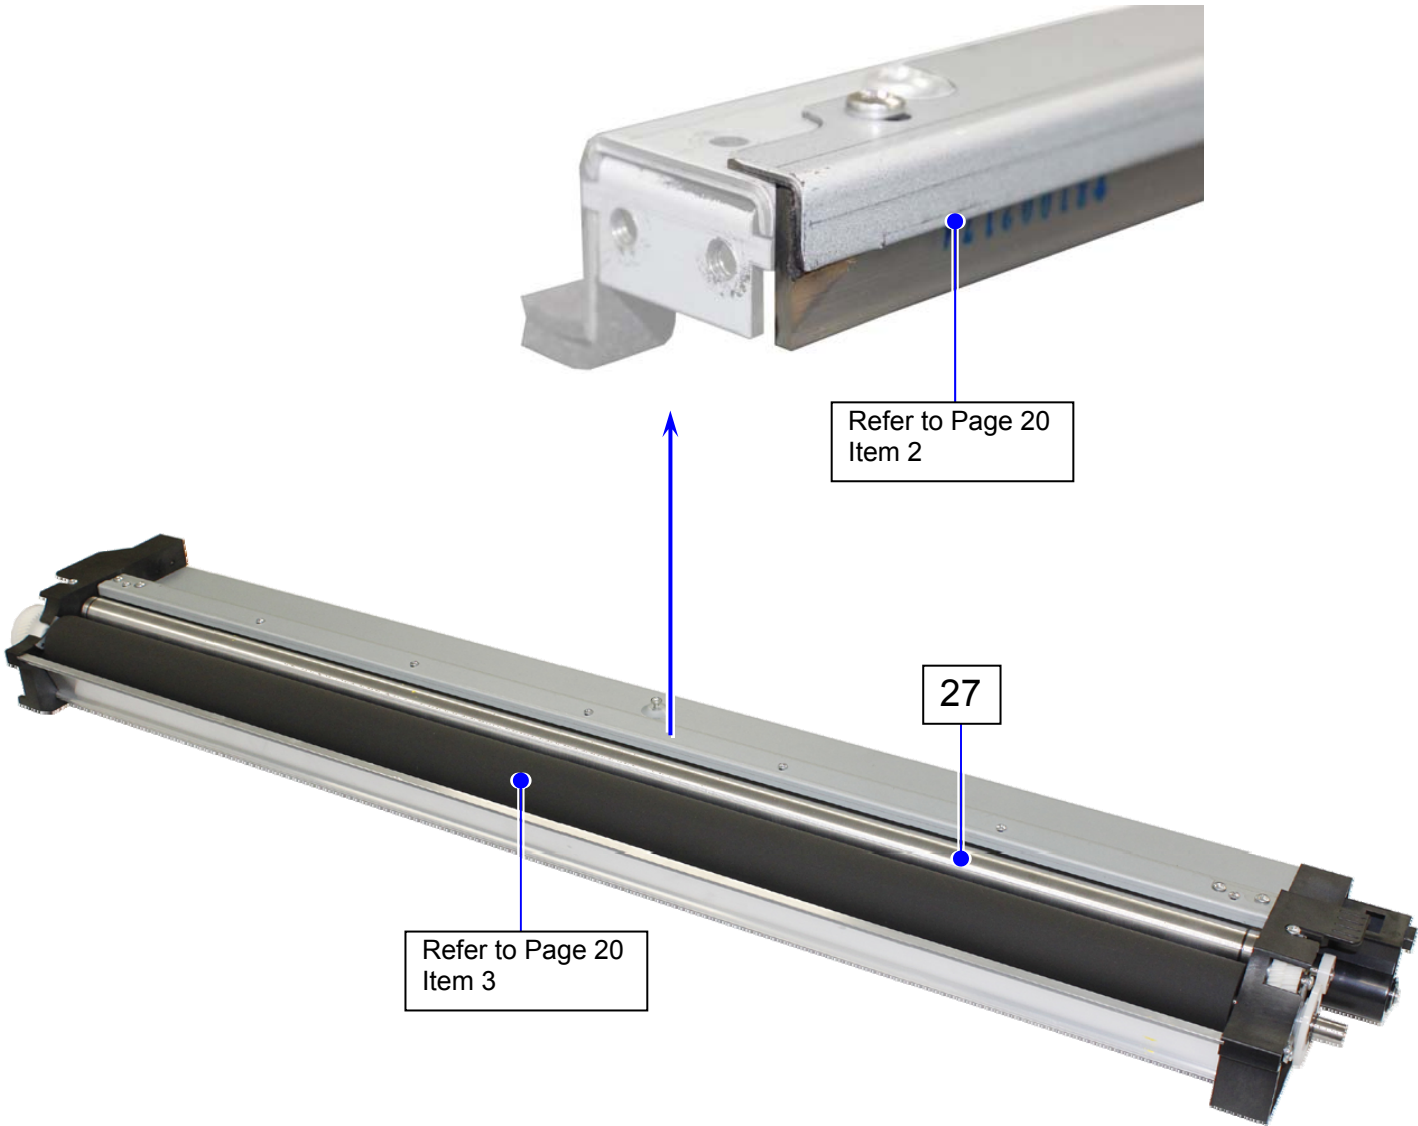

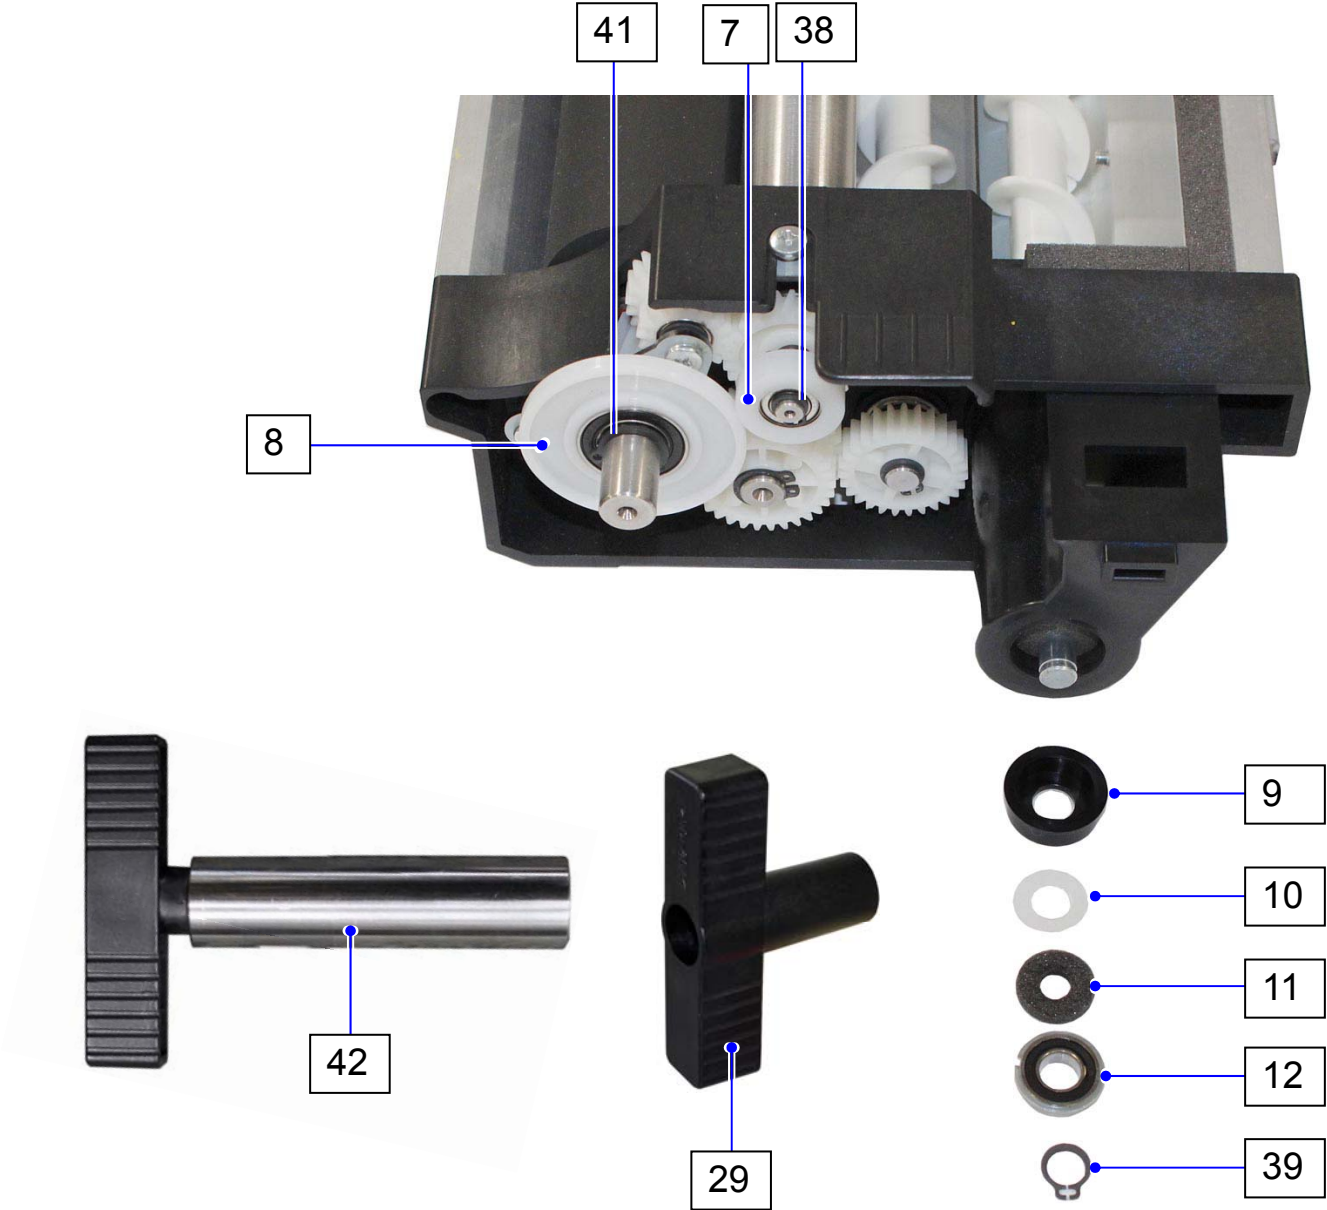


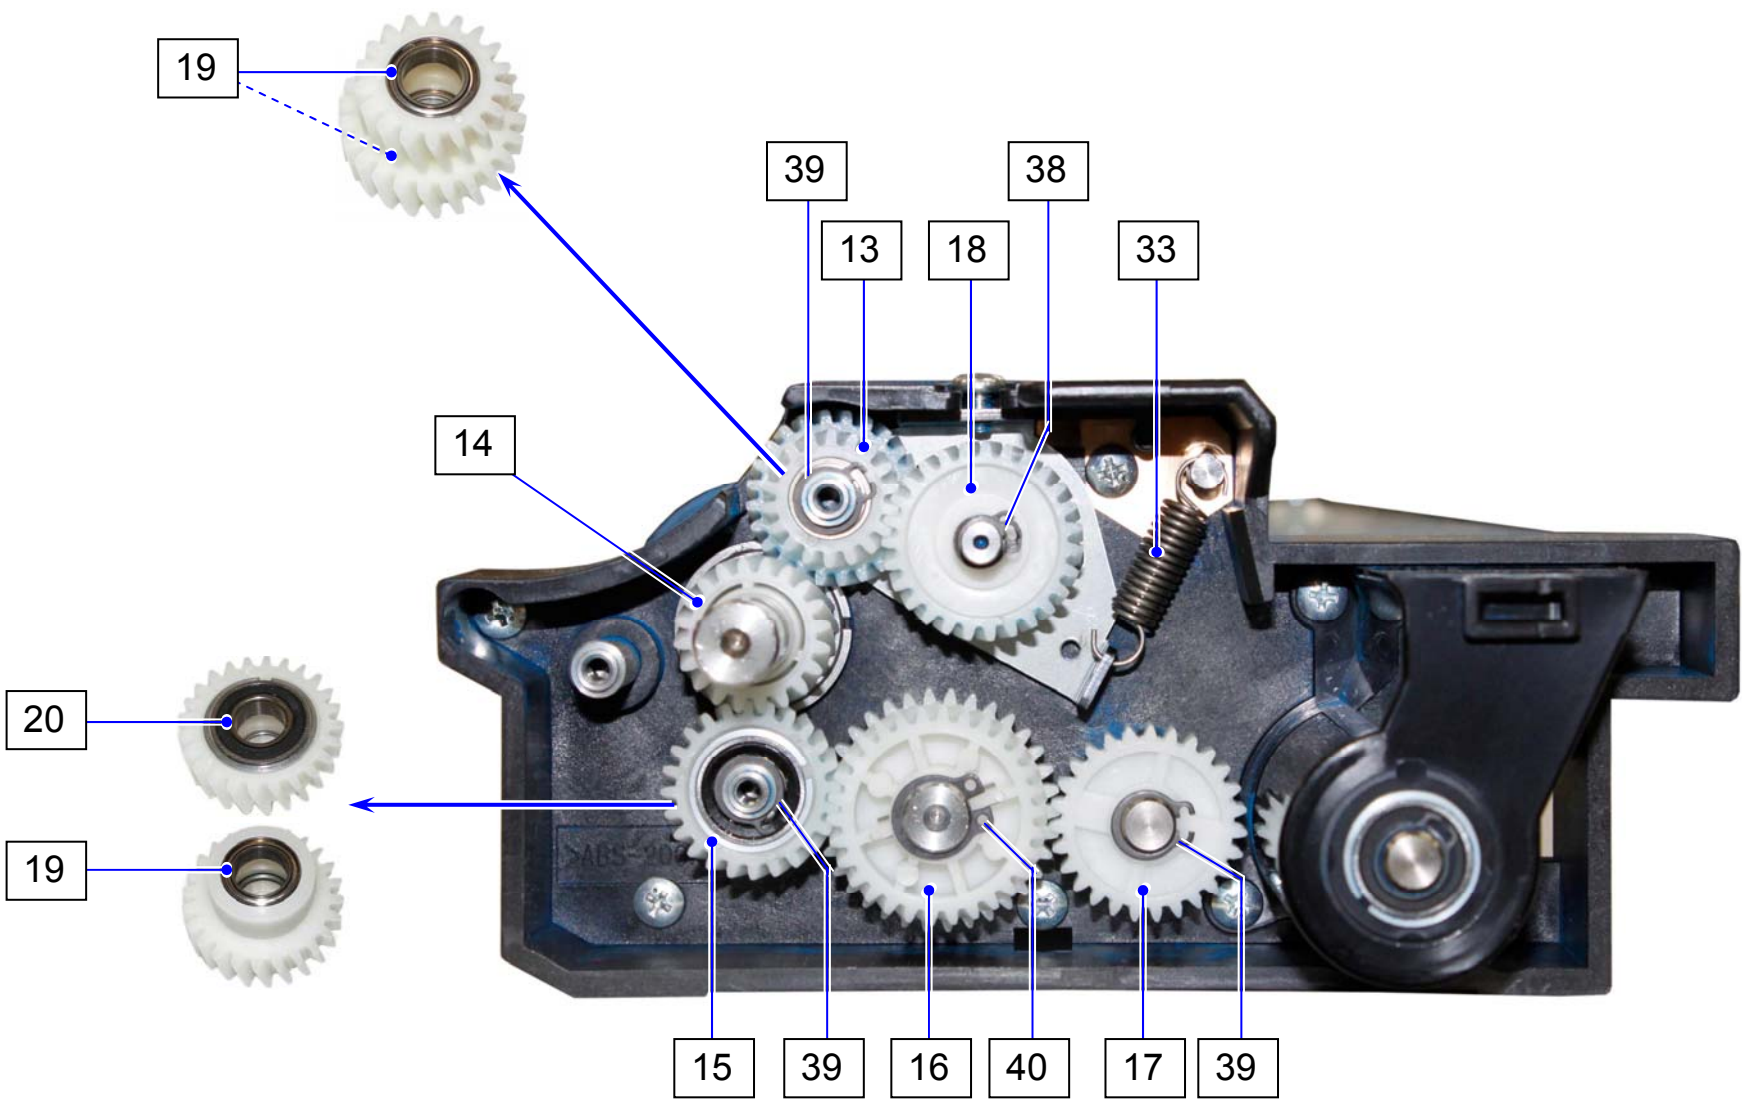

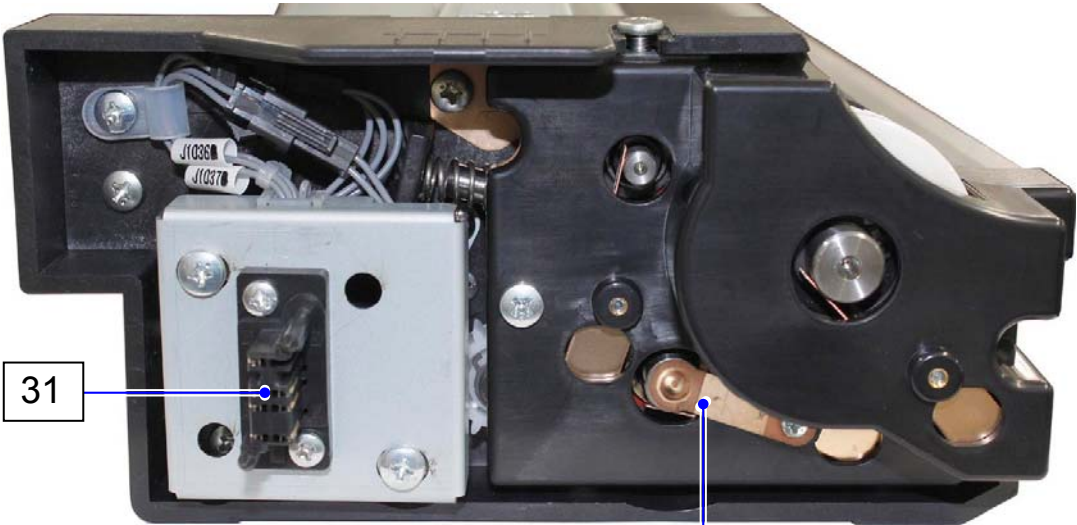

31


Refer to Page 20
Item 12


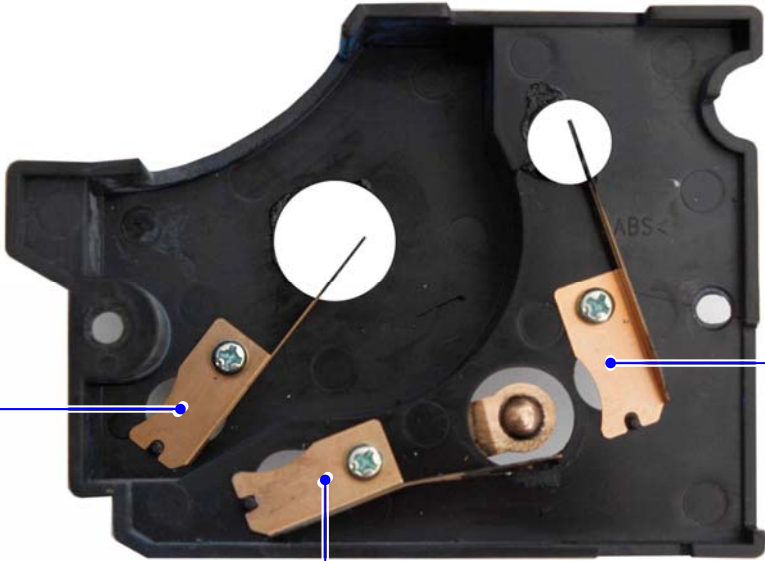



Refer to Page 20
Item 4


Refer to Page 20
Item 4


Refer to Page 20
Item 13

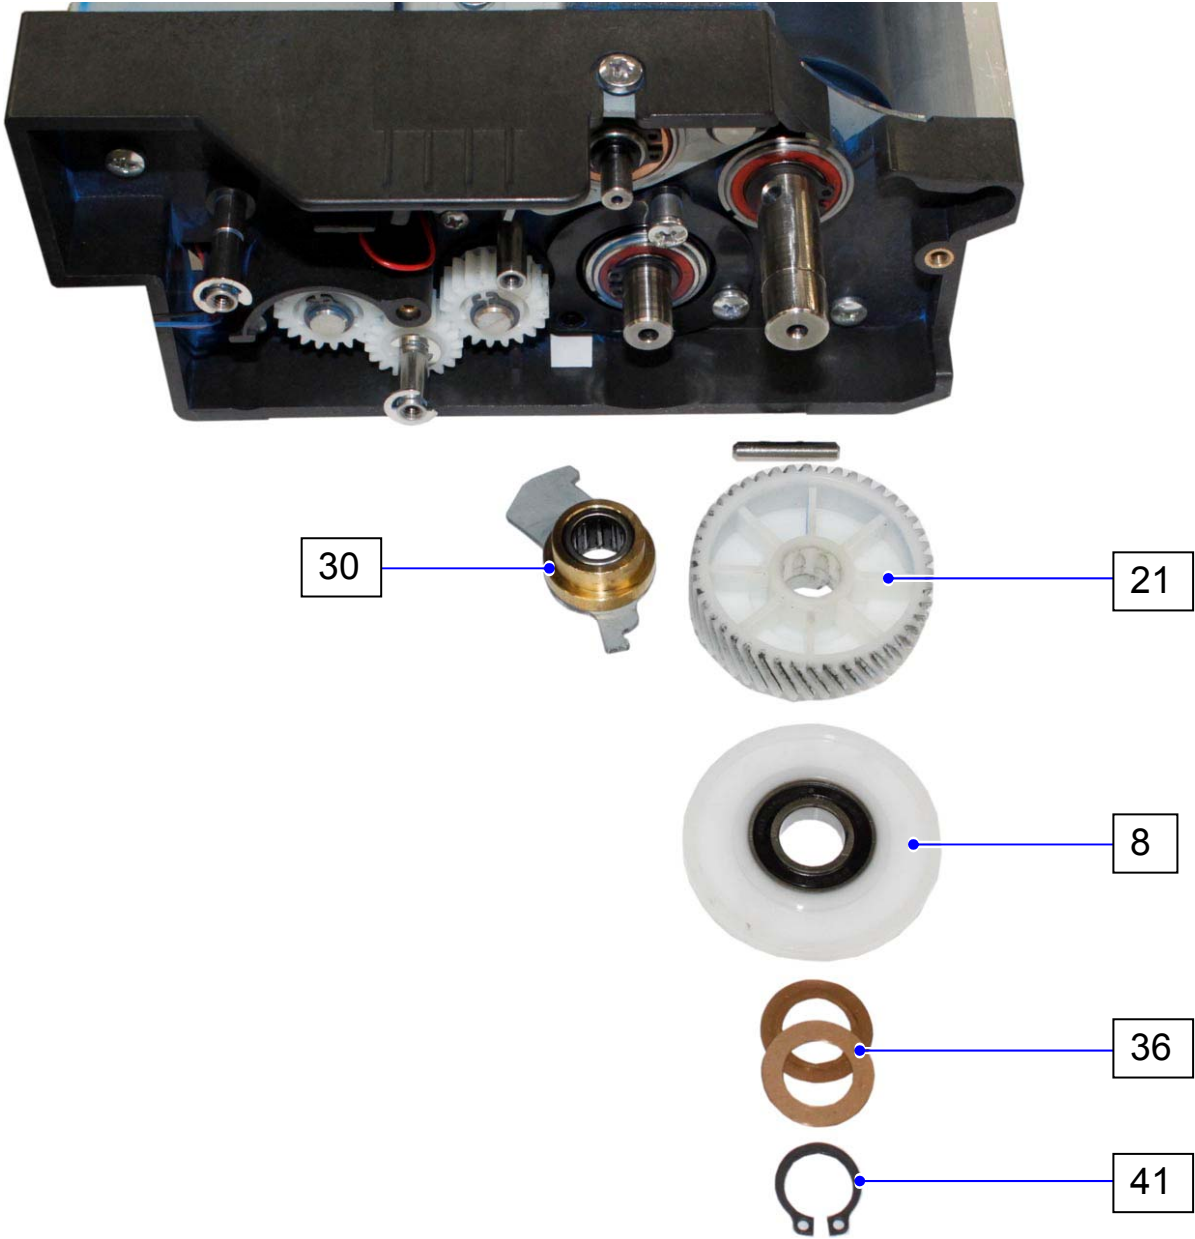


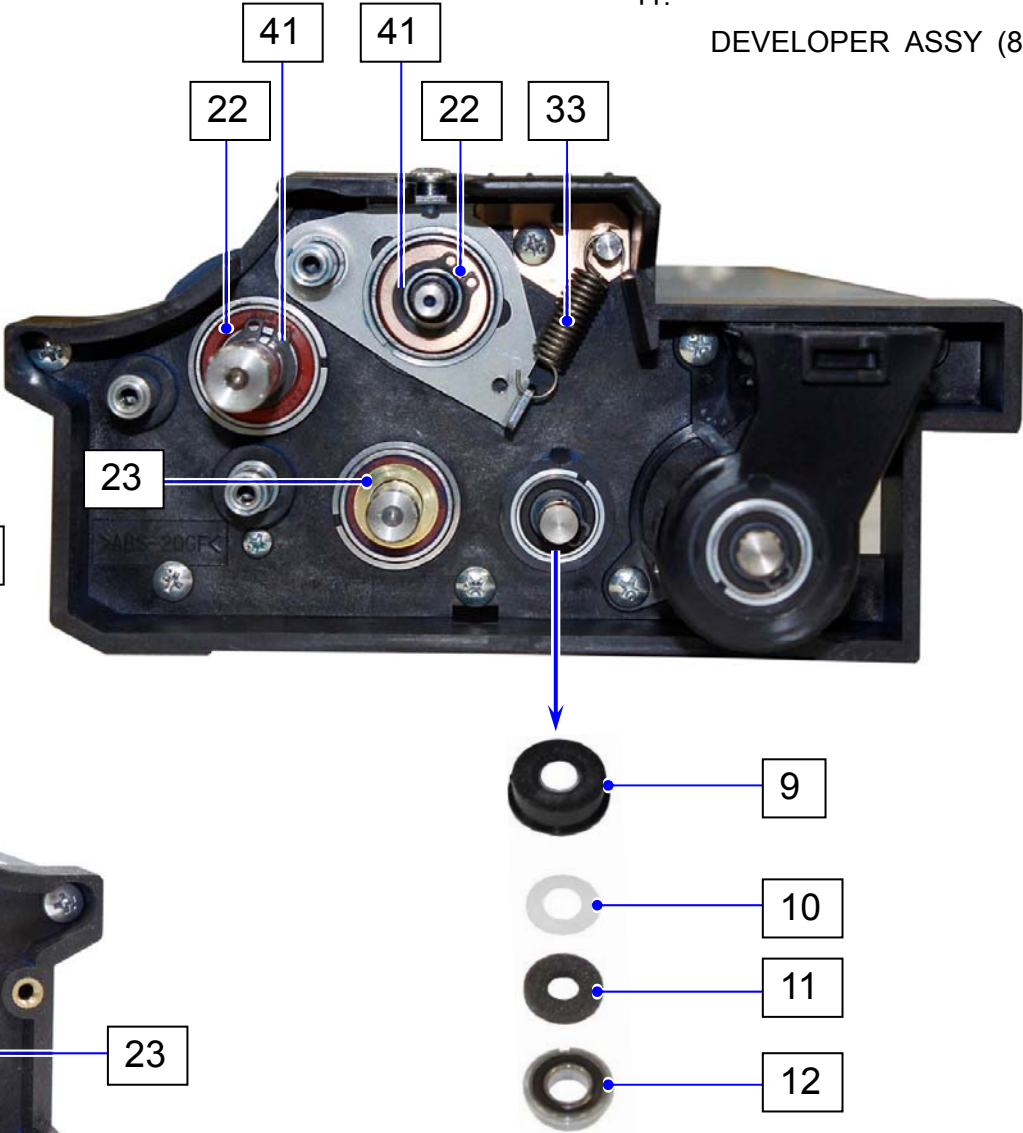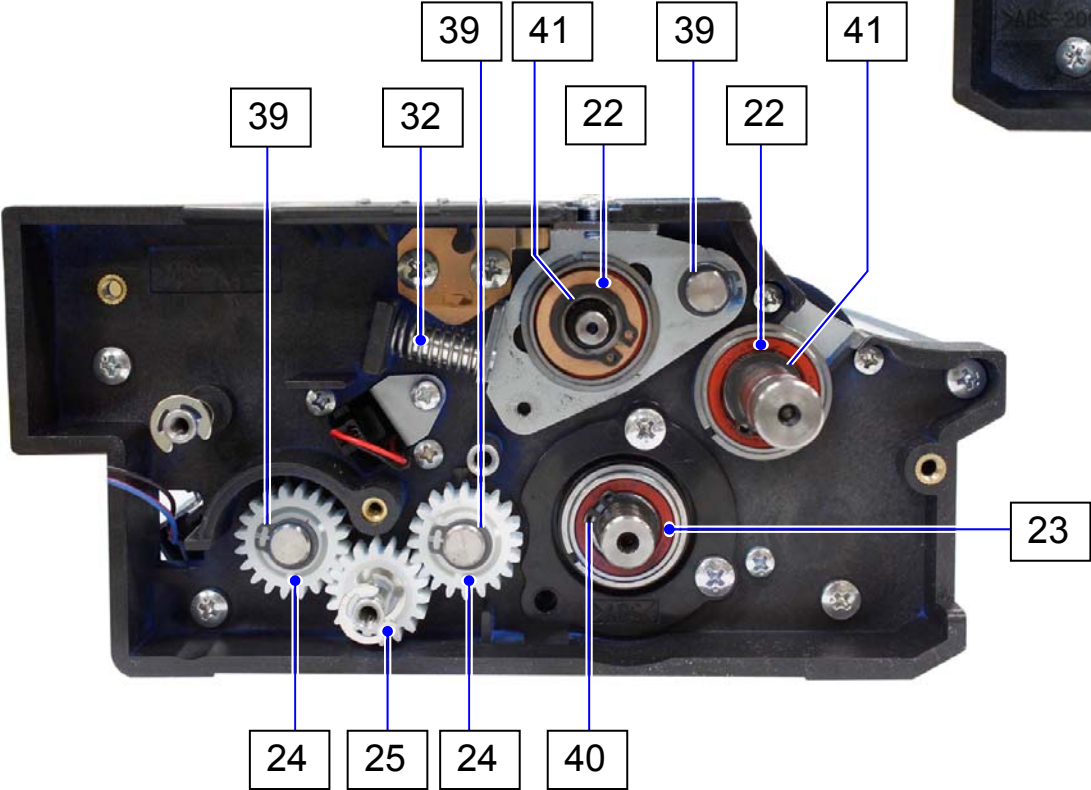

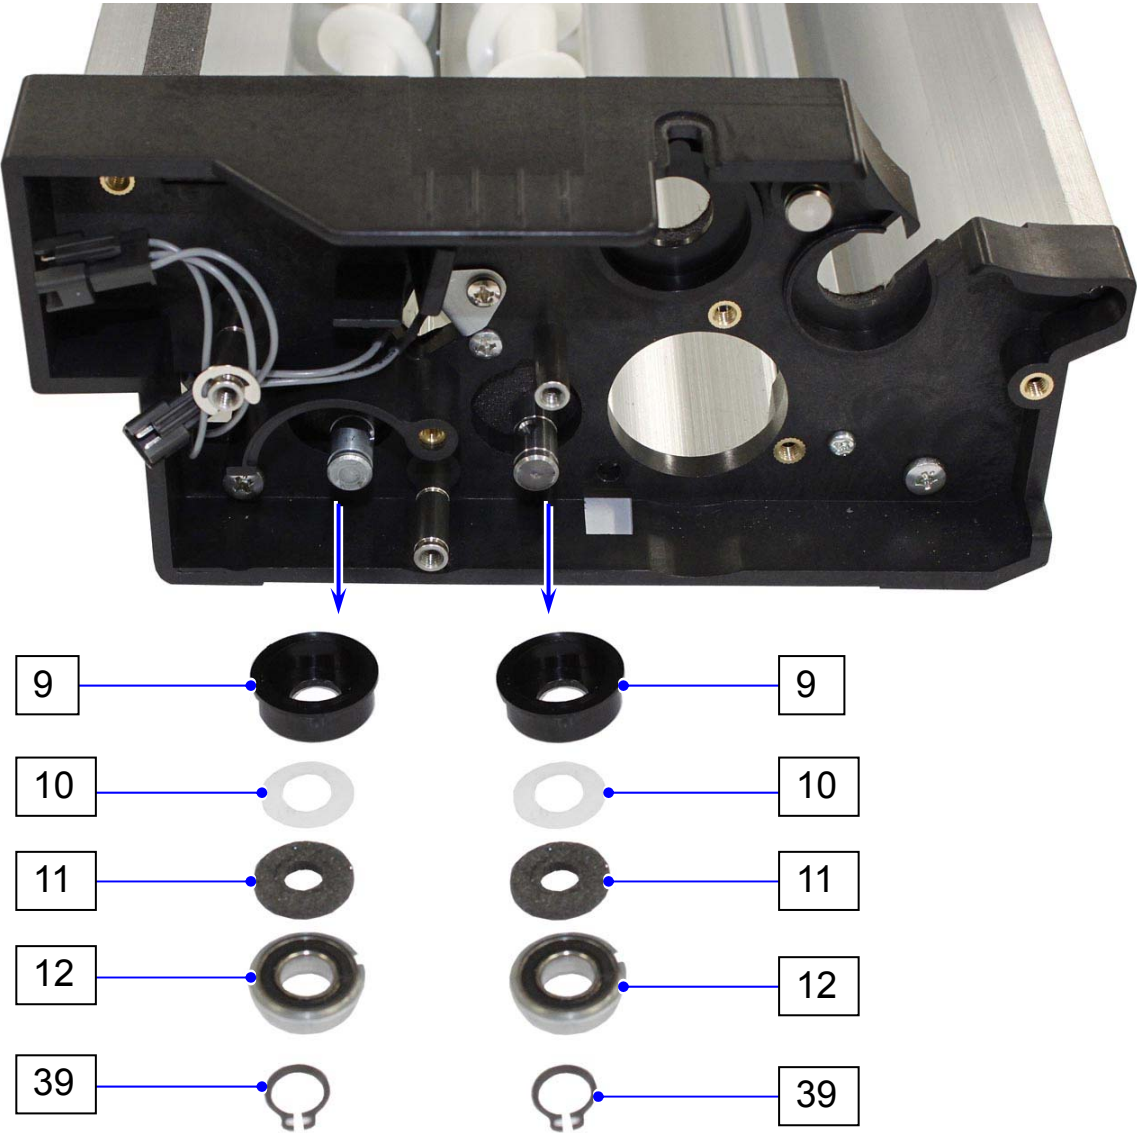

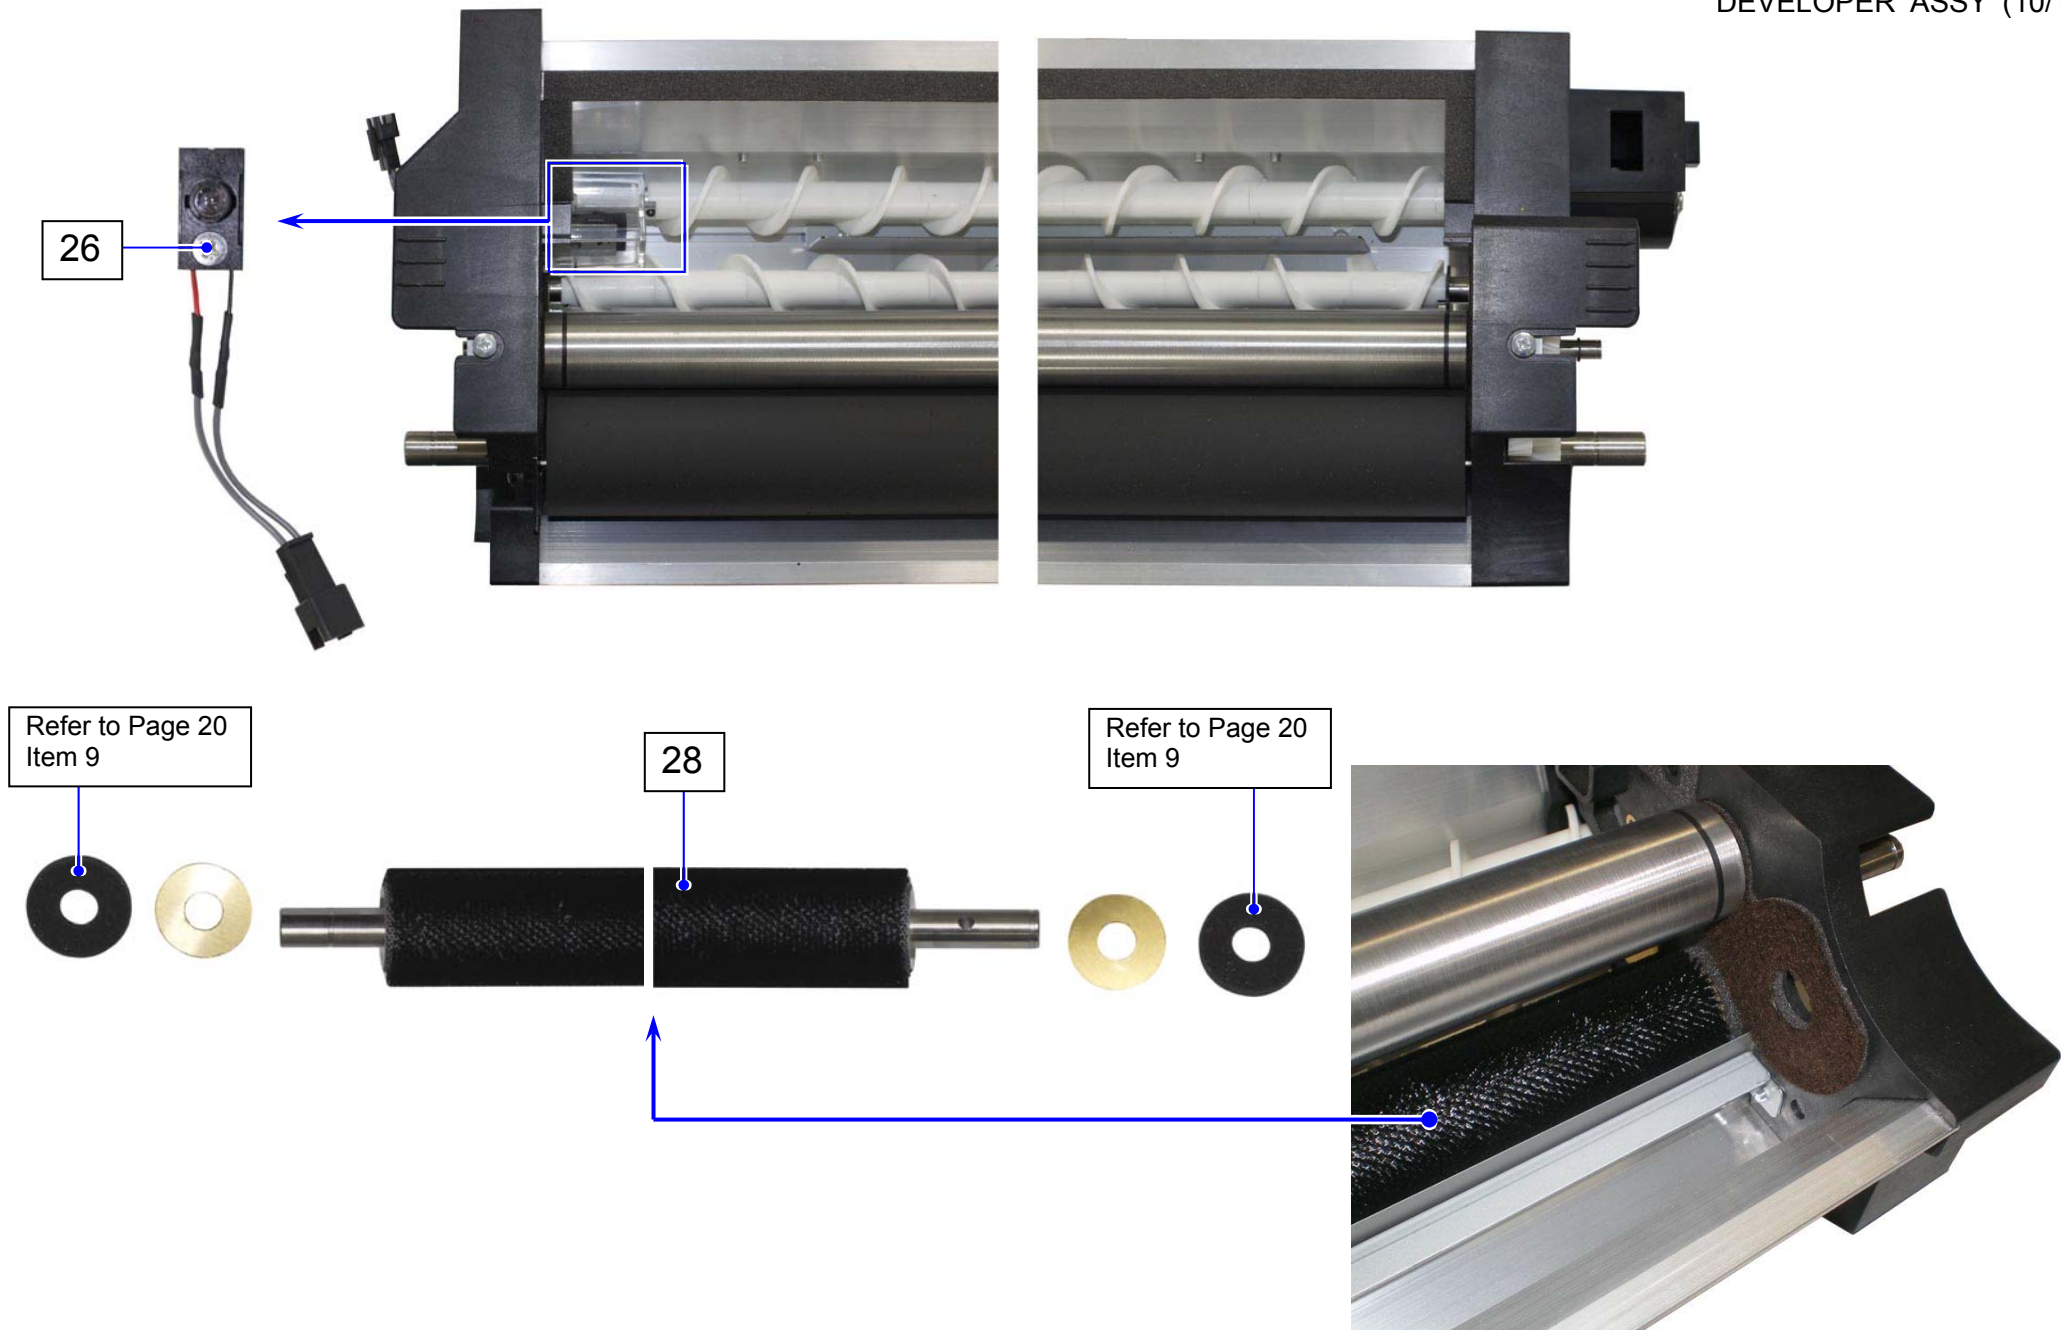



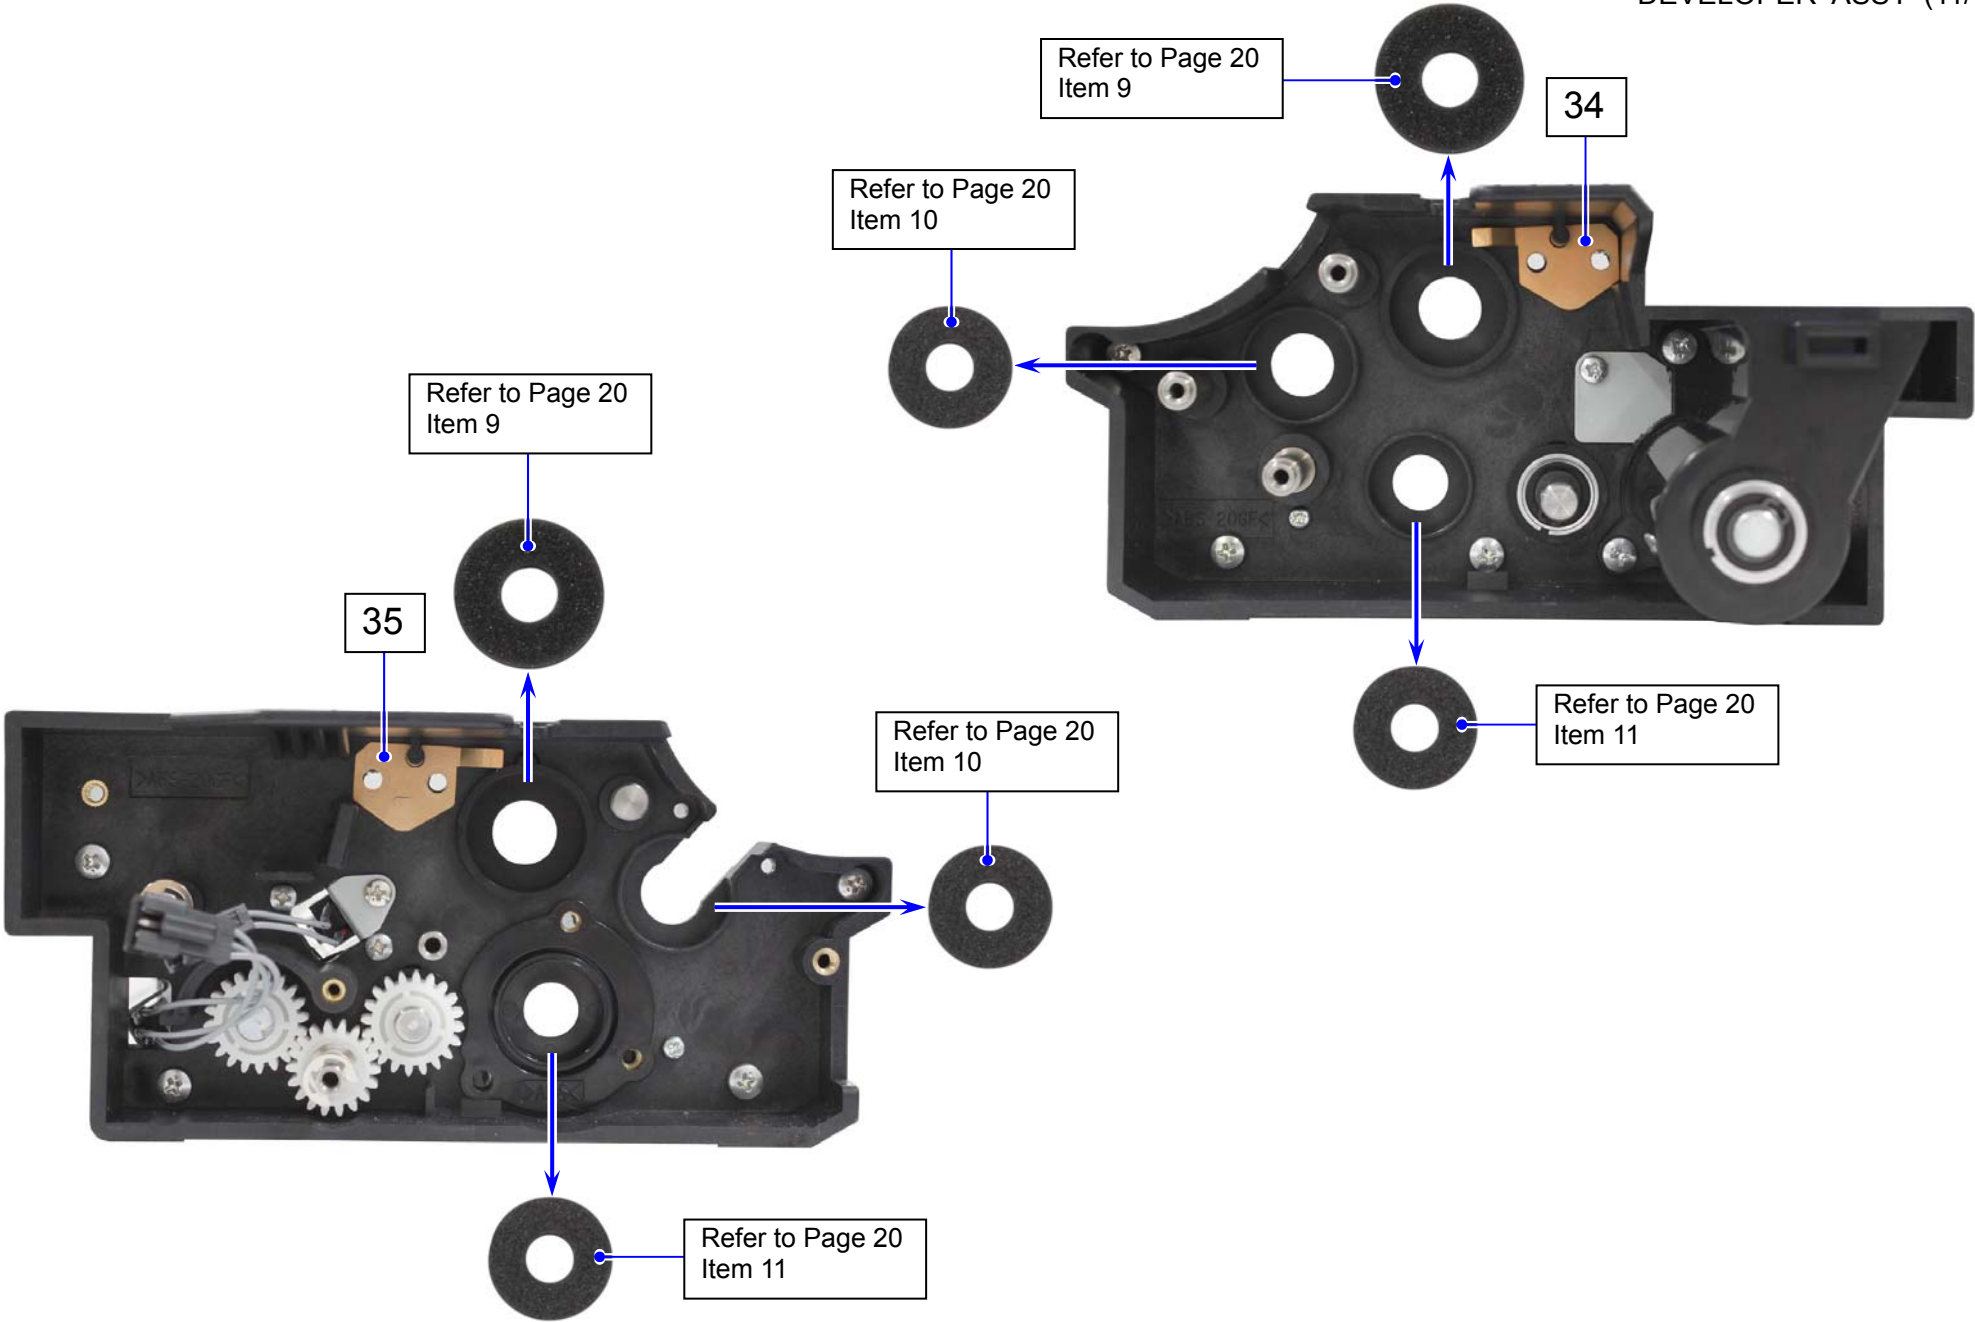



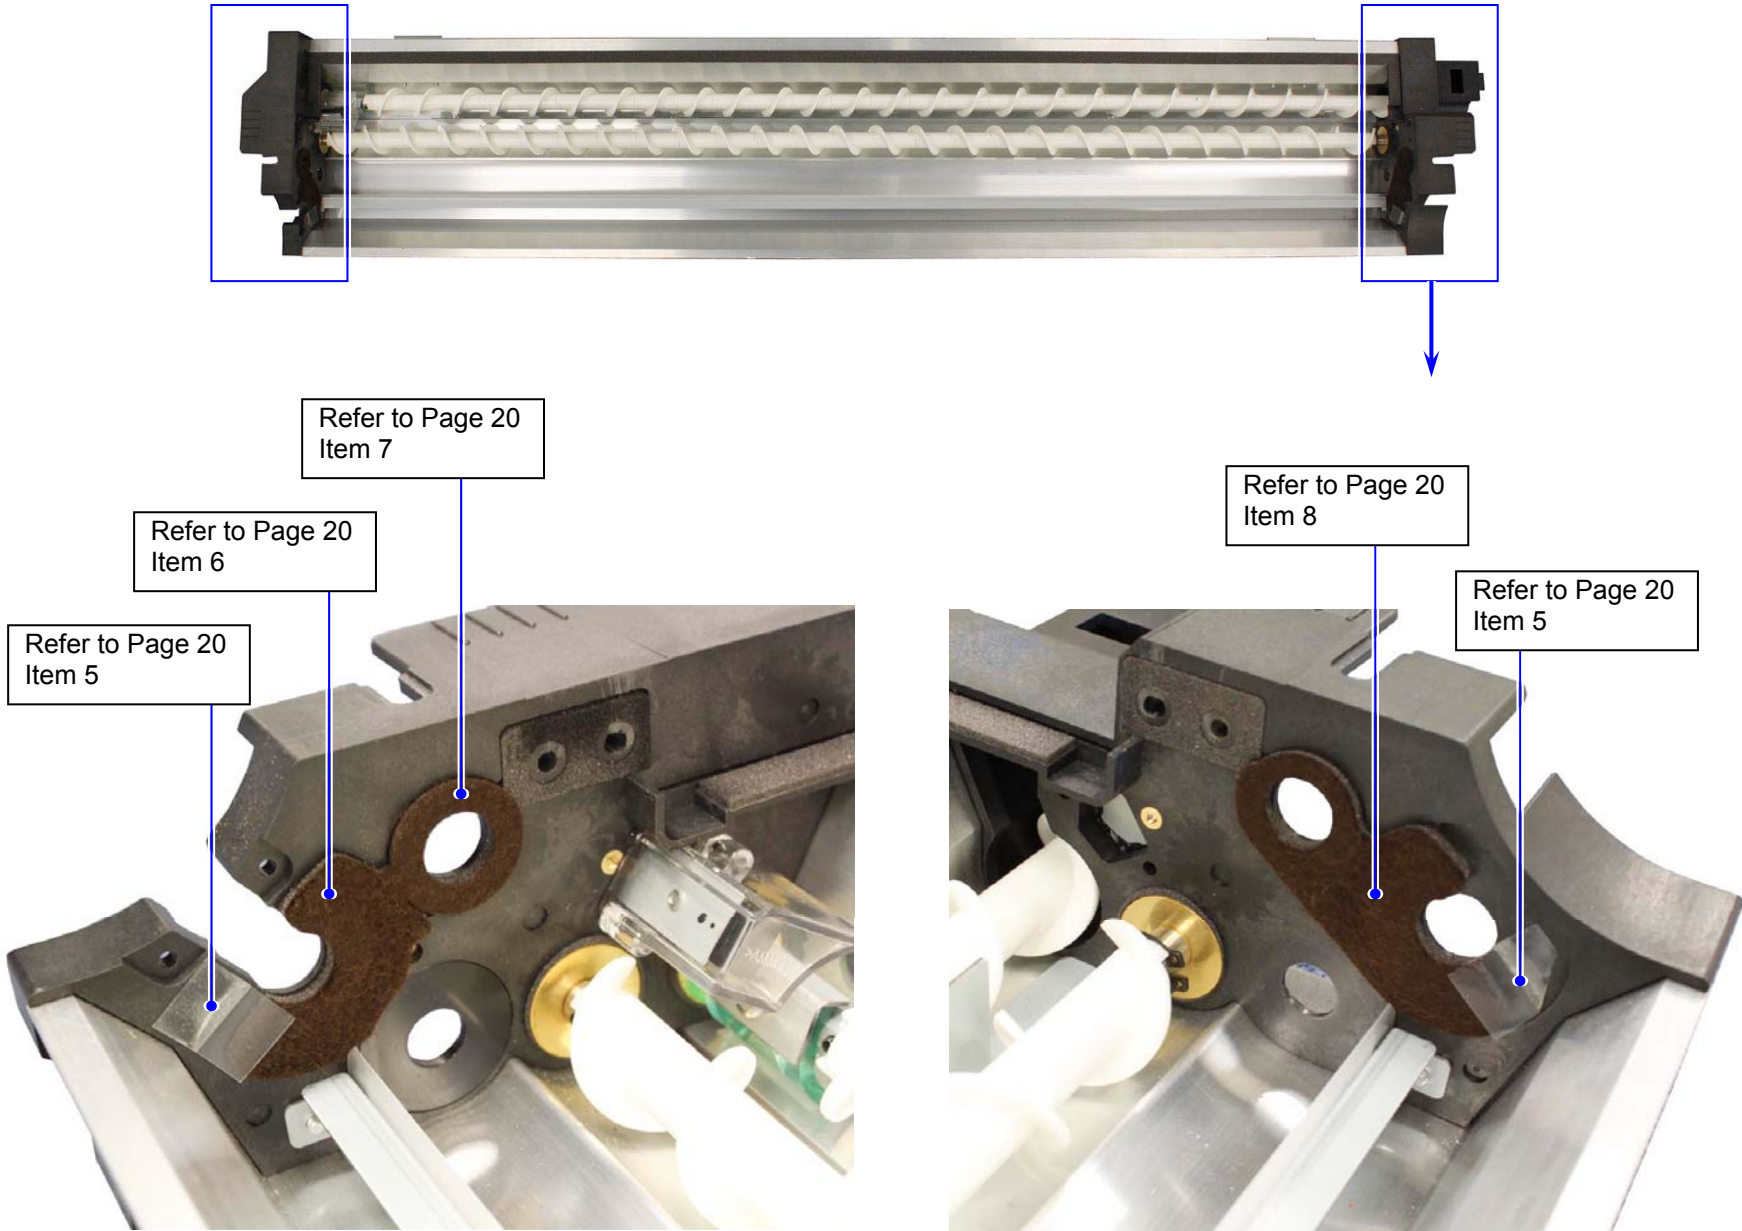




Item	Part Number	Part Description	Type	Qty	SP
1	Z428090010	PACKAGED DEVELOPER KIT		1	B
2	Z428060070	DEVELOPER UNIT Y		1	D
3	Z428060080	DEVELOPER UNIT M		1	D
4	Z428060090	DEVELOPER UNIT C		1	D
5	Z428060100	DEVELOPER UNIT K		1	D
6	9000101152	SENSOR (Receiver)	KB874-KD24LF	1	B
7	Z254600450	COUNTER ROLLER 2		1	D
8	7104603870	COUNTER ROLLER		2	C
9	Z254620050	FLANGE 3 ASSY		4	C
10	Z254600570	SEAL 11		4	C
11	Z254600550	SEAL 9		4	C
12	9000780189	BALL BEARING	LNR-1680DDR POP25LY551	4	D
13	Z074600460	GEAR 24-18		1	D
14	Z254600420	GEAR 20		1	D
15	Z254600650	GEAR 24		1	D
16	Z254600610	GEAR 30-34		1	D
17	Z074602210	GEAR 27		1	D
18	Z074600410	GEAR 27		1	D
19	9000780159	BEARING DDL-1280ZZHPOP25LY13	DDL-1280ZZHPOP25LY13	3	D
20	9000780189	BALL BEARING	LNR-1680DDR POP25LY551	1	D
21	Z424600040	GEAR 43		1	D
22	9000780184	BEARING	6901LLUNRNR/L746QK	4	D
23	9000780028	BEARING (6900LLUNR/2A)	6900LLUNR/2A	2	D
24	Z254600430	GEAR 20-2		2	D
25	Z024600880	GEAR 18		1	D
26	9000101151	SENSOR (Luminescence)	KB876-KD14LF	1	B
27	Z424600030	BRADE ROLLER		1	B
28	Z254600051	SPL, ROLLER		1	C
29	Z050320050	DEV HANDLE ASSY		1	D
30	Z254620060	CAM		1	D
31	Z426400170	DEV LEAD A		1	D
32	Z254600180	SPRING		1	D
33	Z254600940	SPRING		1	D


Item	Part Number	Part Description	Type	Qty	SP
34	Z254600290	BIAS TERMINAL 2		1	D
35	Z254600300	BIAS TERMINAL 3		1	D
36	9000820019	THRUST WASHER		2	D
37	Z254660011	BOTTLE GUIDE UNIT Y		1	D
37	Z254660021	BOTTLE GUIDE UNIT M		1	D
37	Z254660031	BOTTLE GUIDE UNIT C		1	D
37	Z254660041	BOTTLE GUIDE UNIT K		1	D
38	6813032309	RETAINING RING-C,S	C6	3	D
39	6813032311	RETAINING RING-C,S	C8	10	D
40	6813032313	RETAINING RING-C,S	C10	2	D
41	6813032315	RETAINING RING-C,S	C12	5	D
42	Z258560010	DEV HANDLE ASSY 2		1	D
43	Z258060160	GUIDE PLATE 2 ASSY		1	D
44	Z074601080	SENSOR BLADE		1	D
45	Z426400250	DEV LEAD B		1	D

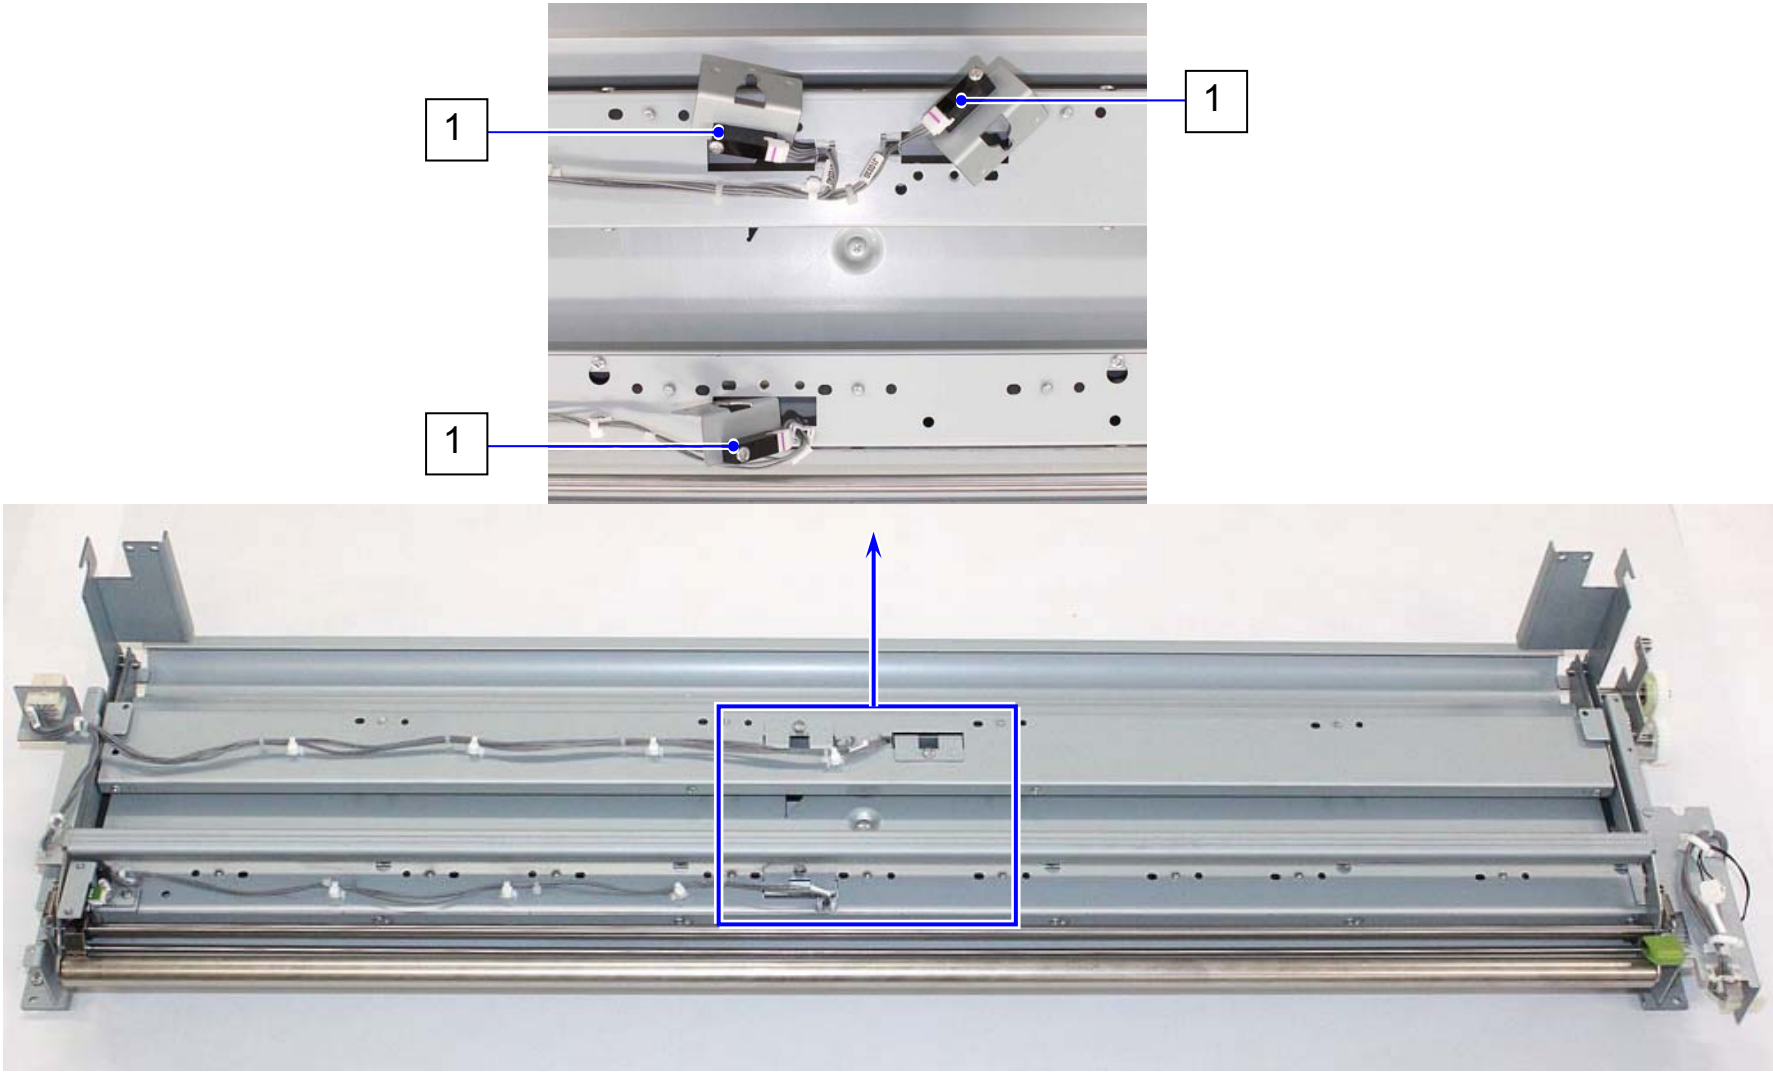

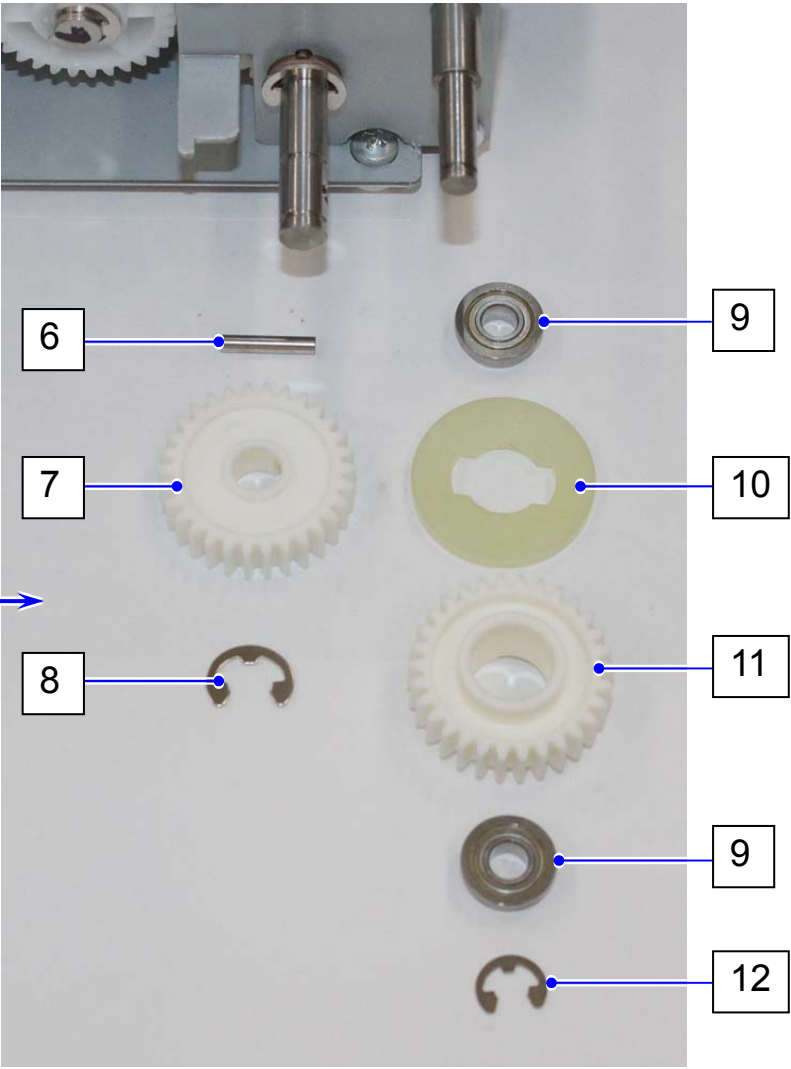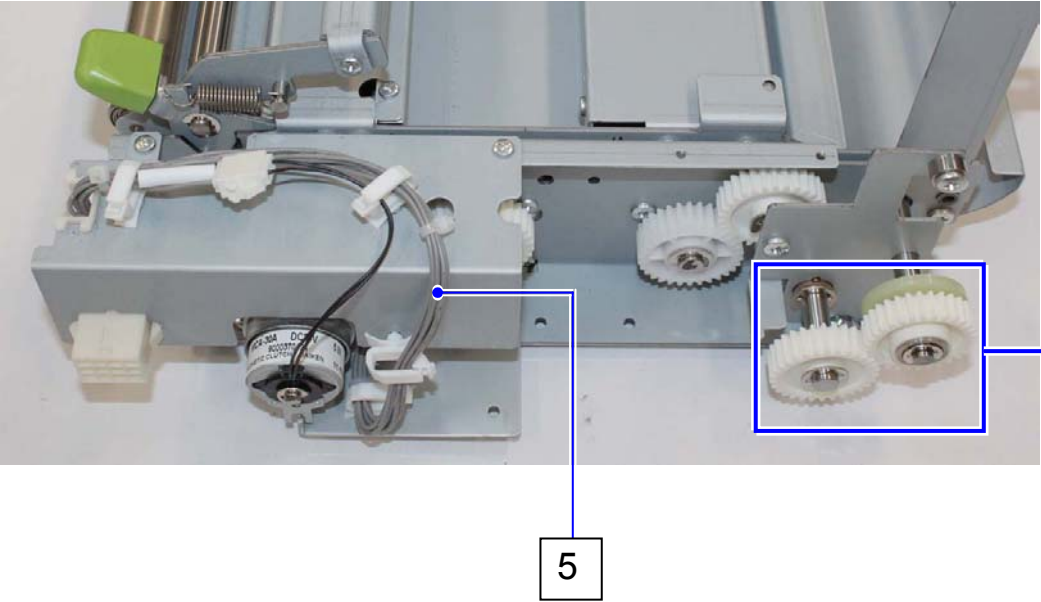


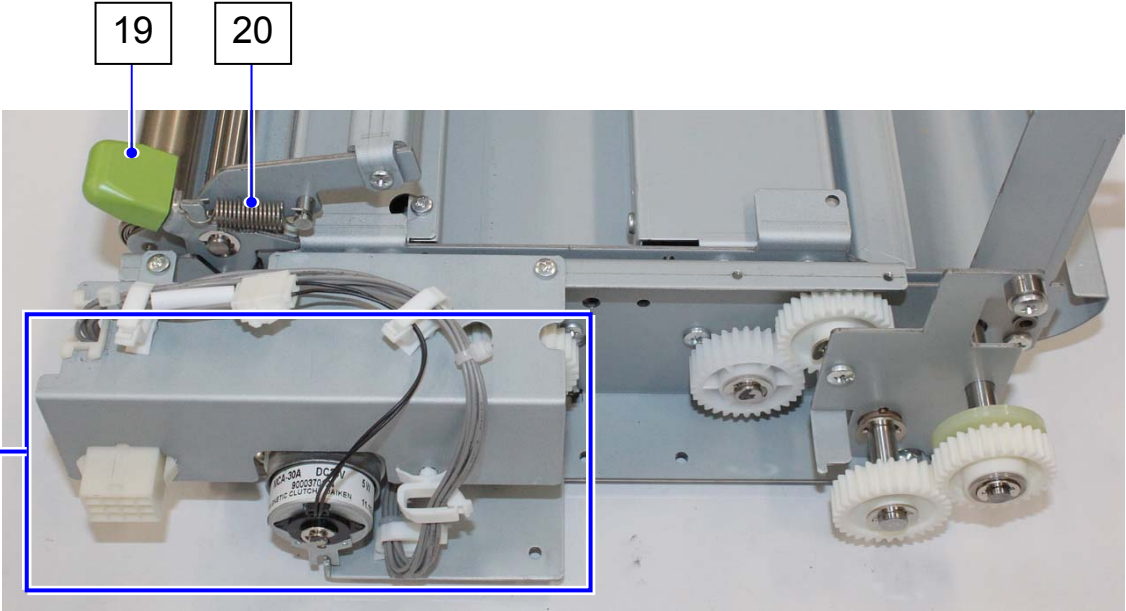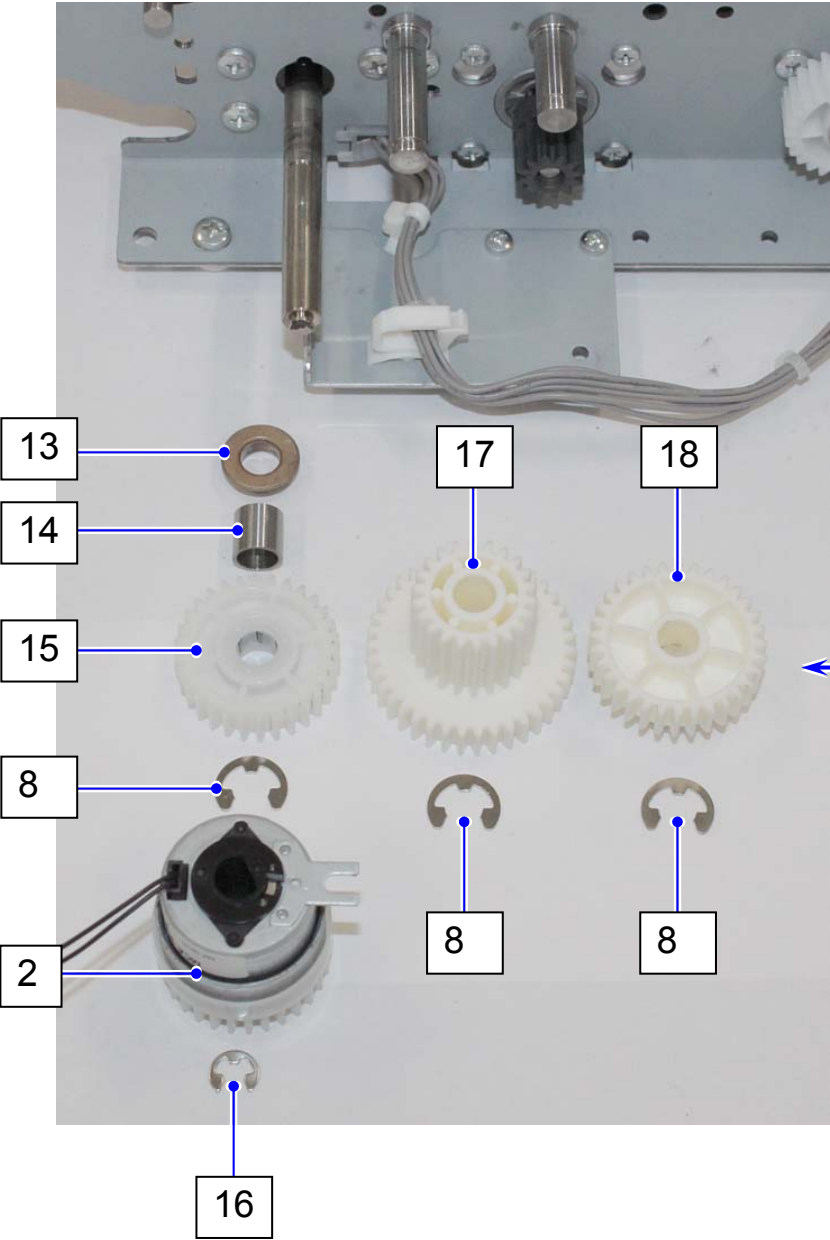

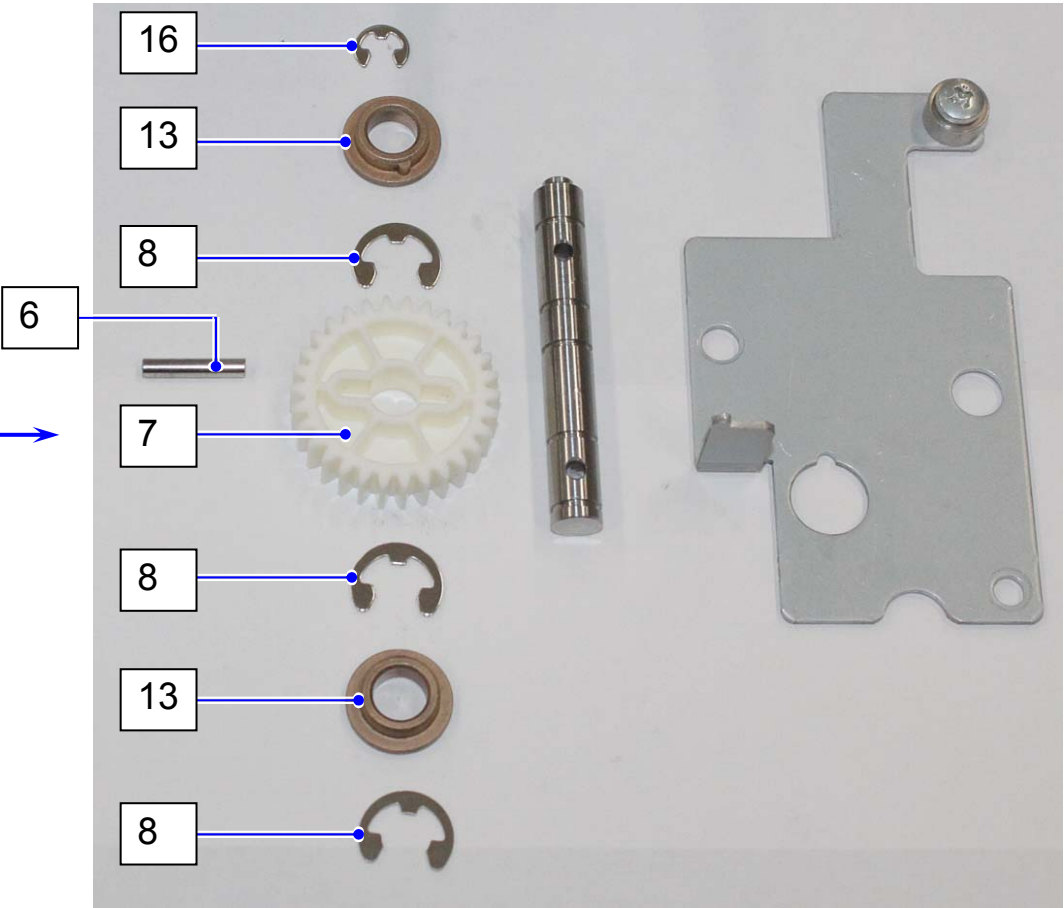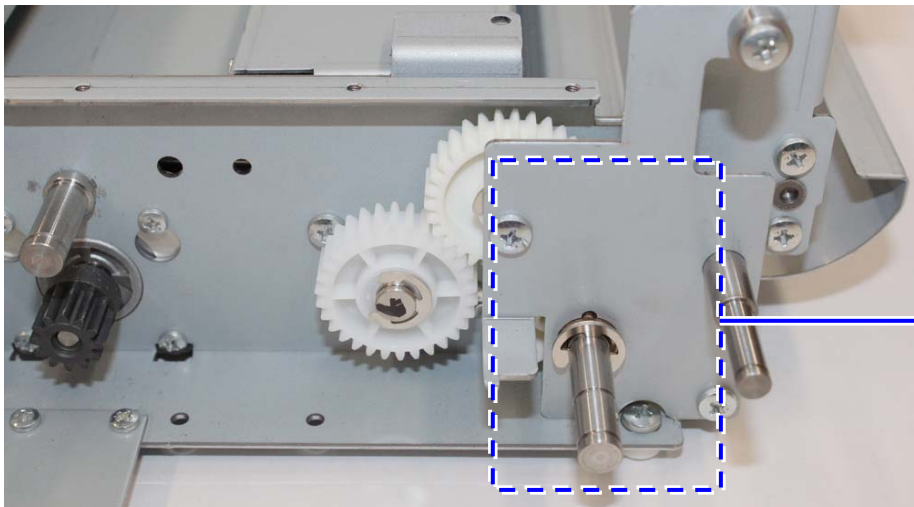

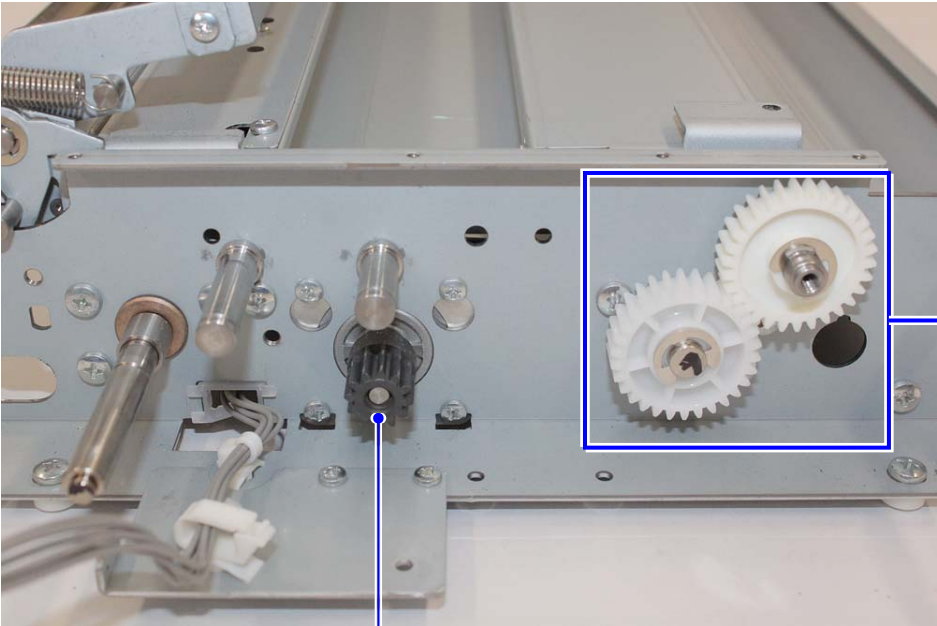

21

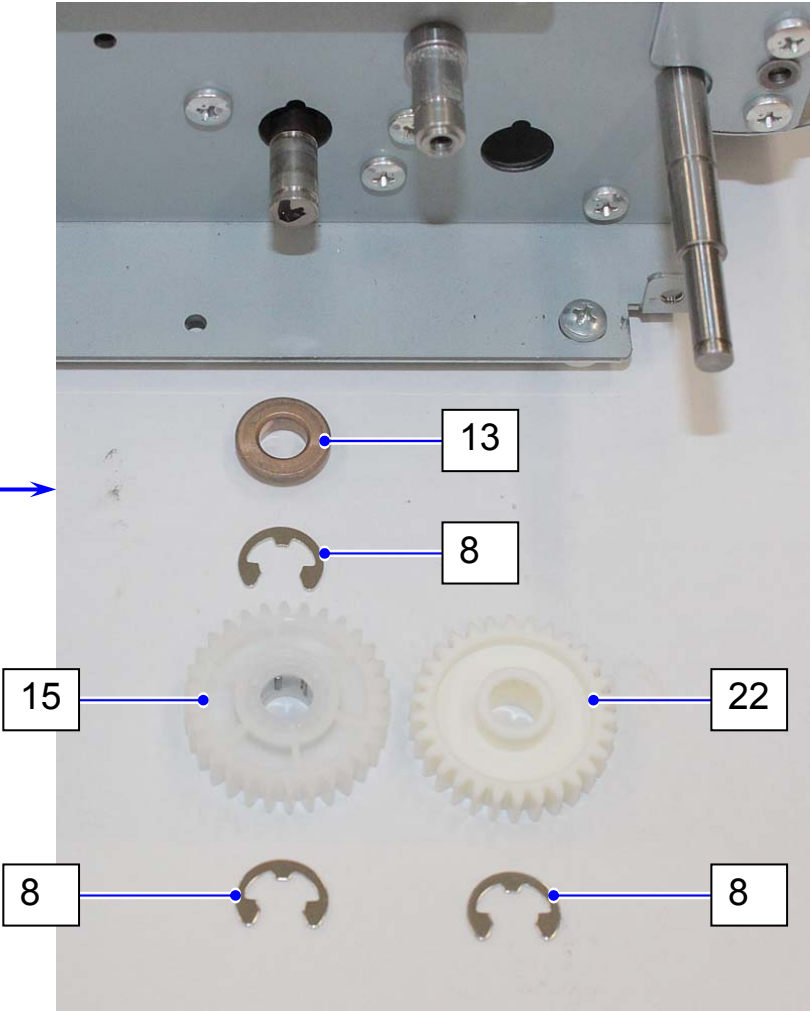

13


8

15


22


8


8

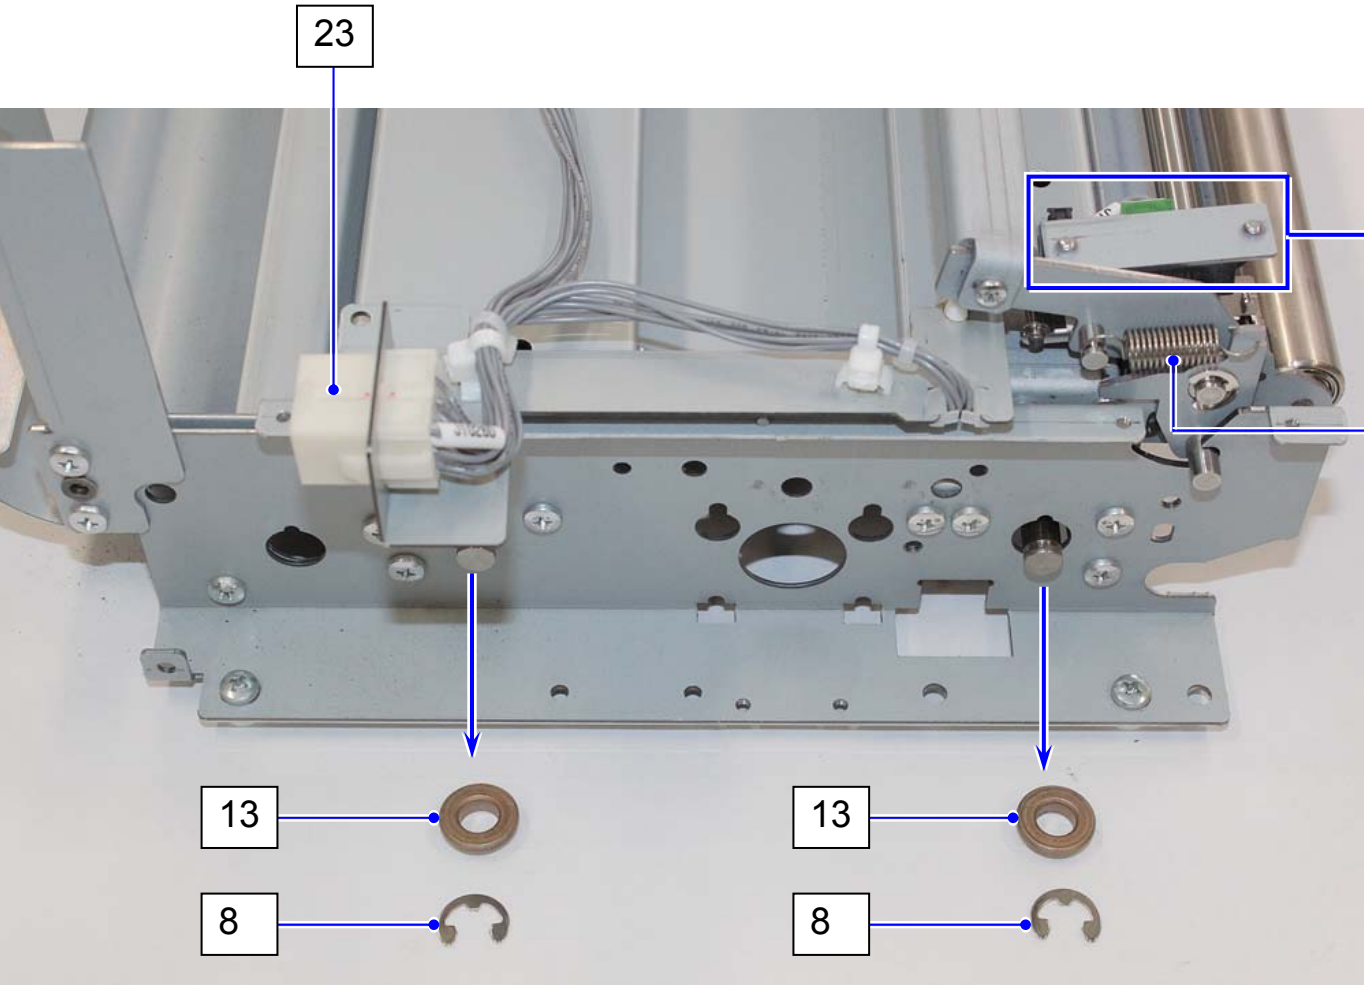


12. LOWER PAPER TRANSPORT ASSY (6/8)

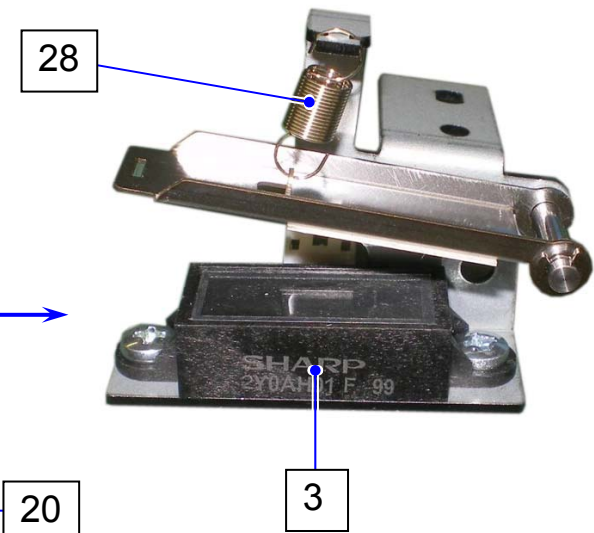

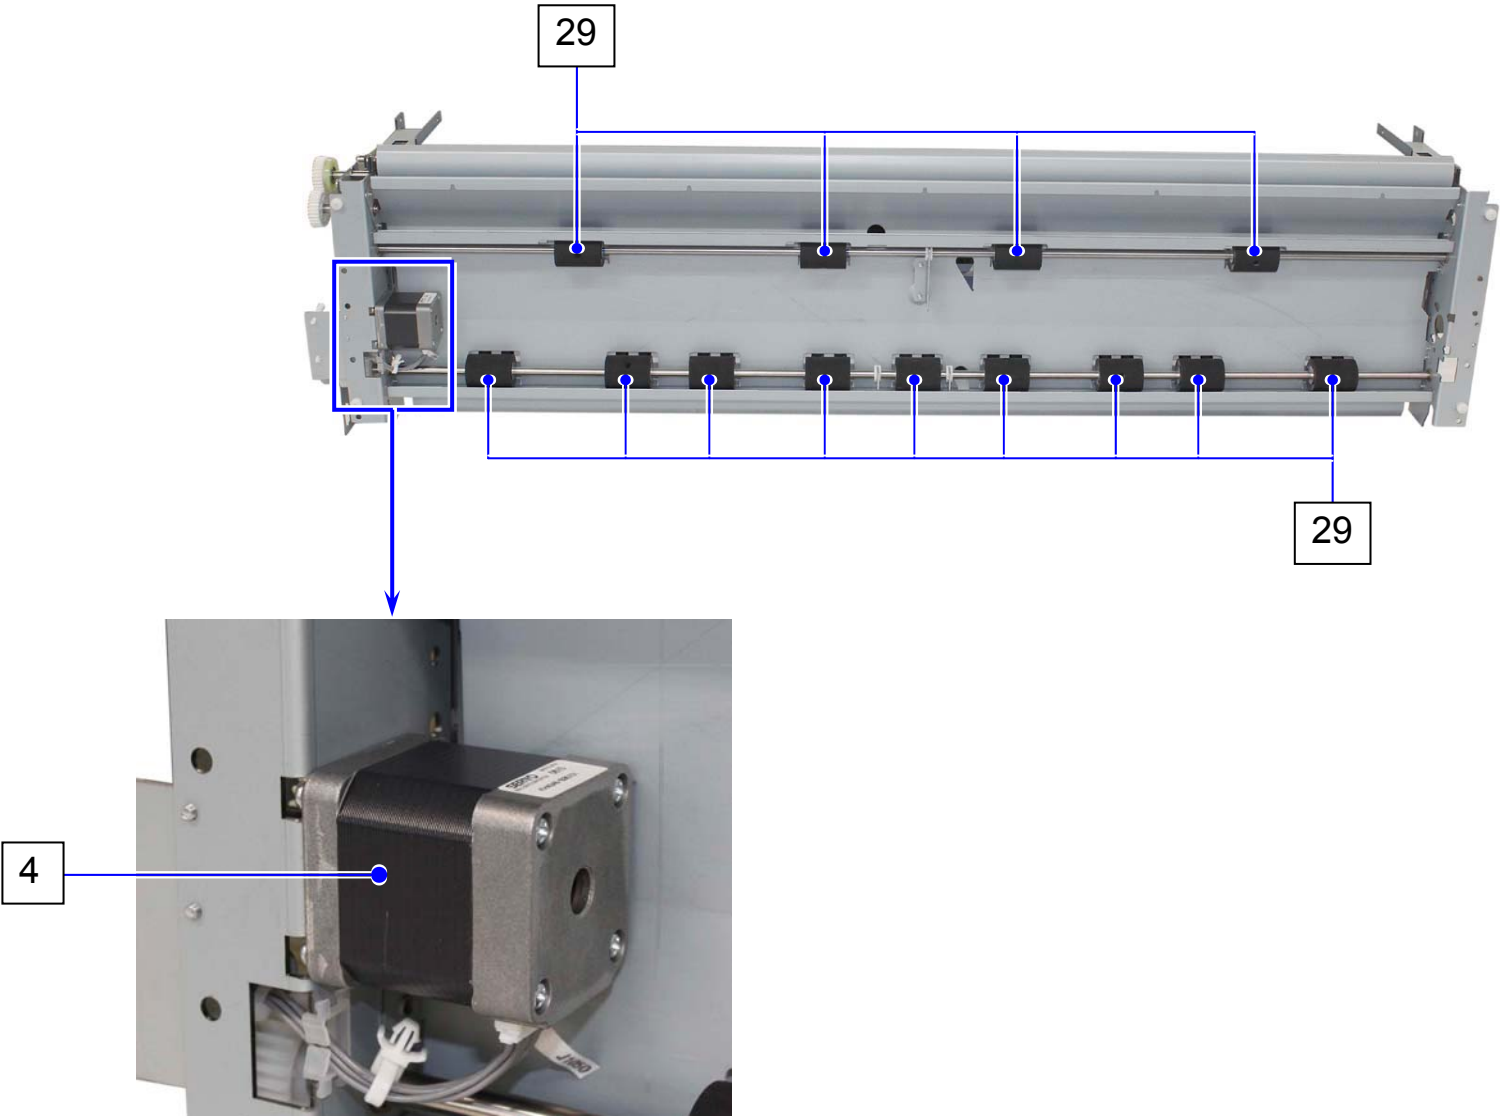

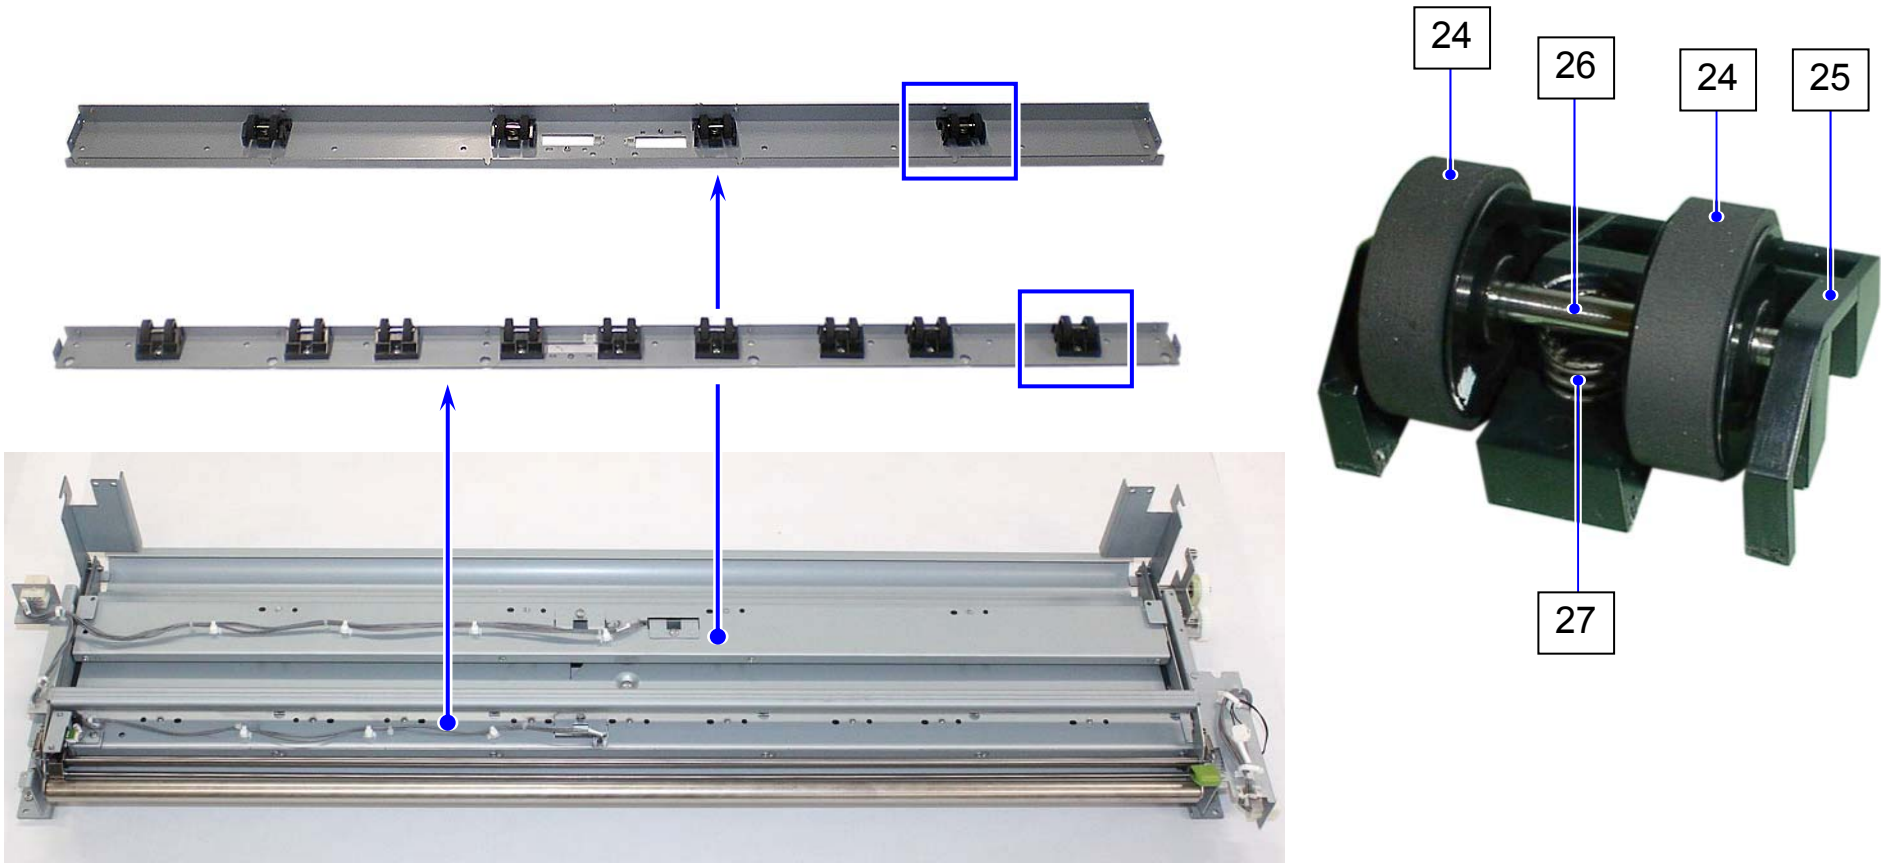


Item	Part Number	Part Description	Type	Qty	SP
1	9000100982	SENSOR (PS117ED1)	PS117ED1	3	B
2	9000370124	MICRO CLUTCH	MCA-30A	1	C
3	9000101108	SENSOR	GP2Y0AH01K0F	1	B
4	9000380118	STEPPING MOTOR	KH4248-B90101	1	C
5	Z256400612	UNDER TRANSPORT TERMINAL HARNESS		1	D
6	6817114054	PARALLEL PIN	3×16 SUS	2	D
7	3101300760	SPUR GEAR 30T		2	D
8	6807033310	RETAINING RING-E	E7,Ni	12	D
9	9000780041	BEARING (F-FLW686T2ZZ1/5K)	F-FLW686T2ZZ1/5K	2	D
10	4201600040	SPACING PLATE		1	D
11	4201600050	30T GEAR		1	D
12	6807033308	RETAINING RING-E	E5,Ni	1	D
13	1159100060	BUSH		6	D
14	Z251400620	COLLAR 2		1	D
15	4201300120	30T GEAR (Oneway)		2	D
16	6807033307	RETAINING RING-E	E4,Ni	2	D
17	Z251400420	GEAR 22-39T		1	D
18	Z251400410	GEAR 20-32T		1	D
19	1710150141	KNOB		1	D
20	Z251400760	GUIDE PLATE 6R SPRING		2	D
21	Z251400400	GEAR 12T		1	D
22	3101400140	GEAR 30T		1	D
23	Z256400392	SENSOR TERMINAL LEAD		1	D
24	4503520140	COUNTER ROLLER (R)		26	D
25	2603100270	COUNTER ROLLER HOLDER		13	D
26	6817114060	PARALLEL PIN	3×32 SUS	13	D
27	1710430310	COUNTER ROLLER SPRING		13	D
28	Z251400850	6R LINK SPRING		1	D
29	6601300160	ROLLER		13	D

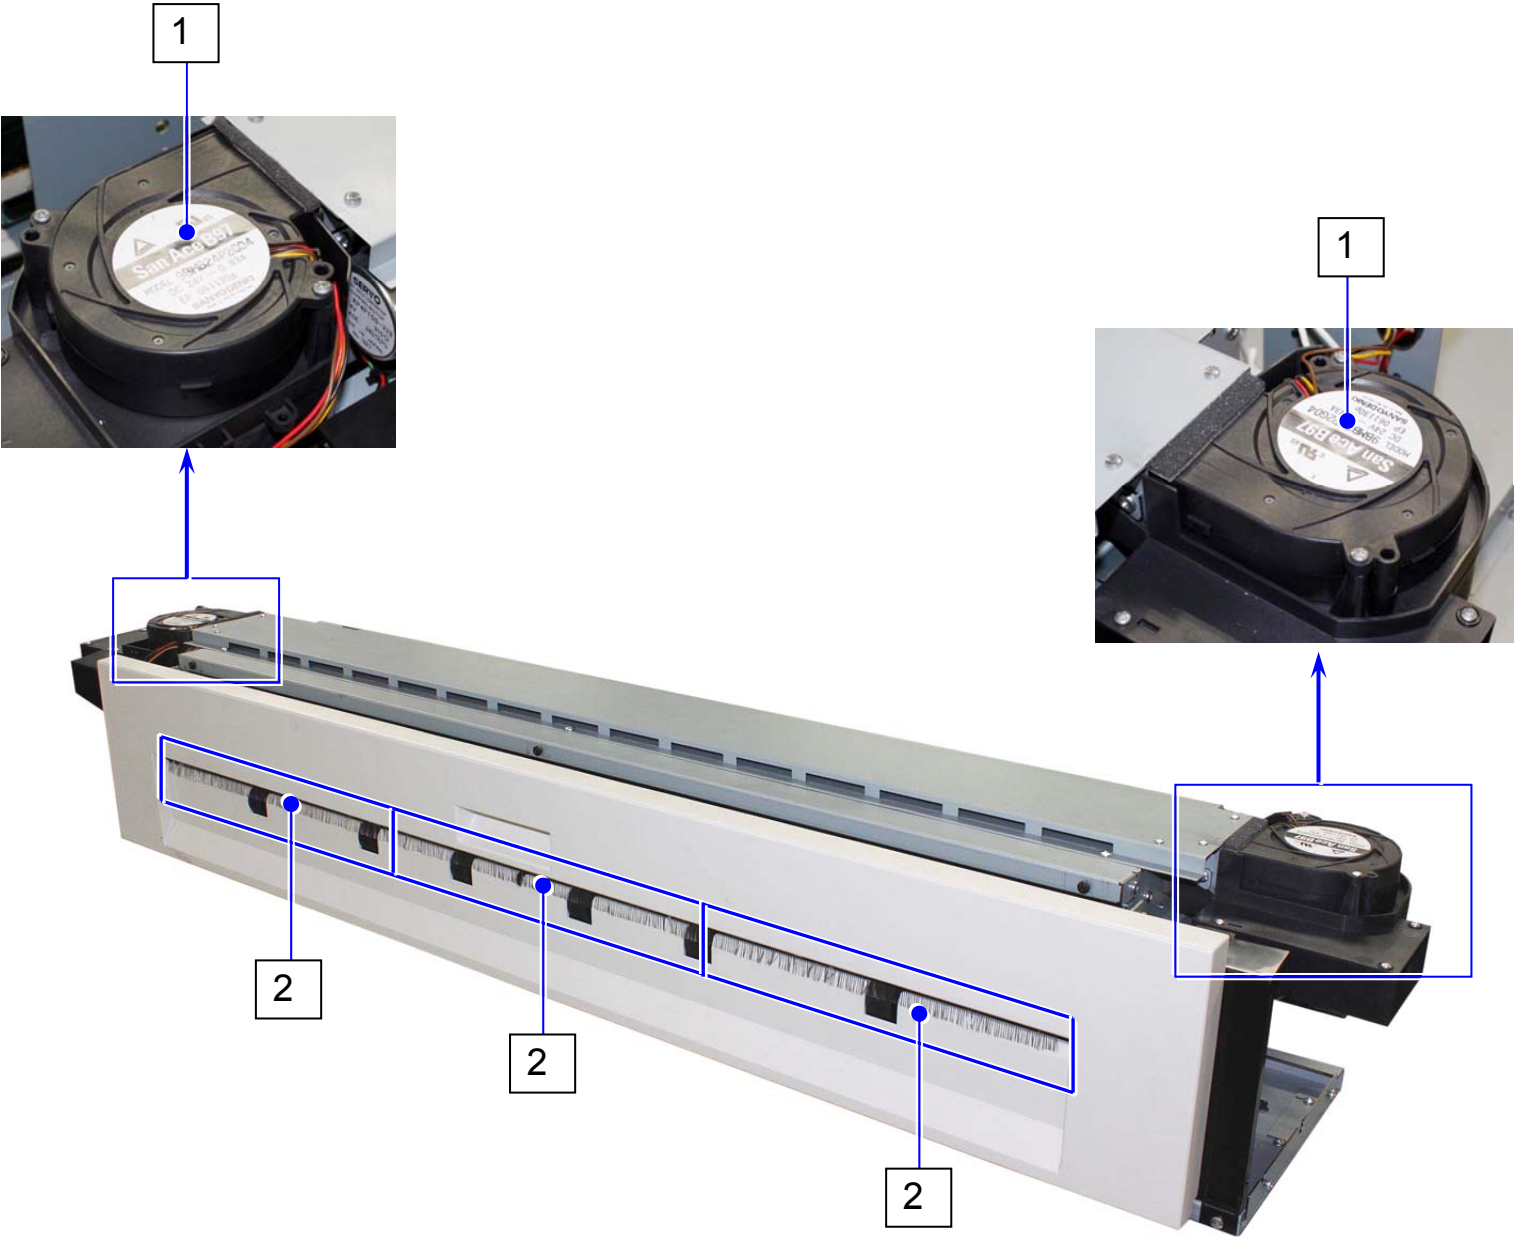



87

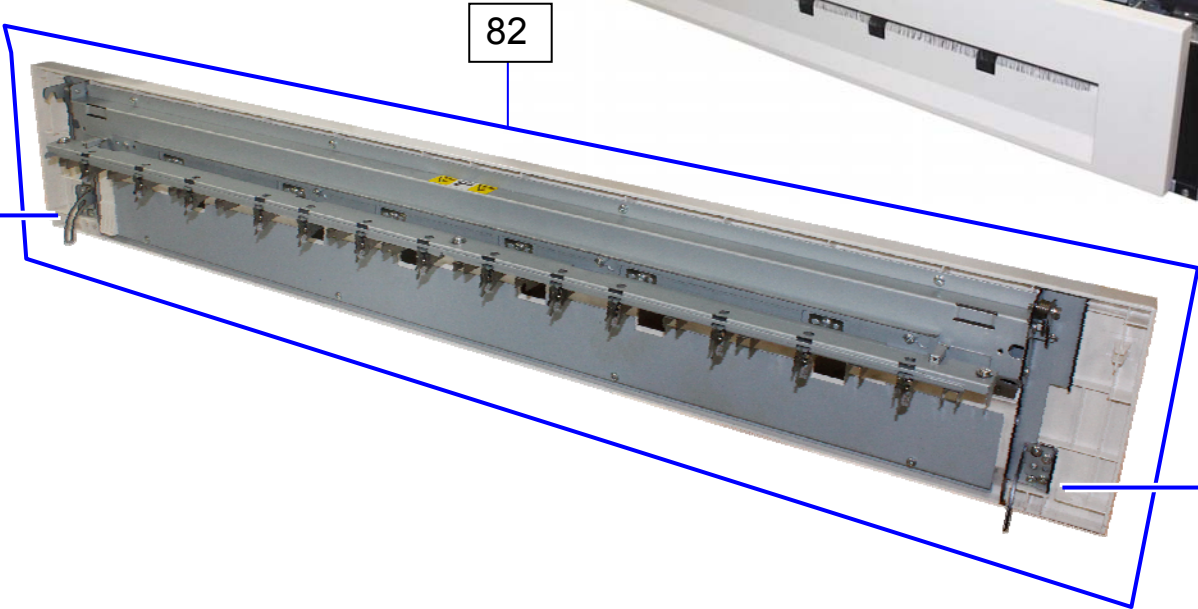


82



87

Refer to Page 20
Item 33

79

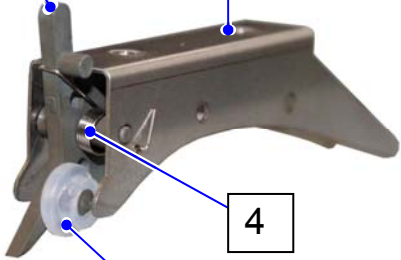


4

3

Refer to Page 20
Item 33

80

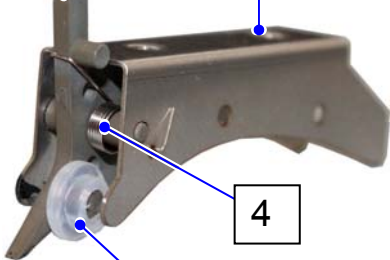


4


3


81






5




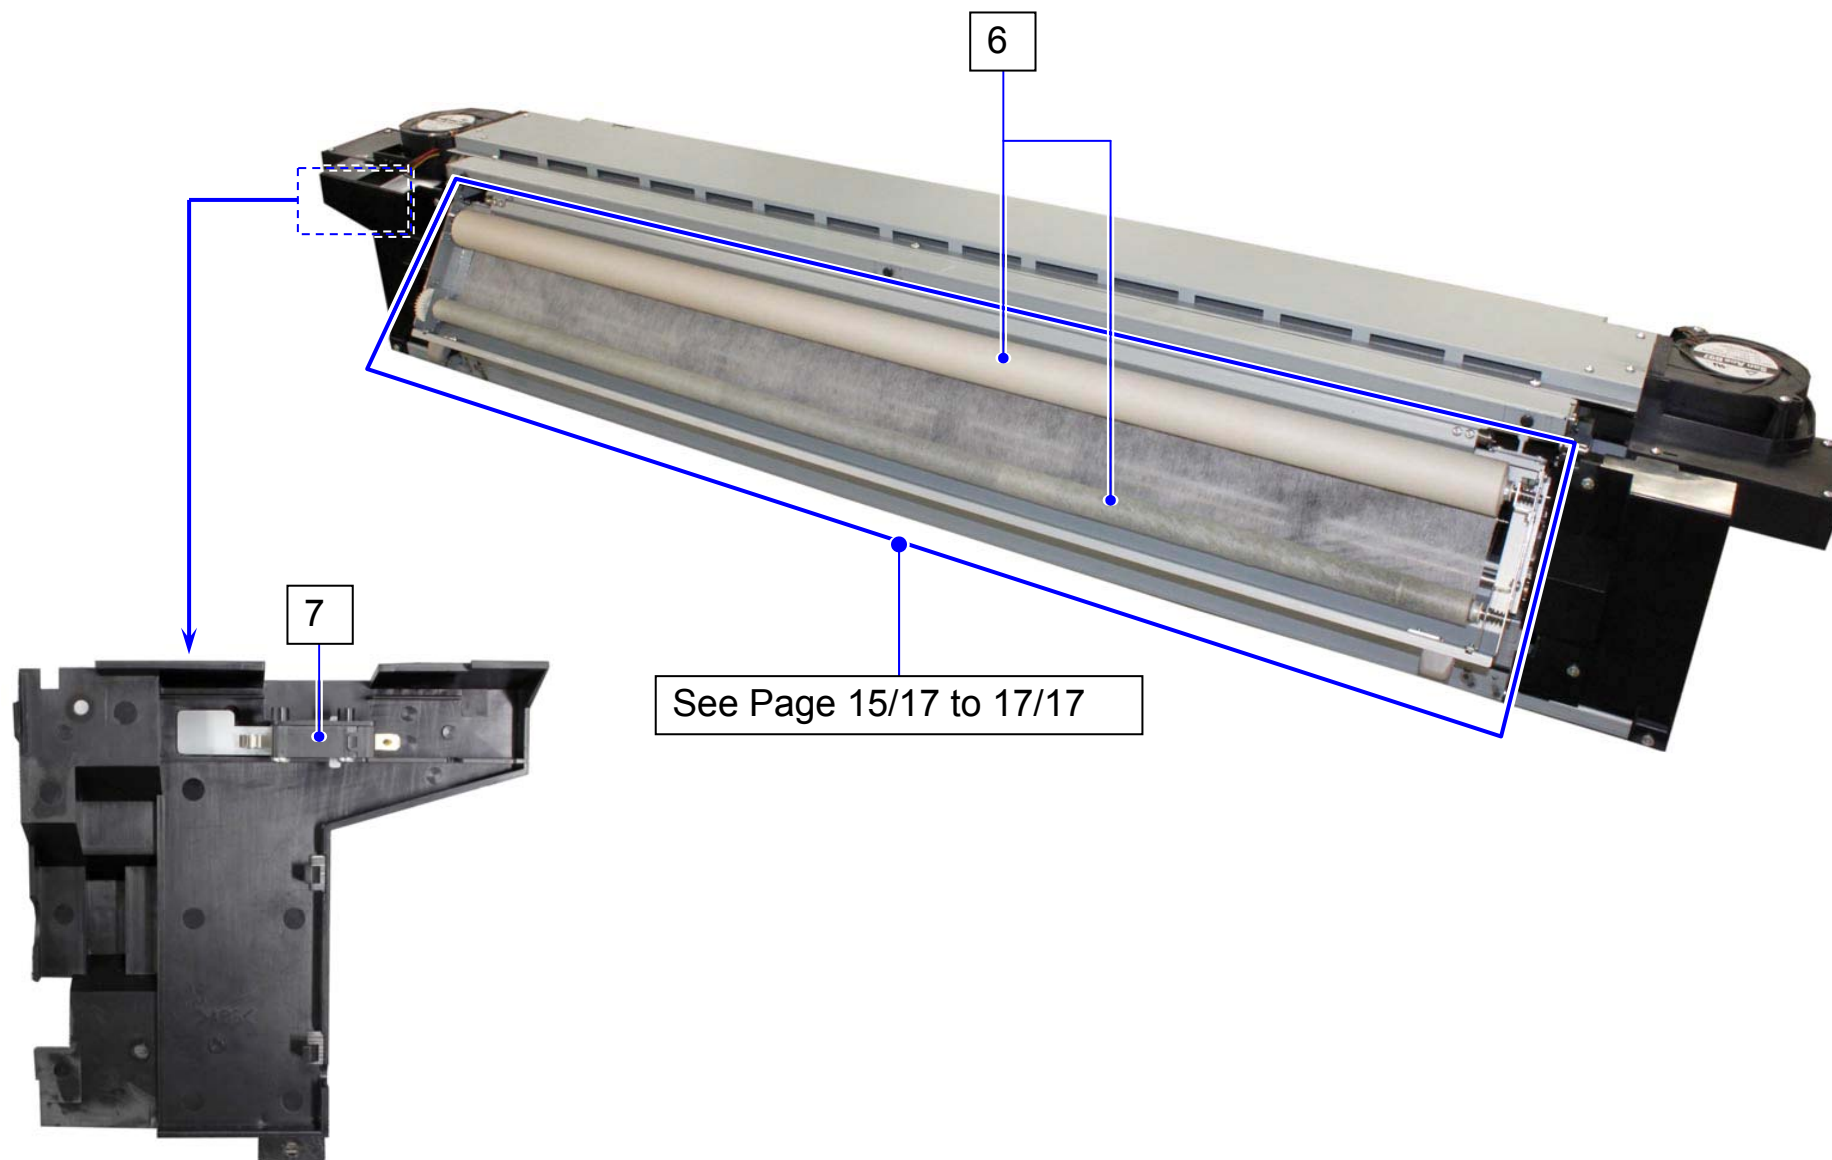


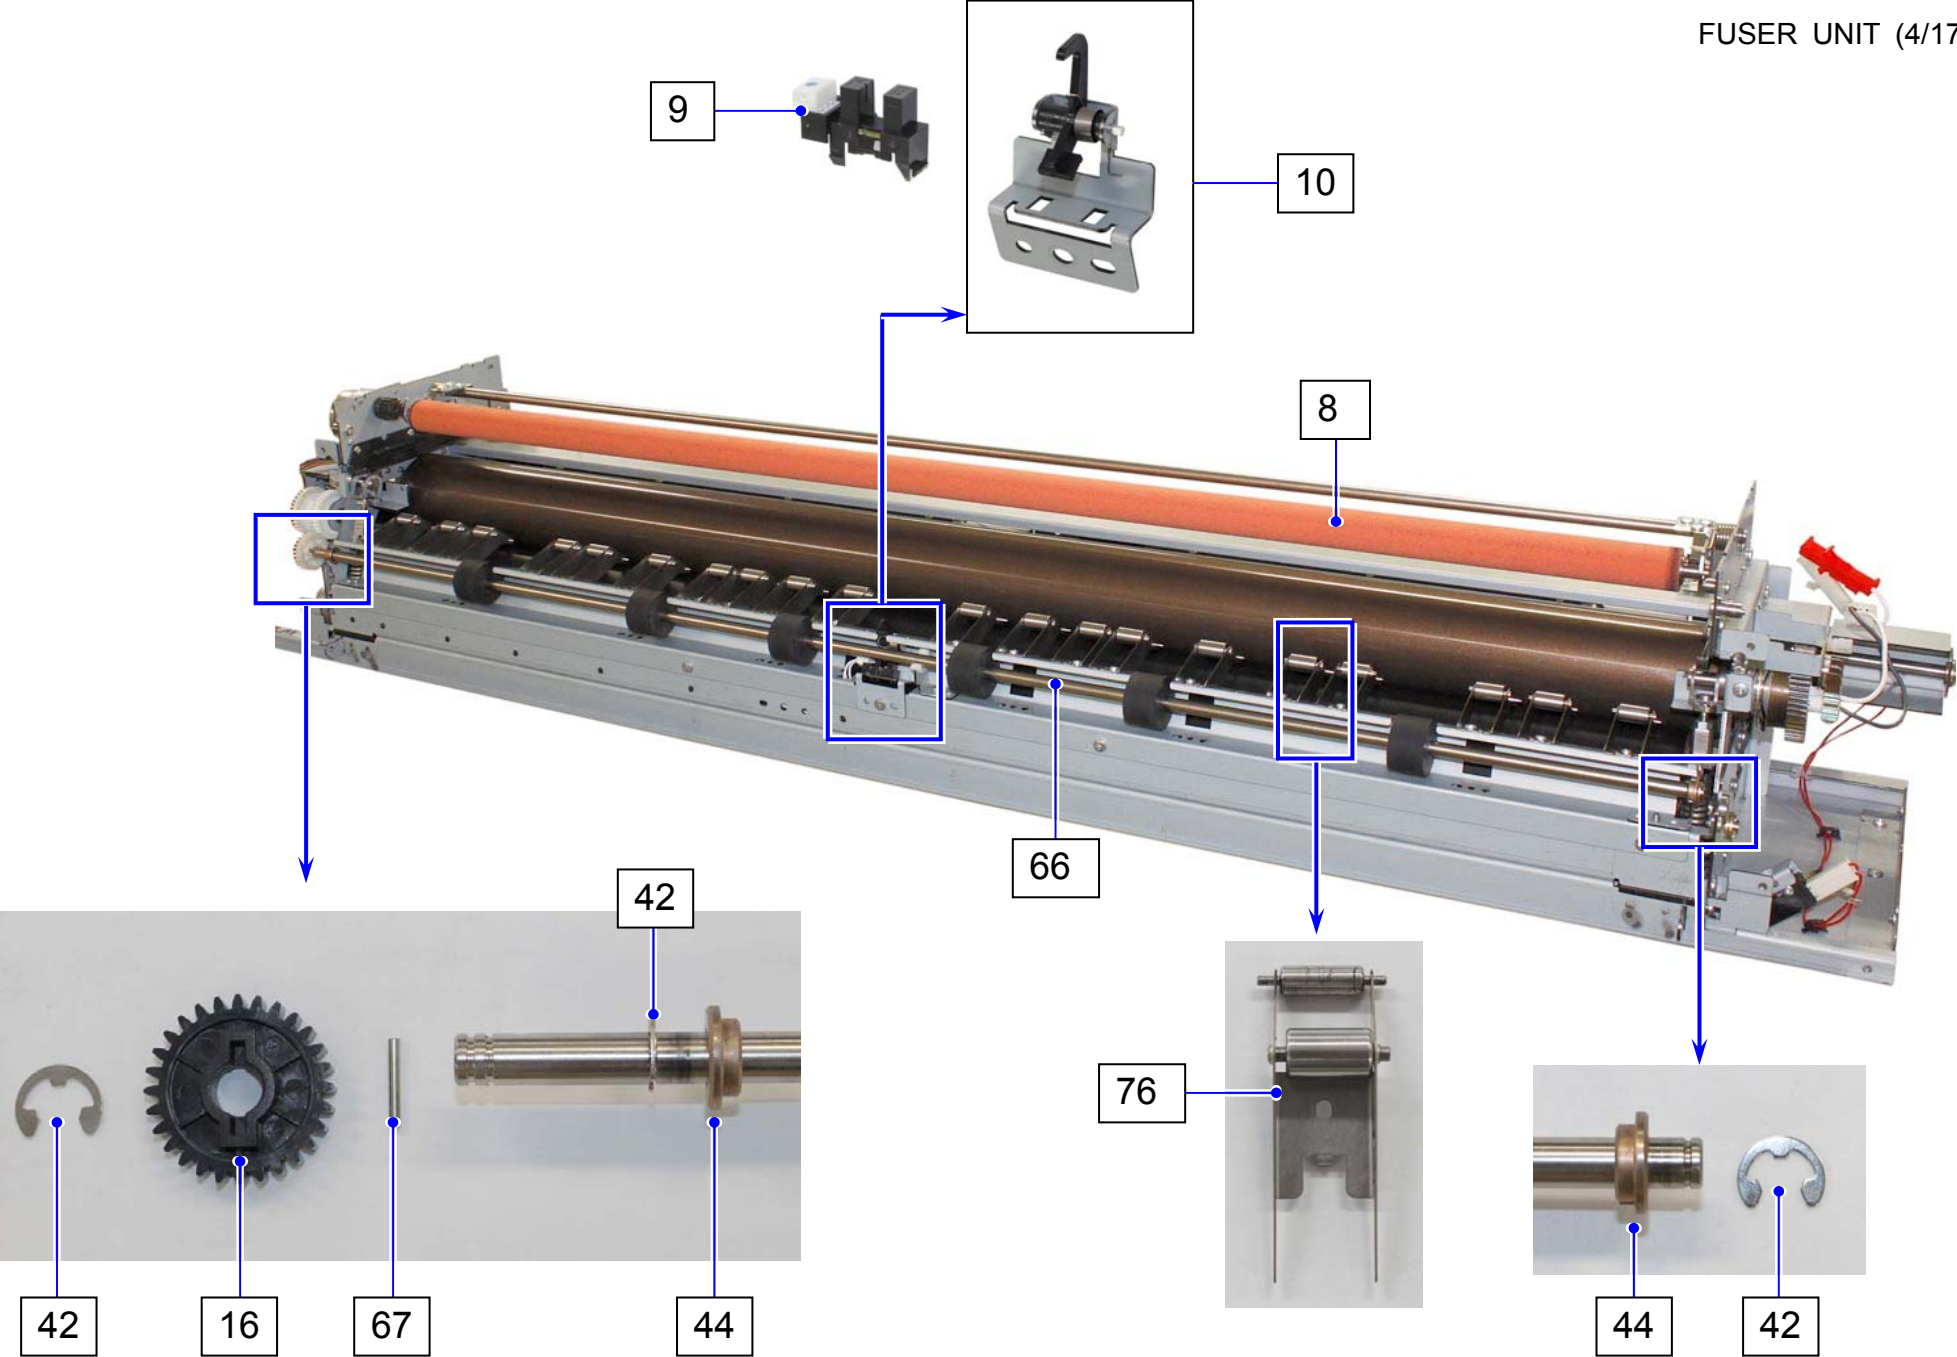


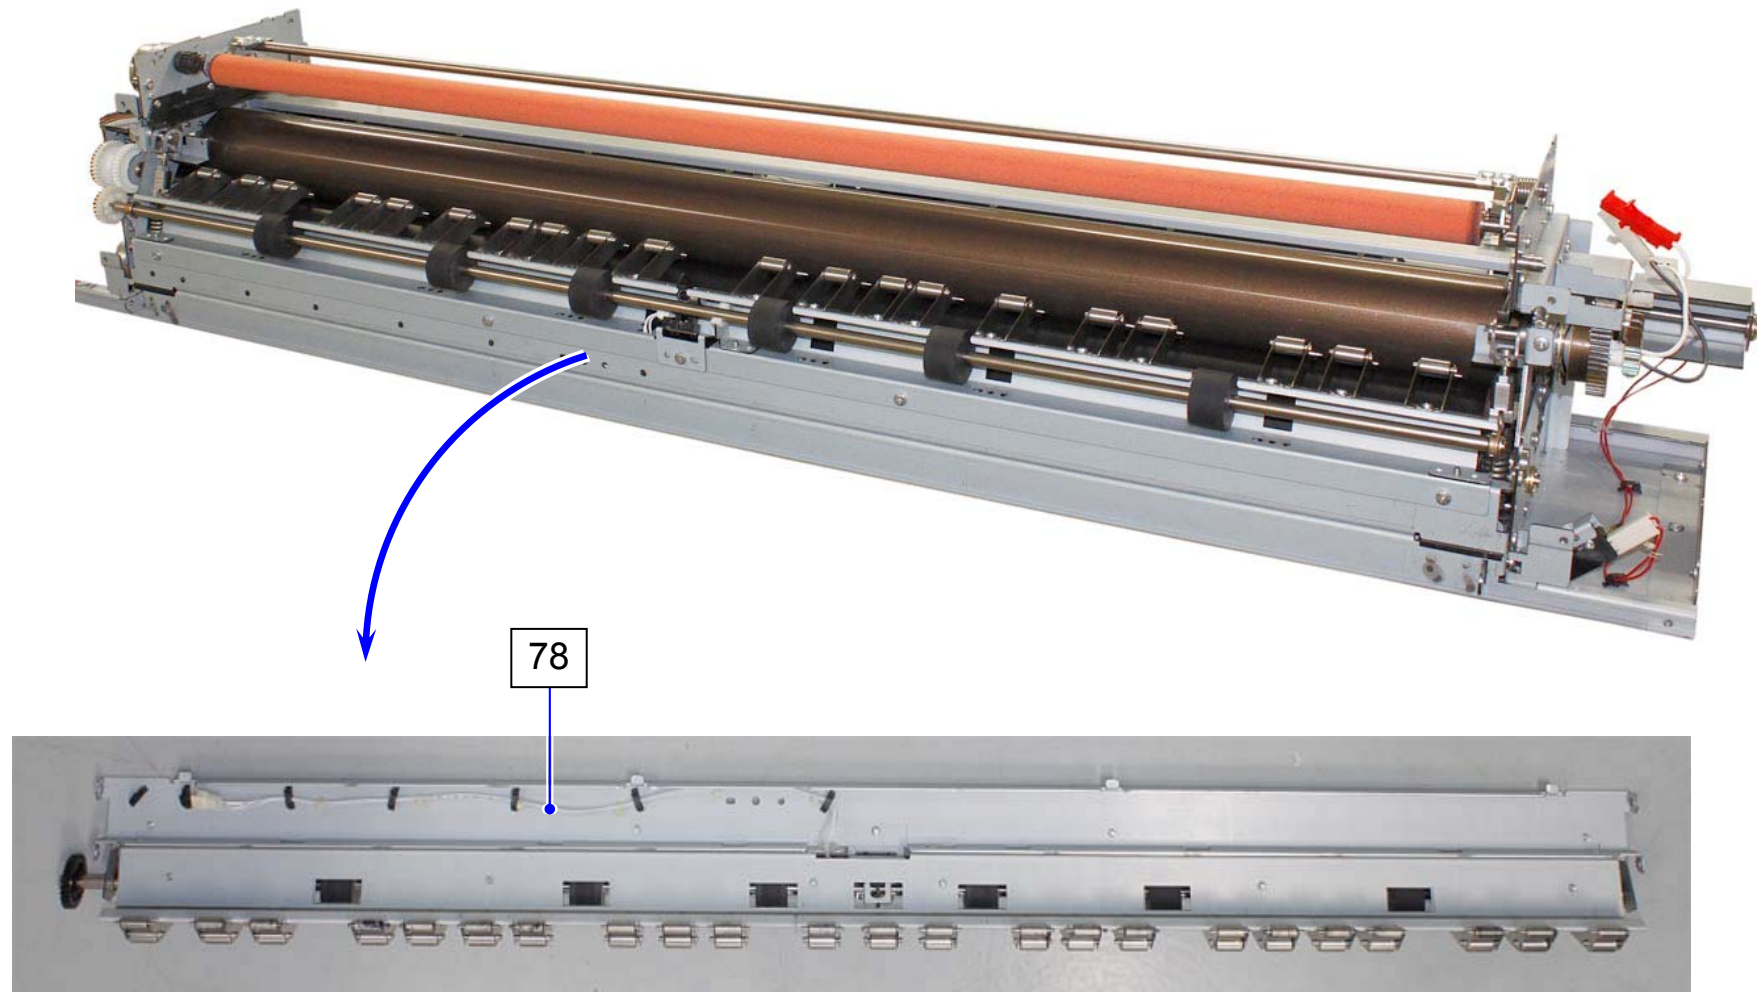

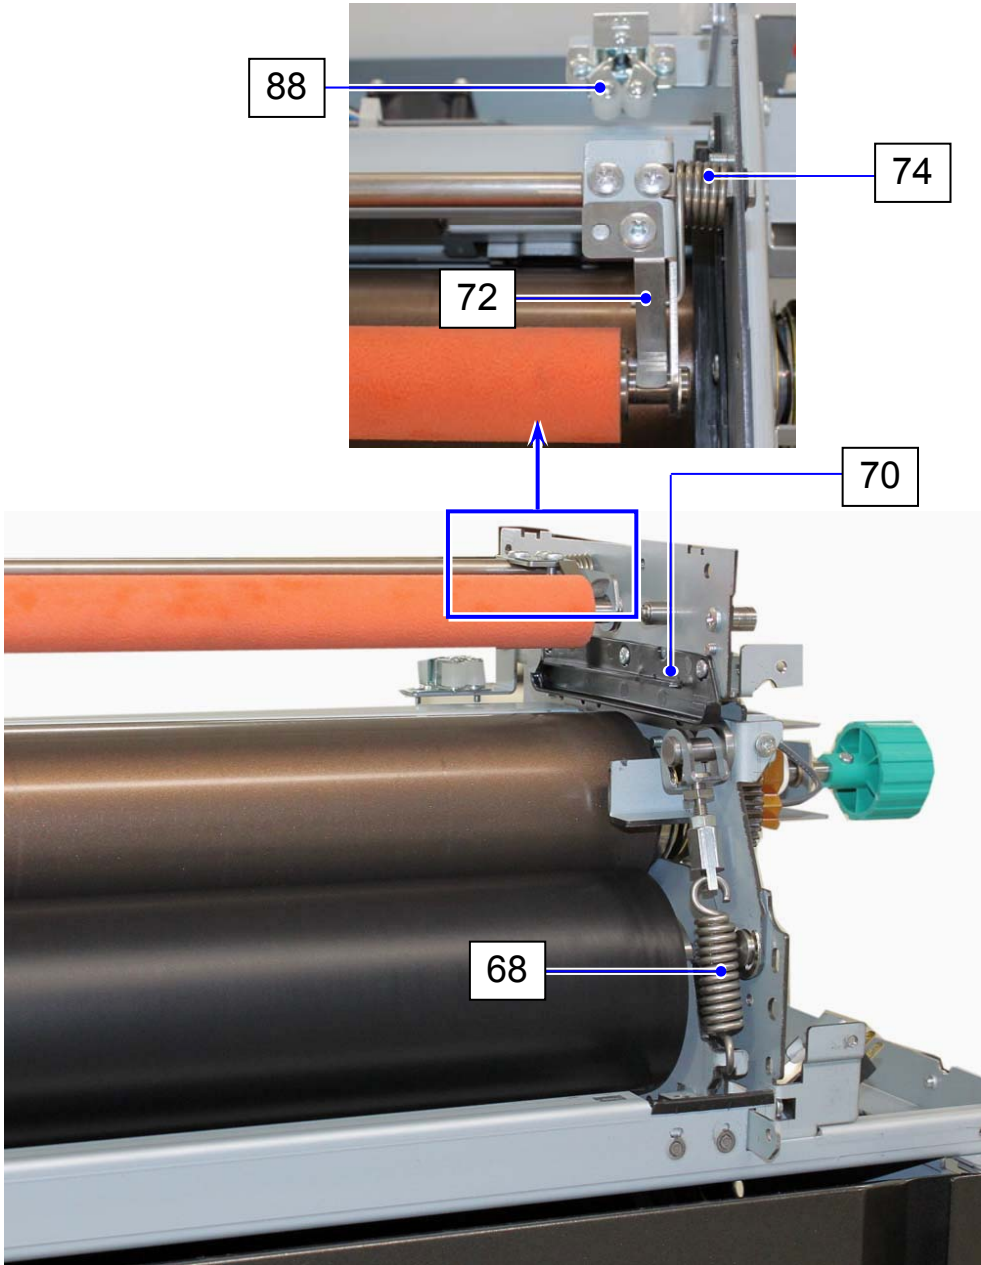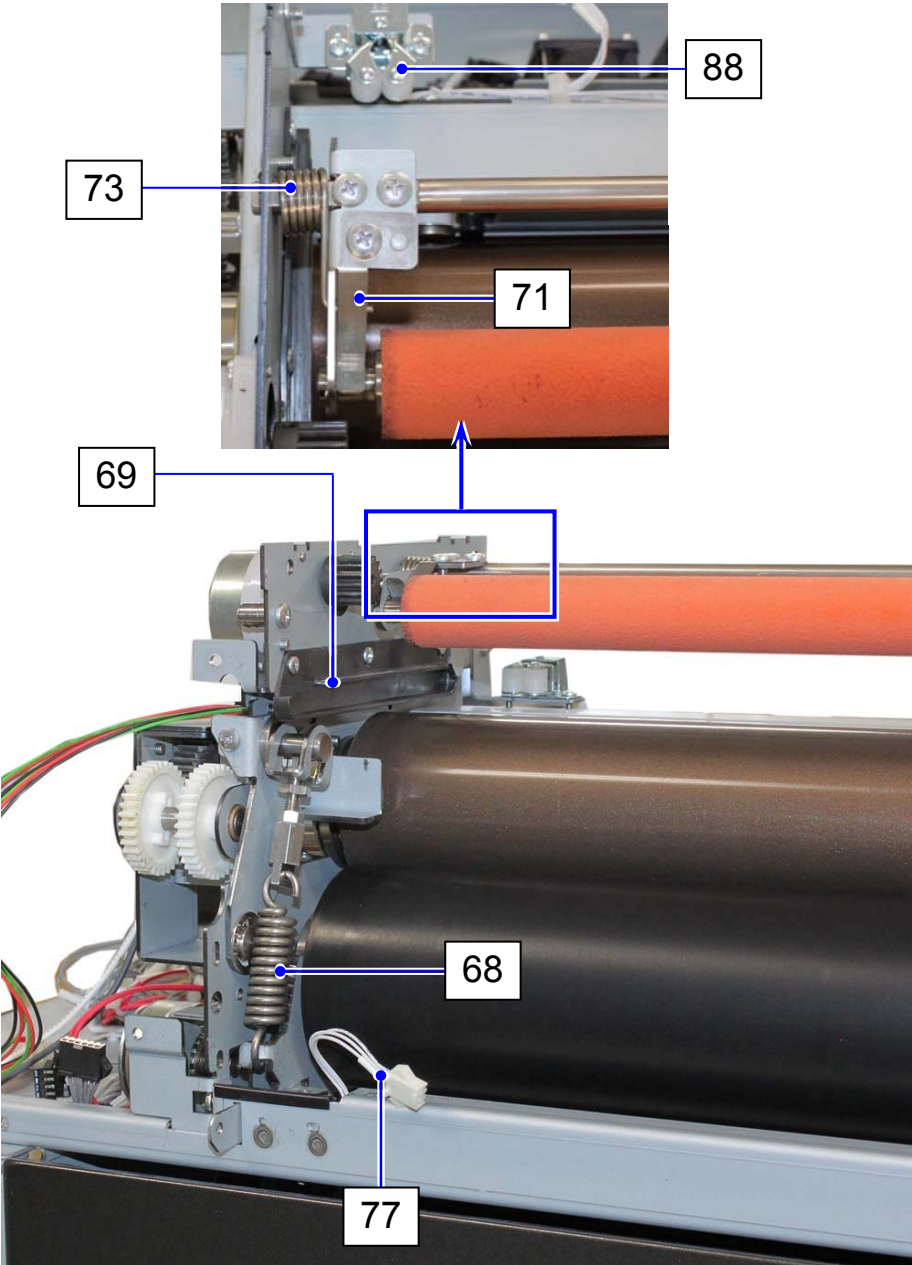

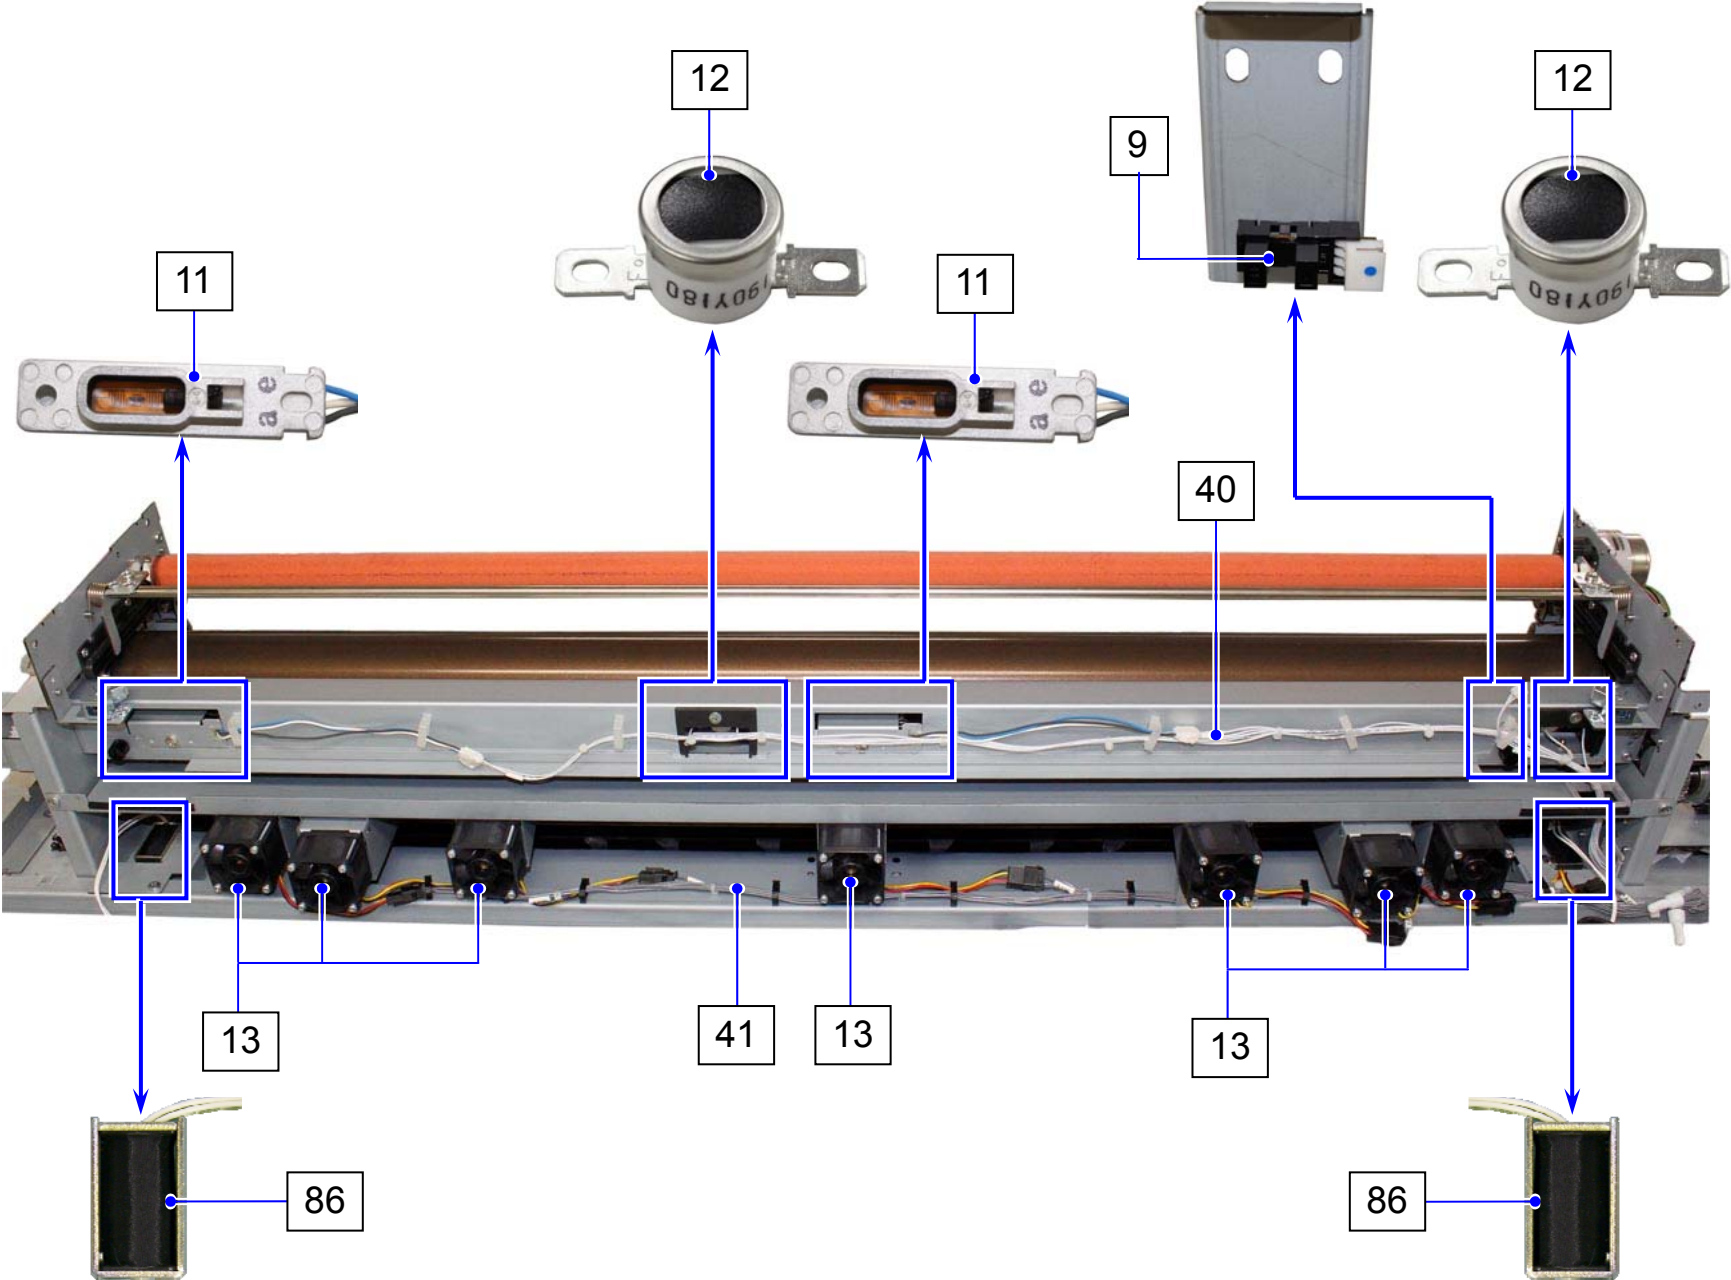



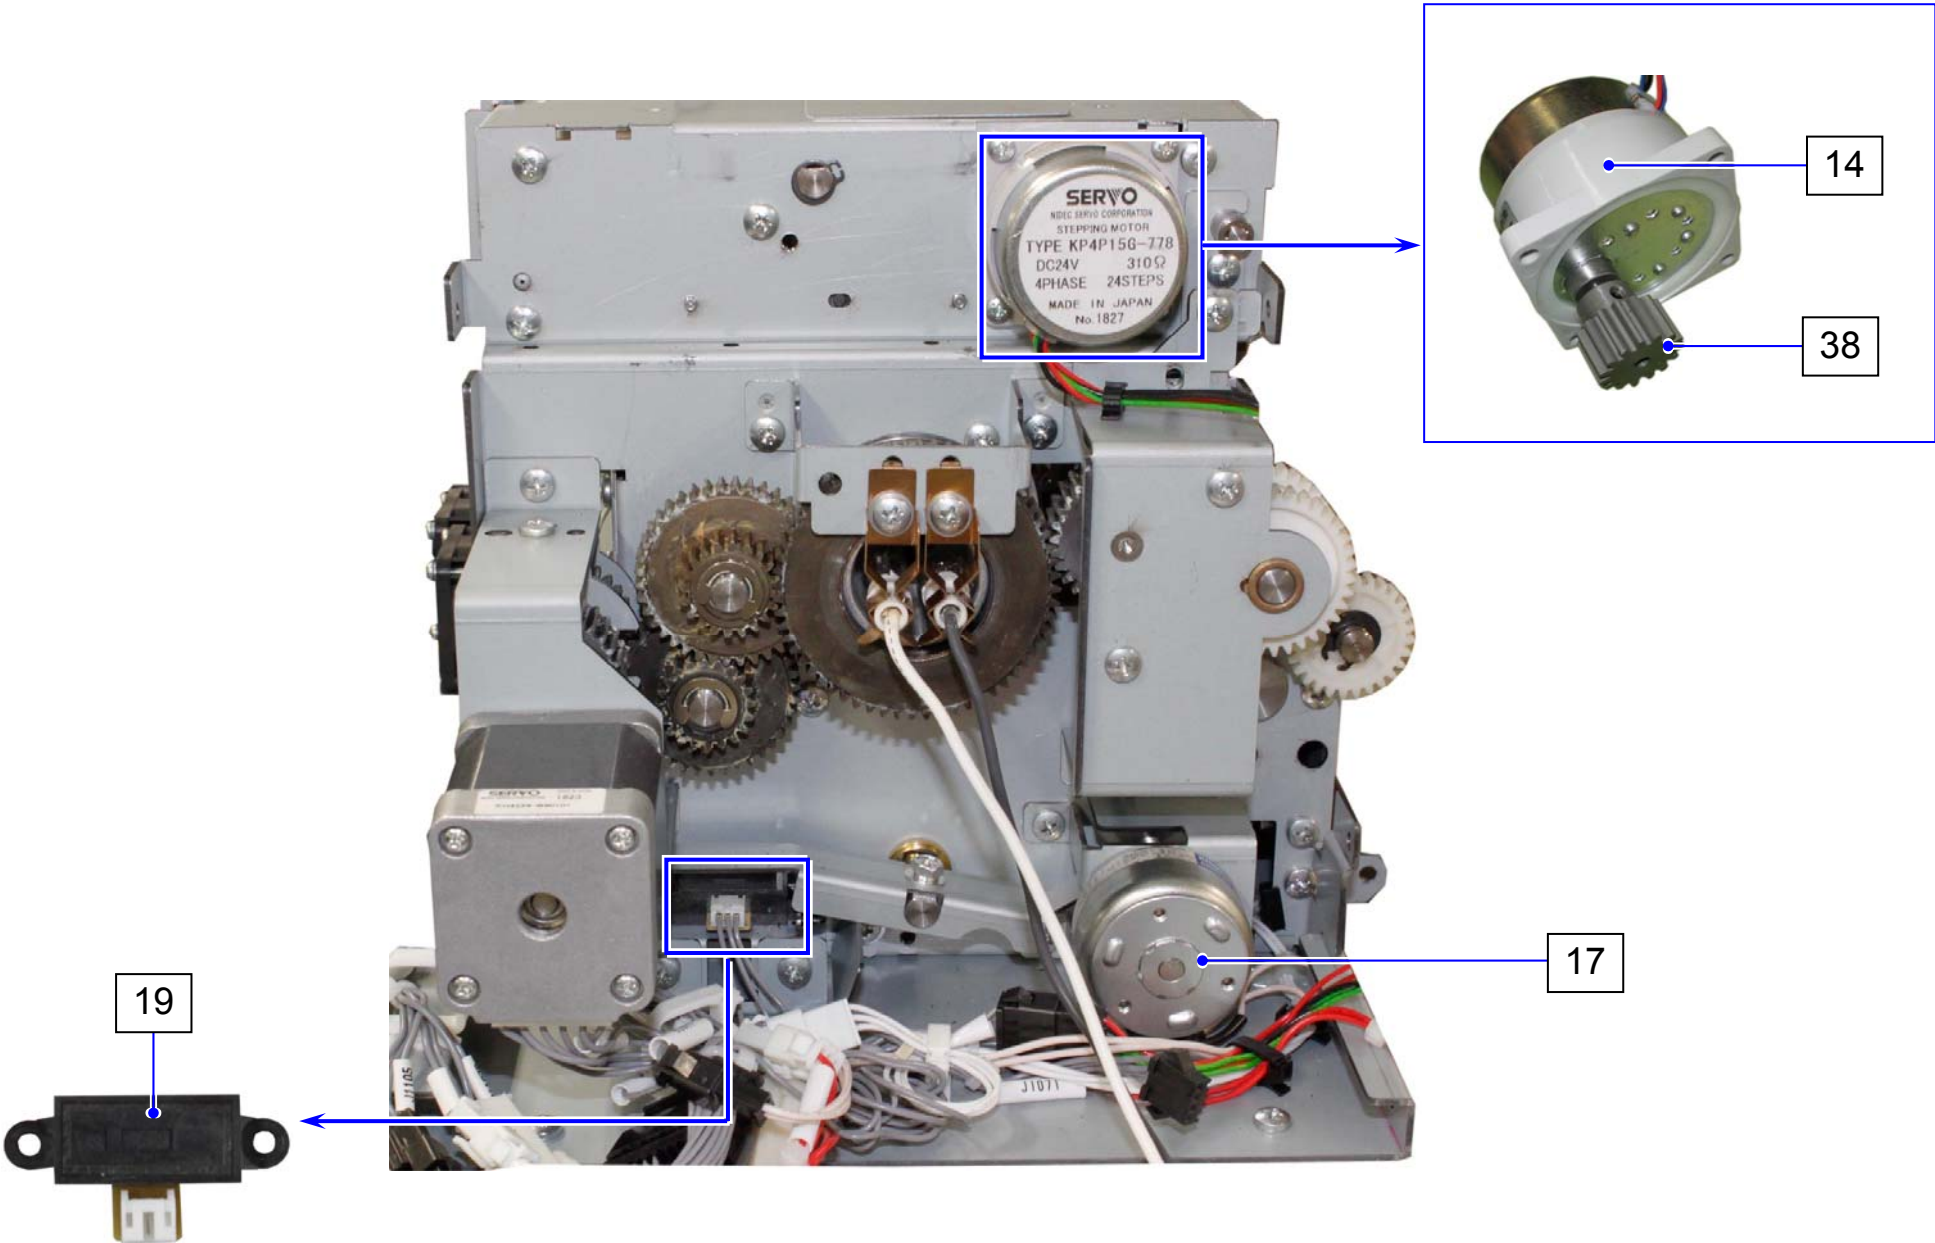


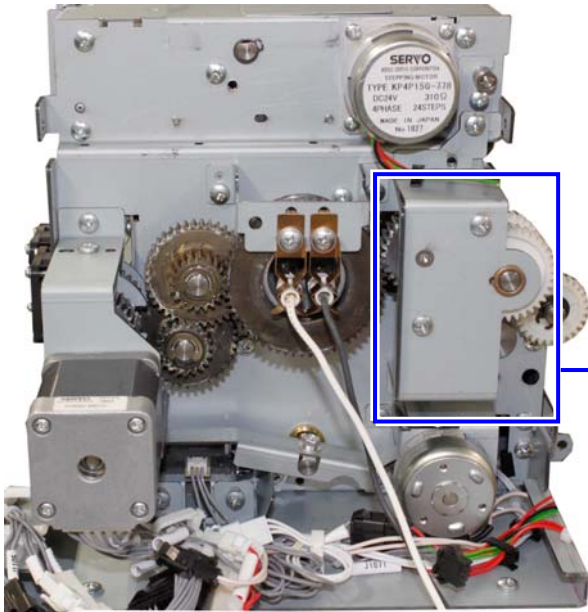



42


43

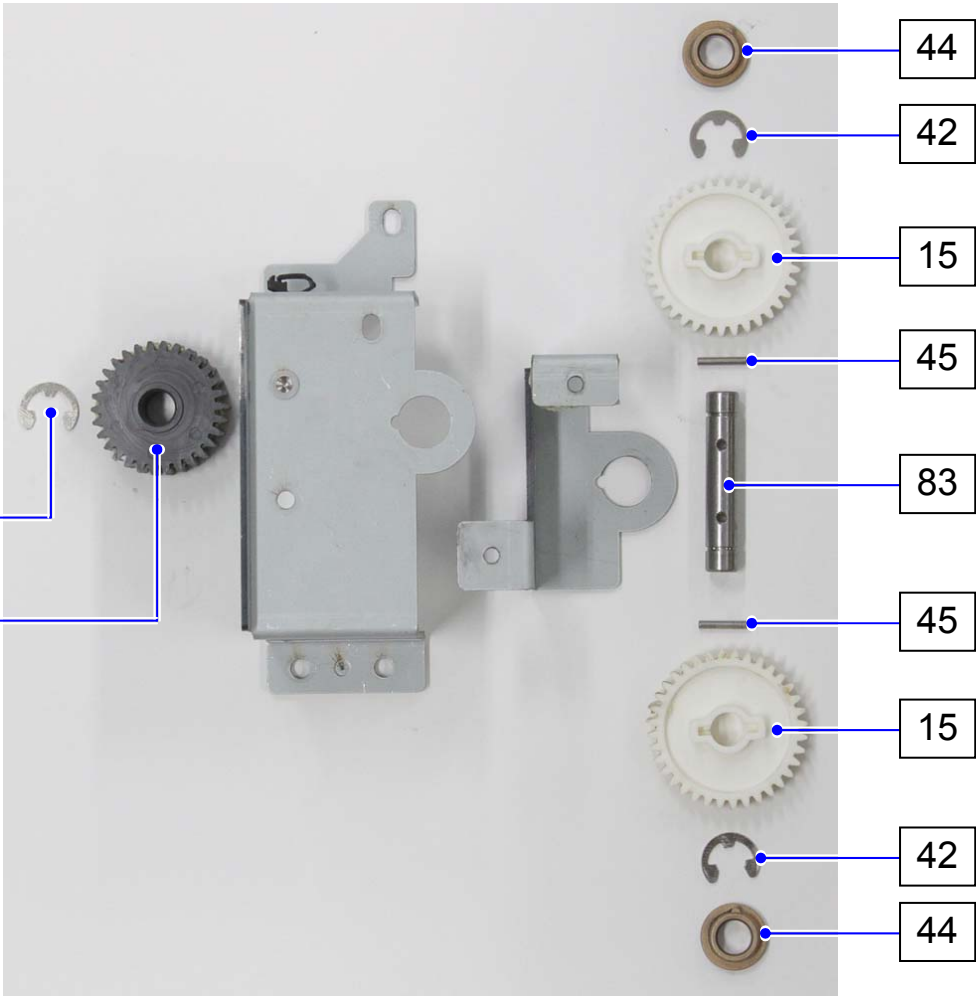


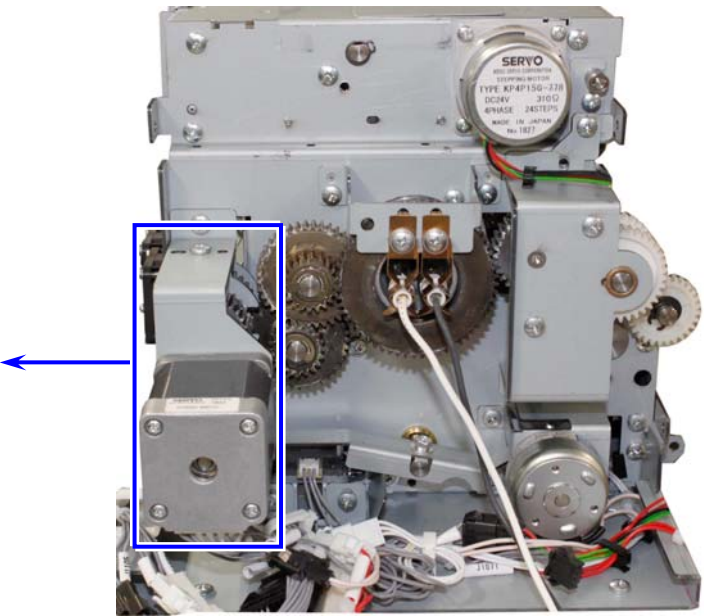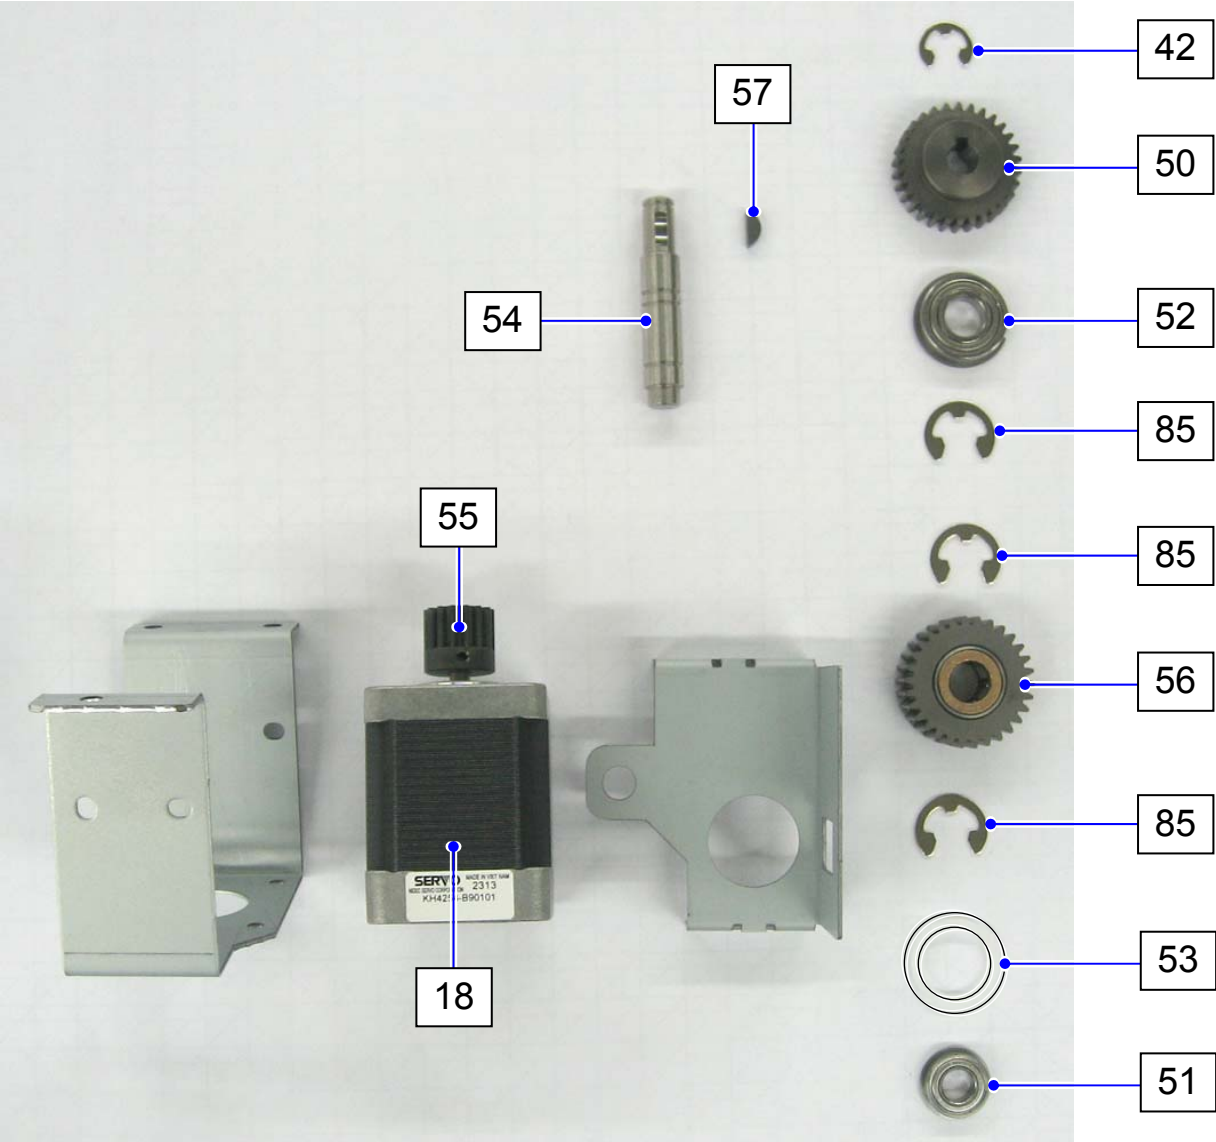

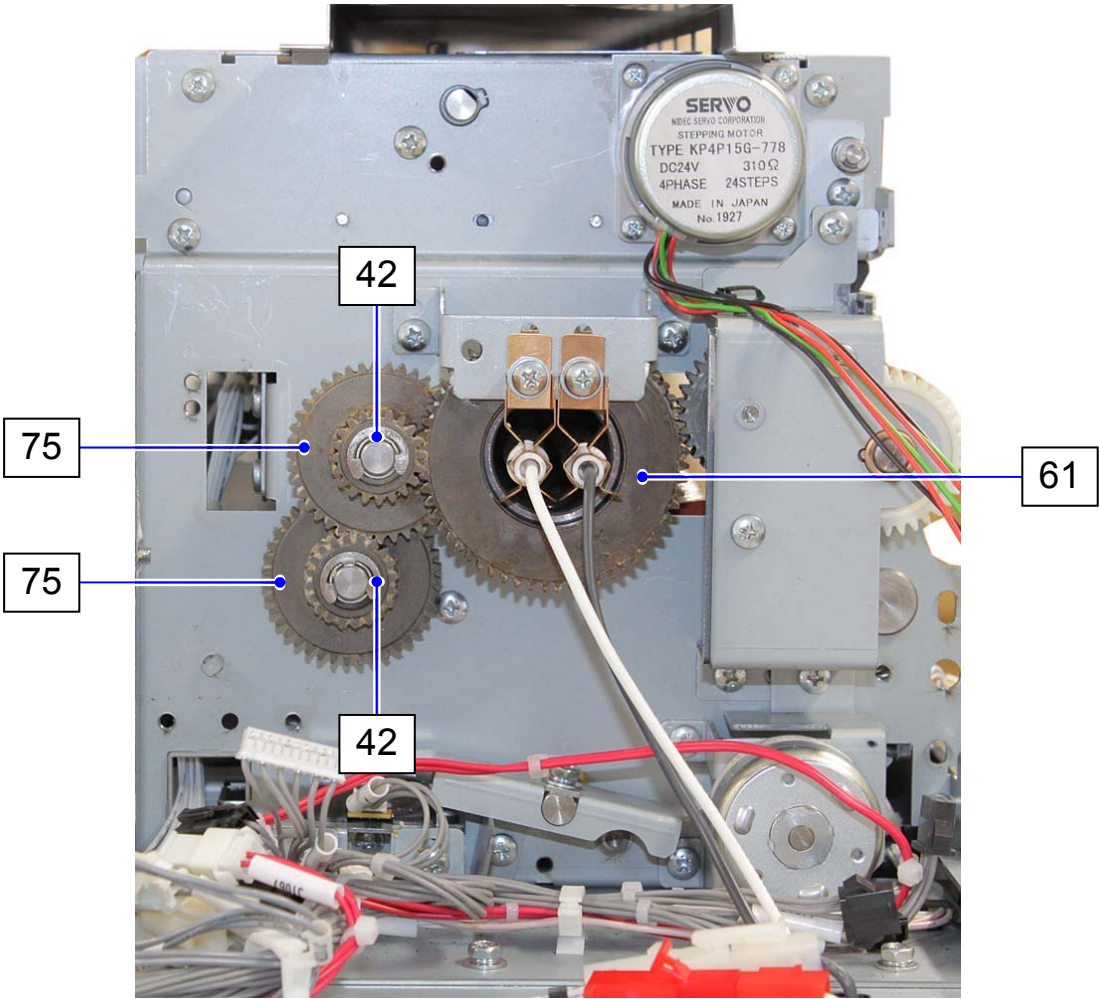








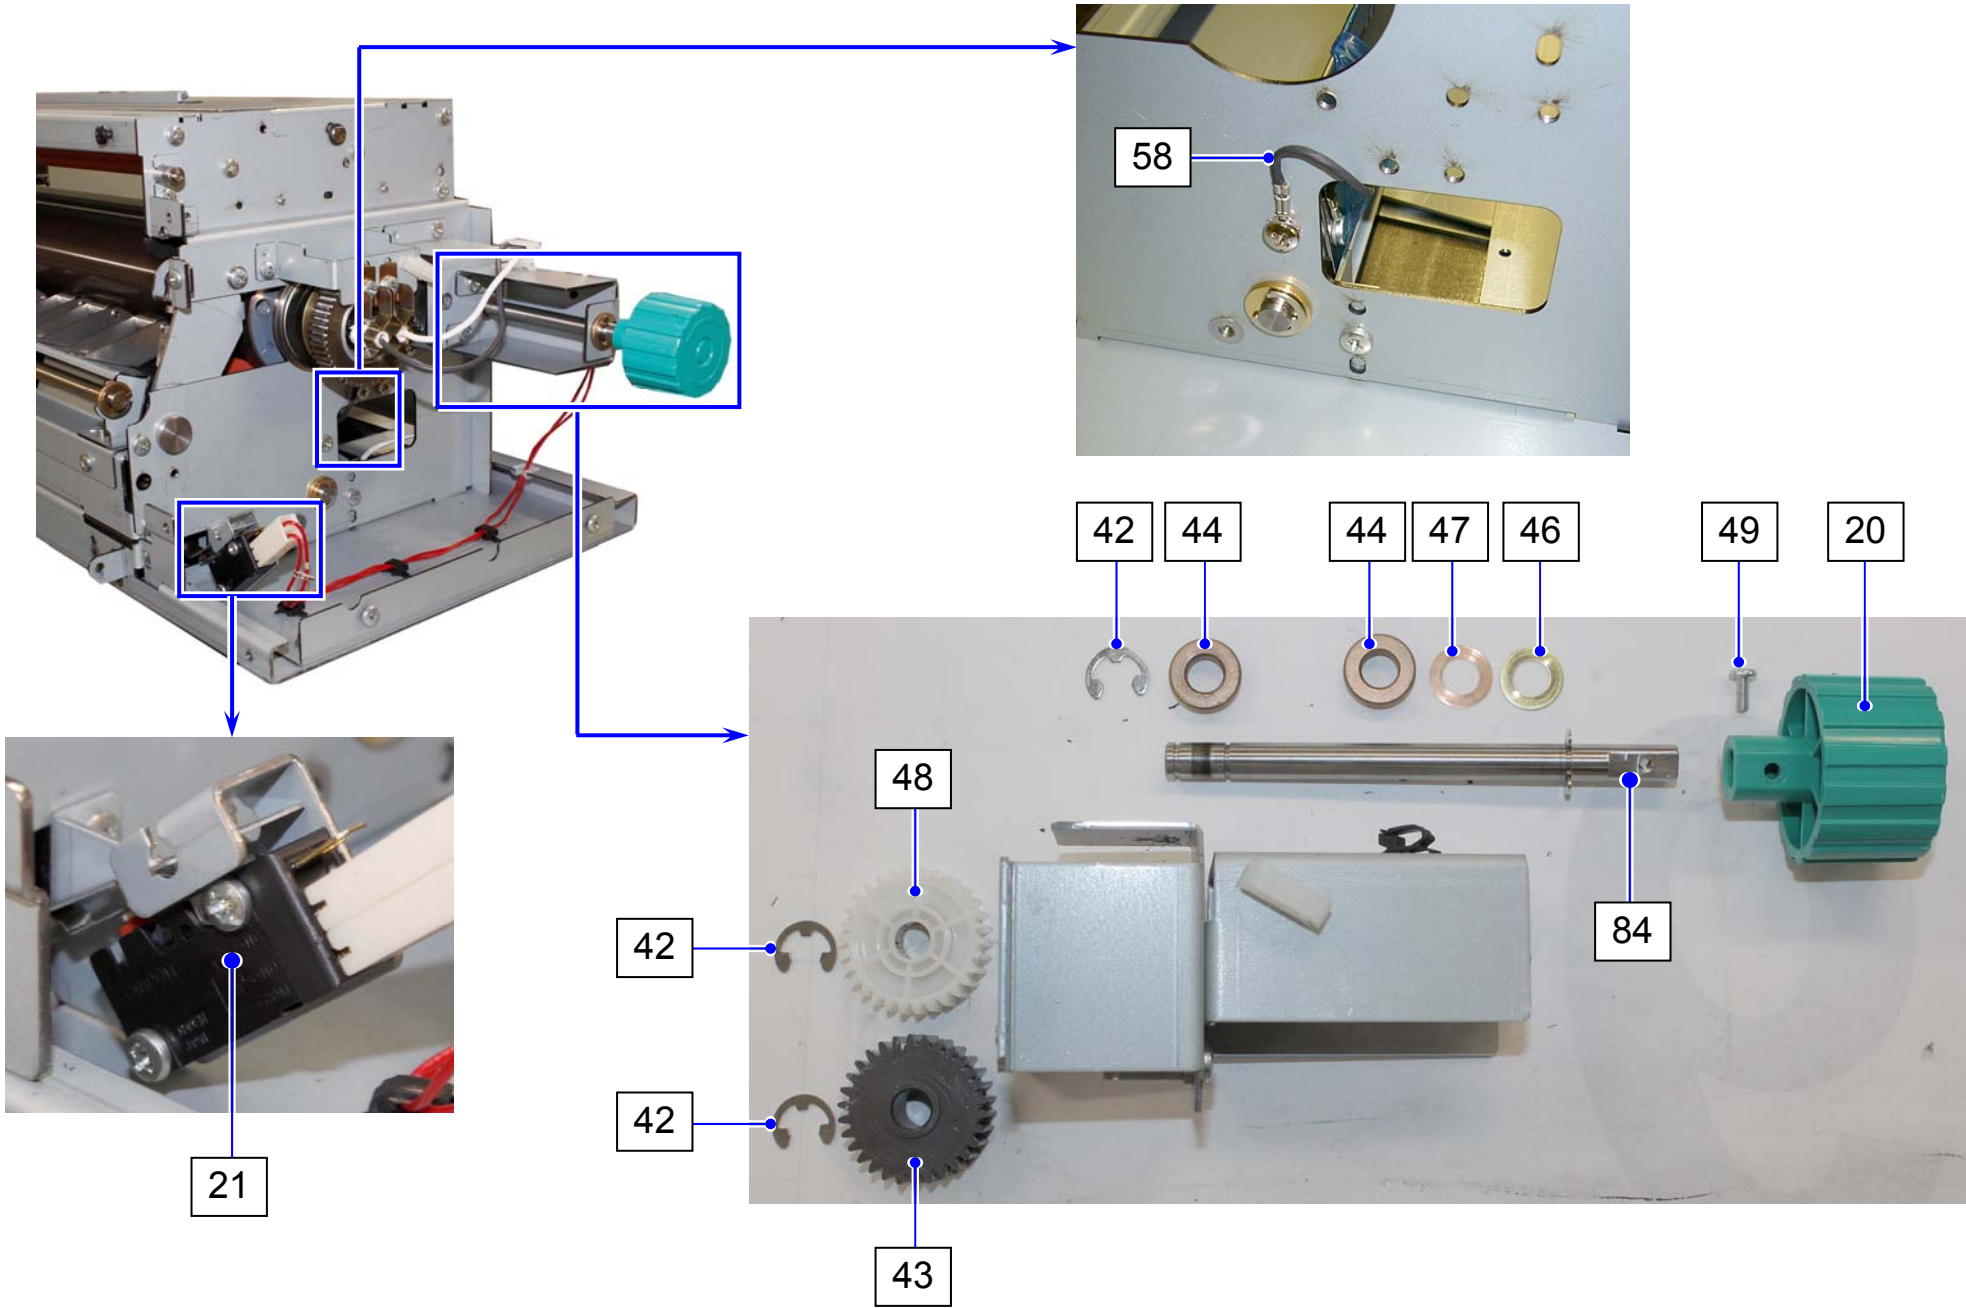


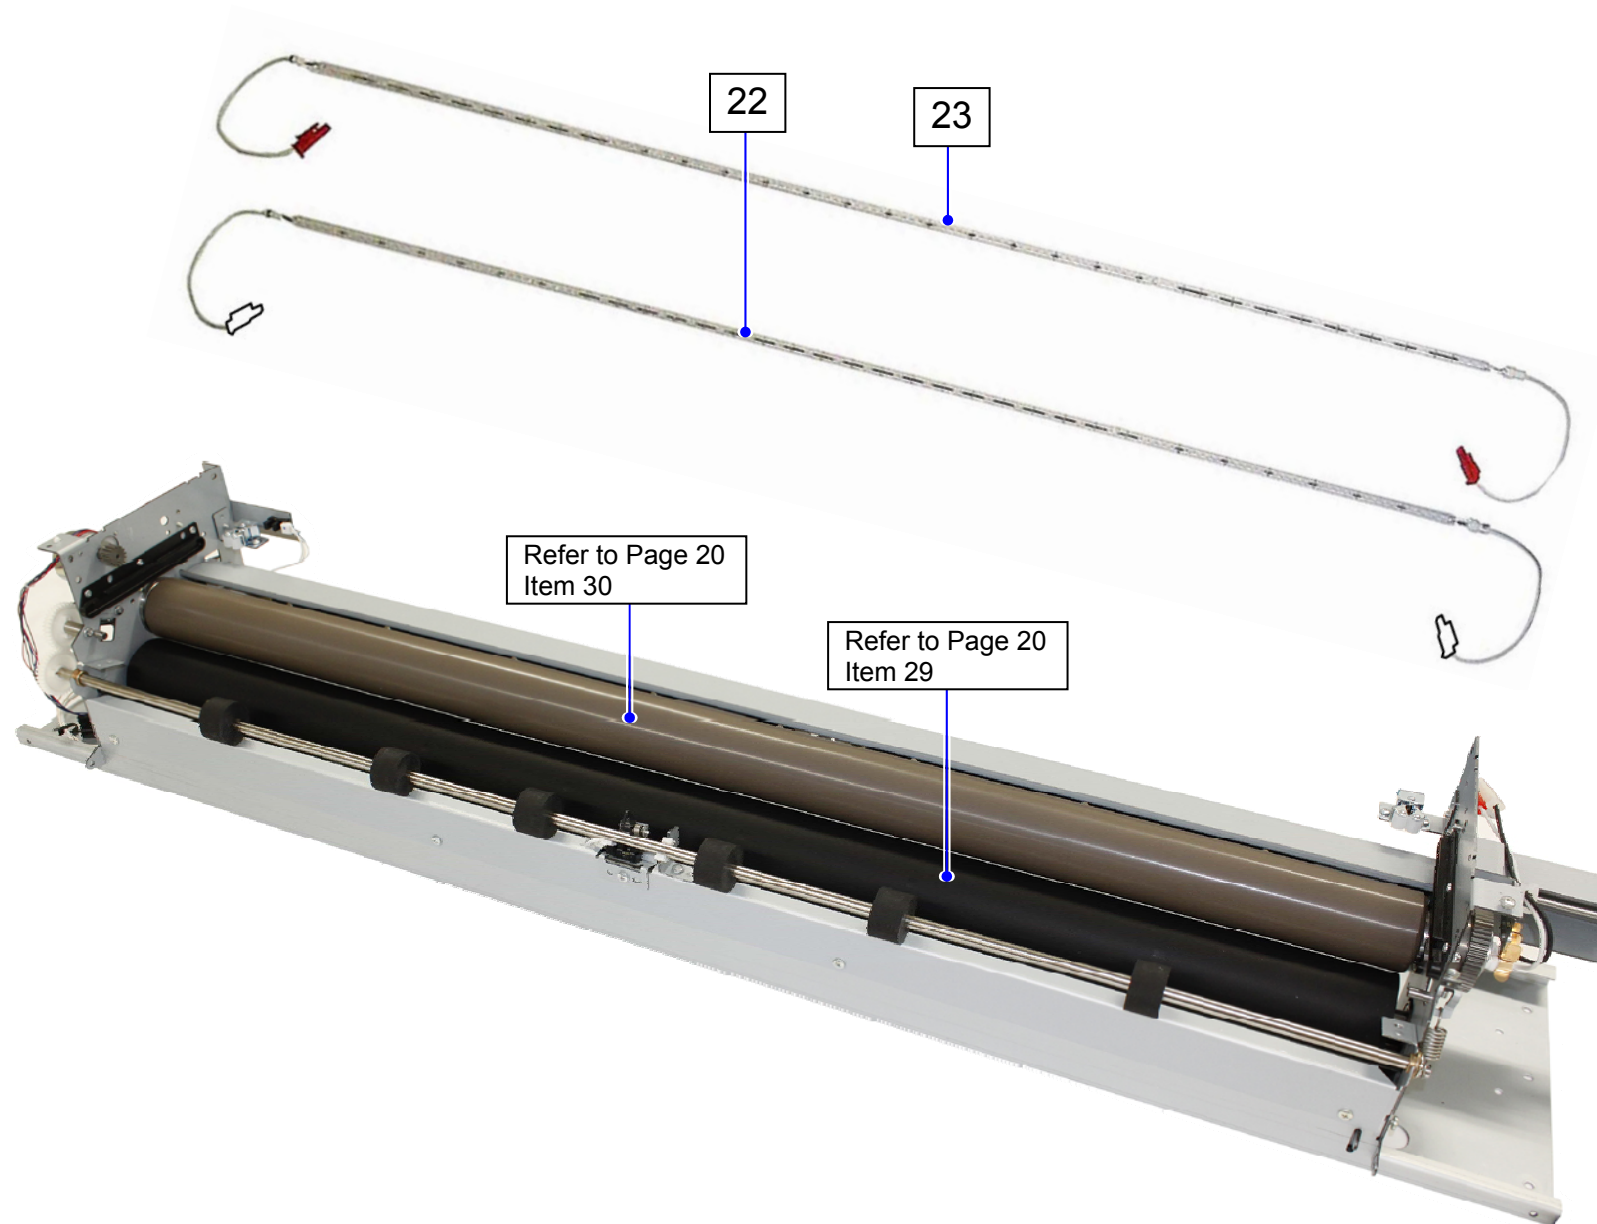


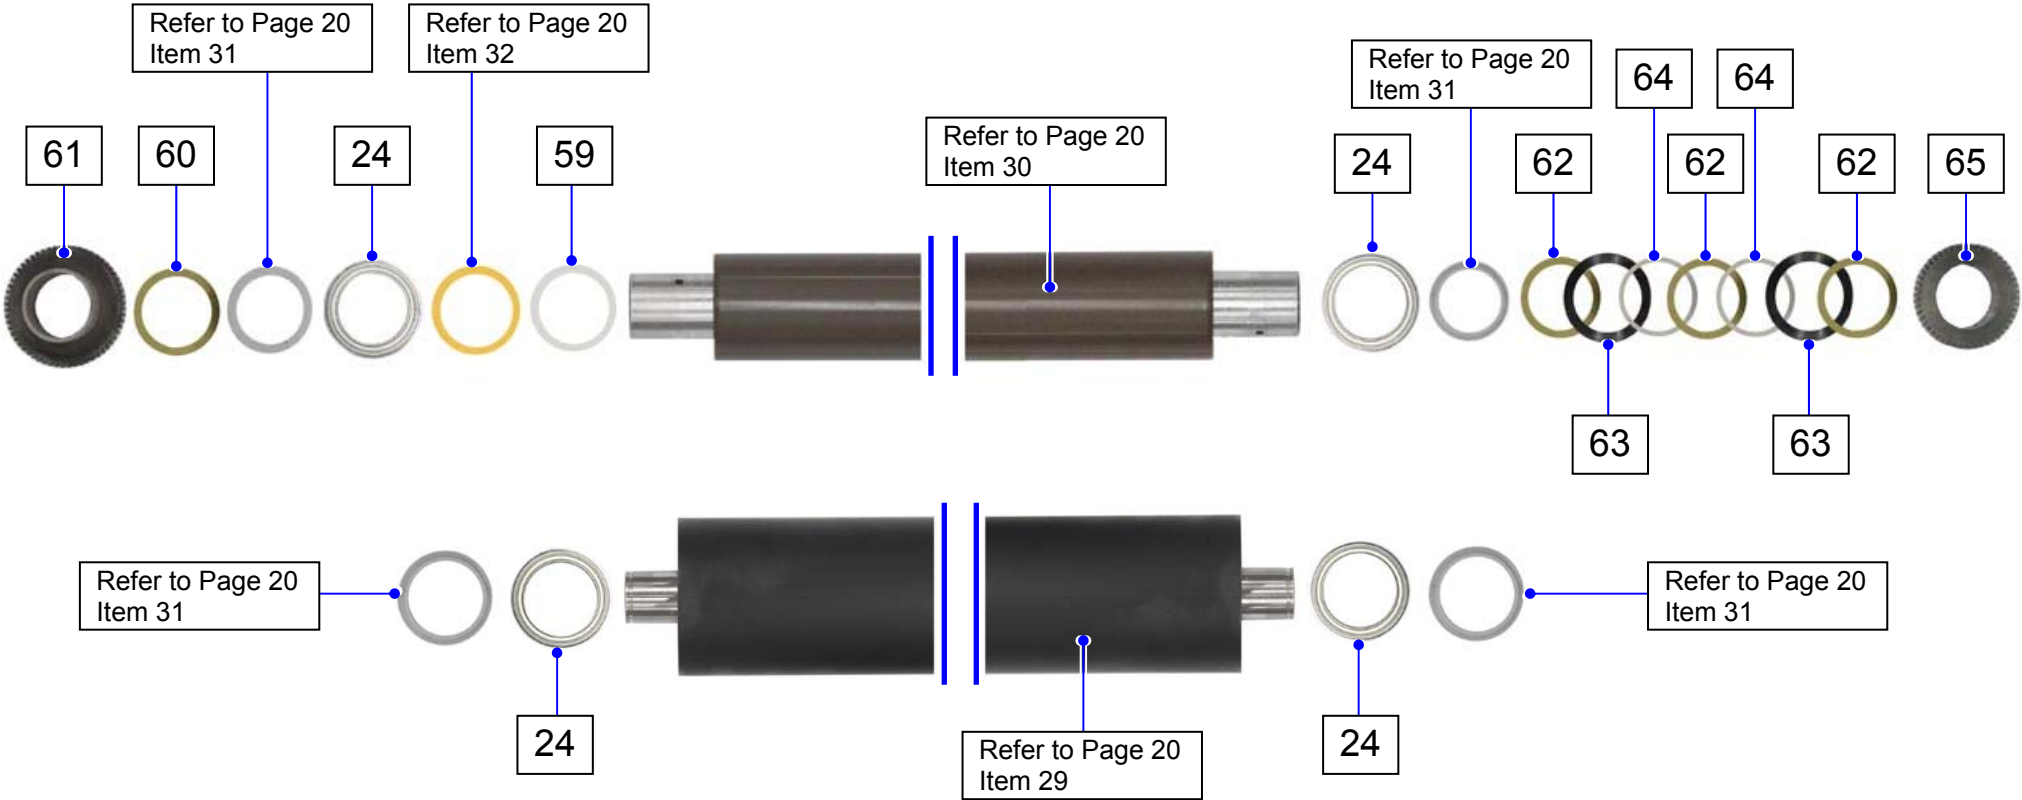

39

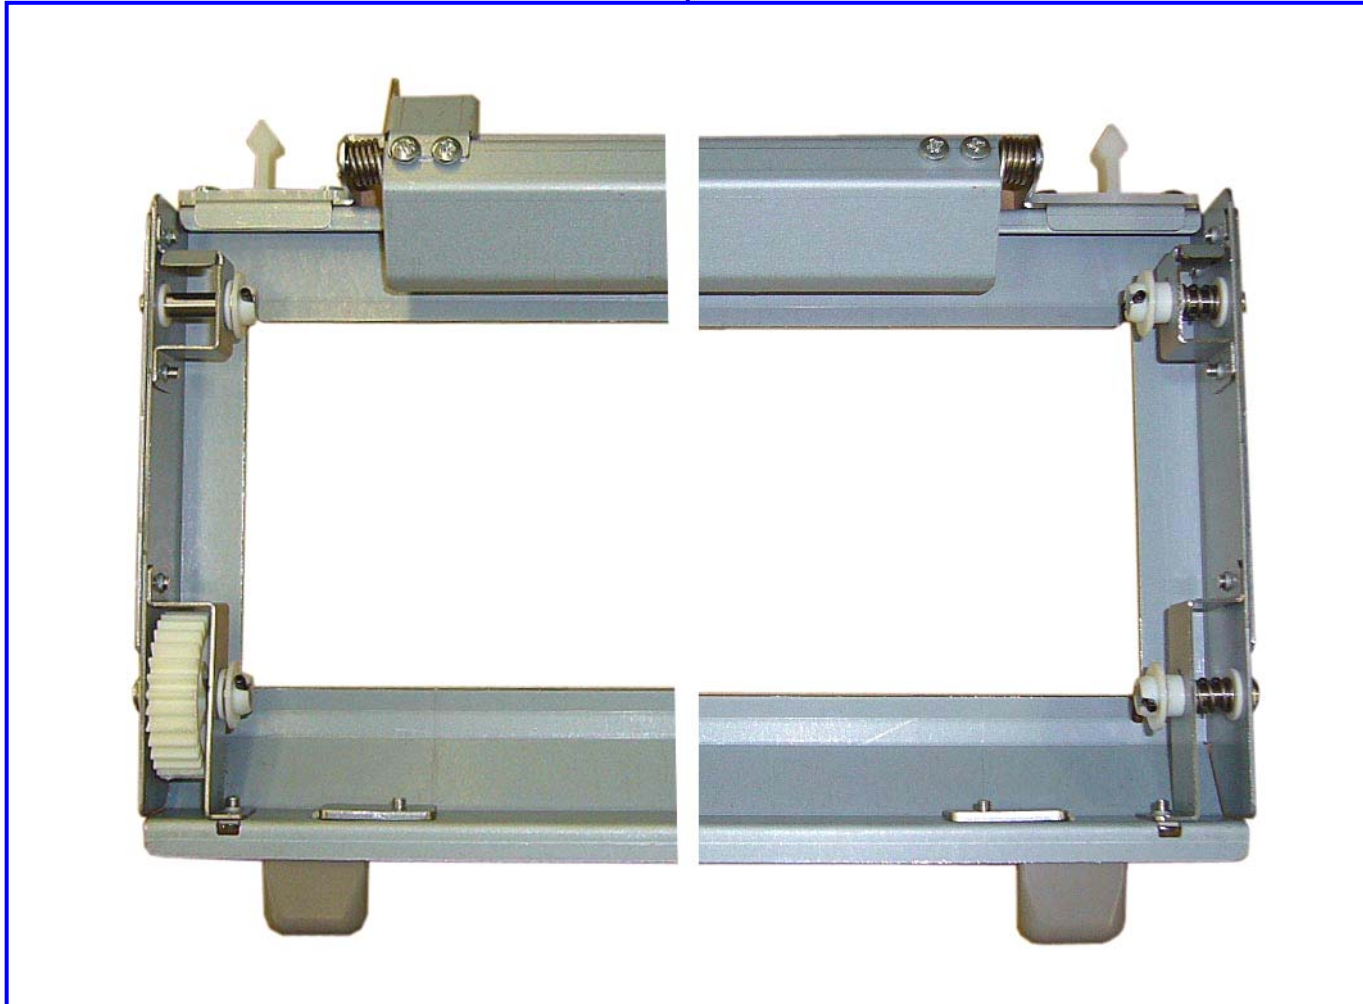

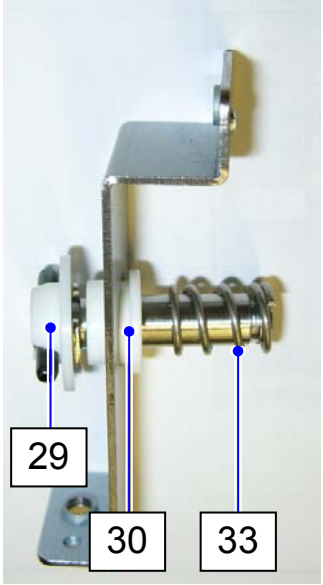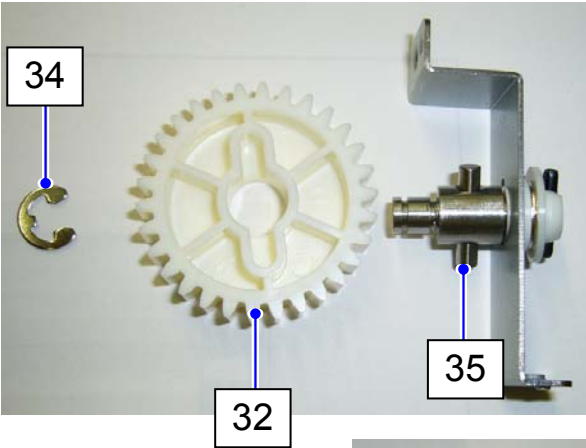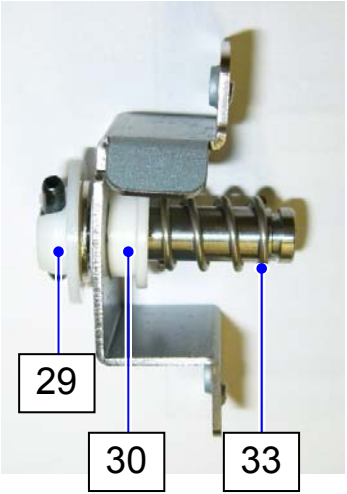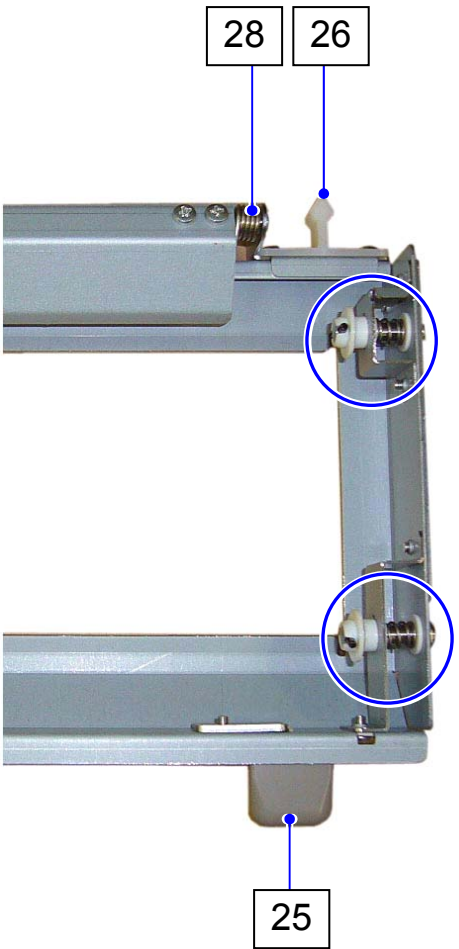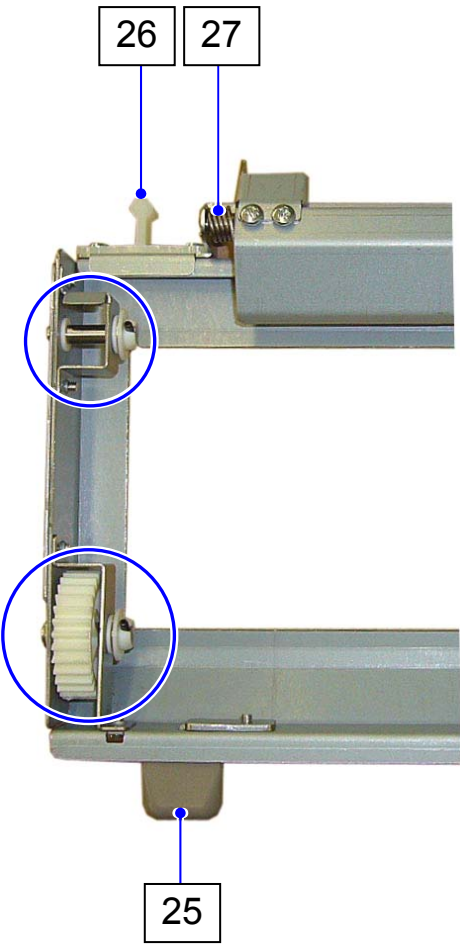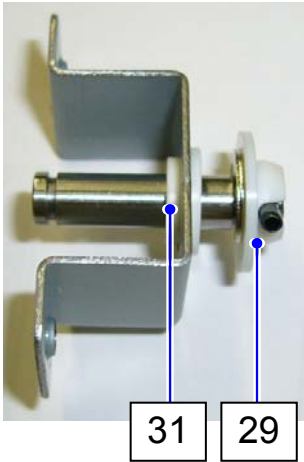

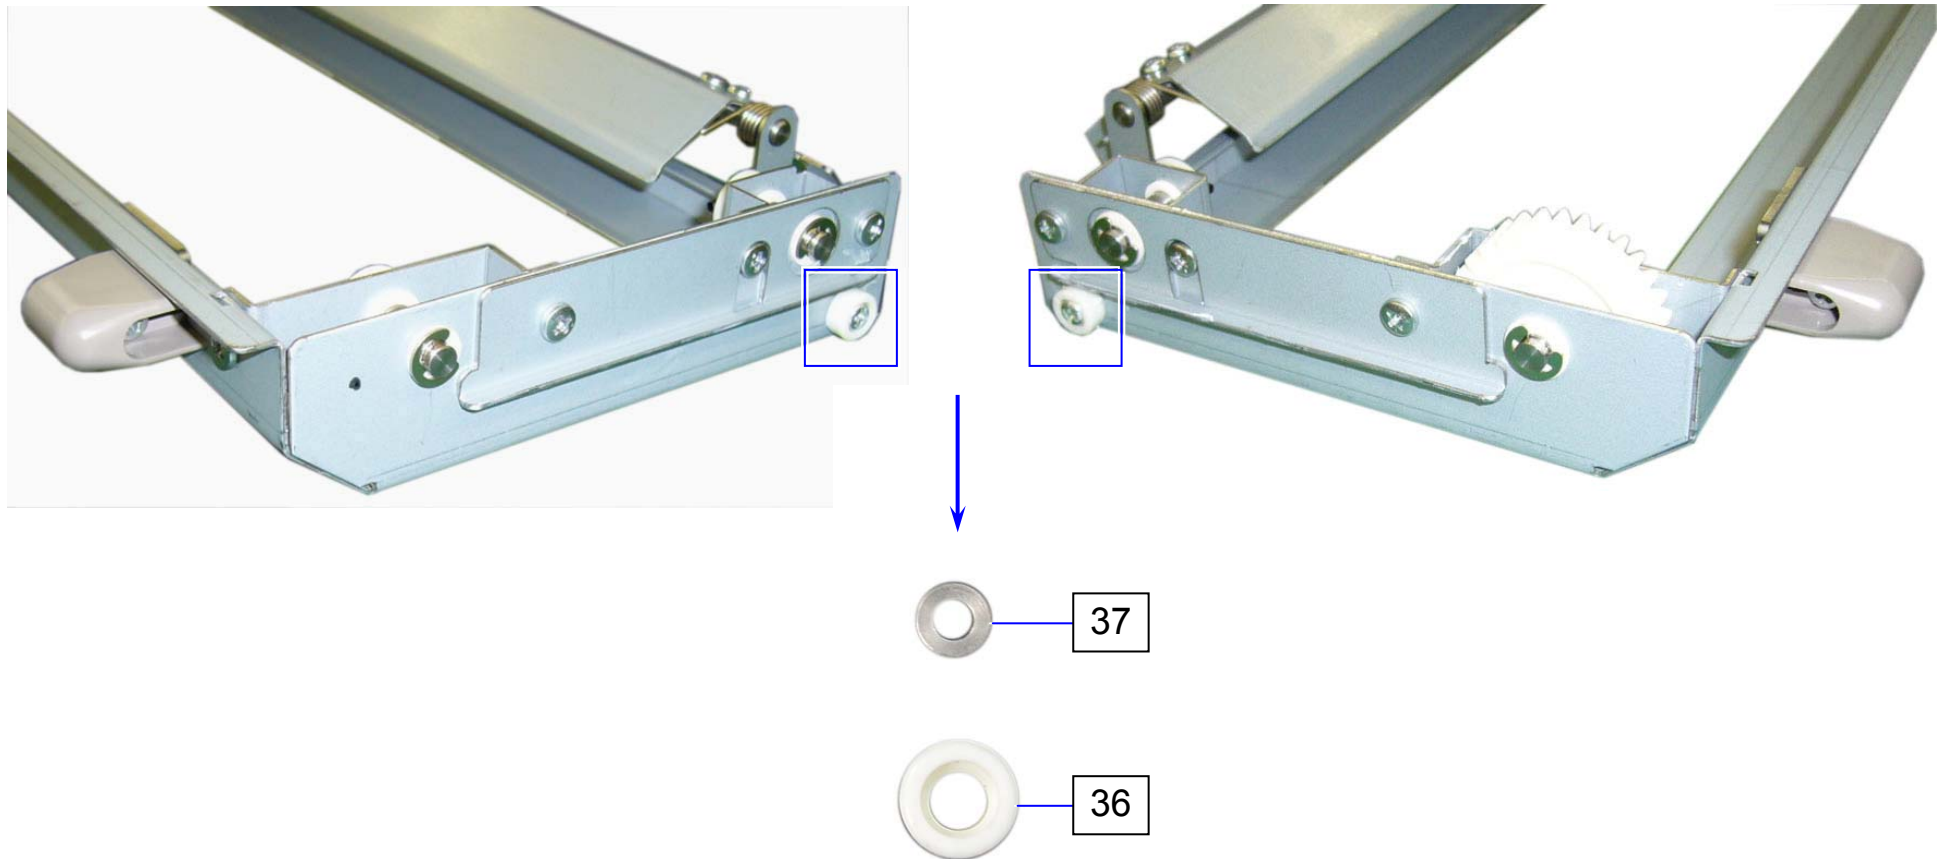


Item	Part Number	Part Description	Type	Qty	SP
1	9000470152	DC BLOWER	9BMB24P2G04	2	C
2	Z254401590	BRUSH DISCHARGE		3	C
3	7104403860	ROLLER		13	D
4	Z254401650	SPRING 8		13	D
5	Z254400640	HOLDER 3		6	C
6	Z254400600	WEB		1	A
7	9000310208	MICRO SWITCH	D2VW-5L3-1HS-191	1	C
8	Z254400590	WEB ROLLER		1	D
9	9000101103	SENSOR (LG248NL1)	LG248NL1	2	B
10	Z254460040	BRACKET SENSOR 2 ASSY		1	D
11	9000290111	THERMISTOR	NC-F16	2	B
12	9000310220	THERMOSTAT	CH-152-35	2	B
13	9000470159	FAN MOTOR	109P0424J3D053	7	C
14	9000380125	STEPPING MOTOR	KP4P15G-778	1	C
15	7101007090	GEAR 36T		2	D
16	Z254402700	GEAR 28T		1	D
17	9000390026	SOLENOID	4ER25-31 X369	1	D
18	9000380134	STEPPING MOTOR	103H7121-0248	1	C
19	9000101108	SENSOR	GP2Y0AH01K0F	1	B
20	Z254401600	KNOB		1	D
21	9000310209	MICRO SWITCH	D2VW-01L3-1HS(VDE)	1	C
22	Z256800040	IR LAMP	QIR 220-1550 KITK	1	B
23	Z256800030	IR LAMP	QIR 220-1150 KITK	1	B
24	9000780173	BALL BEARING	TS2-6807JRZZNRC4/LY08	4	D
25	3903000330	KNOB C		2	D
26	9000650009	ROLLER CATCH PLUNGER		2	D
27	Z254401450	SPRING 6		1	D
28	Z254401520	SPRING 7		1	D
29	Z254400890	COLLAR 3		4	D
30	Z254402710	COLLAR 18		2	D
31	Z254402720	COLLAR 19		2	D
32	3101300760	SPUR GEAR 30T		2	C
33	Z254401040	SPRING 4		2	D


Item		Part Number	Part Description	Type	Qty	SP
34		6807033307	RETAINING RING-E	E4,Ni	1	D
35		6817114053	PARALLEL PIN	3×14 SUS	1	D
36		Z254400900	ROLLER		2	D
37		Z254400940	COLLAR 4		2	D
38		Z254401060	15T GEAR		1	D
39		Z254470030	WEB FRAME ASSY		1	C
40		Z256400240	FUSER UNIT TERMINAL HARNESS		1	D
41		Z256400941	FAN LEAD		1	D
42		6807033310	RETAINING RING-E	E7,Ni	11	D
43		Z161600360	GEAR 30T		2	D
44		1159100060	BUSH		6	D
45		6817114031	PARALLEL PIN	2×12 SUS	2	D
46		9000820012	THRUST WASHER	φ8.1×φ14× t 0.5	1	D
47		9000820011	THRUST WASHER	φ8.1×φ14× t 0.2	1	D
48		4201300120	30T GEAR (Oneway)		1	D
49		6908203077	BIND.HEAD SCREW	M3×8, Fe+ZC	1	D
50		3505700310	SPUR GEAR 30T		1	D
51		9000780188	BALL BEARING	LNR-1680HHR POP25LY551	1	D
52		9000780187	BALL BEARING	RNR-2210X9KKSD21MTR POP24L	1	D
53		Z254402750	COLLAR 21		1	D
54		Z254402400	SHAFT 11		1	D
55	*	Z424400090	15T GEAR		1	D
56		3505720020	SPUR GEAR 30T		1	D
57		9000800153	KEY		1	D
58		Z256401070	FLAPPER EARTH LEAD 2		1	D
59		3504400720	COLLAR 4		1	D
60		3504400680	COLLAR 1		1	D
61		Z254400200	60T GEAR		1	D
62		1710441660	SPACER		3	D
63		6820117014	WAVE WASHER		2	D
64		3104400500	COLLAR		2	D
65		3505700350	SPUR GEAR,50T		1	D
66		Z254400100	ROLLER		1	D


Item	Part Number	Part Description	Type	Qty	SP
67	6817114032	PARALLEL PIN	2×14 SUS	1	D
68	Z254402180	SPRING 9		2	D
69	Z254400880	RAIL L		1	D
70	Z254400870	RAIL R		1	D
71	Z254401800	PLATE R		1	D
72	Z254401790	PLATE L		1	D
73	Z254401020	SPRING 3R		1	D
74	Z254401030	SPRING 3L		1	D
75	Z254420010	40-20T GEAR		2	D
76	Z258060150	HOLDER 6 ASSY		23	D
77	Z256401100	EXIT SENSOR LEAD 2		1	D
78	Z256400861	EXIT SENSOR LEAD		1	D
79	Z254402640	HOLDER 7		7	D
80	Z254400510	HOLDER 2		6	D
81	Z254400650	COUNTER ROLLER		6	D
82	Z254470020	FUSER DOOR ASSY		1	D
83	Z254402040	SHAFT 8		1	D
84	Z254401330	SHAFT 7		1	D
85	6807033312	RETAINING RING-E	E9,Ni	3	D
86	9000390025	SOLENOID	G-835-K16E	2	D
87	Z254401180	PIN		2	D
88	9000650010	DOUBLE ROLLER CATCH		2	D
89	9000101296	PHOTO INTERRUPTER	KA1346-AALF-01	1	C
90	Z426260030	MTR TERMINAL PCB ASSY	PW14290	1	B
91	Z426400260	MTR TERMINAL LEAD		1	D





Item		Part Number	Part Description	Type	Qty	SP
0		Z251380030	PAPER ROLL SPOOL ASSY		1	D

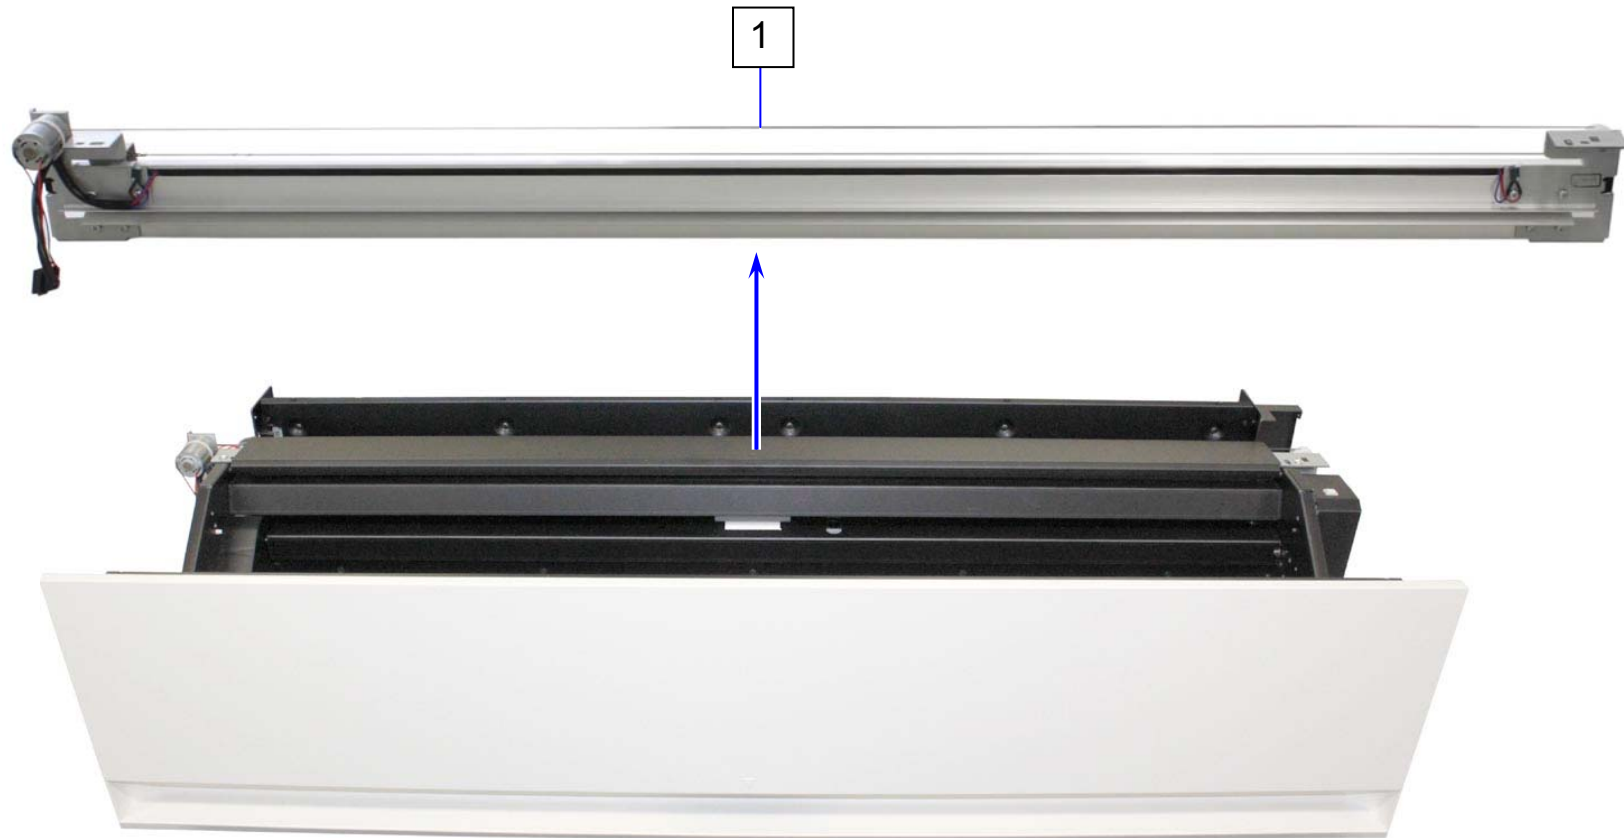


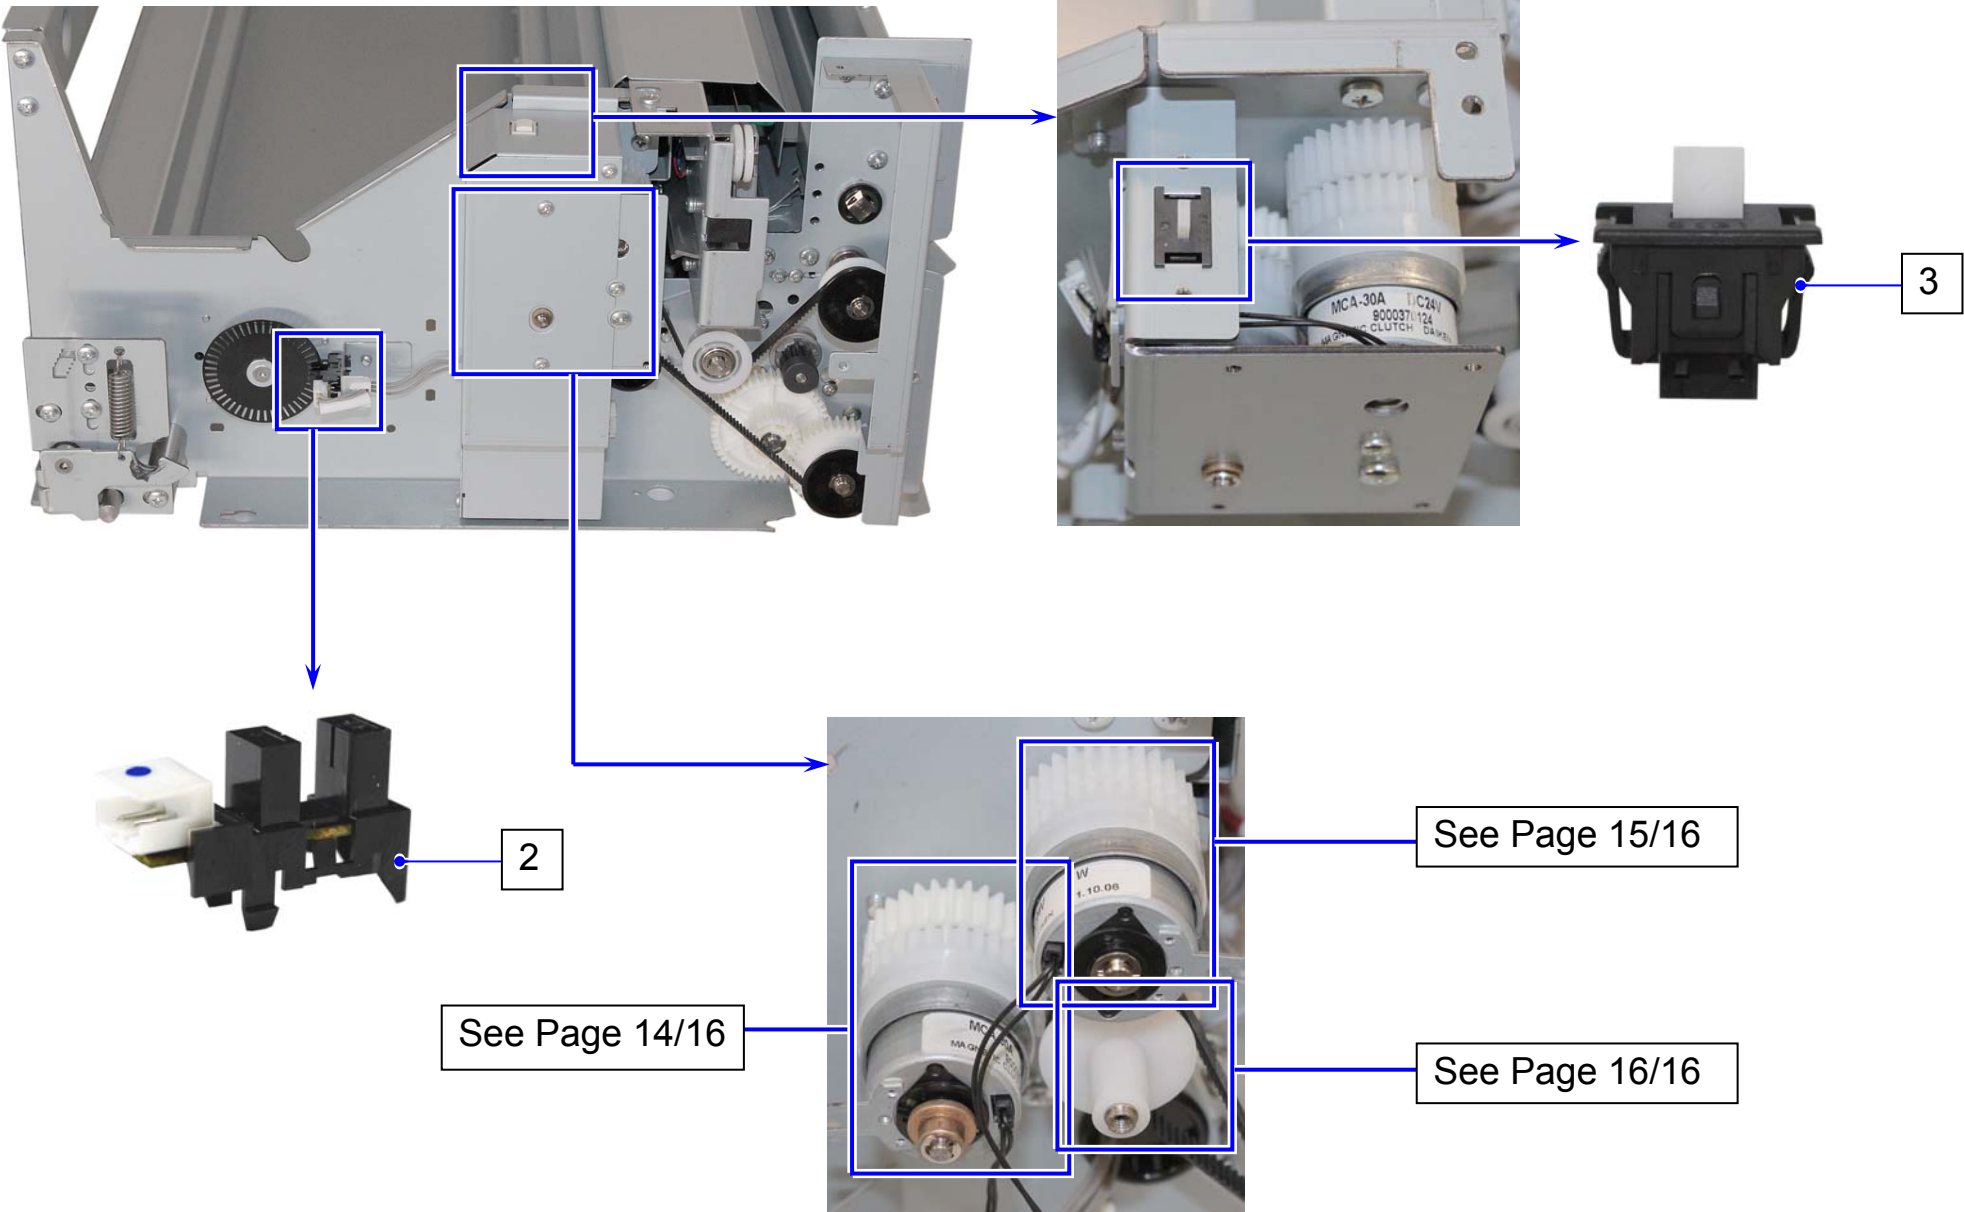



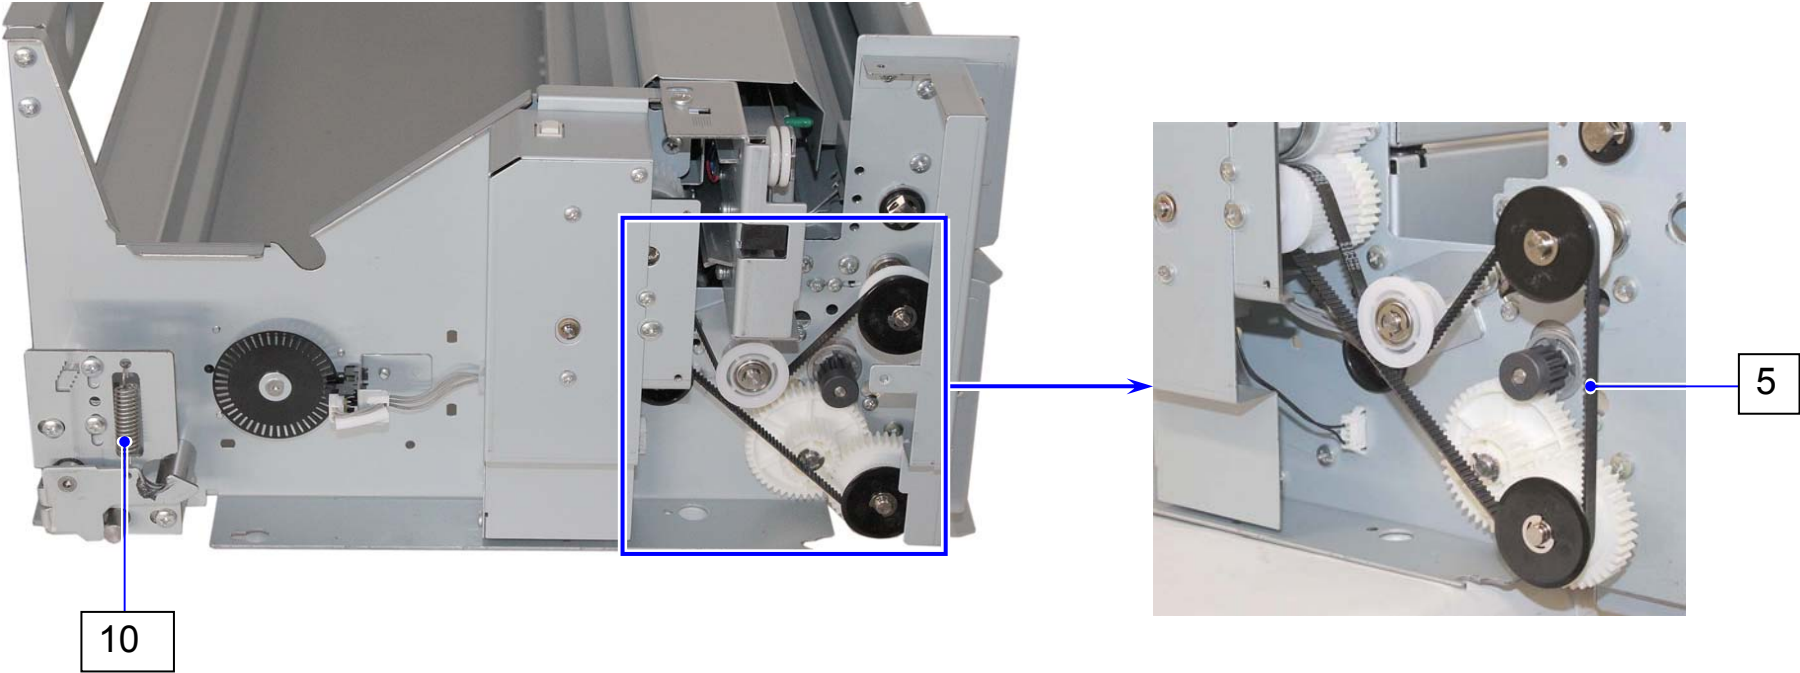


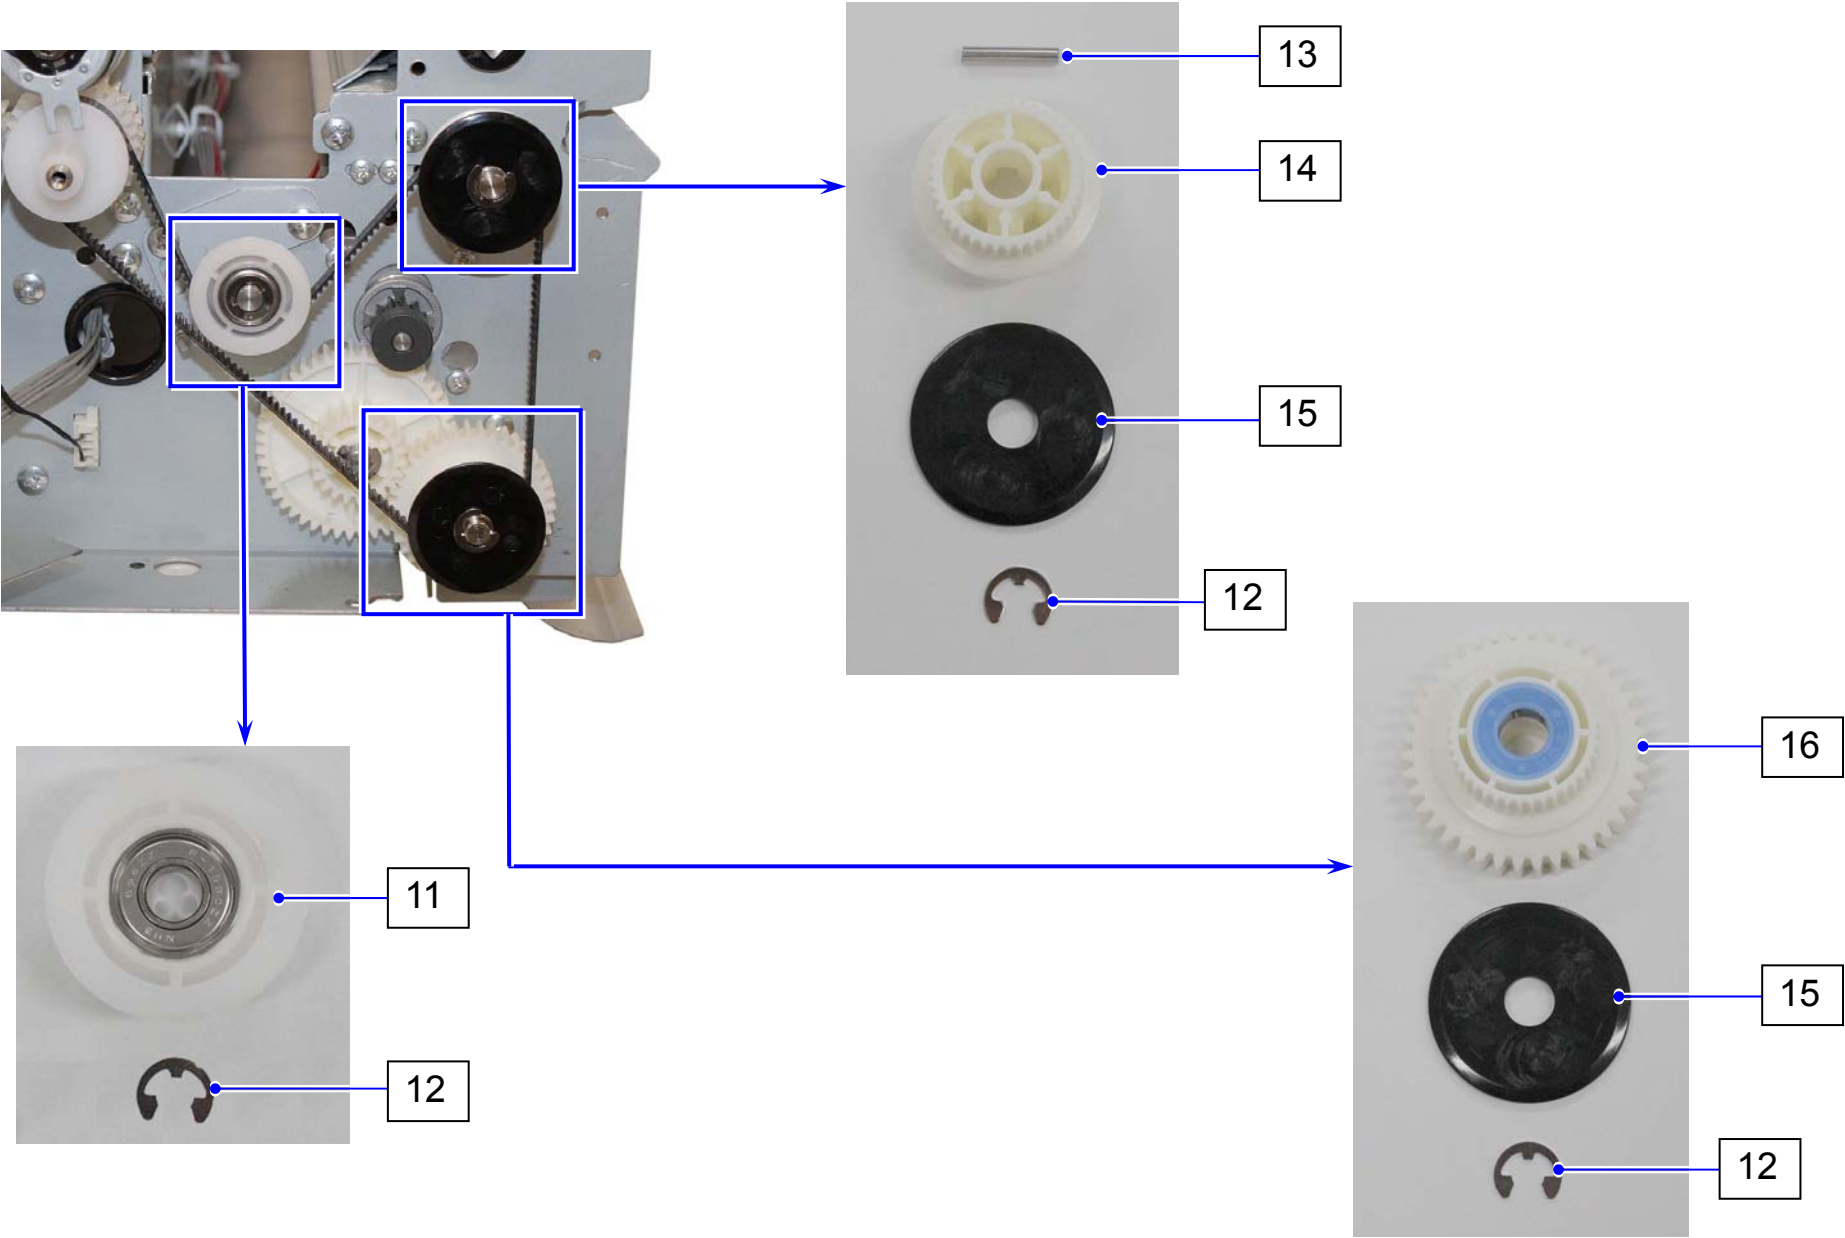



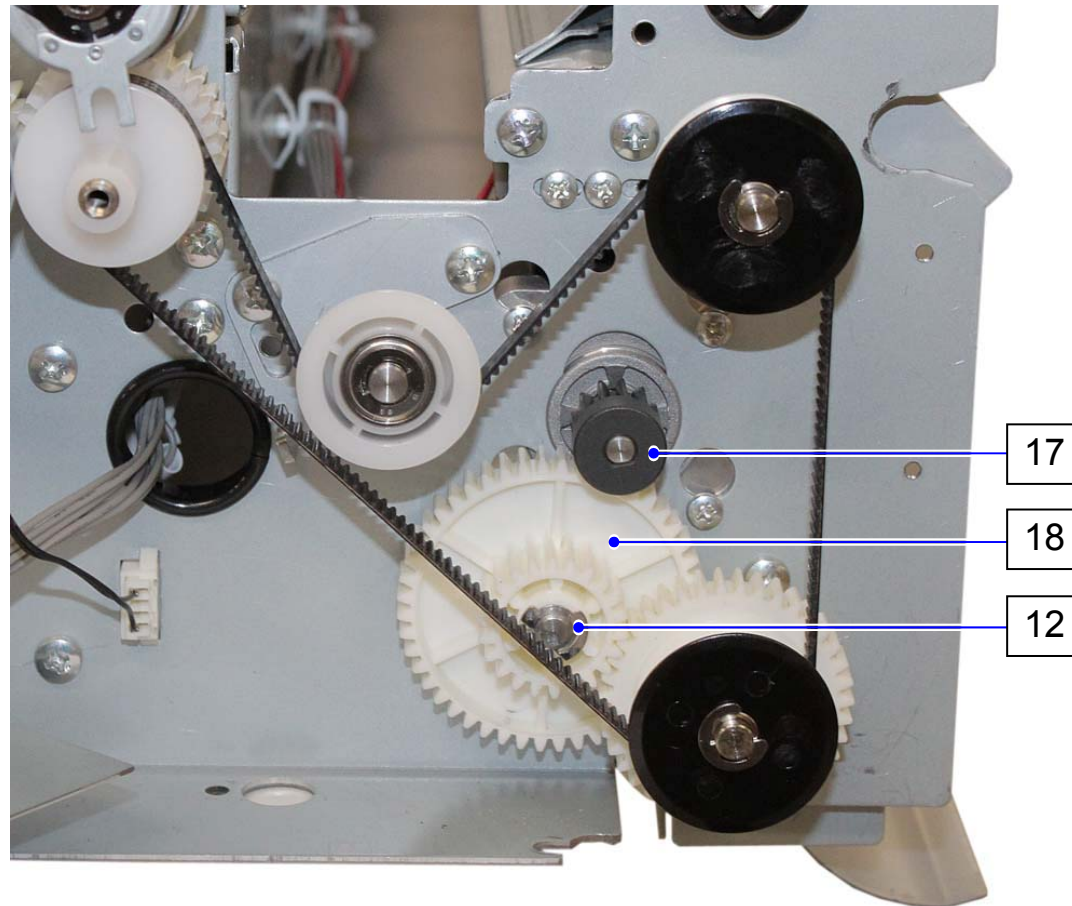


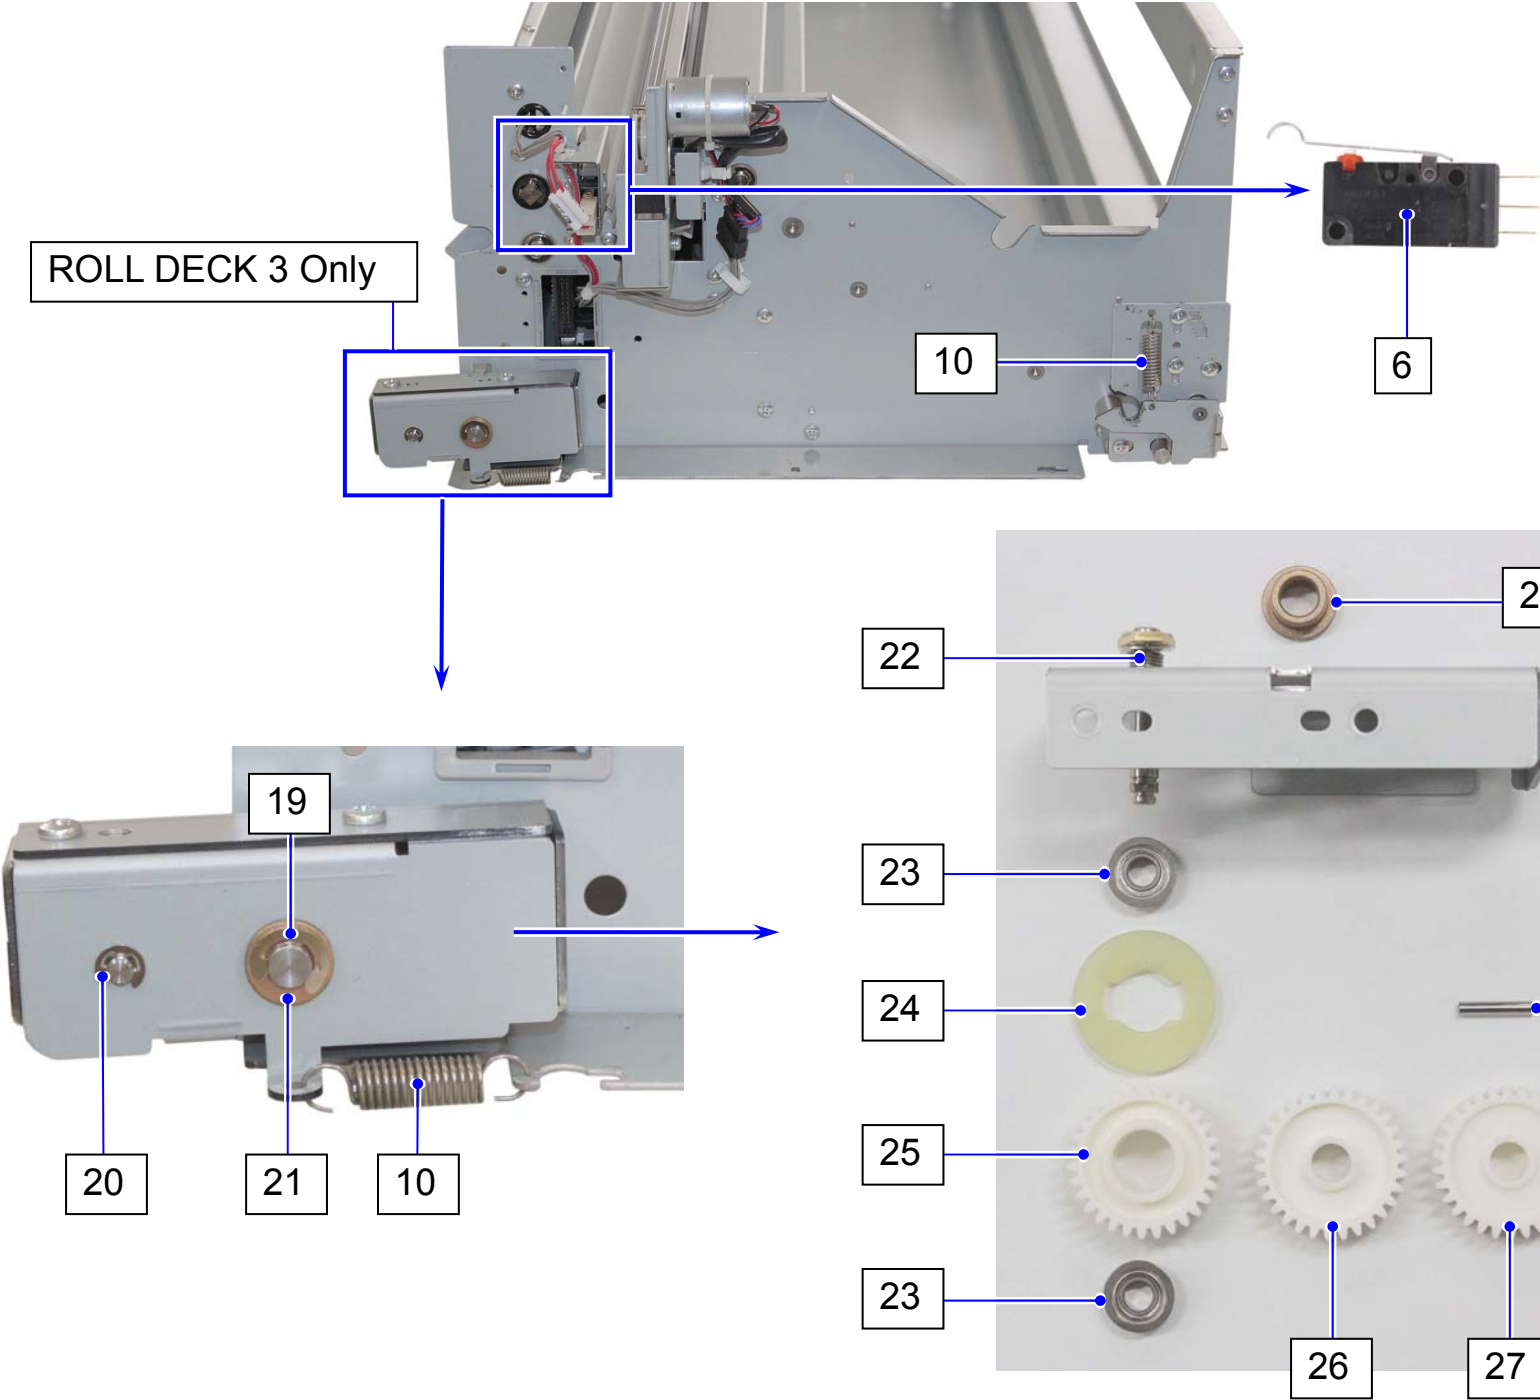

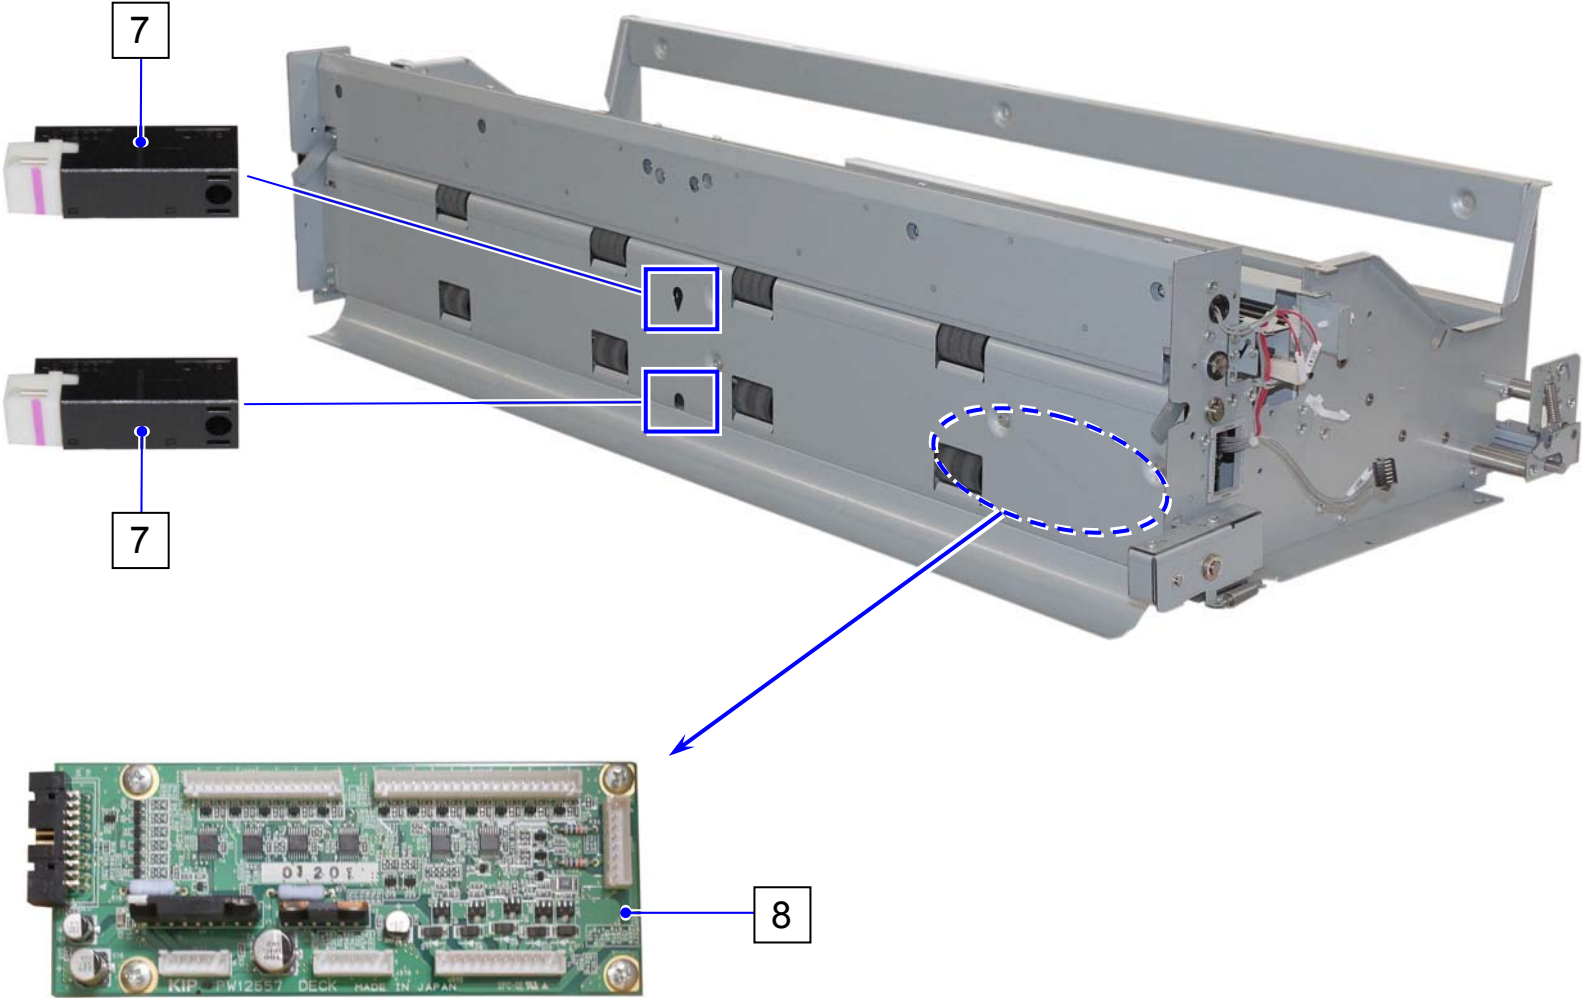

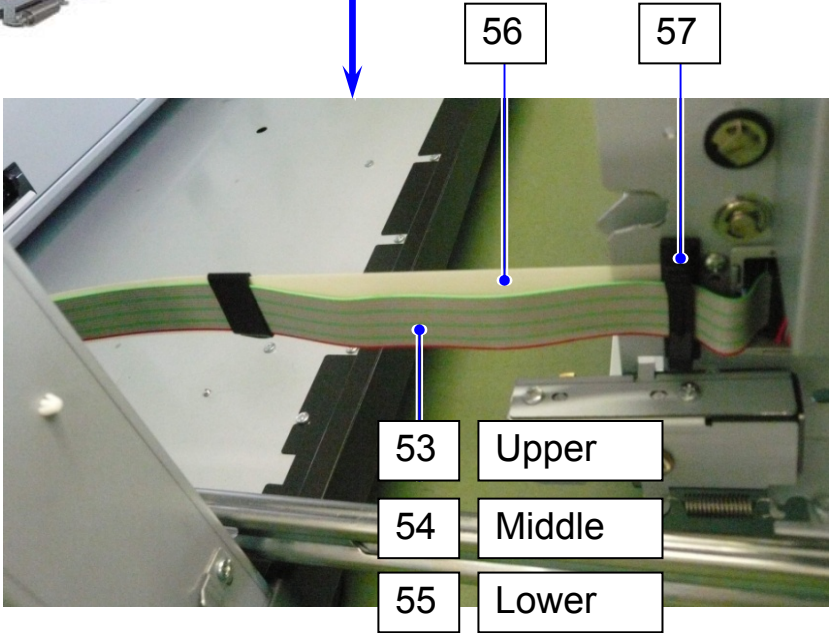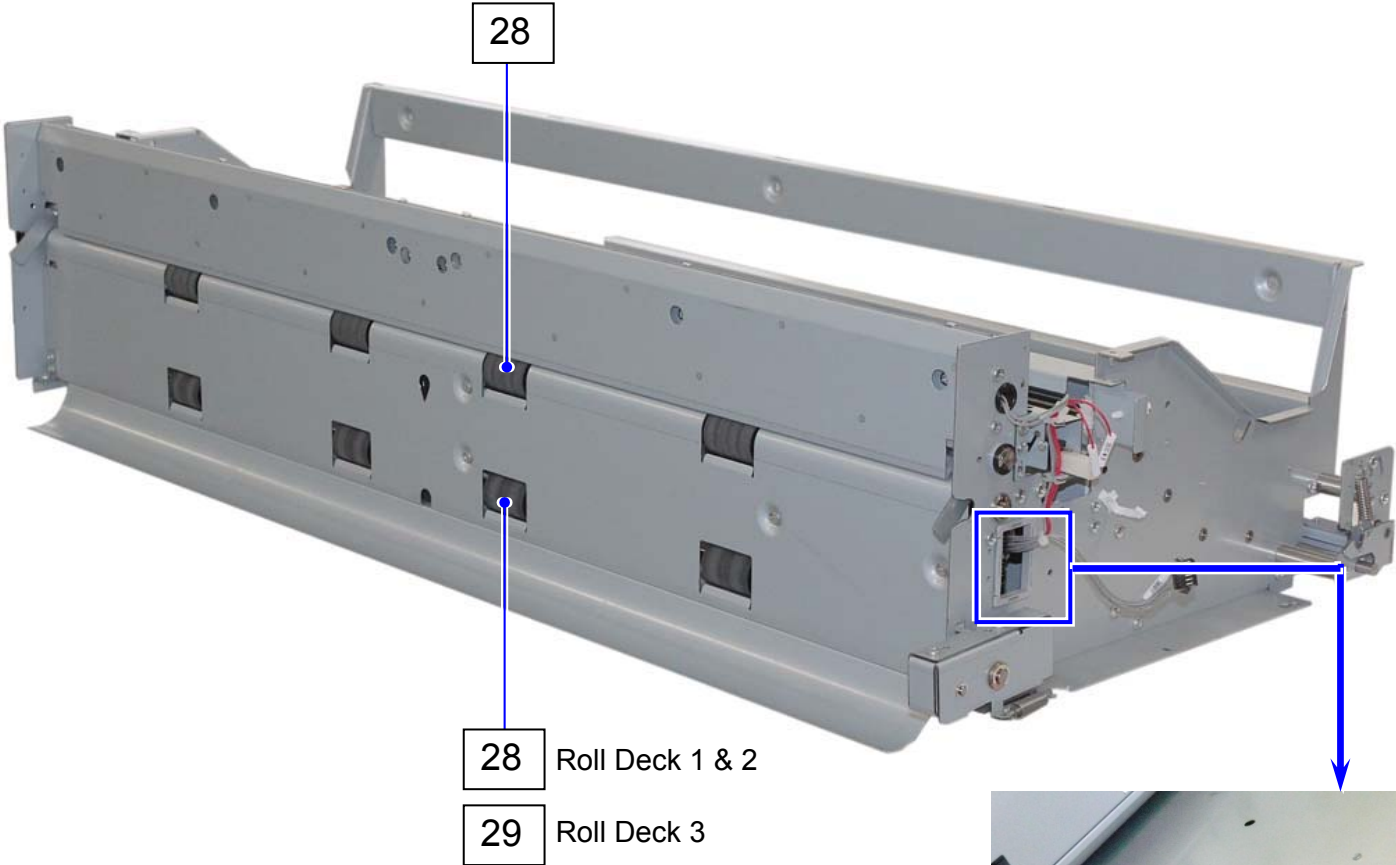

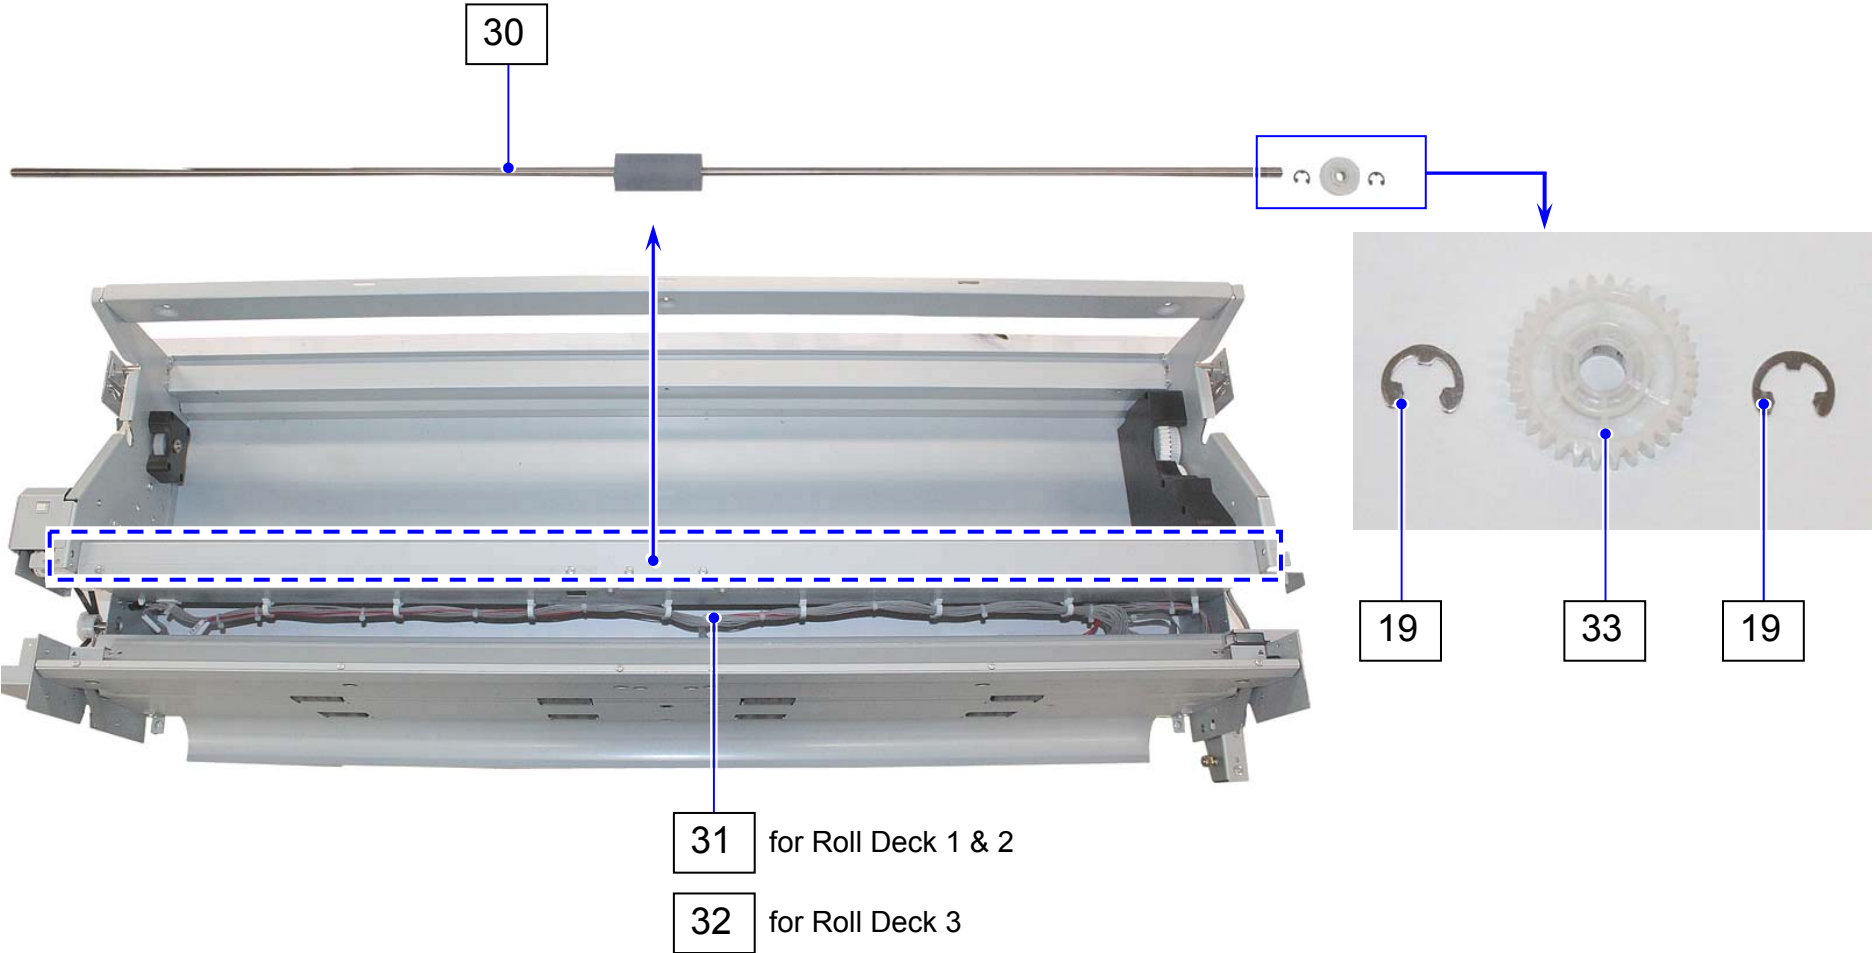


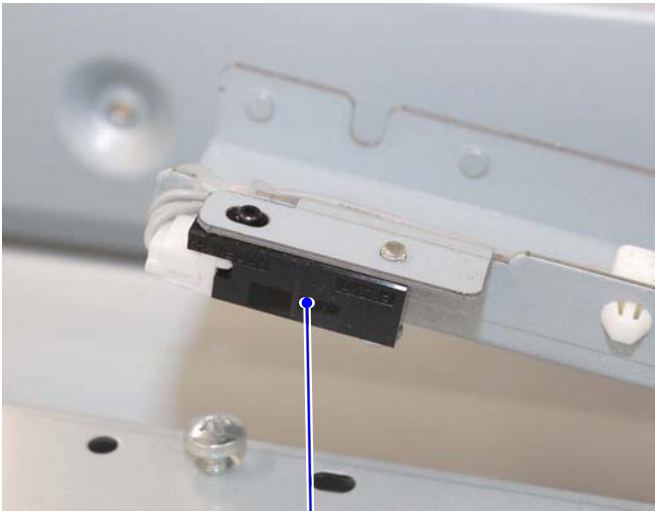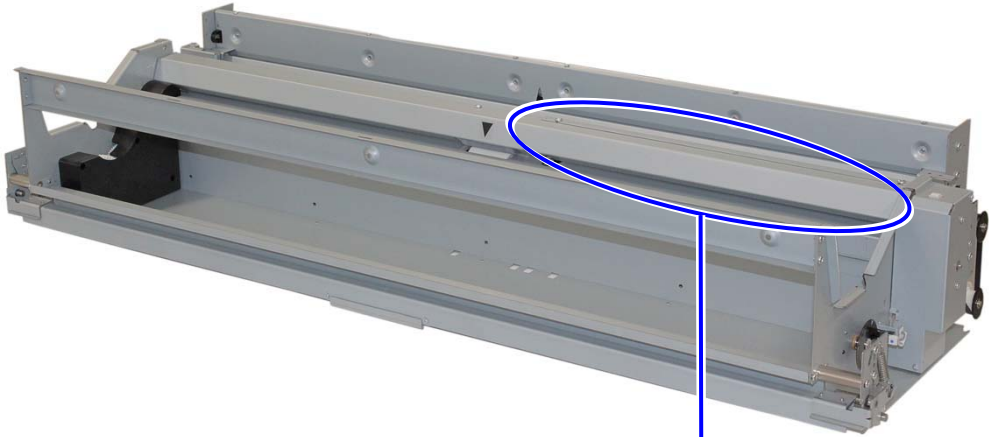



7




34

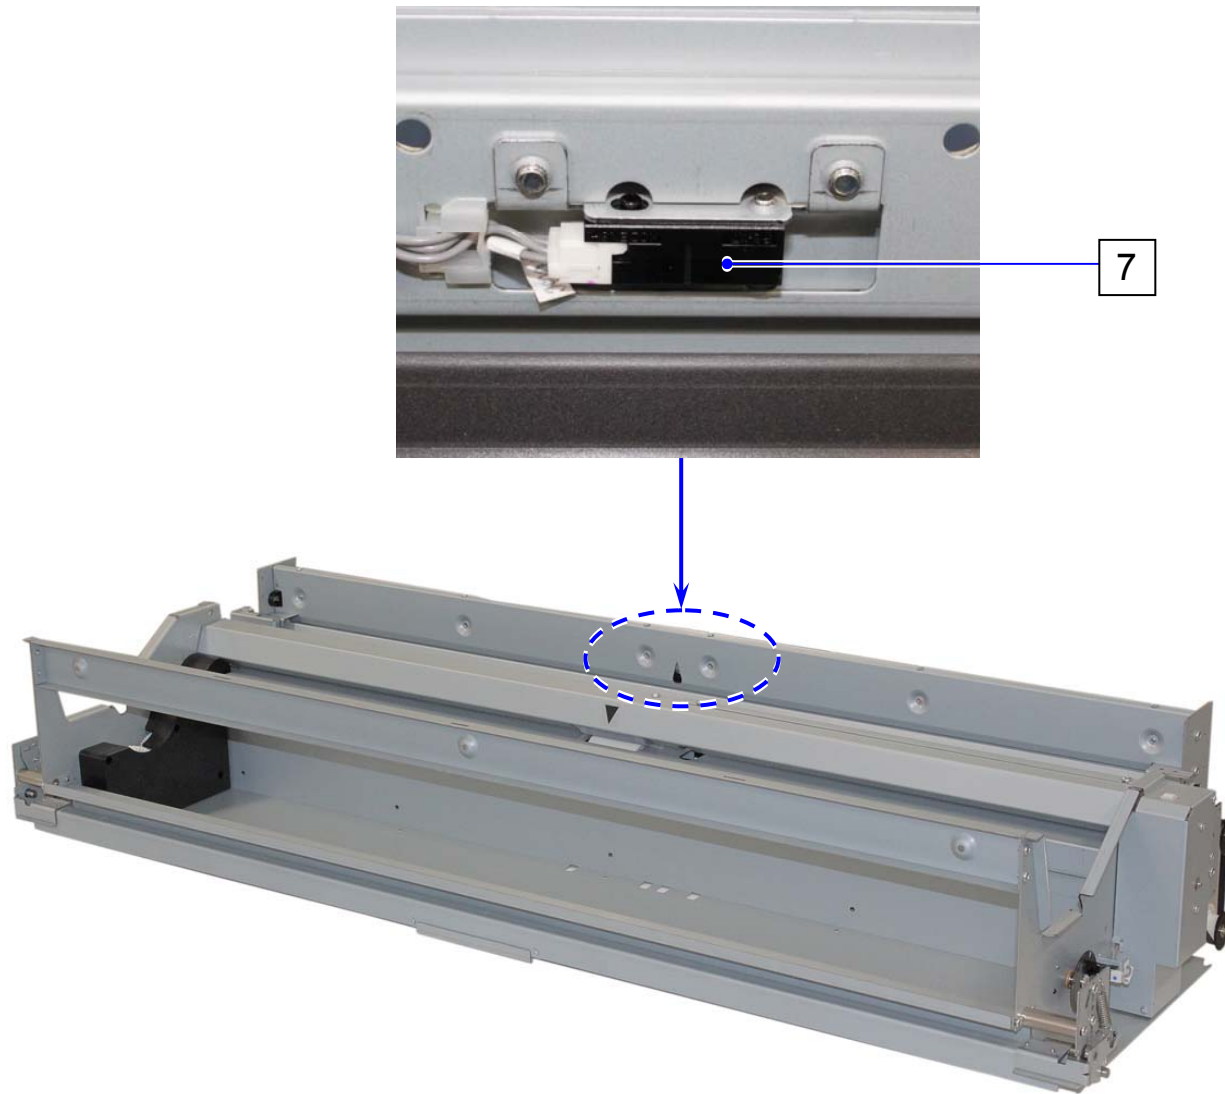


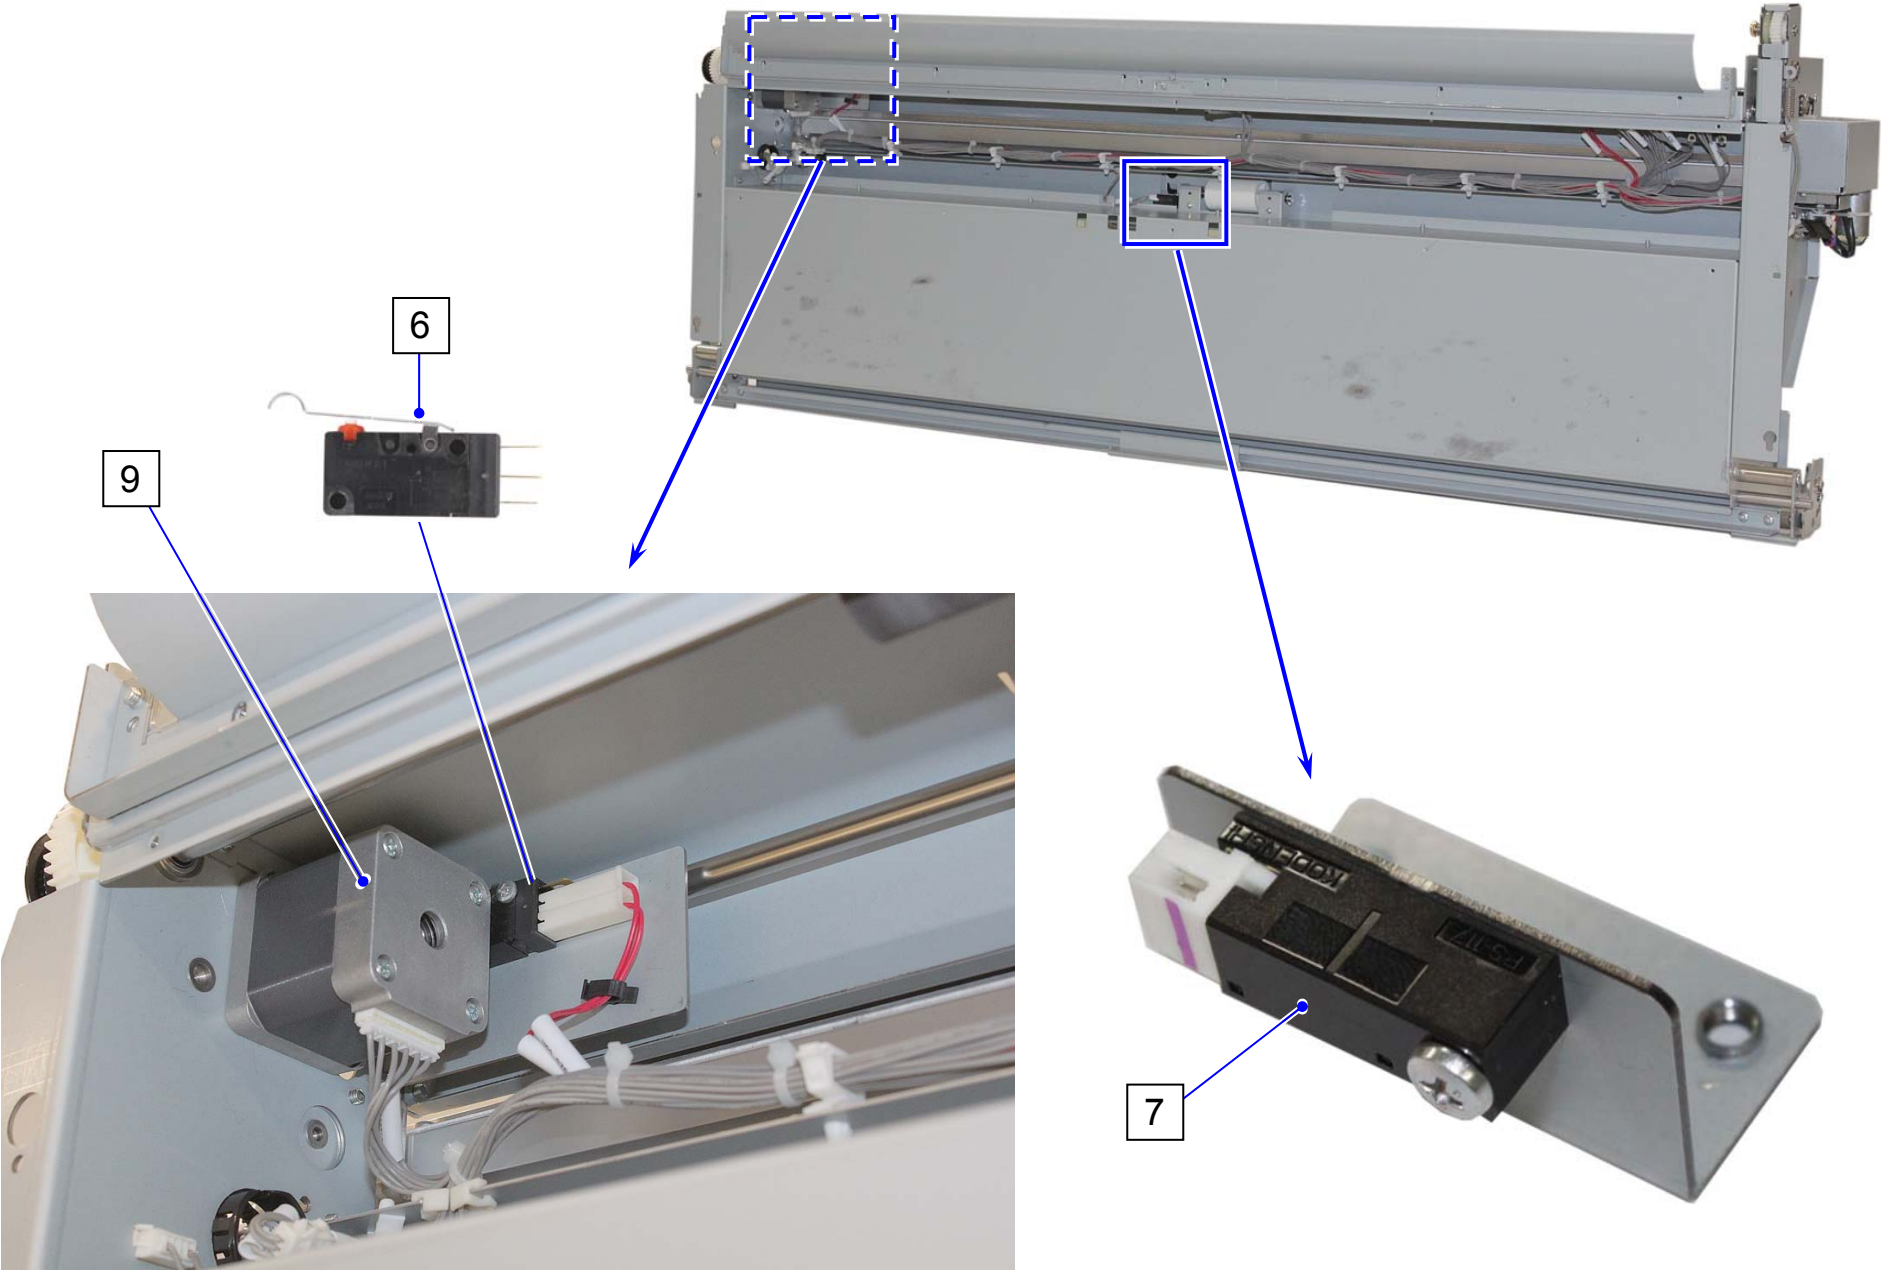


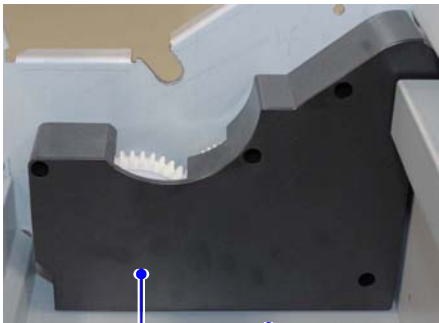



35




36

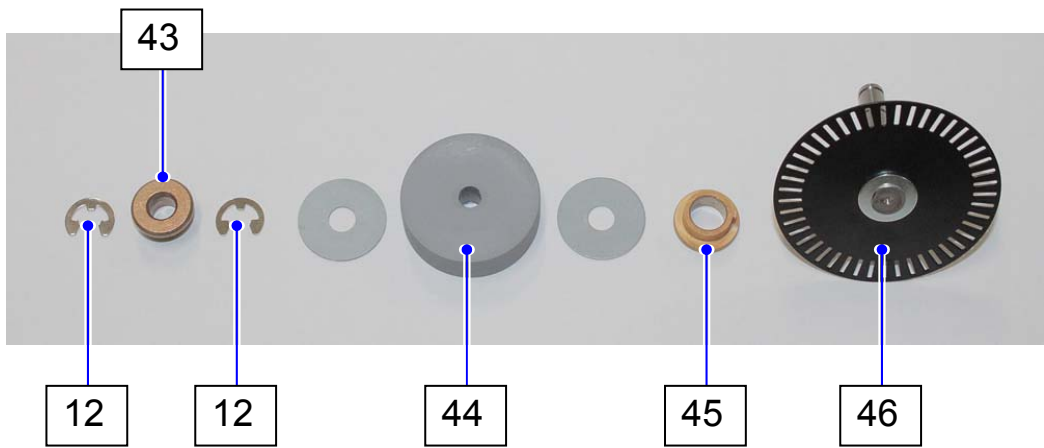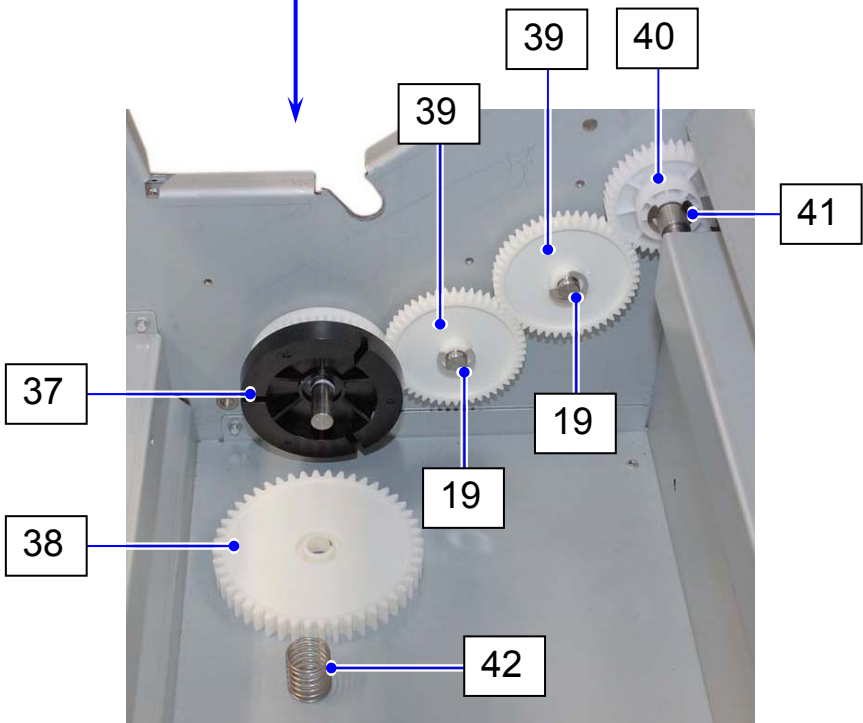


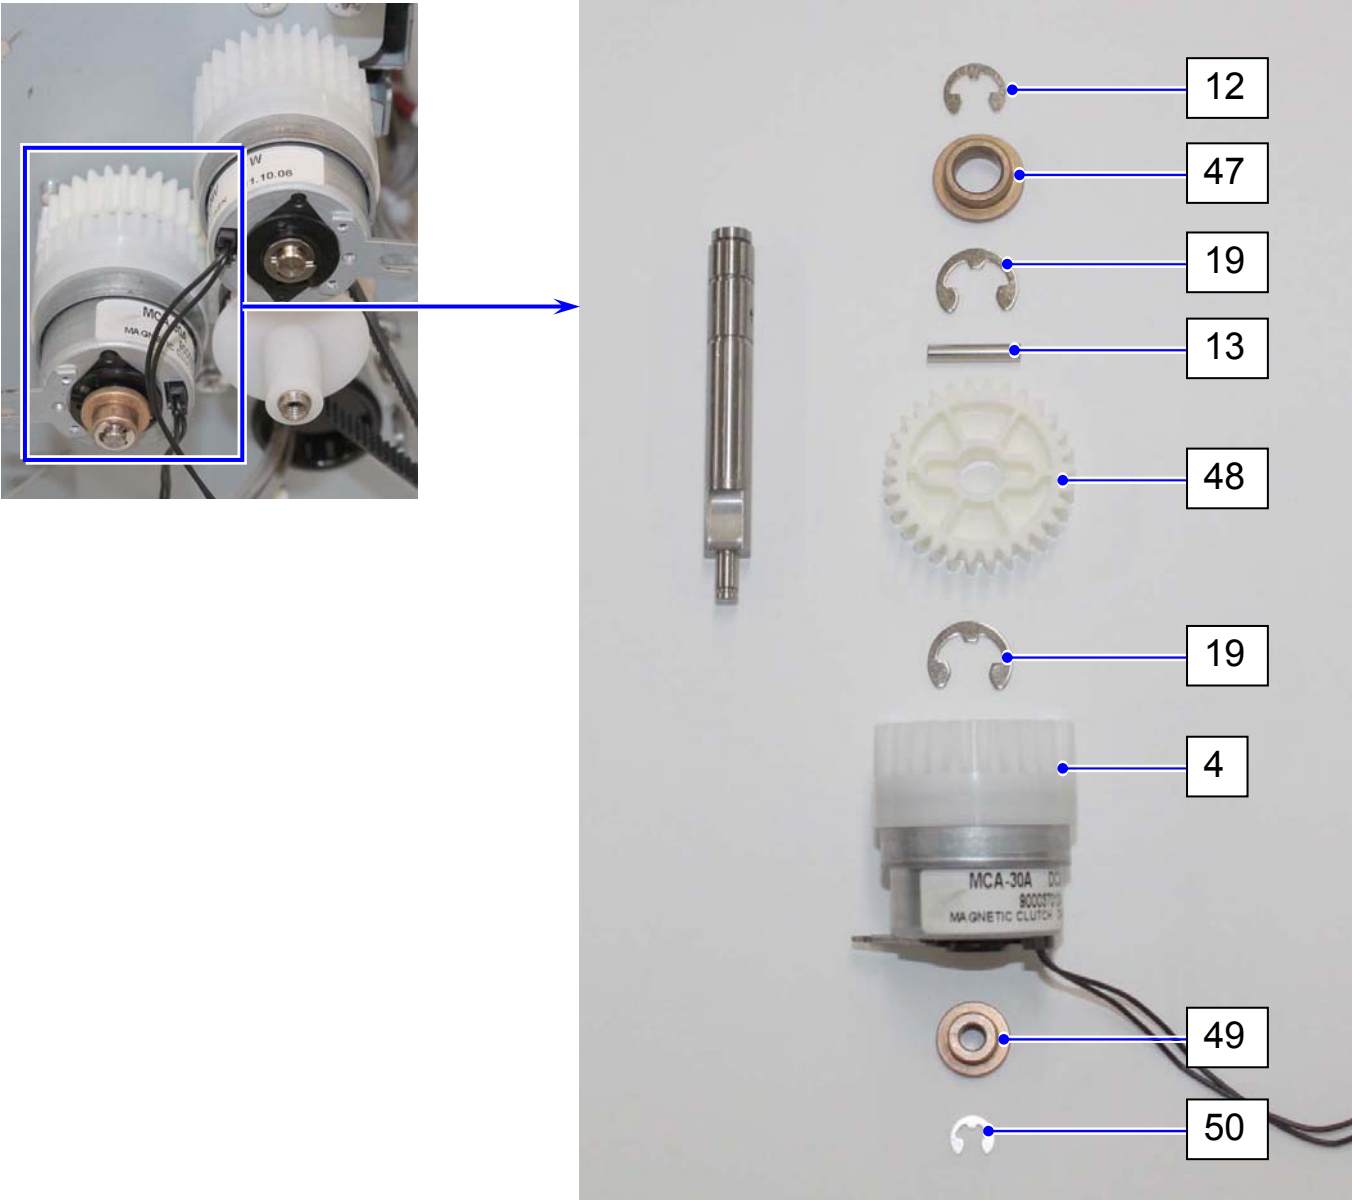


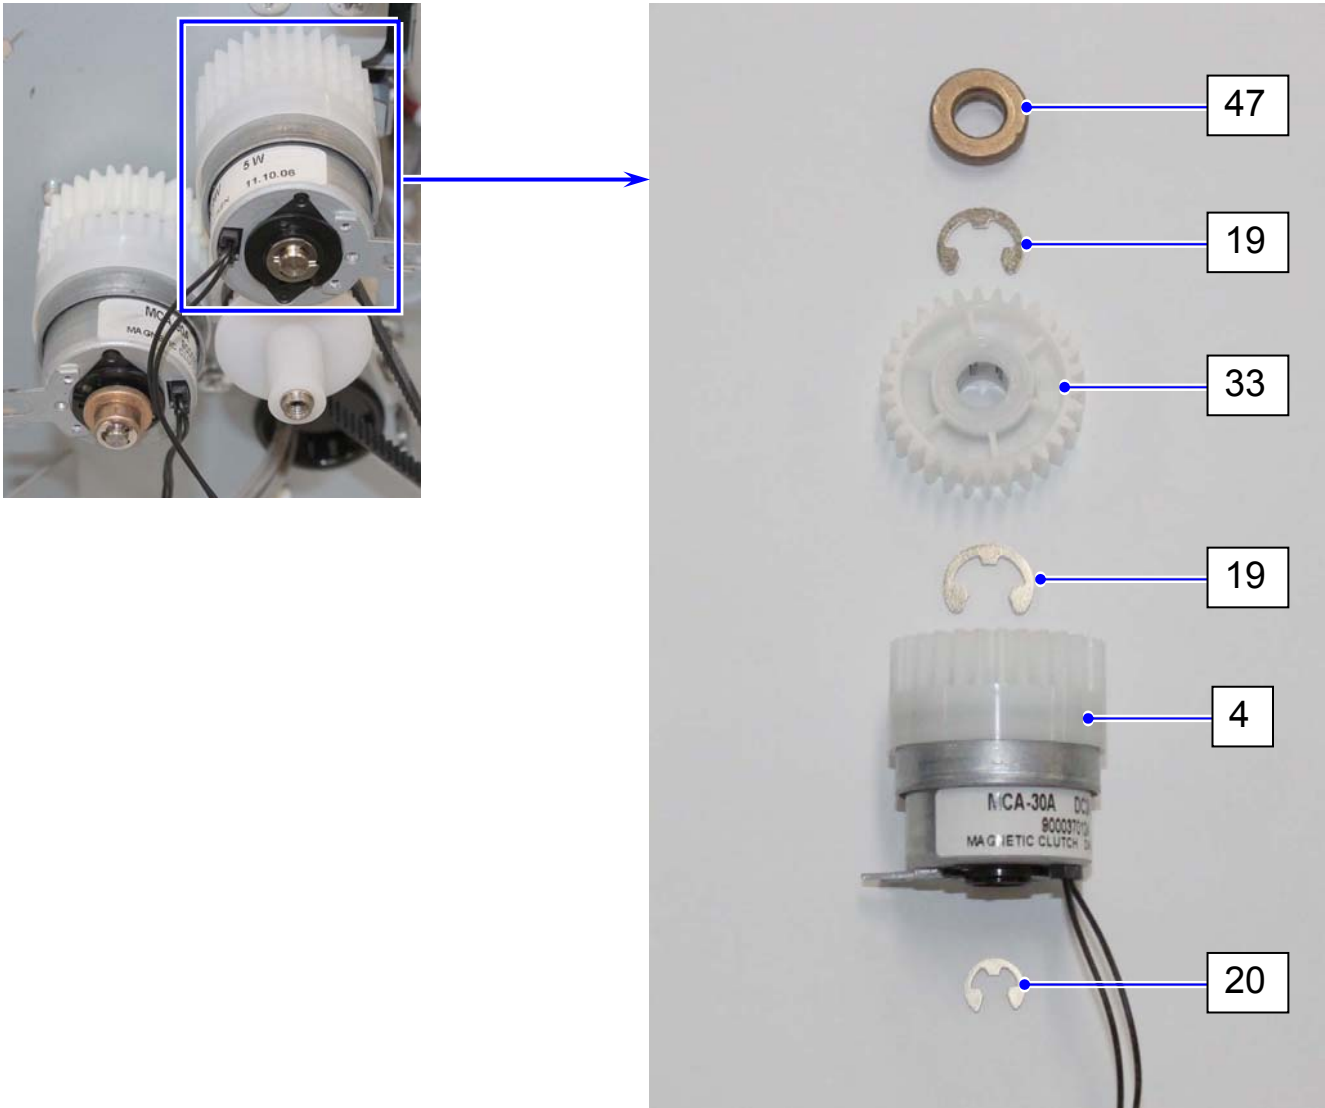

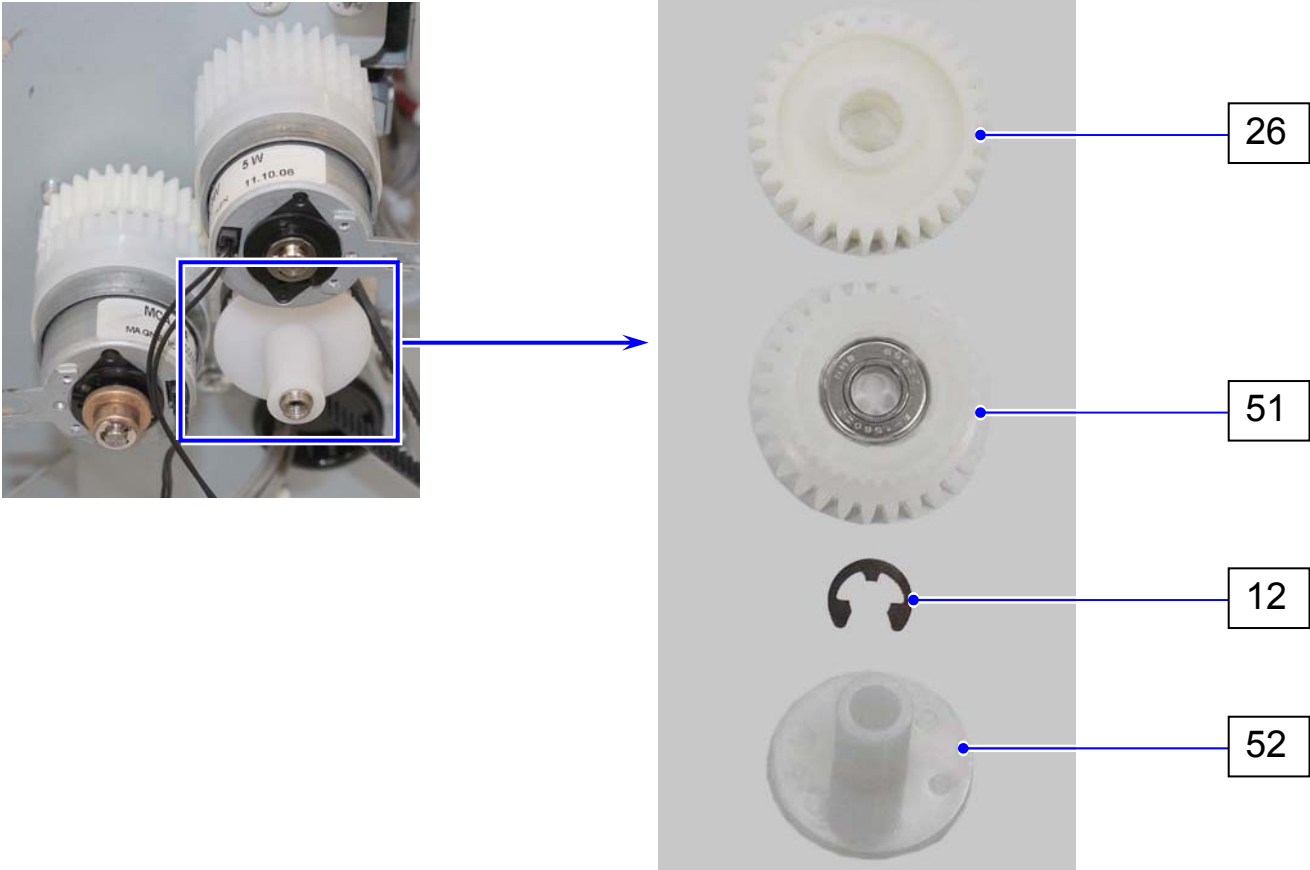



Item	Part Number	Part Description	Type	Qty	SP
1	Z251300731	CUTTER UNIT		1	B
2	9000101103	SENSOR (LG248NL1)	LG248NL1	1	B
3	9000310163	SWITCH (CS1A-B2CA)	CS1A-B2CA	1	D
4	9000370124	MICRO CLUTCH	MCA-30A	2	C
5	Z251300600	BELT 444-2GT-6	444-2GT-6	1	D
6	9000310208	MICRO SWITCH	D2VW-5L3-1HS-191	2	C
7	9000100982	SENSOR (PS117ED1)	PS117ED1	5	B
8	Z256260040	DECK DRIVER PCB ASSY	PW12557	1	B
9	9000380118	STEPPING MOTOR	KH4248-B90101	1	C
10	Z251300960	SPRING		3	D
11	3101300500	IDLER		1	D
12	6807033308	RETAINING RING-E	E5,Ni	9	D
13	6817114054	PARALLEL PIN	3×16 SUS	3	D
14	Z251300990	PULLEY 39T		1	D
15	3001000050	PULLEY FLANGE		2	D
16	Z251300190	GEAR 39T / PULLEY 39T		1	D
17	Z251400400	GEAR 12T		1	D
18	Z251301070	GEAR 22-48T		1	D
19	6807033310	RETAINING RING-E	E7,Ni	9	D
20	6807033307	RETAINING RING-E	E4,Ni	2	D
21	9000790015	OILLESS METAL B-F8-33	B-F8-33, F8×12(16×2)×8,TYPE4	2	D
22	2210210520	STOPPER SPRING		1	D
23	9000780041	BEARING (F-FLW686T2ZZ1/5K)	F-FLW686T2ZZ1/5K	2	D
24	4201600040	SPACING PLATE		1	D
25	4201600050	30T GEAR		1	D
26	3101400140	GEAR 30T		2	D
27	3101300760	SPUR GEAR 30T		1	D
28	Z251300030	ROLLER 2		1 or 2	D
29	Z251300040	ROLLER 3	for Roll Deck 3	1	D
30	Z251300021	ROLLER		1	D
31	Z256400522	PAPER FEEDER HARNESS 1	for Roll Deck 1 & Roll Deck 2	1	D
32	Z256400542	PAPER FEEDER HARNESS 3	for Roll Deck 3	1	D
33	4201300120	30T GEAR (Oneway)		2	D


Item	Part Number	Part Description	Type	Qty	SP
34	Z256400550	PAPER FEEDER TERMINAL LEAD		1	D
35	Z251300720	GEAR COVER		1	D
36	Z251300920	ROLLER COVER		1	D
37	2210530221	SPOOL BRAKE		1	D
38	Z251300680	GEAR 48T		1	D
39	3105700040	50T GEAR		2	D
40	2210140910	SPUR GEAR,40T		1	D
41	6807033311	RETAINING RING-E	E8,Ni	1	D
42	Z251301060	SPRING 2		1	D
43	9000790024	OILLESS METAL B-F6-269	B-F6-269	1	D
44	6601300800	ROLLER		1	D
45	9000790022	OILLESS METAL (56022)	56022, F8×11(15×2)×6,TYPE3	1	D
46	Z251320100	PULSE PLATE		1	D
47	1159100060	BUSH		2	D
48	3101300760	SPUR GEAR 30T		1	D
49	9000790081	OILLESS METAL		1	D
50	6807033306	RETAINING RING-E	E3,Ni	1	D
51	Z251300890	GEAR 30T / PULLEY 39T		1	D
52	Z251301250	FLANGE		1	D
53	Z256400090	PAPER DECK DRIVER IF CABLE 1		1	D
54	Z256400100	PAPER DECK DRIVER IF CABLE 2		1	D
55	Z256400110	PAPER DECK DRIVER IF CABLE 3		1	D
56	Z251301130	FILM		3	D
57	9000450574	CLIP		3	D



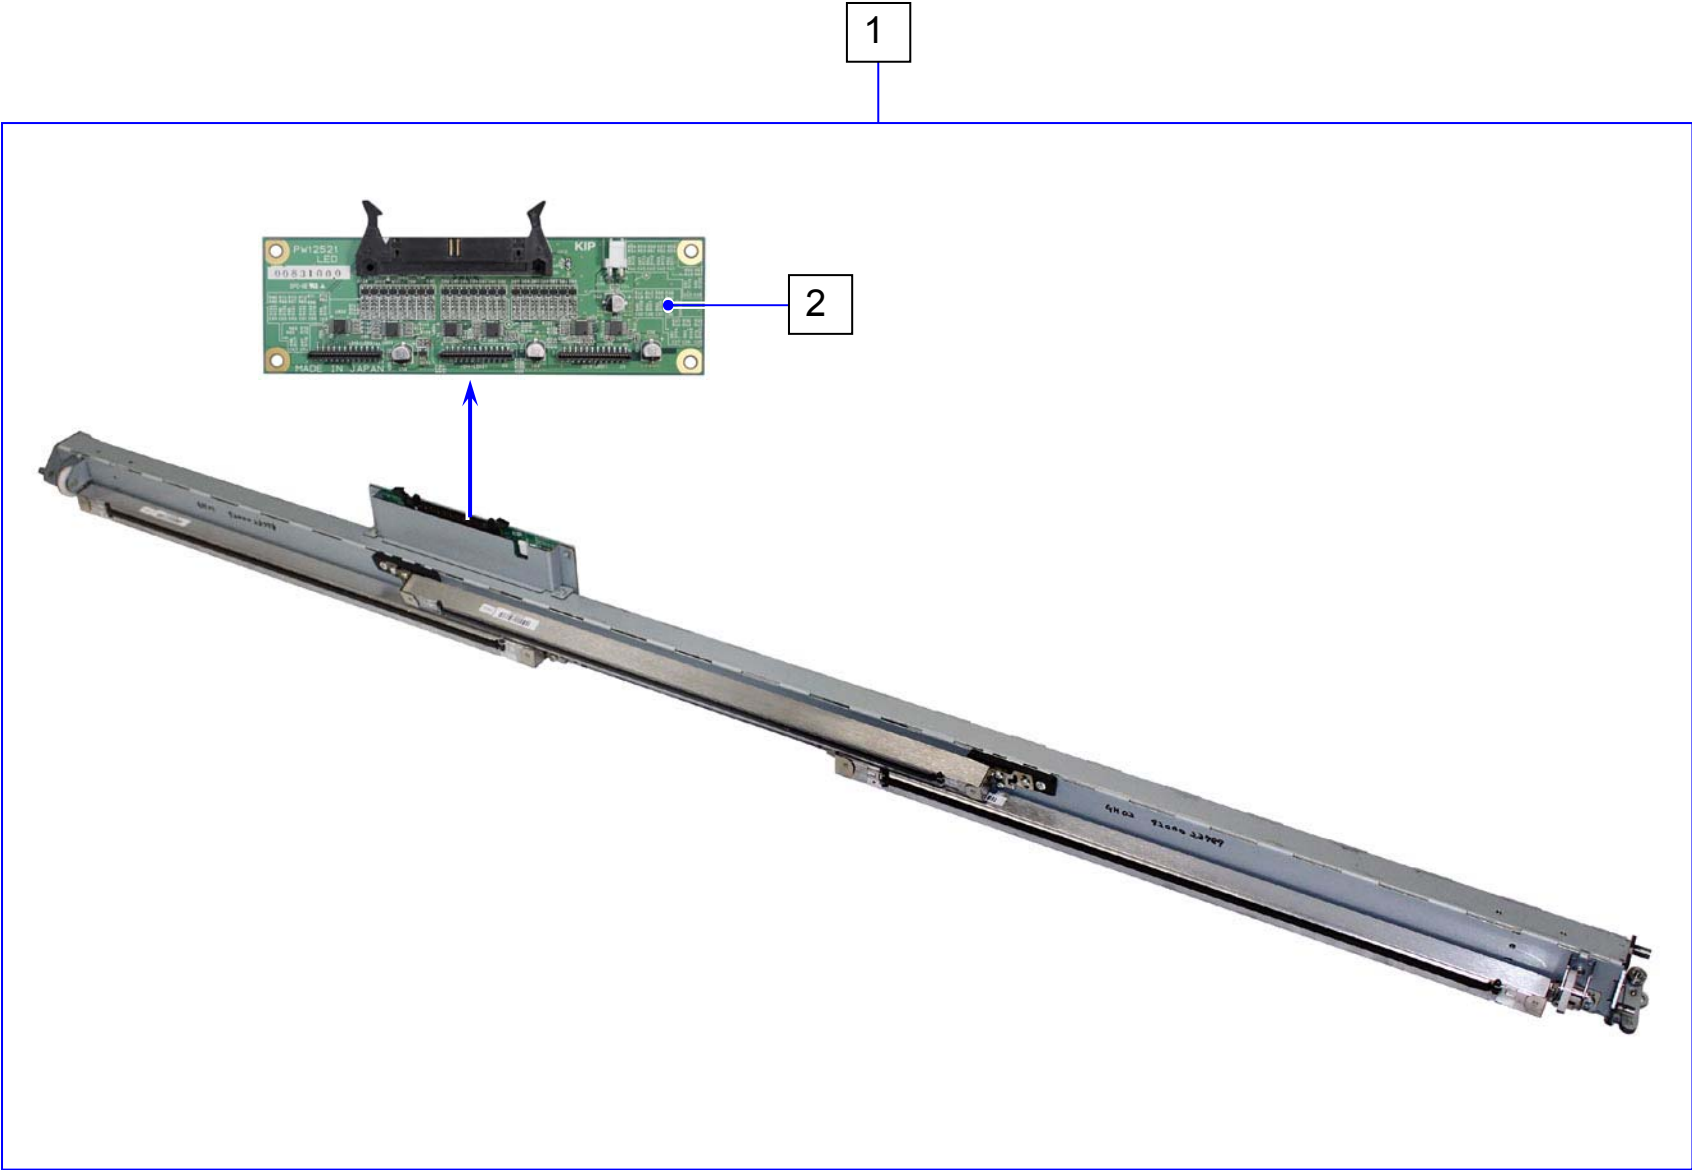



Item		Part Number	Part Description	Type	Qty	SP
1		Z258060120	PACKAGED LED HEAD		1	B
2		Z256260020	LED TERMINAL PCB ASSY	PW12521	1	B
3		Z258501270	LED SET LEVER		1	B

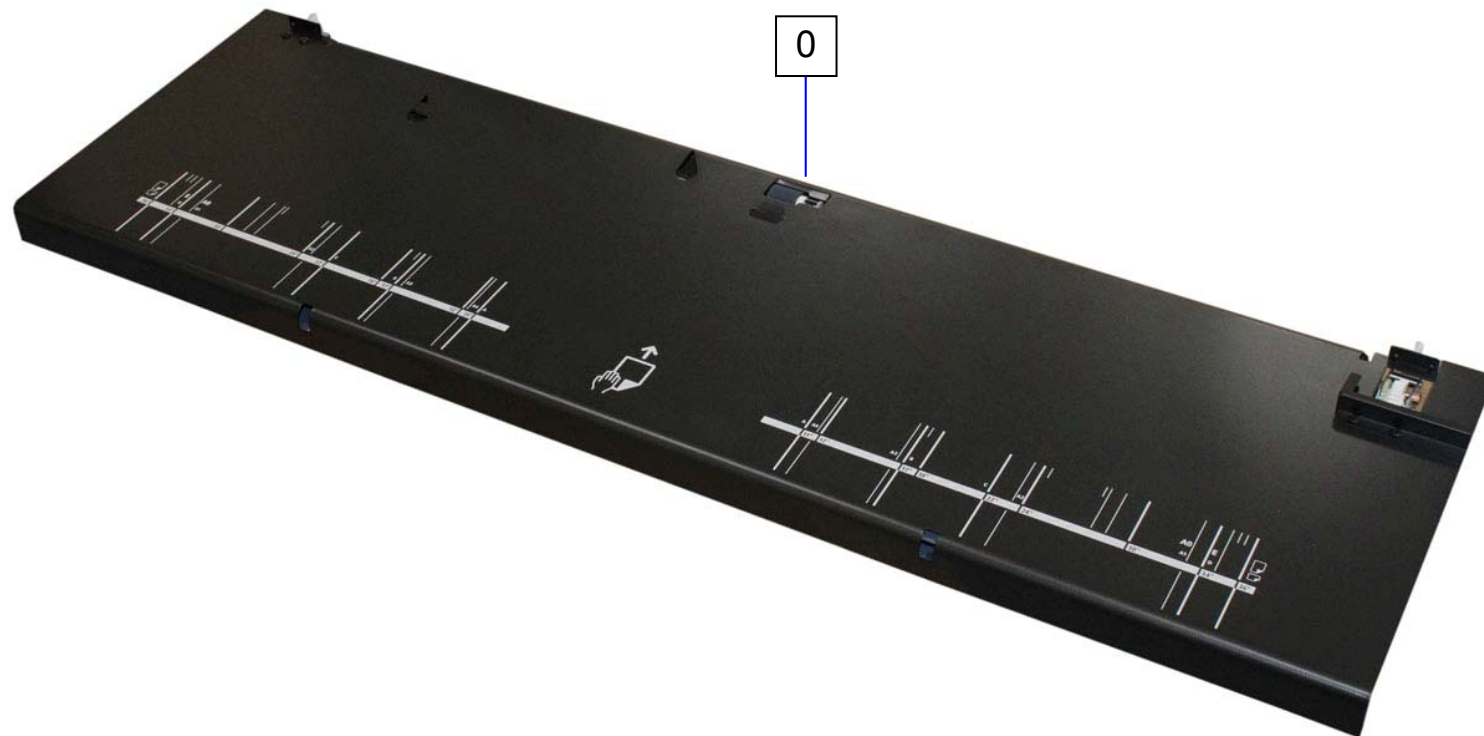


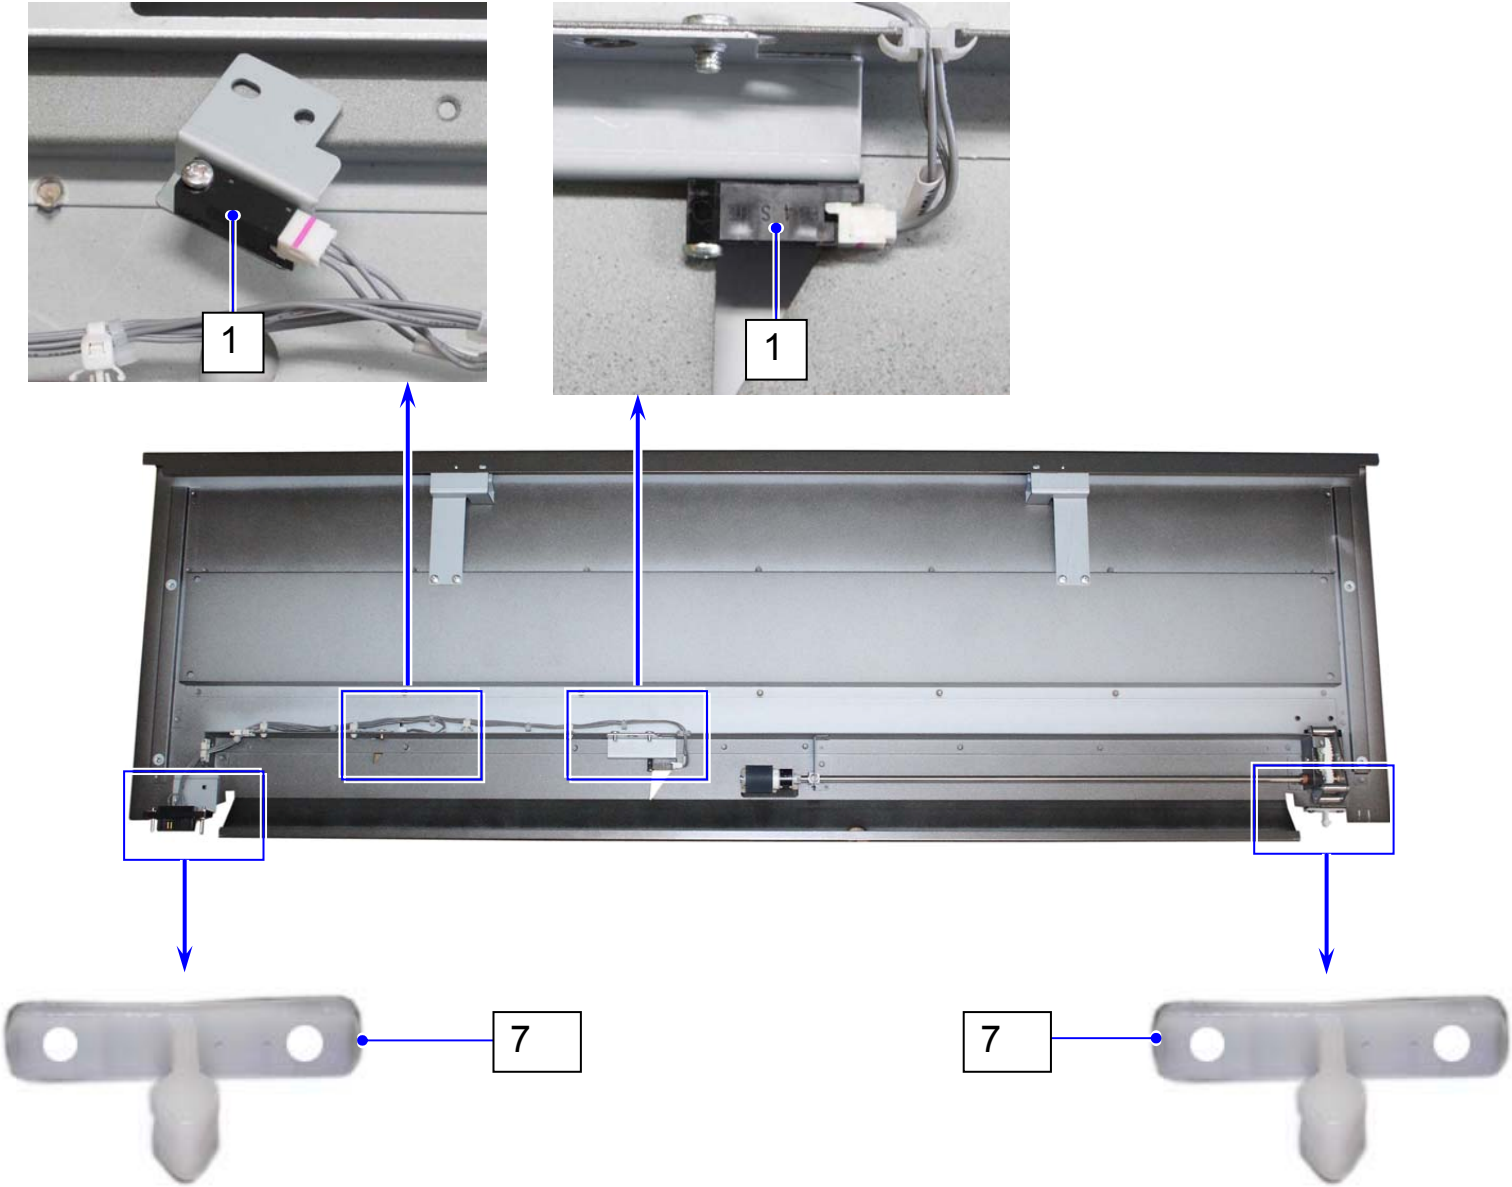


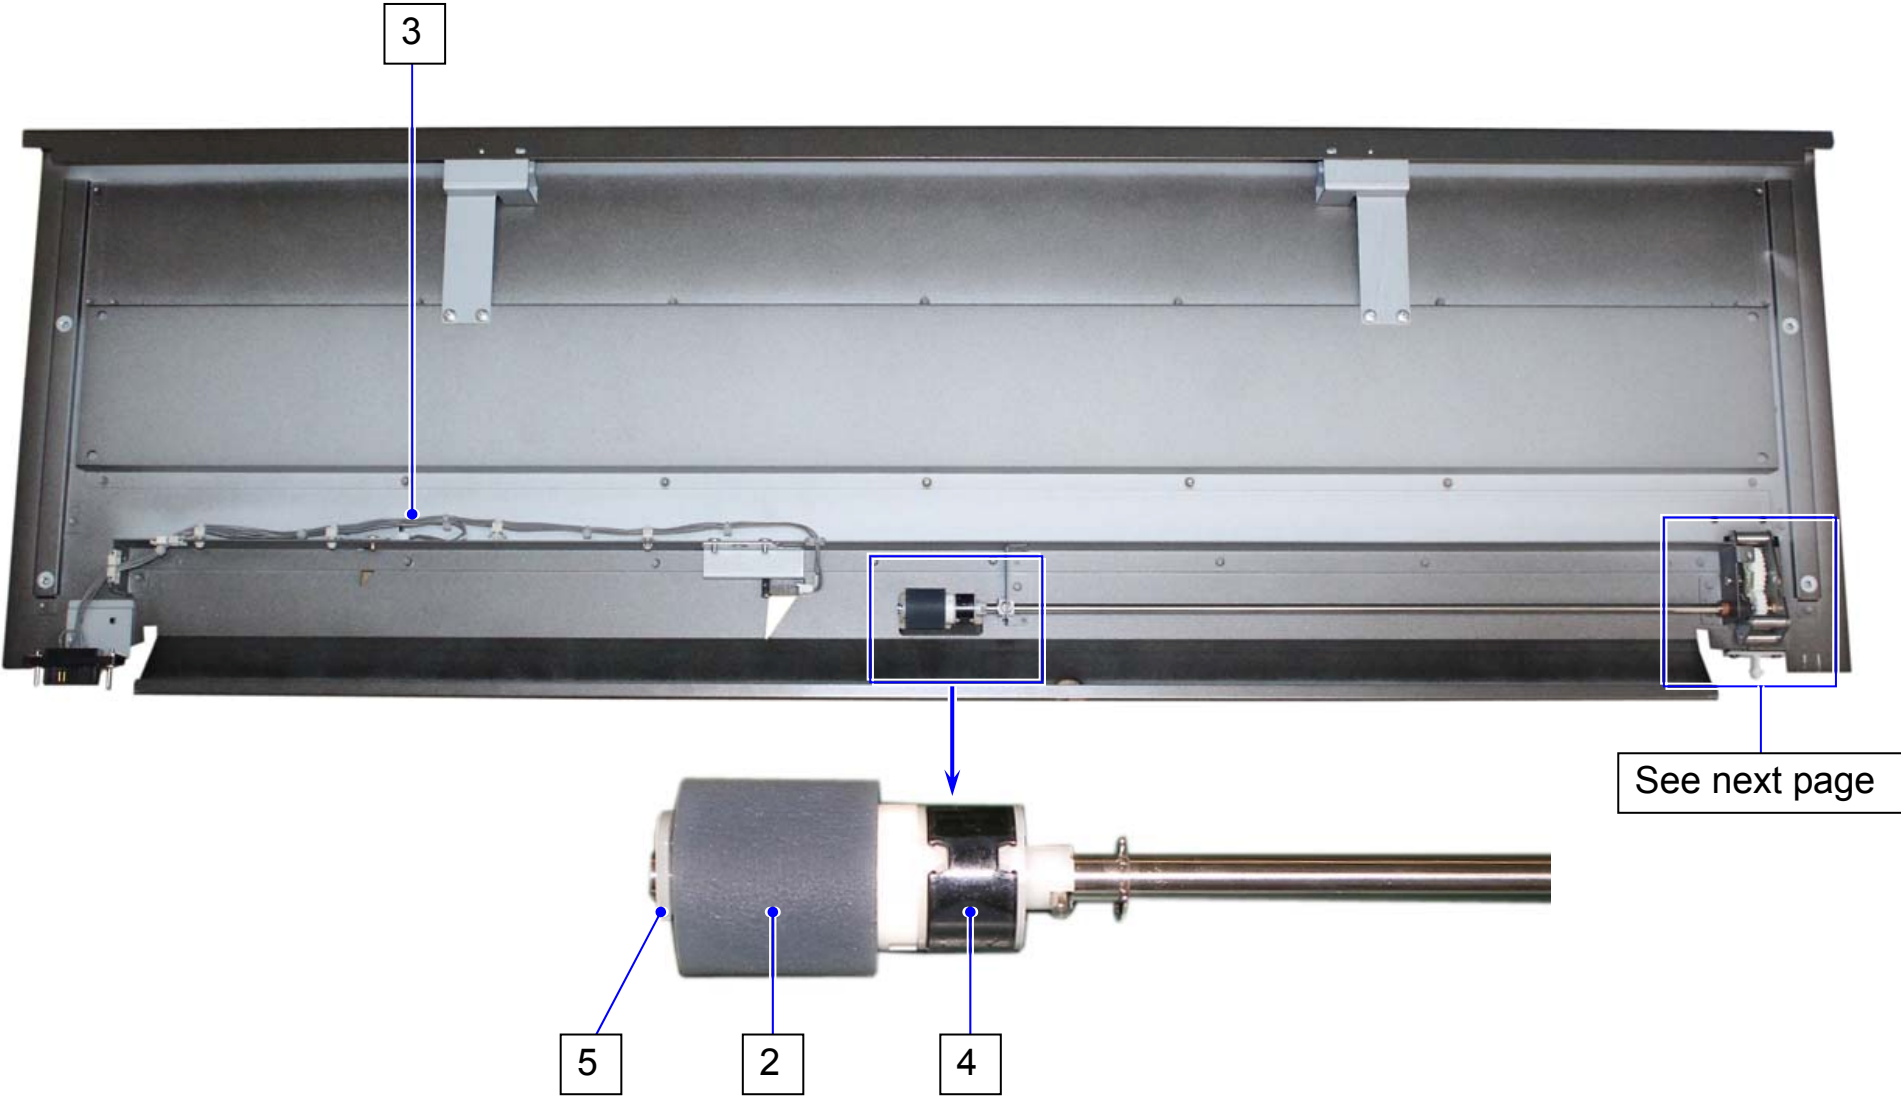


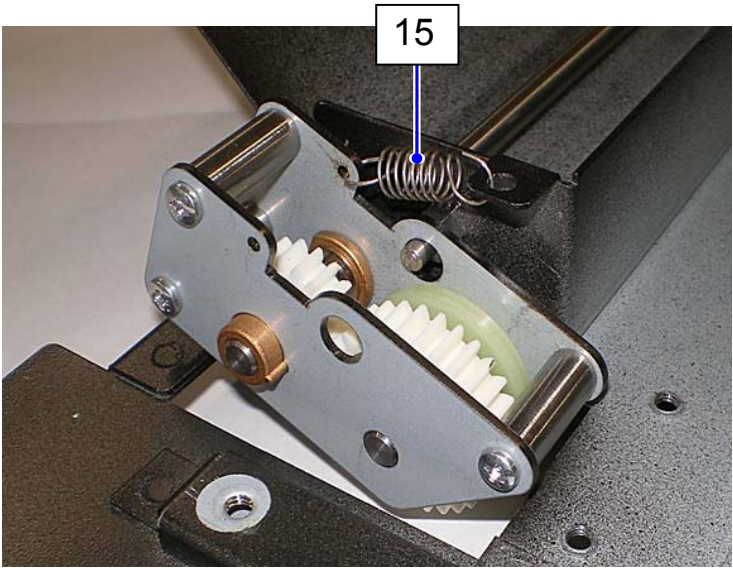
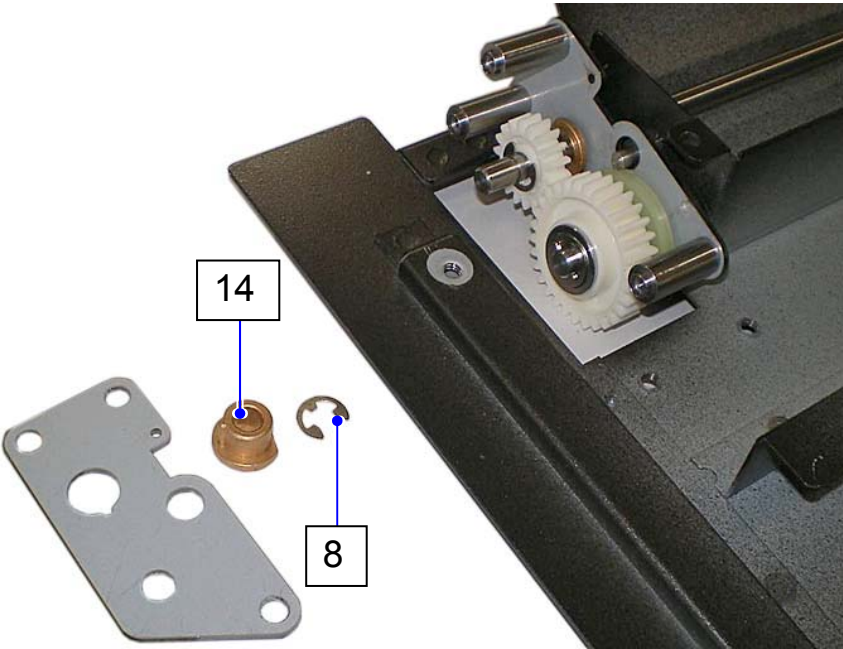
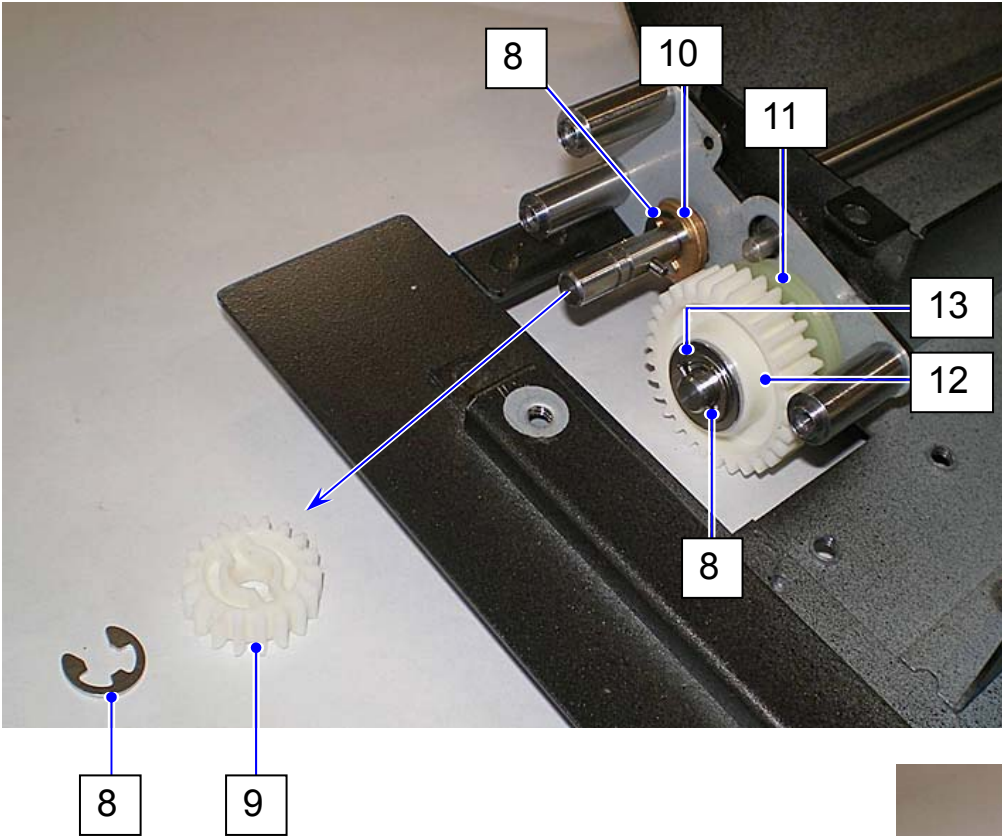


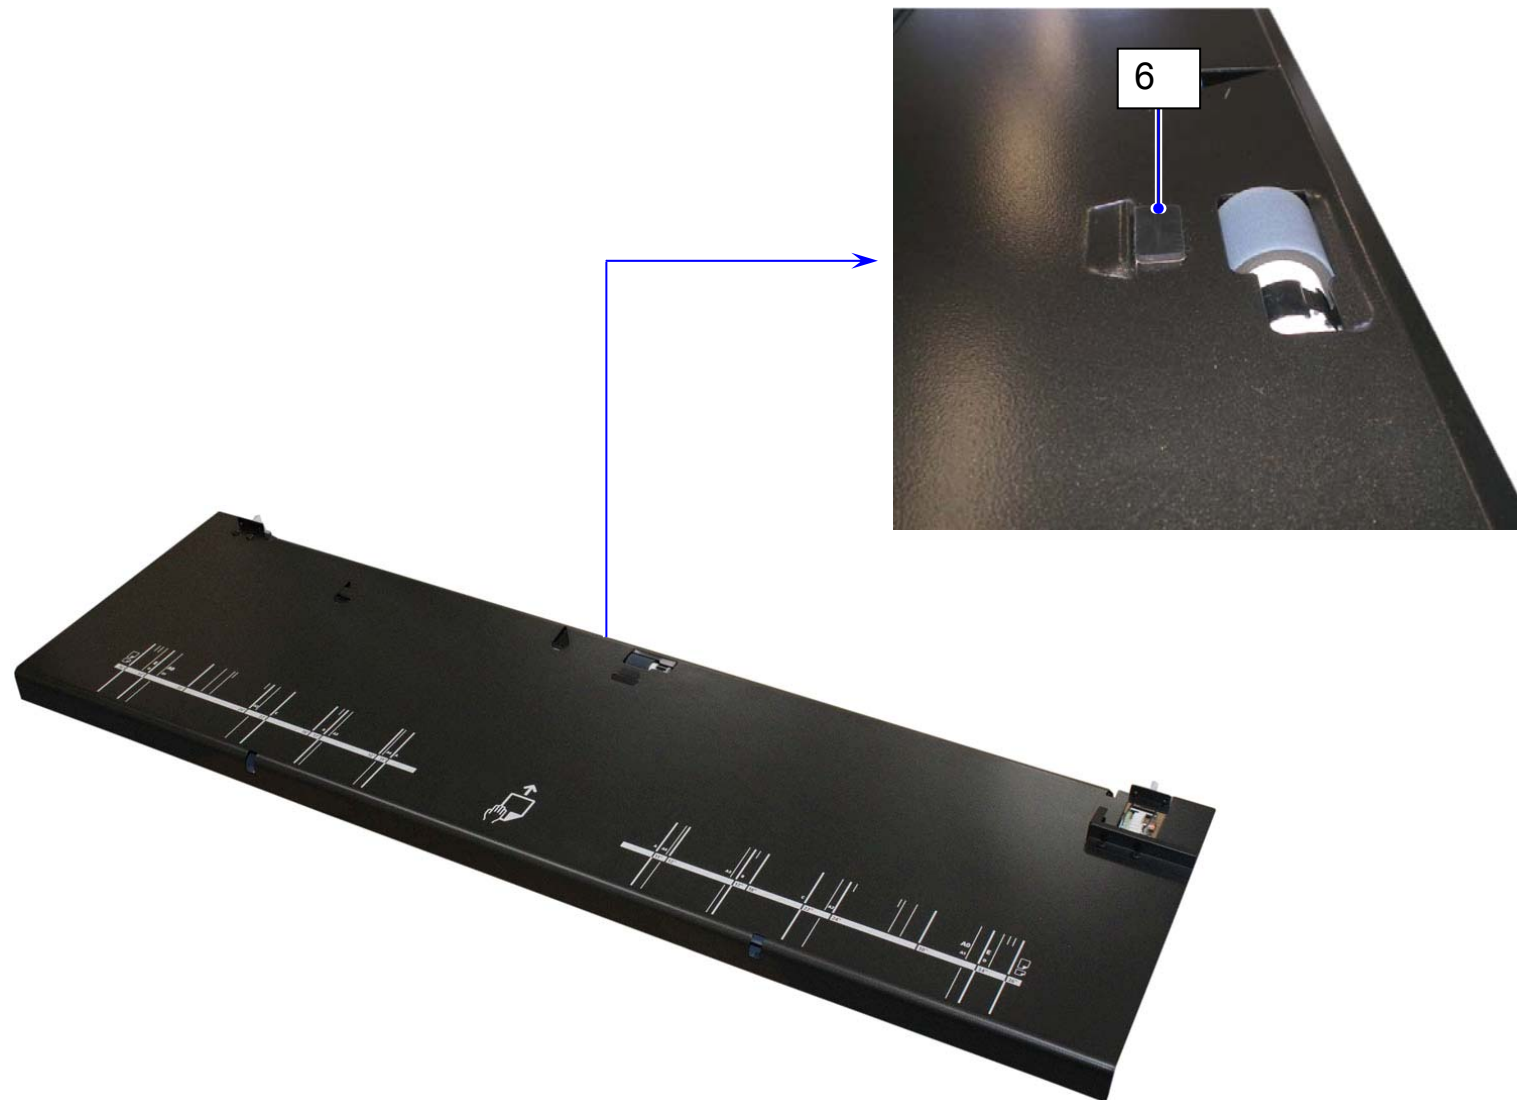

Item	Part Number	Part Description	Type	Qty	SP
0	Z421570010	MULTI TRAY UNIT		1	D
1	9000100982	SENSOR (PS117ED1)	PS117ED1	2	B
2	7101007230	ROLLER, PAPER REVERS 2		1	D
3	Z256400380	MF SENSOR TERMINAL LEAD		1	D
4	7101404180	LIMITER,TORQUE		1	D
5	7101004240	RING,RETAINING		1	D
6	7101407070	BRACKET		1	D
7	9000650009	ROLLER CATCH PLUNGER		2	D
8	6807033308	RETAINING RING-E	E5,Ni	4	D
9	7101403690	GEAR, 18T		1	D
10	9000790069	BUSHING	B-F6-37	1	D
11	4201600040	SPACING PLATE		1	D
12	4201600050	30T GEAR		1	D
13	9000780041	BEARING (F-FLW686T2ZZ1/5K)	F-FLW686T2ZZ1/5K	2	D
14	9000790069	BUSHING	B-F6-37	1	D
15	7705803160	SPRING (209)		1	D

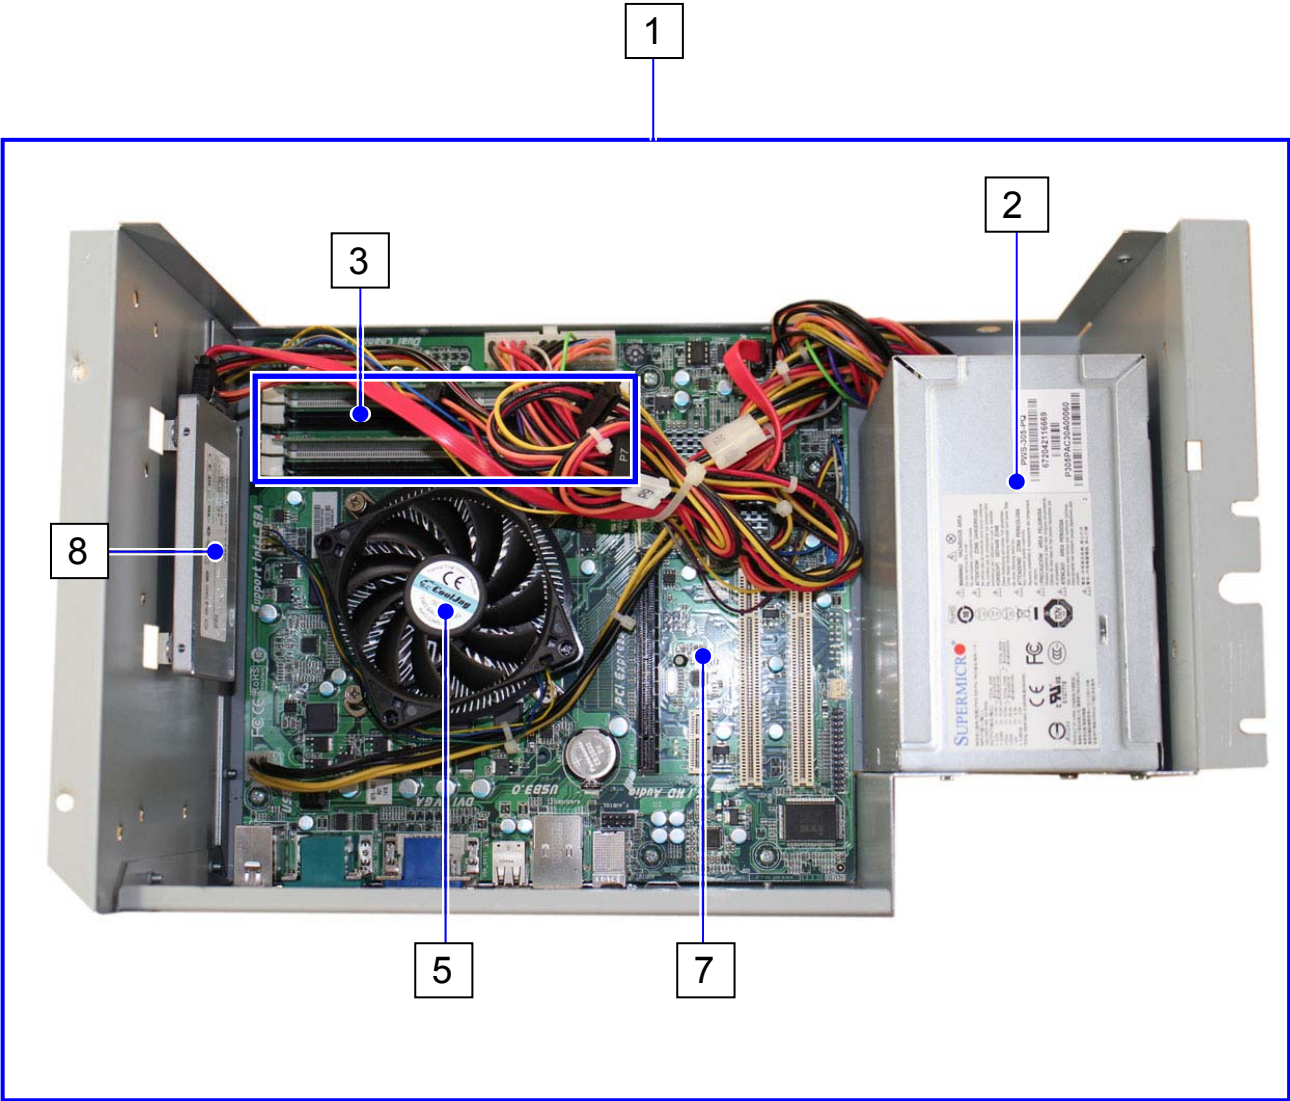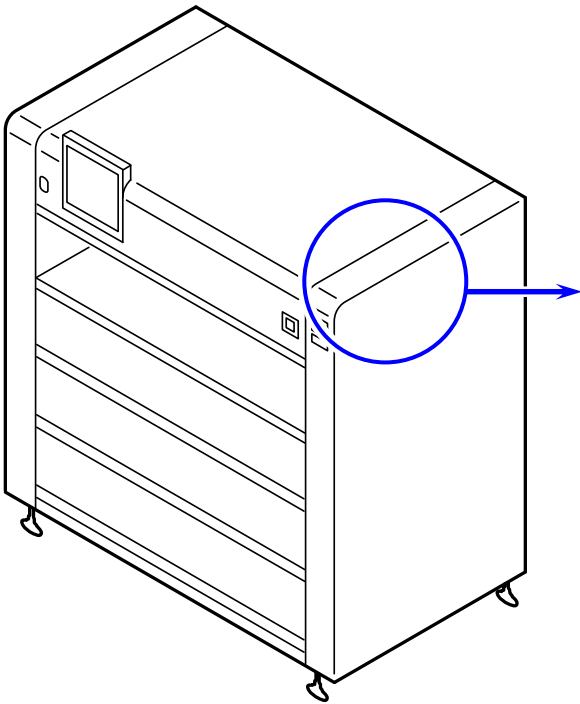

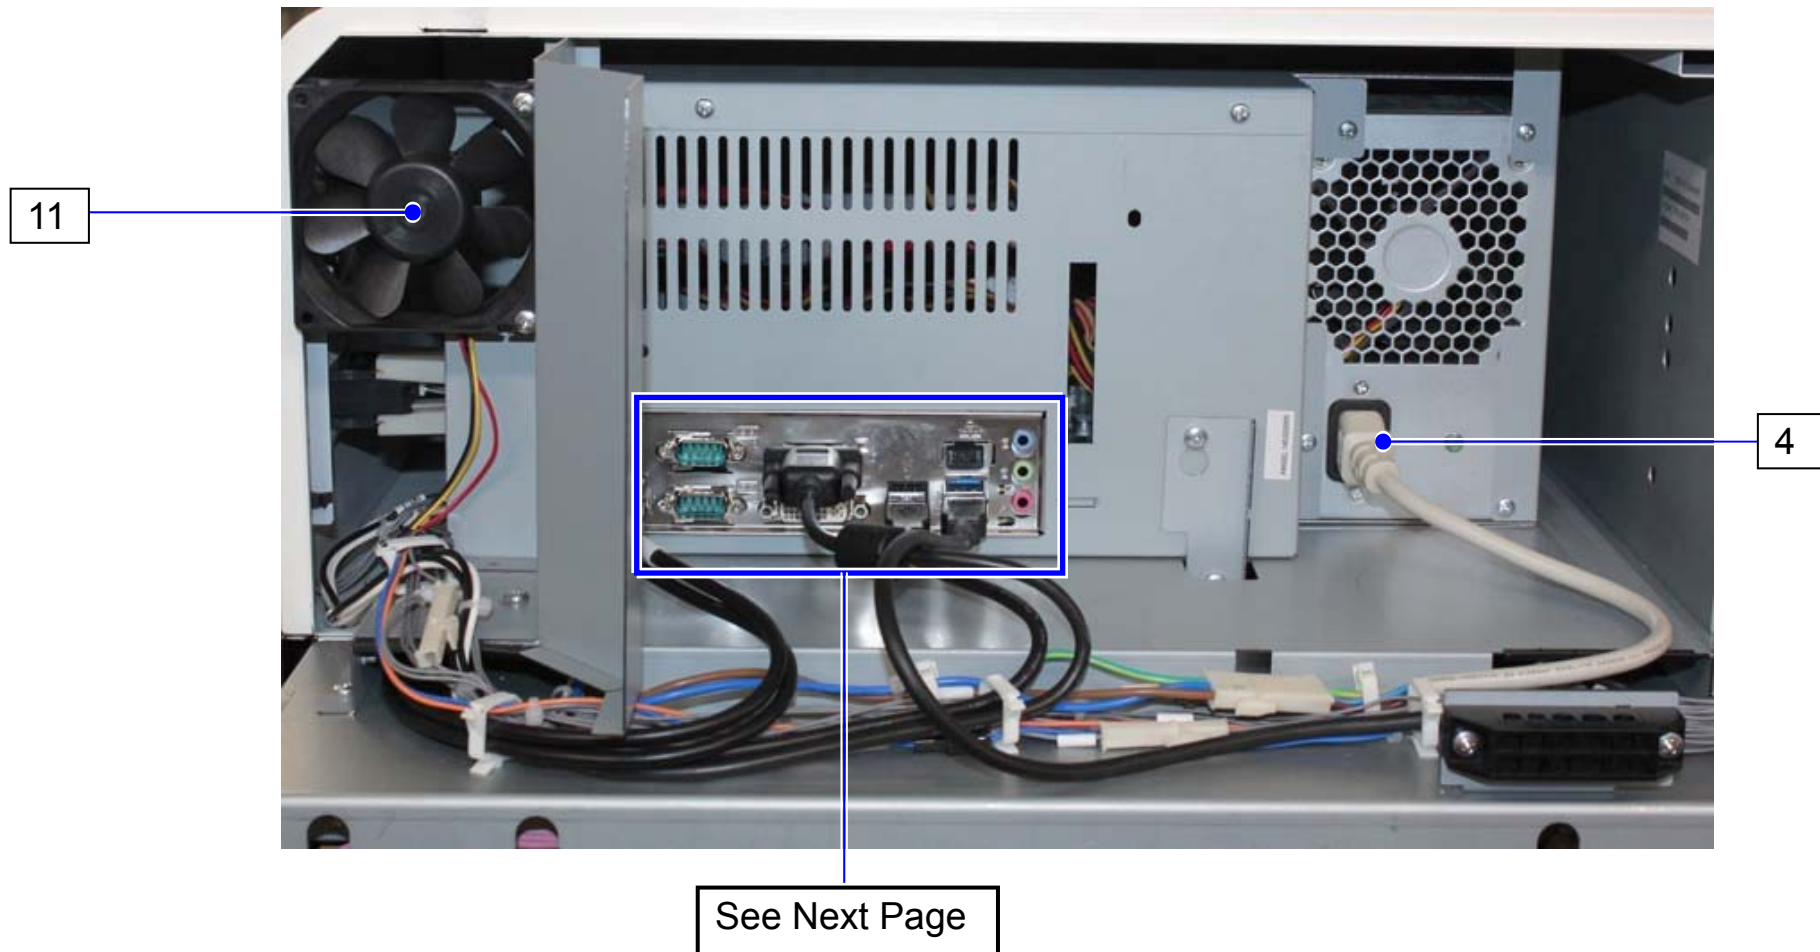

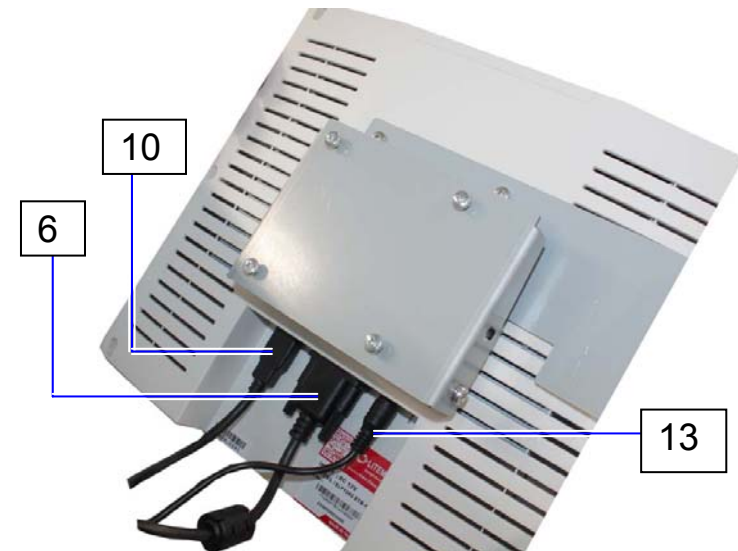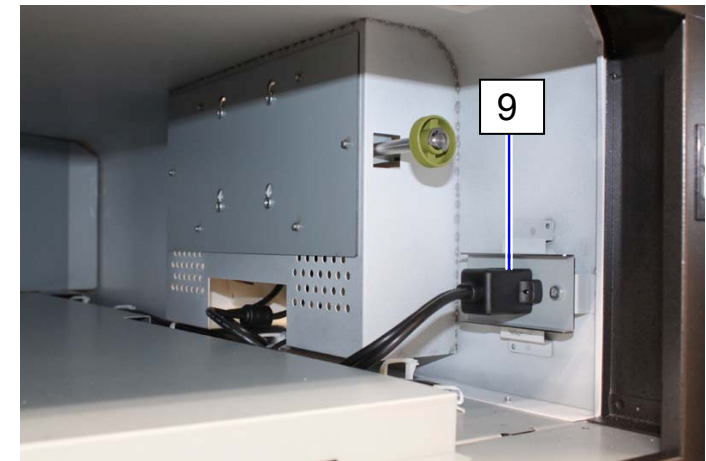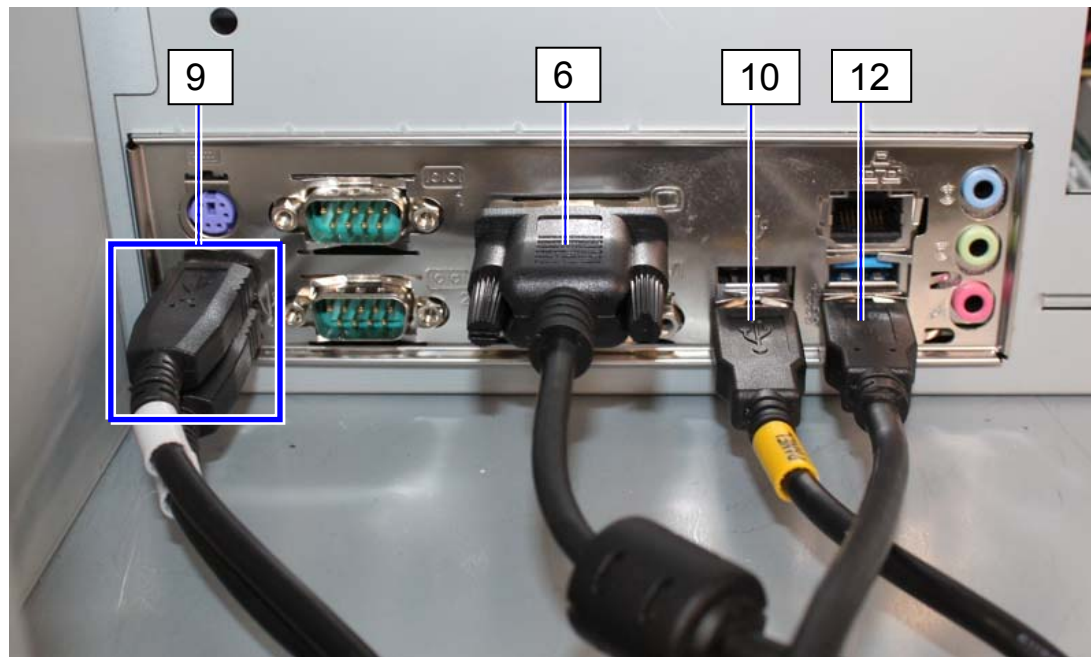


Item	Part Number	Part Description	Type	Qty	SP
1	Z426660010	KIP ATX1(NK)		1	B
2	9000500472	ATX POWER SUPPLY 300W	PWS-305-PQ	1	C
3	9000500427	DDR3 MEMORY 2G	ADATA (DDR3 1333 NON-ECC U-DIMM 256*8 2G CL9)	2	C
4	9000480062	PC POWER CORD		1	D
5	9000500460	CORE i5 CPU	Core4 i5-2400 3.4GHz	1	C
6	Z426400040	DISPLAY CABLE		1	D
7	9000500429	Mother Board(with retainer)	IB75-M2T (w.retainer)	1	C
8	9000500479	SOLID STATE DRIVE (SSD)	CT256MX100SSD1	1	C
9	Z426400030	USB CABLE WAPAP		1	D
10	Z426400020	USB CABLE APAP		1	D
11	9000470154	FAN MOTOR	9A0824G406	1	C
12	Z426400010	USB 3.0 CABLE AB		1	D
13	Z096400100	UI POWER SUPPLY HARNESS		1	D








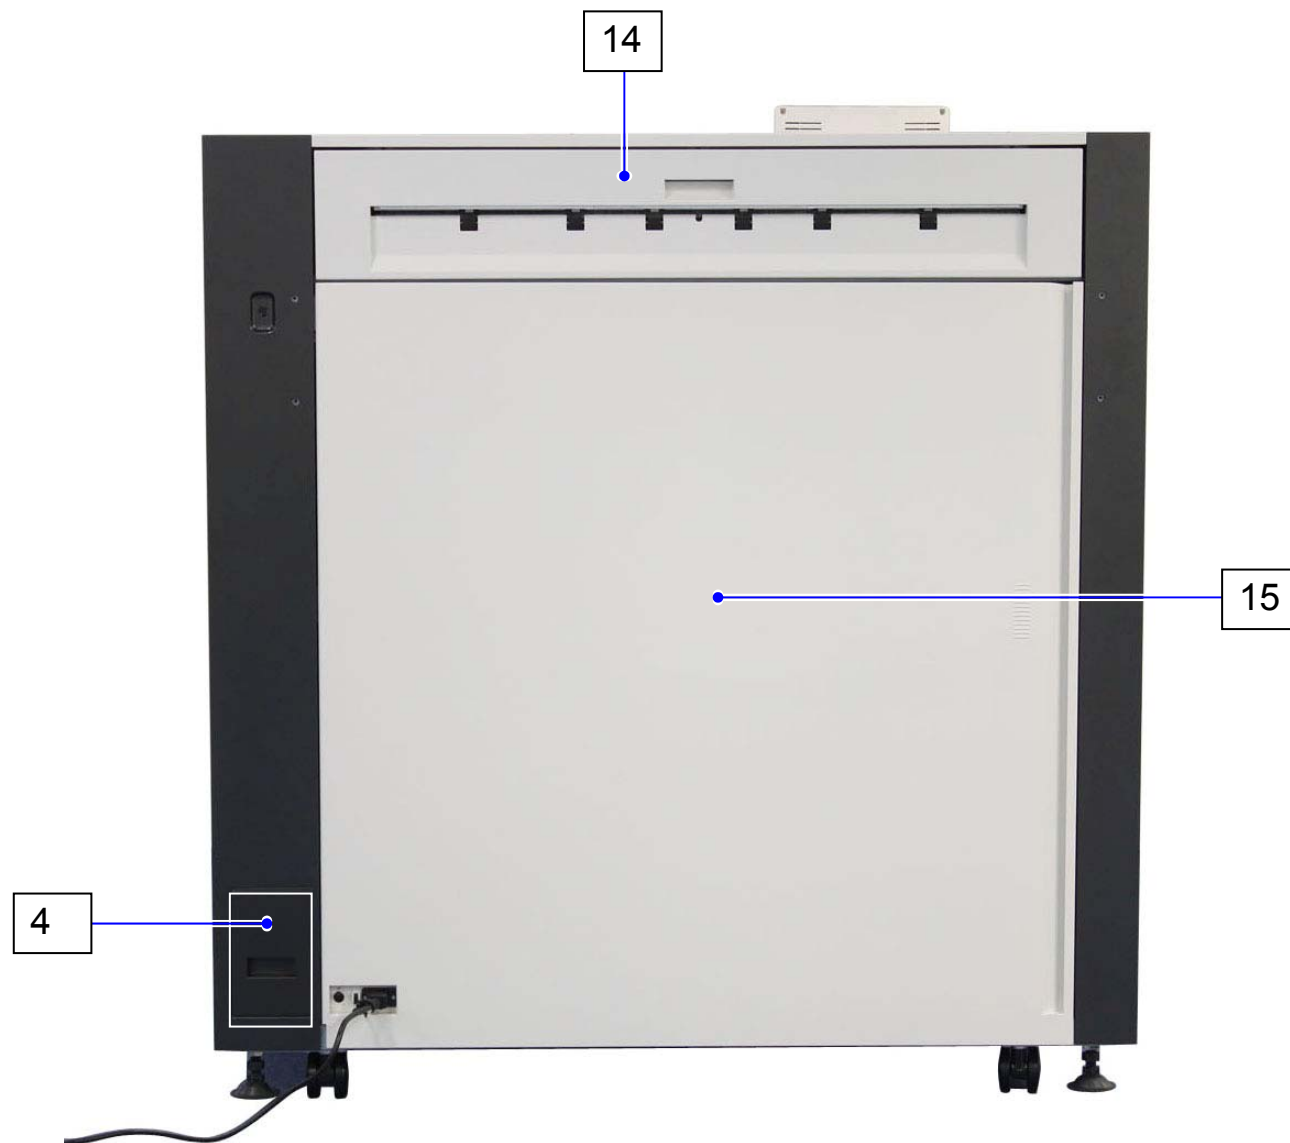

Item	Part Number	Part Description	Type	Qty	SP
1	Z258060090	COVER SIDE L2 ASSY		1	D
2	Z420410030	COVER SIDE L		1	D
3	Z420410010	COVER UPPER ASSY		1	D
4	Z250410100	COVER 3		1	D
5	Z250410010	COVER		1	D
6	Z420410020	COVER SIDE R ASSY		1	D
7	Z251360010	COVER 3 ASSY 1		1	D
8	Z251360020	COVER 3 ASSY 2		1	D
9	Z251360030	COVER 3 ASSY 3		1	D
10	Z250410070	GUIDE PAPER		1	D
11	Z251510030	GUIDE PLATE		1	D
12	Z250410080	PANEL SIDE		1	D
13	Z250410090	PANEL SIDE 2		1	D
14	Z254401071	COVER 5		1	D



2

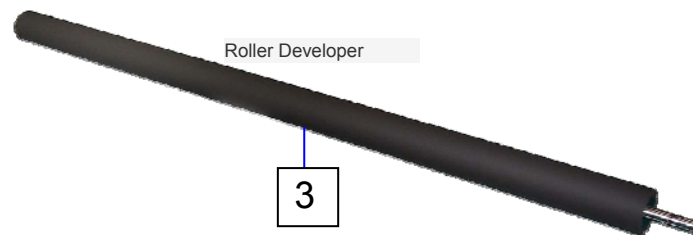

3



9

9




12

4

13


4

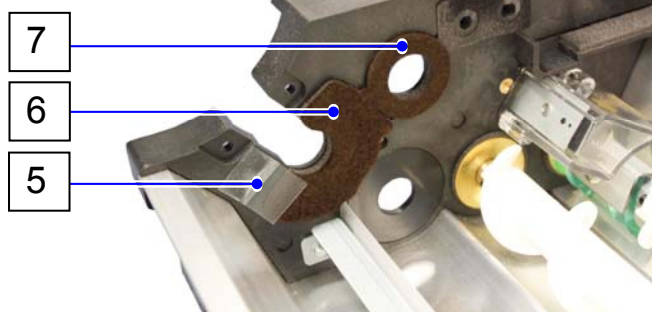

7


6

5

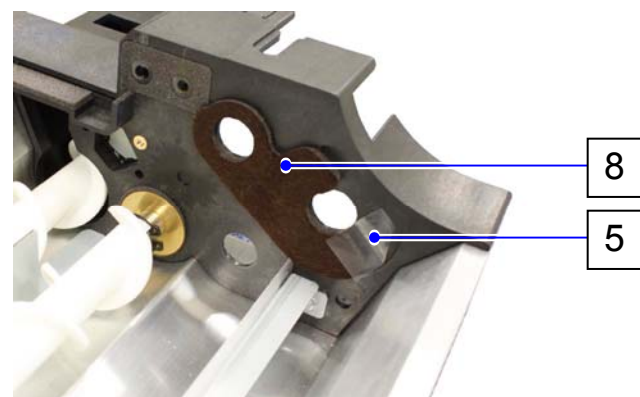

8


5

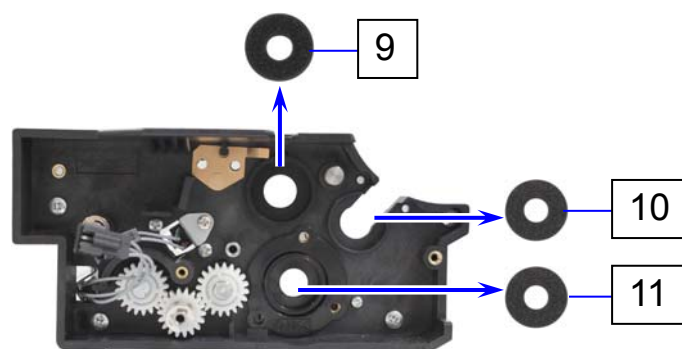

9

10


11

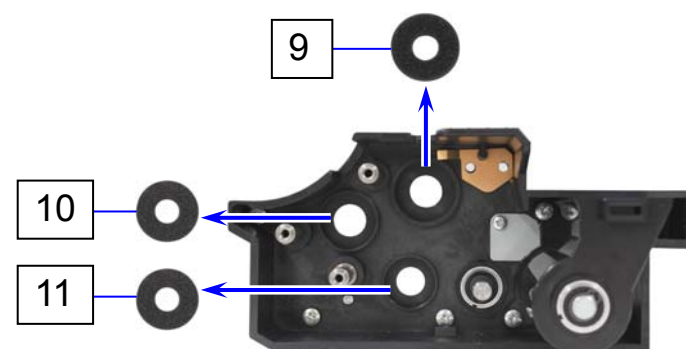



9



10

11

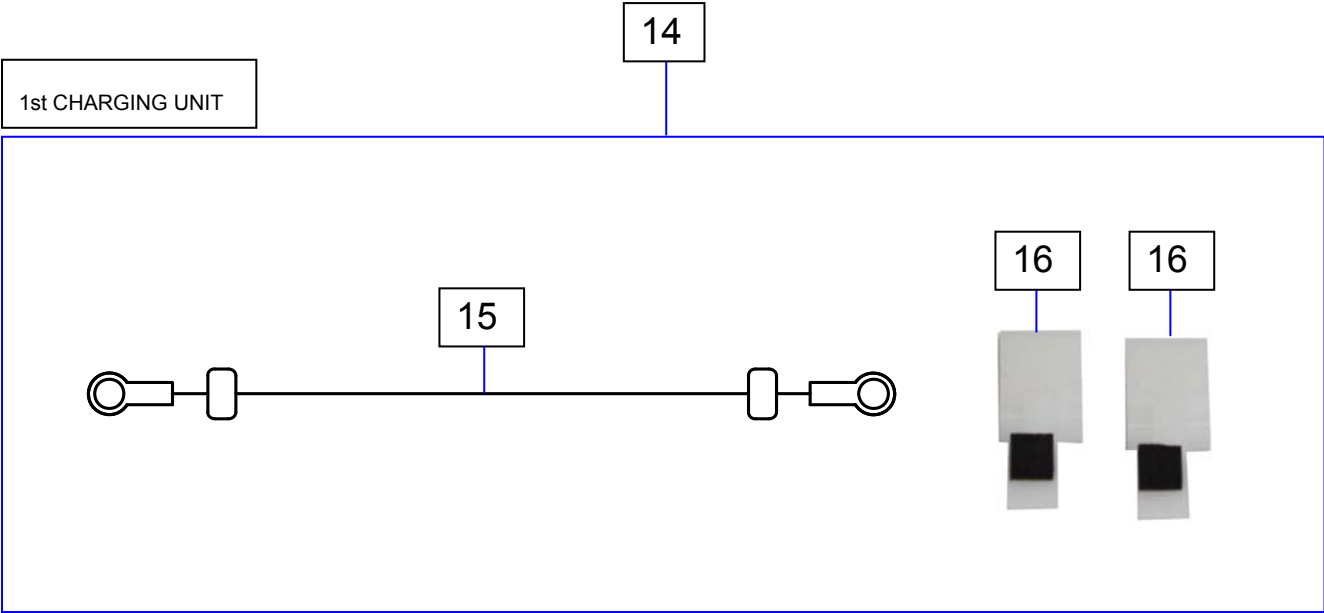

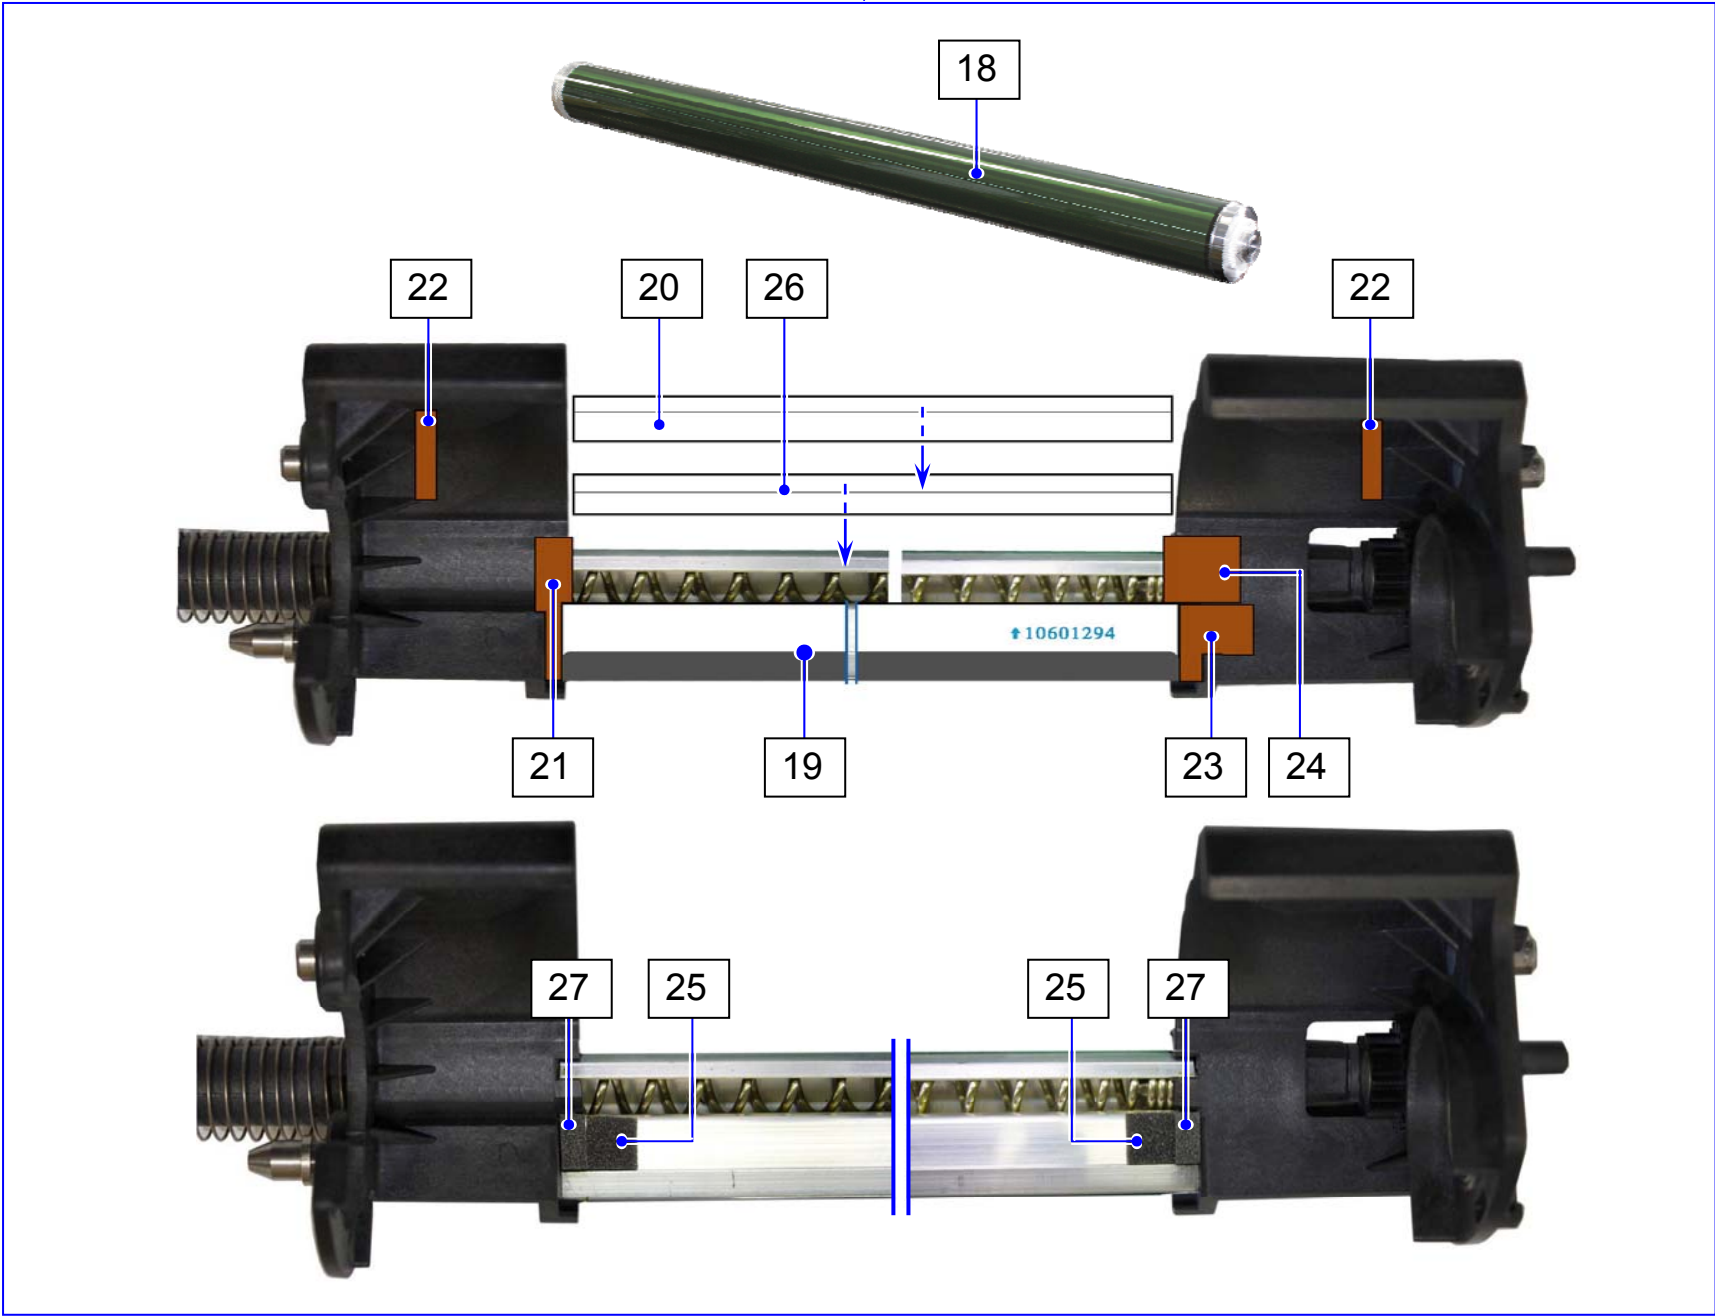

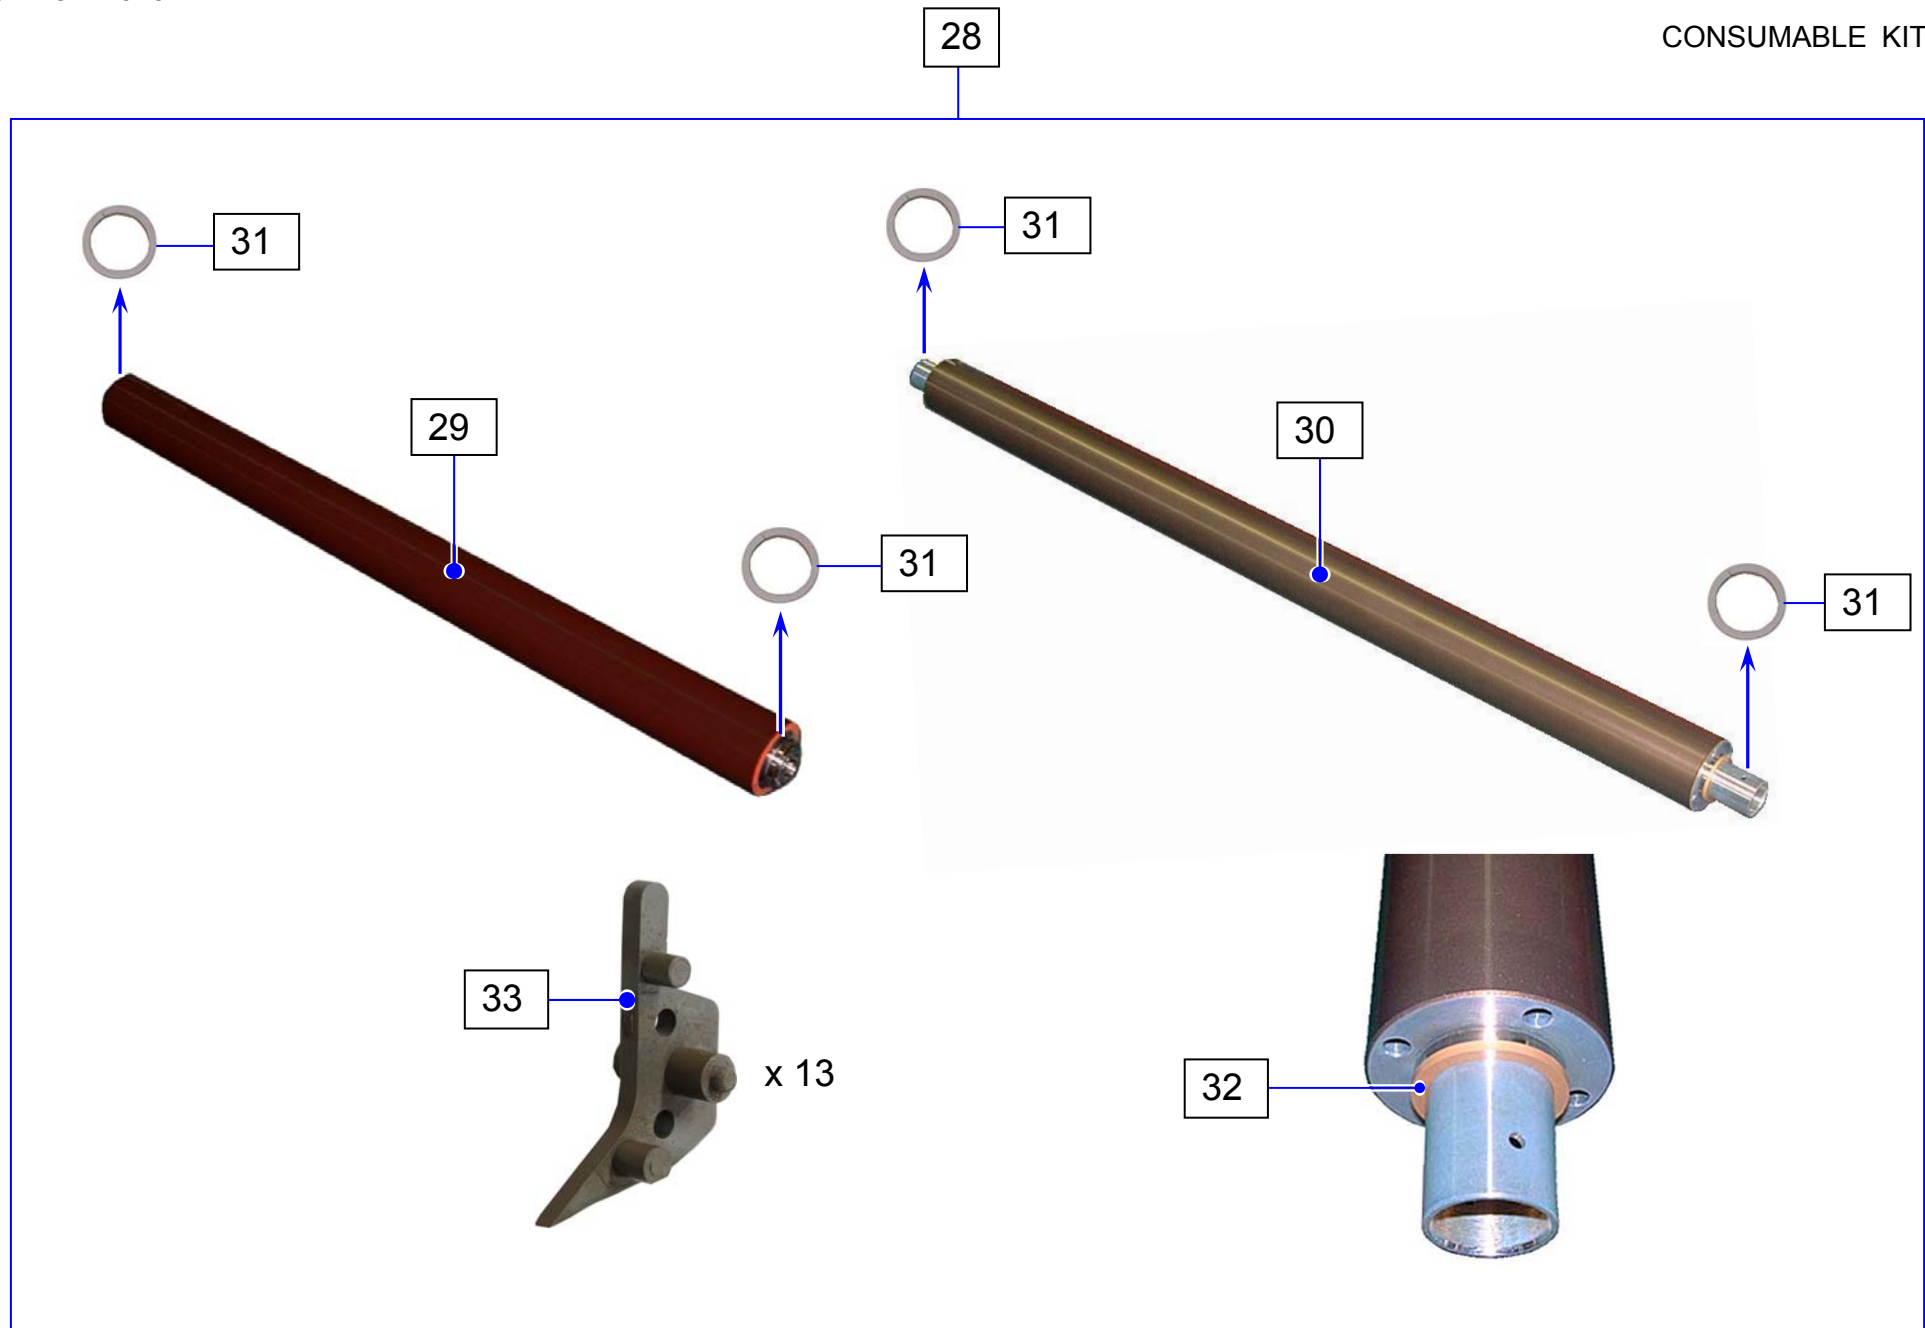


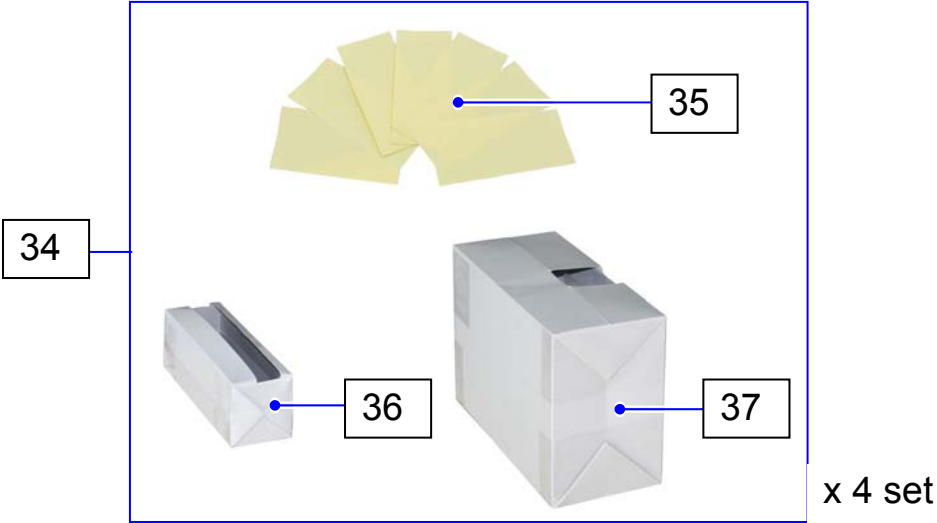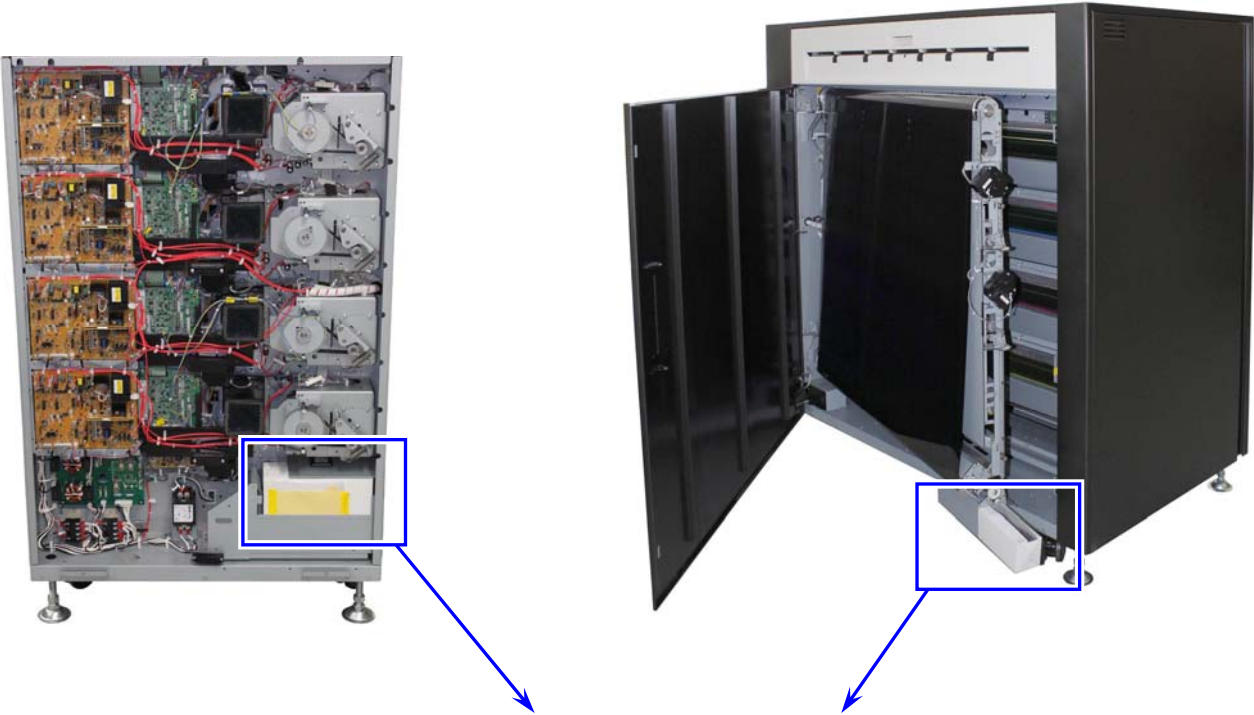


38




39

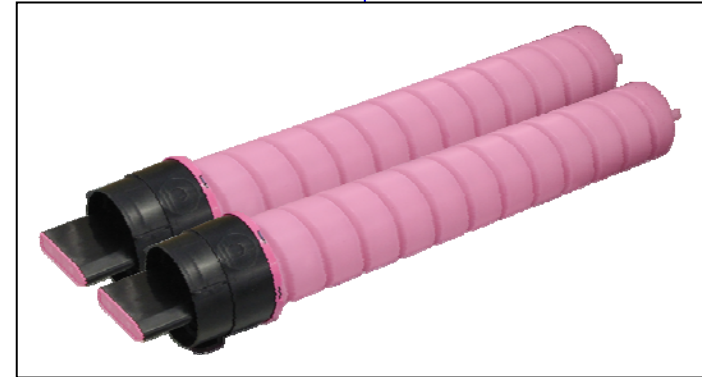

40

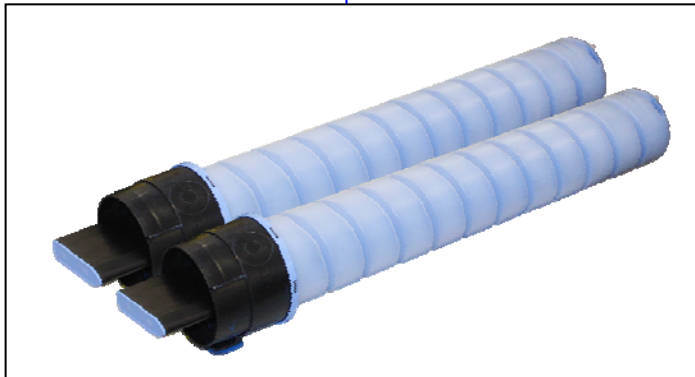

41

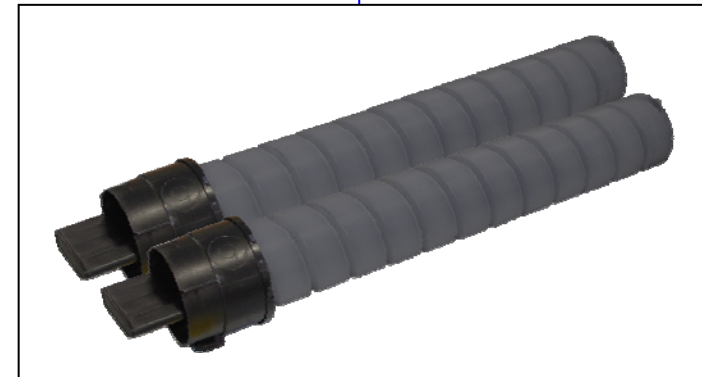

Item		Part Number	Part Description	Type	Qty	SP
1		Z258060020	ROLLER DEVELOPER KIT		1	A
2		Z254620010	BLADE ASSY	ROLLER DEVELOPER KIT	1	B
3		Z254610010	ROLLER DEVELOPER	ROLLER DEVELOPER KIT	1	B
4		Z254600280	BIAS TERMINAL	ROLLER DEVELOPER KIT	2	B
5		Z254600810	SEAL 17	ROLLER DEVELOPER KIT	2	B
6		Z254600480	SEAL 2	ROLLER DEVELOPER KIT	1	B
7		Z254620020	FLANGE 2 ASSY	ROLLER DEVELOPER KIT	1	B
8		Z254600470	SEAL	ROLLER DEVELOPER KIT	1	B
9		Z074600860	SIDE SEAL 10	ROLLER DEVELOPER KIT	4	C
10		Z074600870	SIDE SEAL 11	ROLLER DEVELOPER KIT	2	C
11		Z074600900	SIDE SEAL 12	ROLLER DEVELOPER KIT	2	C
12		Z254600970	BIAS TERMINAL 4	ROLLER DEVELOPER KIT	1	B
13		Z254600980	BIAS TERMINAL 5	ROLLER DEVELOPER KIT	1	B
14		Z258060010	1st SET		1	A
15		Z075100130	CORONA WIRE	1st SET	1	C
16		Z255160020	CLEANING PAD ASSY	1st SET	2	C
17	*	Z428060110	DRUM KIT		1	A
18	*	Z424700010	DRUM	DRUM KIT	1	B
19		Z254320100	BRADE	DRUM KIT	1	C
20		Z254300170	SHEET	DRUM KIT	1	C
21		Z254301080	SEAL8	DRUM KIT	1	C
22		Z254301130	SEAL 10	DRUM KIT	2	C
23		Z254301150	SEAL 12	DRUM KIT	1	C
24		Z254301160	SEAL 13	DRUM KIT	1	C
25		Z254301170	SEAL 14	DRUM KIT	2	C
26		Z254301180	SHEET 4	DRUM KIT	1	C
27		Z254301210	SEAL 15	DRUM KIT	2	C
28		Z258060070	FUSER KIT		1	A
29		Z254402370	ROLLER PRESSURE	FUSER KIT	1	B
30		Z254402360	ROLLER FUSING	FUSER KIT	1	B
31		1710441650	ISOLATE BUSHING	FUSER KIT	4	C
32		1710441070	COLLAR	FUSER KIT	1	C
33		4704400070	STRIPPER FINGER	FUSER KIT	13	B

Item	Part Number	Part Description	Type	Qty	SP
34	Z258060060	WASTE TONER BOX KIT (4 set)		1	A
35	----	TAPE	WASTE TONER BOX KIT (4 set)	28	N
36	----	BC WASTE TONER BOX	WASTE TONER BOX KIT (4 set)	4	N
37	----	WASTE TONER BOX 2	WASTE TONER BOX KIT (4 set)	4	N
38	Z424590010	TONER BOTTLE KIT Y	2pcs./kit	1	A
39	Z424590020	TONER BOTTLE KIT M	2pcs./kit	1	A
40	Z424590030	TONER BOTTLE KIT C	2pcs./kit	1	A
41	Z424590040	TONER BOTTLE KIT K	2pcs./kit	1	A