

KONICA MINOLTA

PARTS GUIDE MANUAL

MAY 2012

bizhub C224
/bizhub C284
/bizhub C364
A161

INFORMATION FOR PARTS GUIDE MANUAL

To find correct Parts No., refer to the "HOW TO MAKE THE BEST USE OF THIS MANUAL" in the following page.

HOW TO MAKE THE BEST USE OF THIS MANUAL

- 1 When you order, please check the proper figures beforehand that are on Our Parts Guide Manual, and order with the appropriate figures.
- 2 For screws, Nuts, Washers, retaining rings and Pins which are used in this model, one letter is shown on the Standard parts column of Parts list and exploded diagrams.
- 3 In order to maintain safety of the product, some specific parts composed of this product are set up as "essential safety parts".
- 4 The assigned parts number for the "essential safety parts" is indicated as "SP00-****".
When replacing these parts, follow precautions for disassembling and installing which are listed in the Service Manual.
Do not use any parts that are not set up as
- 5 ♣ means that there are exclusive parts for each destination.
Please check the appropriate destination when you order.
- 6 Revision Mark
Marked as ▲ on the illustration shows that the revision has been made.
- 7 All rights reserved. (any reprints or quotations are prohibited.)
Use of this parts guide manual should be strictly supervised to avoid disclosure of confidential information.


パーツガイドマニュアルのご案内

サービス部品をご発注の際には、下記に示す“パーツガイドマニュアルの活用にあたって”をご参照の上、正しい部品番号にてお願い致します。

パーツガイドマニュアルの活用にあたって

- 1 部品発注の際には、掲載されている部品番号の桁数を確認し、掲載されている桁数で発注願います。
- 2 この製品に使用されているネジ、ナット、ワッシャー、止め輪、ピンなどは、リストの右側の Standard parts 欄に a,b,c,……で表示し、イラストにも a,b,c,……表示してあります。
- 3 製品の安全性を維持する為に、製品に使用される特定の部品を「重要保安部品」として設定しています。
- 4 重要保安部品の部品番号は、“SP00-****”と記載されていますので、部品交換時は、サービスマニュアル記載の分解・組み立ての注意事項に従って作業をして下さい。
また、指定以外の部品は一切使用しないで下さい。
- 5 本文に ♣ が表示されている部品は、仕向け地毎に専用部品がある事を意味しています。
オーダーされる時は、仕向け地を確認して下さい。
- 6 改訂記号について
イラスト上に ▲ 印が表示されている部分は、改訂された事を表します。
- 7 著作権所有（無断転載及び無断引用の禁止）
本パーツガイドマニュアルについては、機密保持等その扱いには十分注意して下さい。万一取り扱いを誤った場合には、法律で処罰されることがあります。


SYSTEM OUTLINE

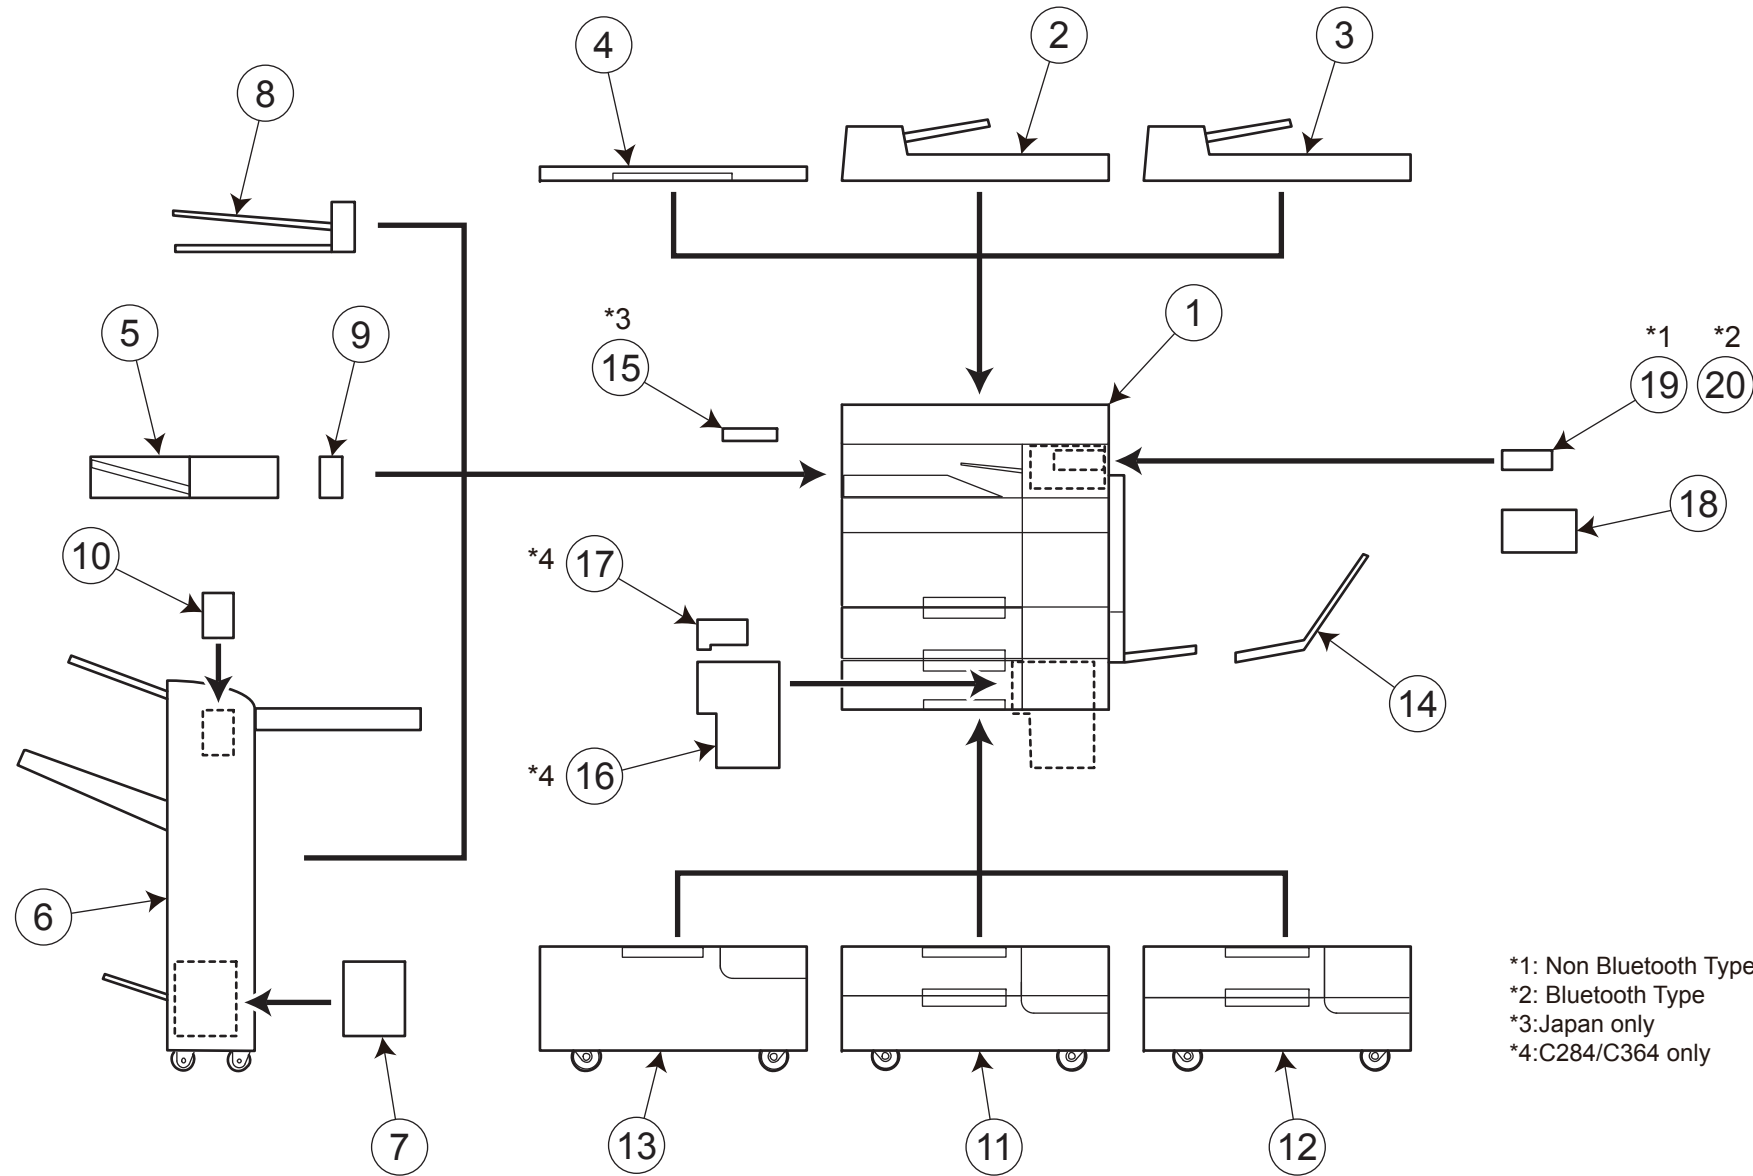

GENERAL CONTENTS

No.	Description	Model
1	DIGITAL MFP COLOR	bizhub C224/bizhub C284/bizhub C364
2	DOCUMENT FEEDER	DF-624
3	DOCUMENT FEEDER	DF-701
4	OTHER OPTION	OC-511
5	SORTER/FINISHER	FS-533
6	SORTER/FINISHER	FS-534
7	SORTER/FINISHER	SD-511
8	OTHER OPTION	JS-506
9	PUNCH UNIT	PK-519
10	PUNCH UNIT	PK-520
11	PAPER FEEDER	PC-110
12	PAPER FEEDER	PC-210
13	PAPER FEEDER	PC-410
14	OTHER OPTION	MK-730
15	OTHER OPTION	HT-510
16	OTHER OPTION	IC-414
17	OTHER OPTION	VI-506
18	FAX CONTROLLER	FK-511
19	OTHER OPTION	EK-606
20	OTHER OPTION	EK-607

DIAGRAMS OF MAIN PARTS SECTION

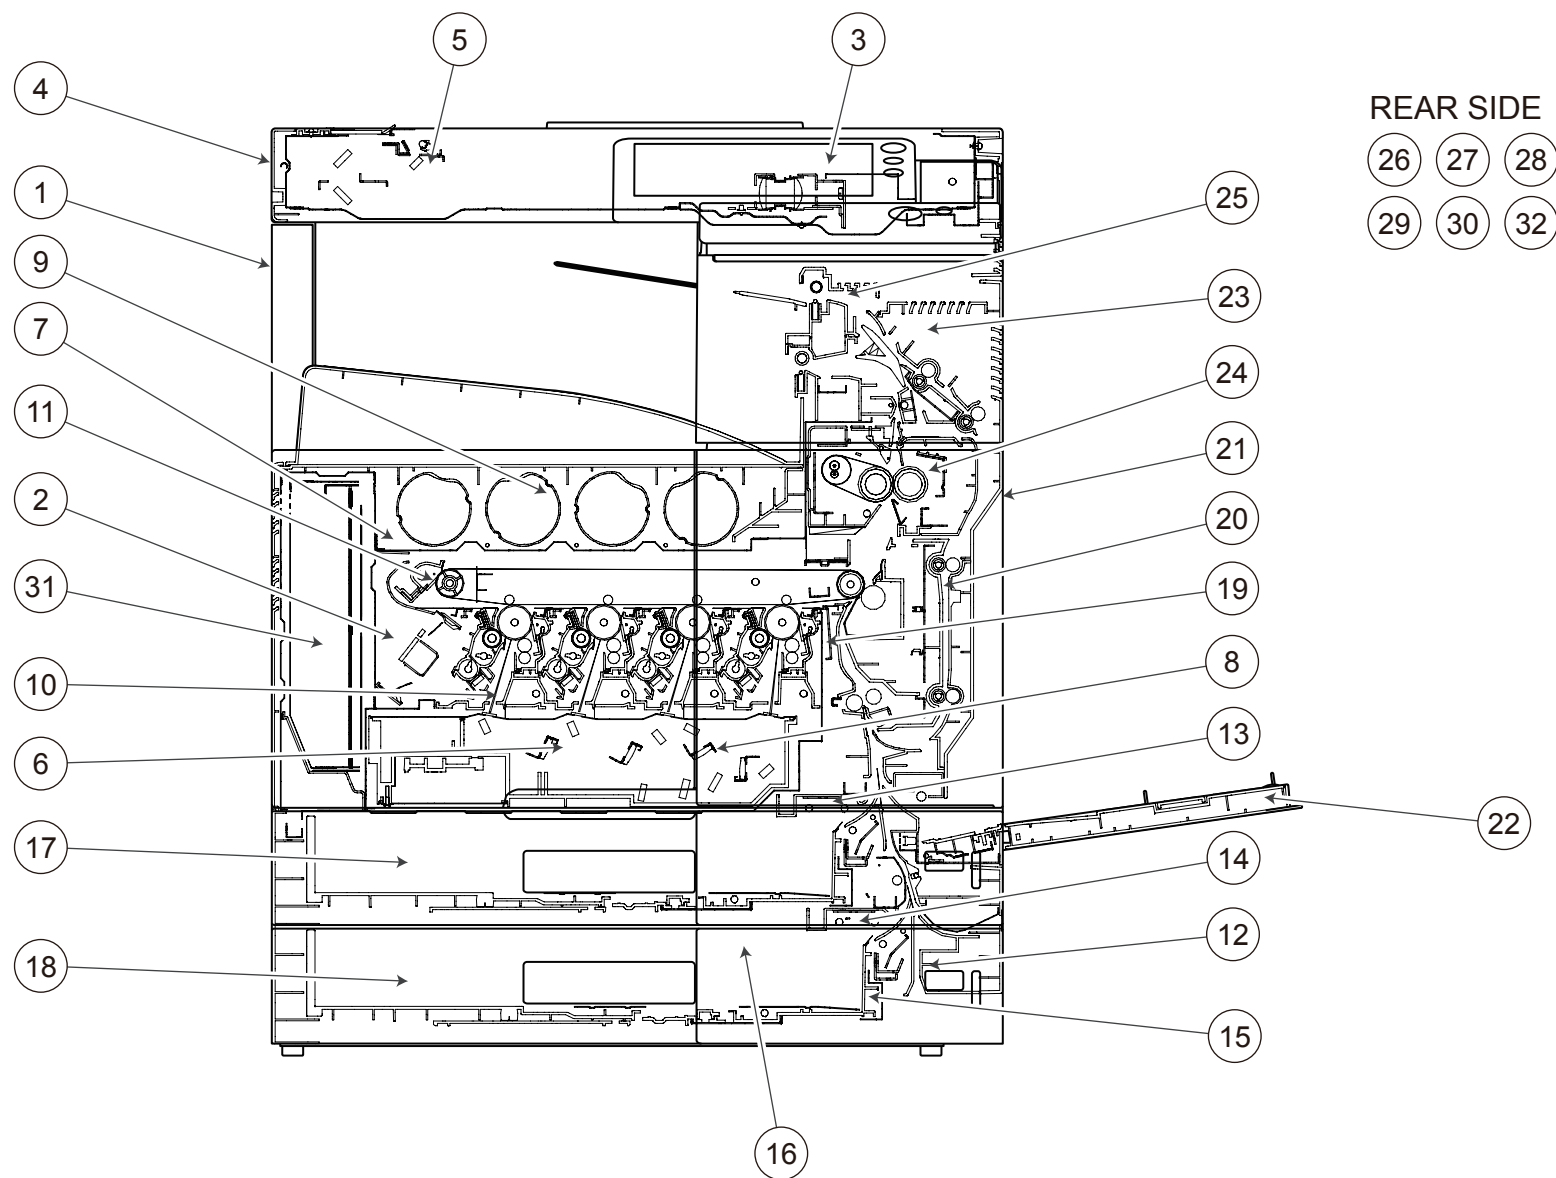

CONTENTS

No.	DESCRIPTION	名称	PAGE No.
1	EXTERNAL PARTS	外装部	P1 P2
2	INNER COVER SECTION	2 次カバー部	P3
3	OPERATION PANEL SECTION	オペレーションパネル部	P4
4	IR COVER SECTION	I R カバー部	P5
5	SCANNER SECTION	スキャナー部	P6 P7 P8
6	PH UNIT	P H 部	P9
7	TONER SUPPLY SECTION	トナー補給部	P10 P11
8	WASTE TONER BOX SECTION	廃棄トナーボックス部	P12
9	ERASE LAMP SECTION	イレーサーランプ部	P13
10	DV LOCK LEVER SECTION	D V ロックレバー部	P14
11	TRANSFER UNIT	転写ベルト部	P15
12	PAPER FEED SECTION	給紙部	P16
13	1ST PAPER FEED SECTION	1 段目給紙部	P17 P18
14	2ND PAPER FEED SECTION	2 段目給紙部	P19 P20
15	CASSETTE RAIL SECTION	カセットレール部	P21
16	PAPER SIZE DETECTION SECTION	カセットサイズ検出部	P22
17	1ST CASSETTE SECTION	1 段目カセット部	P23 P24
18	2ND CASSETTE SECTION	2 段目カセット部	P25 P26
19	CONVEYANCE SECTION	搬送部	P27
20	VERTICAL TRANSPORT SECTION	縦搬送部	P28 P29
21	VERTICAL CONVEYANCE DOOR SECTION	縦搬送扉部	P30
22	BYPASS TRAY SECTION	手差しトレイ部	P31 P32
23	REVERSAL UNIT	反転部	P33 P34
24	FUSING SECTION	定着部	P35
25	PAPER EXIT SECTION	排紙部	P36 P37
26	MAIN DRIVE/ PAPER FEED DRIVE SECTION	メイン駆動／給紙駆動部	P38
27	TONER BOTTLE DRIVE SECTION	トナーボトル駆動部	P39
28	FUSING DRIVE SECTION	定着駆動部	P40 P41
29	OZONE DUCT SECTION	オゾン排気部	P42
30	HIGH VOLTAGE SECTION	高圧電源部	P43
31	MAIN POWER SUPPLY SECTION	低圧電源部	P44
32	ELECTRICAL COMPONENTS	電装部	P45 P46
33	WIRING	束線	P47 P48
34	WIRING ACCESSORIES AND JIGS	配線部品・治具	P49
35	ACCESSORY PARTS	同梱部品	P50

INDEX

1/6

Parts No.	Page No.	Parts No.	Page No.	Parts No.	Page No.	Parts No.	Page No.	Parts No.	Page No.
0996305501	21-7	4163529301	27-32	A00J940100	50-7	A0ED103100	13-7	A0ED551100	28-15
1164202801	37-5	4163529301	28-2	A00J942202	23-5	A0ED104801	14-6	A0ED551700	28-18
4002311002	22-7	4163529301	29-26	A00J942202	25-5	A0ED105400	13-4	A0ED563900	18-5
4004590301	37-1	4163529301	33-2	A00J945201	2-26	A0ED105500	13-1	A0ED563900	20-5
4011585202	27-35	4163529301	34-3	A00J945500	1-13	A0ED105700	14-7	A0ED597800	31-23
4025357201	27-2	4163529301	37-23	A00JH00D00	1-7	A0ED110900	15-16	A0ED620200	24-16
4025357201	40-26	4333501201	11-17	A011946200	4-24	A0ED111000	15-4	A0ED620200	26-17
4025598401	37-3	4475260302	1-9	A02E117300	42-12	A0ED111100	15-30	A0ED620701	24-22
4030301703	18-11	4532341001	18-13	A02E149900	2-25	A0ED111200	15-18	A0ED620701	26-22
4030301703	20-12	4532341001	20-15	A02E167700	5-8	A0ED111400	15-29	A0ED621400	24-12
4030320601	24-15	4576536301	11-8	A02E167700	50-4	A0ED111500	15-12	A0ED621400	26-12
4030320601	26-16	4581162501	6-8	A02E560800	17-24	A0ED111700	15-17	A0ED627600	22-11
4030322601	24-9	4640392001	36-3	A02E560800	19-28	A0ED112000	15-14	A0ED700100	27-8
4030322601	26-9	4658015106	32-30	A02E561100	17-16	A0ED112100	15-22	A0ED700200	27-17
4030340301	32-21	56AA17471	14-2	A02E561100	19-20	A0ED131900	46-28	A0ED700300	27-19
4030347501	32-24	56AA17471	41-12	A02E592100	32-39	A0ED135700	45-8	A0ED700600	27-14
4034352501	17-2	56AA40490	1-4	A02E595100	31-21	A0ED146900	35-12	A0ED700700	27-20
4036254901	37-16	56AA40490	17-15	A02E595400	31-16	A0ED162401	3-7	A0ED702400	29-28
4036307501	6-7	56AA40490	18-8	A02E596100	31-20	A0ED163000	1-3	A0ED702800	27-5
4036534801	11-24	56AA40490	19-19	A02E596300	31-9	A0ED166100	50-2	A0ED703200	27-23
4037320401	24-11	56AA40490	20-7	A02E597600	32-29	A0ED166200	50-1	A0ED703800	28-9
4037320401	26-11	9313100072	42-6	A02E712900	27-12	A0ED245000	12-7	A0ED705800	27-4
4038101401	10-4	9313110033	35-2	A02E815200	29-10	A0ED257500	40-20	A0ED712100	30-8
4038228702	3-17	9J06730101	45-6	A02E815200	33-9	A0ED259700	40-12	A0ED811700	29-1
4038258001	40-18	9J06M10300	22-8	A02E815200	34-17	A0ED262500	6-11	A0ED811700	33-19
4038353701	27-9	9J06M20000	31-24	A02E940300	24-24	A0ED271200	7-7	A0ED811900	29-4
4038353901	27-13	9J06M60100	3-18	A02E940300	26-24	A0ED271300	7-6	A0ED815100	34-9
4038541202	39-8	9J06M60100	30-3	A02E941300	23-20	A0ED273600	8-12	A0ED891100	37-6
4038M60000	3-4	A00F623201	31-10	A02E941500	23-6	A0ED274300	8-19	A0ED897700	37-15
4131300301	17-12	A00J169100	50-3	A02EM10400	11-16	A0ED274400	8-8	A0ED940600	10-6
4131300301	19-17	A00J169300	5-6	A02EM10400	39-2	A0ED276301	8-16	A0ED940700	1-19
4131353202	31-17	A00J265300	6-5	A02EM10400	41-1	A0ED363000	12-4	A0EDF36000	12-11
4139M10000	9-2	A00J563600	17-14	A02EM20000	19-30	A0ED363100	12-1	A0EDM10200	33-21
4139M10000	35-1	A00J563600	18-6	A02EM20000	27-1	A0ED363200	12-2	A0EDM10300	36-1
4139M10000	44-6	A00J563600	19-18	A02EM20100	31-22	A0ED363300	12-5	A0EDM10500	46-20
4163510201	11-7	A00J563600	20-6	A02EM20200	17-26	A0ED363400	12-3	A0EDM50100	17-5
4163529301	9-3	A00J617900	19-12	A02EM20200	19-29	A0ED401000	11-25	A0EDM50100	19-3
4163529301	15-35	A00J663200	17-28	A02EN12512	45-13	A0ED550800	28-24	A0EDM50100	19-34
4163529301	24-23	A00J663200	19-16	A034M20100	27-34	A0ED550900	28-17	A0EDM60001	14-8
4163529301	26-13	A00J940100	5-3	A0CR953400	44-8	A0ED551000	28-14	A0EDN30002	45-9

Parts No.	Page No.	Parts No.	Page No.	Parts No.	Page No.	Parts No.	Page No.	Parts No.	Page No.
A0EDN30201	50-13	A161104101	28-22	A161122500	35-14	A161139500	46-17	A161161201	2-17
A0P0144300	46-12	A161104200	21-3	A161130101	13-3	A161139800	2-16	A161161301	1-10
A0P0144400	46-11	A161104300	21-1	A161130200	44-9	A161139901	46-10	A161161401	4-18
A0P0145900	46-30	A161104400	21-11	A161130301	9-8	A161140101	46-19	A161161503	4-5
A0P0149100	46-29	A161104701	21-5	A161130502	45-7	A161140200	9-1	A161161700	4-11
A0P0742300	36-8	A161104800	21-6	A161130603	45-10	A161140300	35-4	A161161804	2-11
A0P0901100	37-12	A161105200	21-14	A161130700	46-16	A161140400	35-8	A161161900	4-16
A0P0H02500	4-7	A161105400	9-5	A161130801	45-4	A161140500	35-6	A161162102	2-2
A0P0M50300	43-16	A161105500	38-22	A161131005	46-3	A161140800	44-5	A161162201	2-19
A0P0M50400	27-29	A161105600	13-6	A161131400	45-1	A161141500	42-2	A161162302	36-5
A0P0M73100	4-19	A161105800	21-9	A161132000	2-21	A161141700	15-32	A161162400	4-25
A0P0N15100	46-13	A161107100	13-9	A161132100	43-4	A161141800	42-11	A161162602	4-4
A0P0N15200	46-14	A161107200	13-8	A161132203	46-26	A161141901	42-3	A161162702	4-21
A0P0N15300	4-22	A161107300	13-2	A161132302	2-7	A161142000	42-1	A161162801	2-20
A0TK397501	34-30	A161110102	15-28	A161132504	43-1	A161142200	42-7	A161162900	2-18
A108M50100	6-14	A161110201	15-10	A161132800	43-3	A161143000	35-3	A161163501	2-3
A108M50100	11-22	A161110300	15-11	A161134500	46-1	A161143400	44-4	A161163900	2-14
A108M50100	15-21	A161110400	15-7	A161134701	38-6	A161143601	44-2	A161164000	4-6
A108M50100	17-8	A161110500	15-15	A161134800	43-11	A161144500	44-10	A161164103	4-17
A108M50100	19-9	A161110601	15-3	A161135100	3-14	A161144801	15-34	A161164401	2-12
A108M50100	22-13	A161112000	15-13	A161135300	9-4	A161144900	15-31	A161164600	2-10
A108M50100	27-33	A161112100	15-27	A161135502	10-15	A161145000	44-1	A161164702	2-9
A108M50100	28-10	A161112200	15-8	A161135600	2-15	A161145201	42-10	A161164800	2-8
A108M50100	29-27	A161112300	15-20	A161136200	46-31	A161145300	42-9	A161164902	1-20
A108M50100	31-2	A161112400	15-26	A161136500	45-2	A161146200	15-33	A161165005	3-6
A108M50100	32-7	A161112500	15-5	A161137100	30-4	A161146800	11-27	A161165300	3-5
A108M50100	34-12	A161112600	15-9	A161137202	35-11	A161147001	42-8	A161165602	1-16
A108M50100	46-23	A161112700	15-25	A161137302	4-20	A161147401	9-13	A161165700	3-1
A161100602	44-7	A161112800	15-6	A161137402	46-4	A161151100	3-19	A161166101	2-5
A161101101	21-8	A161112900	15-19	A161137501	46-6	A161151200	30-5	A161166300	2-4
A161101600	21-15	A161115201	14-1	A161137600	46-18	A161151300	3-16	A161166400	2-22
A161101700	21-16	A161116202	14-3	A161137701	43-5	A161160103	1-2	A161167000	4-10
A161101802	9-7	A161119500	14-4	A161137802	9-10	A161160204	1-11	A161167100	4-12
A161101900	21-4	A161120701	10-1	A161137802	45-3	A161160300	1-8	A161167200	4-9
A161102300	21-2	A161121103	35-5	A161137900	46-27	A161160402	1-6	A161167300	4-14
A161102500	30-2	A161121200	30-6	A161138002	4-8	A161160605	2-6	A161167400	4-13
A161102700	35-9	A161121300	30-1	A161138500	13-10	A161160702	1-17	A161170100	5-11
A161102800	13-5	A161121401	35-7	A161138601	46-2	A161160801	1-18	A161170203	5-1
A161103700	21-12	A161121900	40-7	A161138804	46-5	A161160902	2-13	A161170300	5-12
A161103901	21-10	A161122002	40-6	A161139400	46-24	A161161000	1-1	A161170400	5-7

Parts No.	Page No.	Parts No.	Page No.	Parts No.	Page No.	Parts No.	Page No.	Parts No.	Page No.
A161170601	5-5	A161241500	39-11	A161273500	8-18	A161403000	11-18	A161562500	17-20
A161170701	5-4	A161241600	39-1	A161273701	8-11	A161403100	11-9	A161562500	19-24
A161170800	5-9	A161245100	12-6	A161273800	8-20	A161403200	11-23	A161562600	17-18
A161190900	4-2	A161245400	12-8	A161274500	8-22	A161403300	10-12	A161562600	19-22
A161192000	50-5	A161253100	38-12	A161274600	8-21	A161403400	10-13	A161562800	17-11
A161210200	38-4	A161253500	38-10	A161275300	8-9	A161403500	10-10	A161562800	19-13
A161216101	38-3	A161253600	38-9	A161275400	8-10	A161403600	10-11	A161563000	19-32
A161220100	38-20	A161253900	38-8	A161275500	8-6	A161403701	10-2	A161563100	18-1
A161220200	38-19	A161254000	38-1	A161275600	8-5	A161403800	10-9	A161563100	20-1
A161220400	38-18	A161254200	40-1	A161275700	8-3	A161403901	10-5	A161563300	18-12
A161220500	38-17	A161254300	40-2	A161276000	8-4	A161404001	10-16	A161563300	20-13
A161220600	38-16	A161254400	40-3	A161276500	8-7	A161404100	10-17	A161563400	18-9
A161220700	38-15	A161254500	40-5	A161278600	7-1	A161405102	10-3	A161563400	20-10
A161221001	38-21	A161254600	40-23	A161278900	7-3	A161405202	10-3	A161563501	18-4
A161228000	41-9	A161254700	40-4	A161280101	6-19	A161405300	10-3	A161563501	20-4
A161228100	41-10	A161254700	41-17	A161280200	6-22	A161508400	15-2	A161563901	18-14
A161228301	41-11	A161256300	40-10	A161280300	6-18	A161550700	28-12	A161563901	20-14
A161228600	41-16	A161257800	38-2	A161281100	6-25	A161551500	28-21	A161564001	18-10
A161228700	40-22	A161258501	41-18	A161281300	6-24	A161551600	28-20	A161564001	20-11
A161228800	40-9	A161258700	41-13	A161281600	6-4	A161560101	17-10	A161564100	18-17
A161230500	41-8	A161258800	40-19	A161281700	7-5	A161560300	19-10	A161564100	20-18
A161230600	41-7	A161259100	41-14	A161282100	5-13	A161560500	17-29	A161564200	18-16
A161230700	40-15	A161259200	41-15	A161400100	11-10	A161560500	19-14	A161564200	20-17
A161231301	40-16	A161259400	40-17	A161400200	11-14	A161560600	17-3	A161564300	18-18
A161231800	41-5	A161259800	38-13	A161400300	11-13	A161560600	19-11	A161564300	20-19
A161232200	40-8	A161261902	6-16	A161400400	11-11	A161560900	17-4	A161564400	18-15
A161232300	40-14	A161262002	6-17	A161400501	11-19	A161560900	19-7	A161564400	20-16
A161232300	41-3	A161262200	6-15	A161400601	11-12	A161561000	19-1	A161565102	16-8
A161232401	40-21	A161262700	6-10	A161400701	11-20	A161561100	16-1	A161565300	17-9
A161232501	40-13	A161263000	6-12	A161400800	11-26	A161561200	16-2	A161565500	17-6
A161240100	39-4	A161268200	6-3	A161401000	11-6	A161561600	17-7	A161566000	17-1
A161240300	39-15	A161268300	6-1	A161401100	11-5	A161561600	19-8	A161567300	17-23
A161240400	39-7	A161270102	7-10	A161401200	11-4	A161562000	17-19	A161567300	19-27
A161240500	39-6	A161270600	7-12	A161401300	11-2	A161562000	19-23	A161567400	17-22
A161240600	39-5	A161271000	7-9	A161401400	11-1	A161562101	17-21	A161567400	19-26
A161240700	39-9	A161271000	8-14	A161401500	11-3	A161562101	19-25	A161568401	18-7
A161240900	39-10	A161271100	7-11	A161402002	10-3	A161562300	17-17	A161568500	18-2
A161241000	39-12	A161271100	8-17	A161402101	10-14	A161562300	19-21	A161568600	18-3
A161241200	39-13	A161273100	8-15	A161402401	10-8	A161562400	17-13	A161568700	20-9
A161241400	39-14	A161273401	8-13	A161402501	10-7	A161562400	19-15	A161568800	20-2

Parts No.	Page No.	Parts No.	Page No.	Parts No.	Page No.	Parts No.	Page No.	Parts No.	Page No.
A161571100	19-6	A161593300	31-14	A161621701	26-21	A161631400	26-19	A161712000	29-18
A161576100	16-7	A161593400	32-38	A161621800	24-20	A161633101	25-4	A161712100	29-24
A161576200	16-5	A161593600	32-34	A161621800	26-20	A161633202	25-20	A161712300	28-16
A161576300	16-4	A161593701	32-14	A161621900	24-17	A161635000	25-16	A161712400	28-4
A161578100	19-2	A161593800	32-35	A161621900	26-18	A161635103	25-19	A161712500	28-19
A161578200	19-4	A161594000	32-46	A161622100	23-1	A161636502	25-10	A161712600	29-6
A161578401	20-8	A161594100	31-6	A161622100	25-1	A161700104	27-25	A161712700	28-3
A161578500	20-3	A161594201	32-16	A161623101	23-4	A161700300	27-26	A161712800	29-15
A161578700	19-33	A161594300	32-37	A161623301	23-19	A161700401	27-31	A161712800	34-25
A161579000	16-3	A161594400	31-11	A161623400	21-13	A161700600	27-10	A161712900	29-32
A161590101	32-18	A161594500	32-44	A161623400	23-3	A161700700	27-30	A161713100	29-7
A161590201	31-5	A161594600	32-42	A161623400	25-3	A161700800	27-18	A161713500	29-16
A161590303	32-15	A161594700	31-7	A161624100	24-3	A161700901	27-40	A161714500	29-21
A161590500	30-22	A161594800	31-27	A161624100	26-3	A161701100	27-28	A161714600	29-17
A161590600	31-19	A161594900	31-28	A161625000	23-15	A161701301	27-15	A161714800	29-33
A161590800	31-18	A161595000	32-23	A161625103	23-18	A161701401	27-16	A161719000	29-2
A161590901	32-33	A161595100	32-20	A161625900	23-16	A161701501	27-7	A161719100	29-30
A161591000	32-32	A161595200	32-26	A161625900	25-17	A161701703	27-27	A161810102	33-4
A161591100	32-31	A161595300	32-22	A161626000	23-12	A161701800	27-36	A161810200	33-15
A161591200	31-26	A161595400	32-25	A161626000	25-13	A161701900	27-3	A161810301	30-21
A161591300	31-25	A161595600	32-19	A161626100	23-13	A161702000	27-21	A161810400	34-1
A161591400	31-13	A161620103	24-19	A161626100	25-14	A161702100	27-41	A161810503	34-28
A161591500	31-12	A161620400	24-10	A161626200	23-2	A161706001	27-6	A161810600	34-6
A161591600	32-17	A161620400	26-10	A161626200	25-2	A161709100	29-3	A161810701	33-1
A161591700	31-8	A161620600	24-6	A161626300	23-8	A161710102	28-11	A161810801	34-5
A161591800	32-27	A161620600	26-6	A161626300	25-9	A161710202	29-12	A161810900	34-24
A161591900	31-3	A161620701	24-7	A161626502	23-9	A161710300	29-29	A161811000	30-10
A161592002	32-12	A161620701	26-8	A161626601	23-10	A161710401	29-25	A161811100	30-12
A161592100	32-8	A161620802	24-14	A161626601	25-11	A161710500	29-8	A161811301	30-14
A161592200	32-3	A161620802	26-15	A161626800	23-11	A161710900	28-8	A161811401	30-11
A161592300	32-13	A161620903	24-1	A161626800	25-12	A161711000	28-6	A161811500	30-9
A161592400	32-9	A161620903	26-1	A161626900	23-17	A161711100	28-5	A161811600	30-19
A161592500	32-10	A161621100	24-5	A161626900	25-18	A161711200	29-5	A161812200	33-6
A161592600	32-11	A161621100	26-5	A161627102	22-9	A161711300	29-14	A161813001	34-26
A161592700	32-5	A161621300	24-13	A161627300	22-10	A161711400	29-20	A161813100	34-27
A161592800	31-1	A161621300	26-14	A161627500	22-3	A161711500	29-23	A161813200	34-18
A161592900	30-7	A161621400	24-18	A161627701	22-12	A161711600	29-19	A161813300	33-16
A161593001	32-45	A161621600	24-4	A161627801	22-2	A161711700	29-22	A161813400	34-21
A161593101	32-41	A161621600	26-4	A161628000	22-4	A161711800	28-13	A161813600	34-8
A161593200	32-43	A161621701	24-21	A161630102	26-23	A161711900	29-31	A161813701	33-8


Parts No.	Page No.	Parts No.	Page No.	Parts No.	Page No.	Parts No.	Page No.	Parts No.	Page No.
A161813800	33-17	A161890102	37-24	A161942600	3-20	A161H00C02	43-2	A161N10X00	32-28
A161813902	34-22	A161890202	37-14	A161943000	3-3	A161H00U01	4-15	A161N10Y02	14-5
A161814202	34-20	A161890300	37-28	A161943000	24-8	A161H01A00	6-23	A161N11200	15-24
A161814300	33-24	A161890401	37-11	A161943000	26-7	A161H02104	46-9	A161N11300	43-10
A161814401	34-2	A161891000	37-18	A161943100	23-14	A161M10001	38-5	A161N11800	46-8
A161814500	34-16	A161891301	37-26	A161943200	25-15	A161M10200	38-25	A161N11901	9-11
A161814601	33-7	A161891401	36-2	A161943300	50-8	A161M10200	41-2	A161N11B00	46-22
A161814700	33-11	A161892000	37-20	A161943400	50-9	A161M10300	39-3	A161N11C01	5-10
A161814901	33-25	A161892100	37-13	A161943500	25-6	A161M10A00	8-2	A161N11K00	43-9
A161815000	30-15	A161892300	37-19	A161943601	25-7	A161M20100	41-6	A161N11Q01	32-6
A161815100	33-5	A161892400	37-2	A161943700	24-2	A161M20200	38-7	A161N11S03	47-1
A161815201	30-13	A161892901	37-27	A161943700	26-2	A161M20300	38-23	A161N12100	34-4
A161815300	30-17	A161893500	37-25	A161943801	23-7	A161M31001	7-8	A161N12200	31-4
A161815400	30-20	A161893600	37-10	A161943801	25-8	A161M40601	43-8	A161N12602	46-21
A161815500	30-16	A161893800	37-17	A161944101	32-1	A161M50000	27-38	A161N12701	19-5
A161815600	33-12	A161894000	36-7	A161944201	32-1	A161M50300	27-39	A161N12801	11-15
A161815700	33-13	A161894000	37-8	A161944300	32-2	A161M50400	32-36	A161N12A00	3-15
A161815800	33-14	A161894100	36-6	A161944400	32-4	A161M50501	22-6	A161N12H00	27-37
A161815900	30-18	A161895102	37-30	A161946100	33-10	A161M50600	22-5	A161N12K01	43-15
A161816100	33-3	A161895201	37-29	A161946200	29-13	A161M50A00	6-20	A161N12M01	43-14
A161816200	30-23	A161895300	36-4	A161946300	27-11	A161M50A00	6-26	A161N12N01	43-13
A161816300	29-34	A161895400	37-4	A161946400	29-11	A161M50A00	6-26	A161N12P01	43-12
A161816400	33-26	A161895502	37-7	A161947000	50-6	A161M70503	4-1	A161N14000	7-13
A161819000	33-20	A161895600	37-9	A161F10901	40-24	A161M70603	4-1	A161N14100	6-6
A161819200	34-32	A161895800	37-31	A161F16100	3-2	A161M70703	4-1	A161N14200	6-13
A161819400	34-15	A161897200	36-9	A161F21000	12-10	A161M72000	46-15	A161N14300	8-1
A161819500	34-13	A161900100	37-34	A161F21100	38-11	A161N10002	45-5	A161N14401	7-2
A161819600	33-23	A161900201	37-32	A161F21200	38-14	A161N10102	45-11	A161N15602	4-23
A161819701	33-18	A161900300	37-33	A161F25001	41-4	A161N10202	45-12	A161R70000	13-12
A161825000	34-31	A161940101	1-12	A161F25102	40-11	A161N10602	35-13	A161R70100	13-11
A161825100	34-14	A161940400	1-14	A161F56002	17-25	A161N10A03	48-1	A161R70200	43-6
A161825300	34-7	A161940602	5-2	A161F56101	16-6	A161N10D00	27-24	A161R70300	43-7
A161825400	34-19	A161941100	40-25	A161F59000	31-15	A161N10F01	11-21	A161R70400	1-15
A161825500	34-29	A161941500	5-3	A161F6200C	23-21	A161N10H01	28-1	A161R70500	38-27
A161825600	34-23	A161942000	3-13	A161F6300C	25-21	A161N10J00	15-23	A161R70600	38-26
A161825700	29-9	A161942101	3-12	A161F81102	33-22	A161N10K00	1-5	A161R70700	40-27
A161825700	34-10	A161942200	3-11	A161F89001	37-22	A161N10M04	2-1	A161R70800	39-16
A161825800	34-11	A161942300	3-10	A161H00108	46-7	A161N10N01	22-1	A161R70900	9-12
A161825901	34-33	A161942400	3-9	A161H00501	9-6	A161N10P01	17-27	A161R71000	10-18
A161826000	34-34	A161942500	3-8	A161H00800	9-9	A161N10Q02	19-31	A161R71100	10-18

Parts No.	Page No.
A161R71200	10-18
A161R71300	15-1
A161R71400	28-23
A161R71500	16-9
A161R71622	28-25
A161R71711	35-10
A161R71811	35-10
A161R71911	35-10
A161R72000	4-3
A161R72100	7-4
A161R72200	6-2
A161R72300	6-21
A161R72400	31-29
A161R72500	18-19
A161R72500	20-20
A161R72600	37-21
A161R72700	42-5
A161R72900	10-18
A161R7A000	32-40
A161R7A100	44-3
A161R7A200	44-3
A1UDM50200	6-9
A1UDN30001	45-9
A2X0945000	2-24
A2X0945700	2-23
A2XKM10300	38-24
A4FK940101	1-12
A4FKN10003	47-1
A4FKR70000	9-12
A4FM940101	1-12
A4FMH02204	46-9
A4FMN10003	47-1
A4FMN10103	48-1
A4FMN10201	17-27
A4FMN10302	19-31
A4FMR70000	16-9
A4NNWY1	12-9
V116033003	50-11
V153030803	50-12
V500010003	49-1

Parts No.	Page No.
V500010005	49-2
V500010007	49-3
V500010008	49-4
V500010020	49-5
V500010046	49-6
V500010052	49-7
V500010061	49-8
V500020040	50-10
V500020052	49-9
V500020082	49-10
V500020094	49-15
V570010021	49-11
V570010057	49-12
V570010059	49-13
V570010060	49-14
V651010002	42-4
V651010002	44-11
V800500300	27-22
V800500300	28-7
V865300026	46-25

EXTERNAL PARTS

P 1

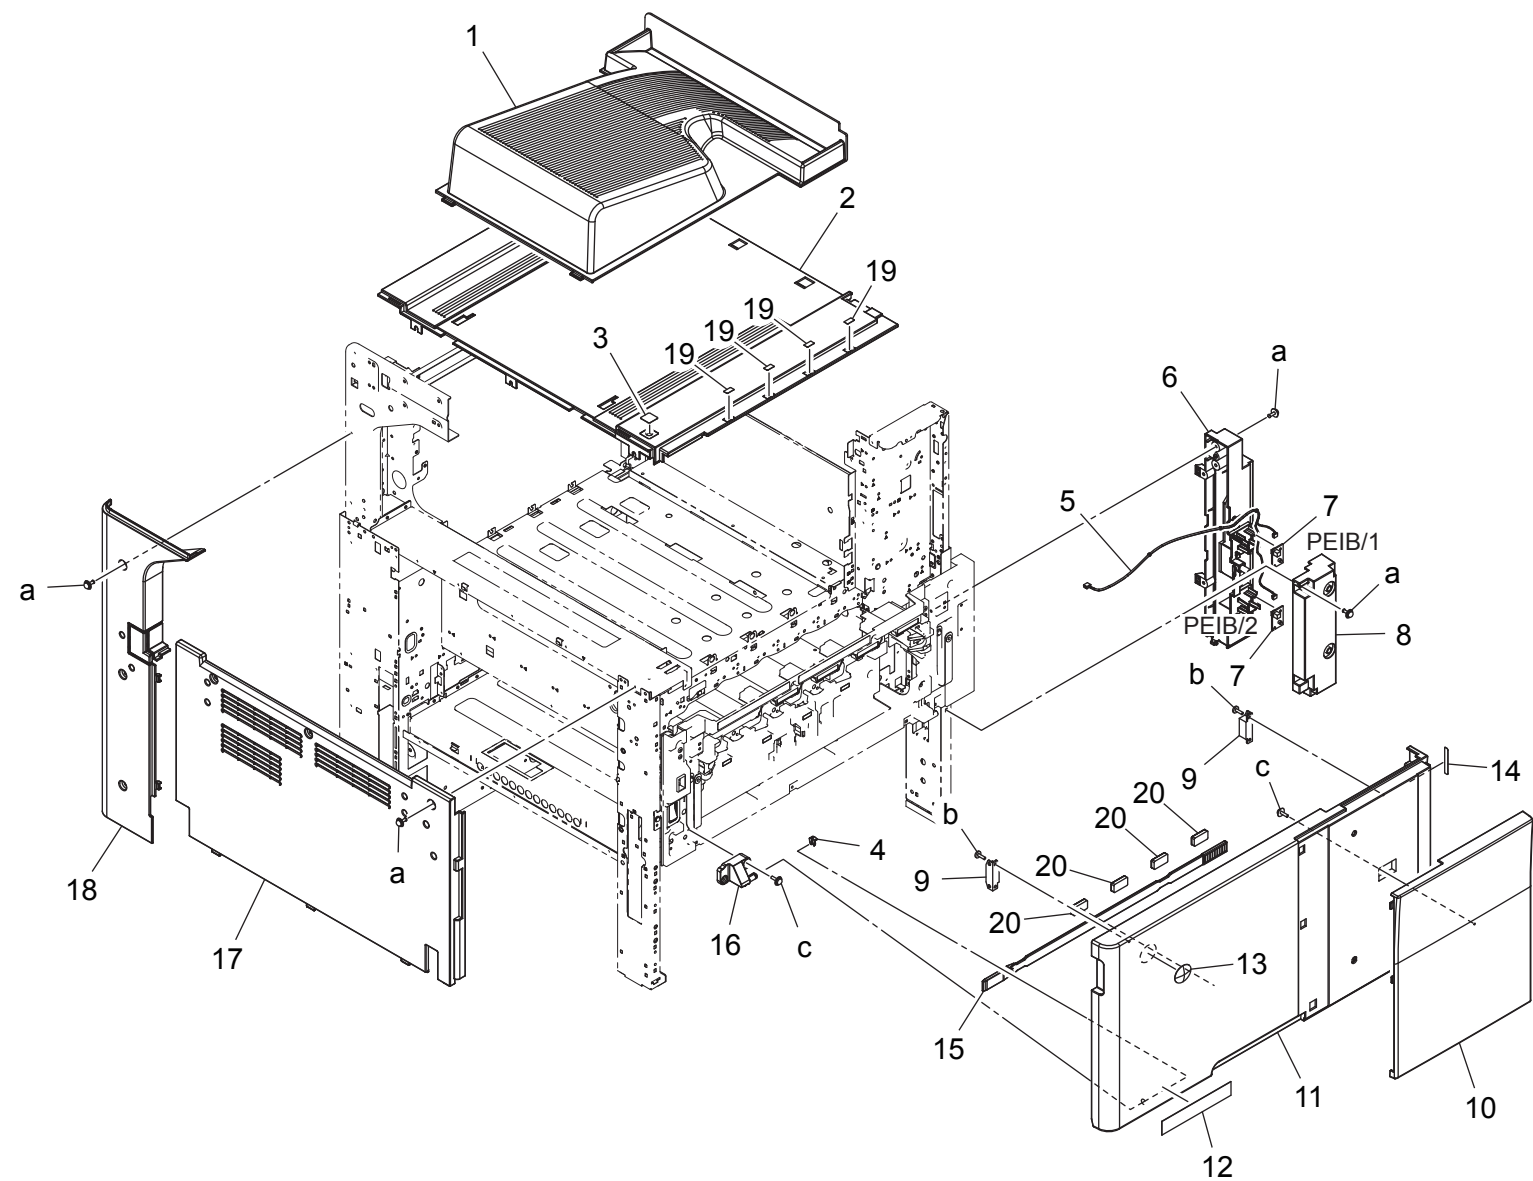

EXTERNAL PARTS


Page. 1

Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A161161000	Tray		C	1	a-V116030804 b-V149030803 c-V153030804
2	A161160103	Cover /Upper		C	1	
3	A0ED163000	Seal		C	1	
4	56AA40490	SHAFT STOPPER 4		C	1	
5	A161N10K00	Indicating Wiring		D	1	
6	A161160402	Cover		C	1	
7	A00JH00D00	PWB Assembly LED1		C	2	
8	A161160300	Cover		C	1	
9	4475260302	MAGNET CATCH		D	2	
10	A161161301	Open/close Cover /Front		C	1	
11	A161160204	Open/close Cover /Front		C	1	
12	A161940101	Label bizhub C364	{C364}	C	1	
12	A4FK940101	Label bizhub C284	{C284}	C	1	
12	A4FM940101	Label bizhub C224	{C224}	C	1	
13	A00J945500	Logo Mark		C	1	
14	A161940400	Label		C	1	
15	A161R70400	CLEANING MATERIAL		C	1	
16	A161165602	Support Shaft		C	1	
17	A161160702	Cover /Left		C	1	
18	A161160801	Cover /Left		C	1	
19	A0ED940700	Label Toner 2		D	4	
20	A161164902	Cushion		C	4	

bizhub C224/bizhub C284/bizhub C364

EXTERNAL PARTS

P 2

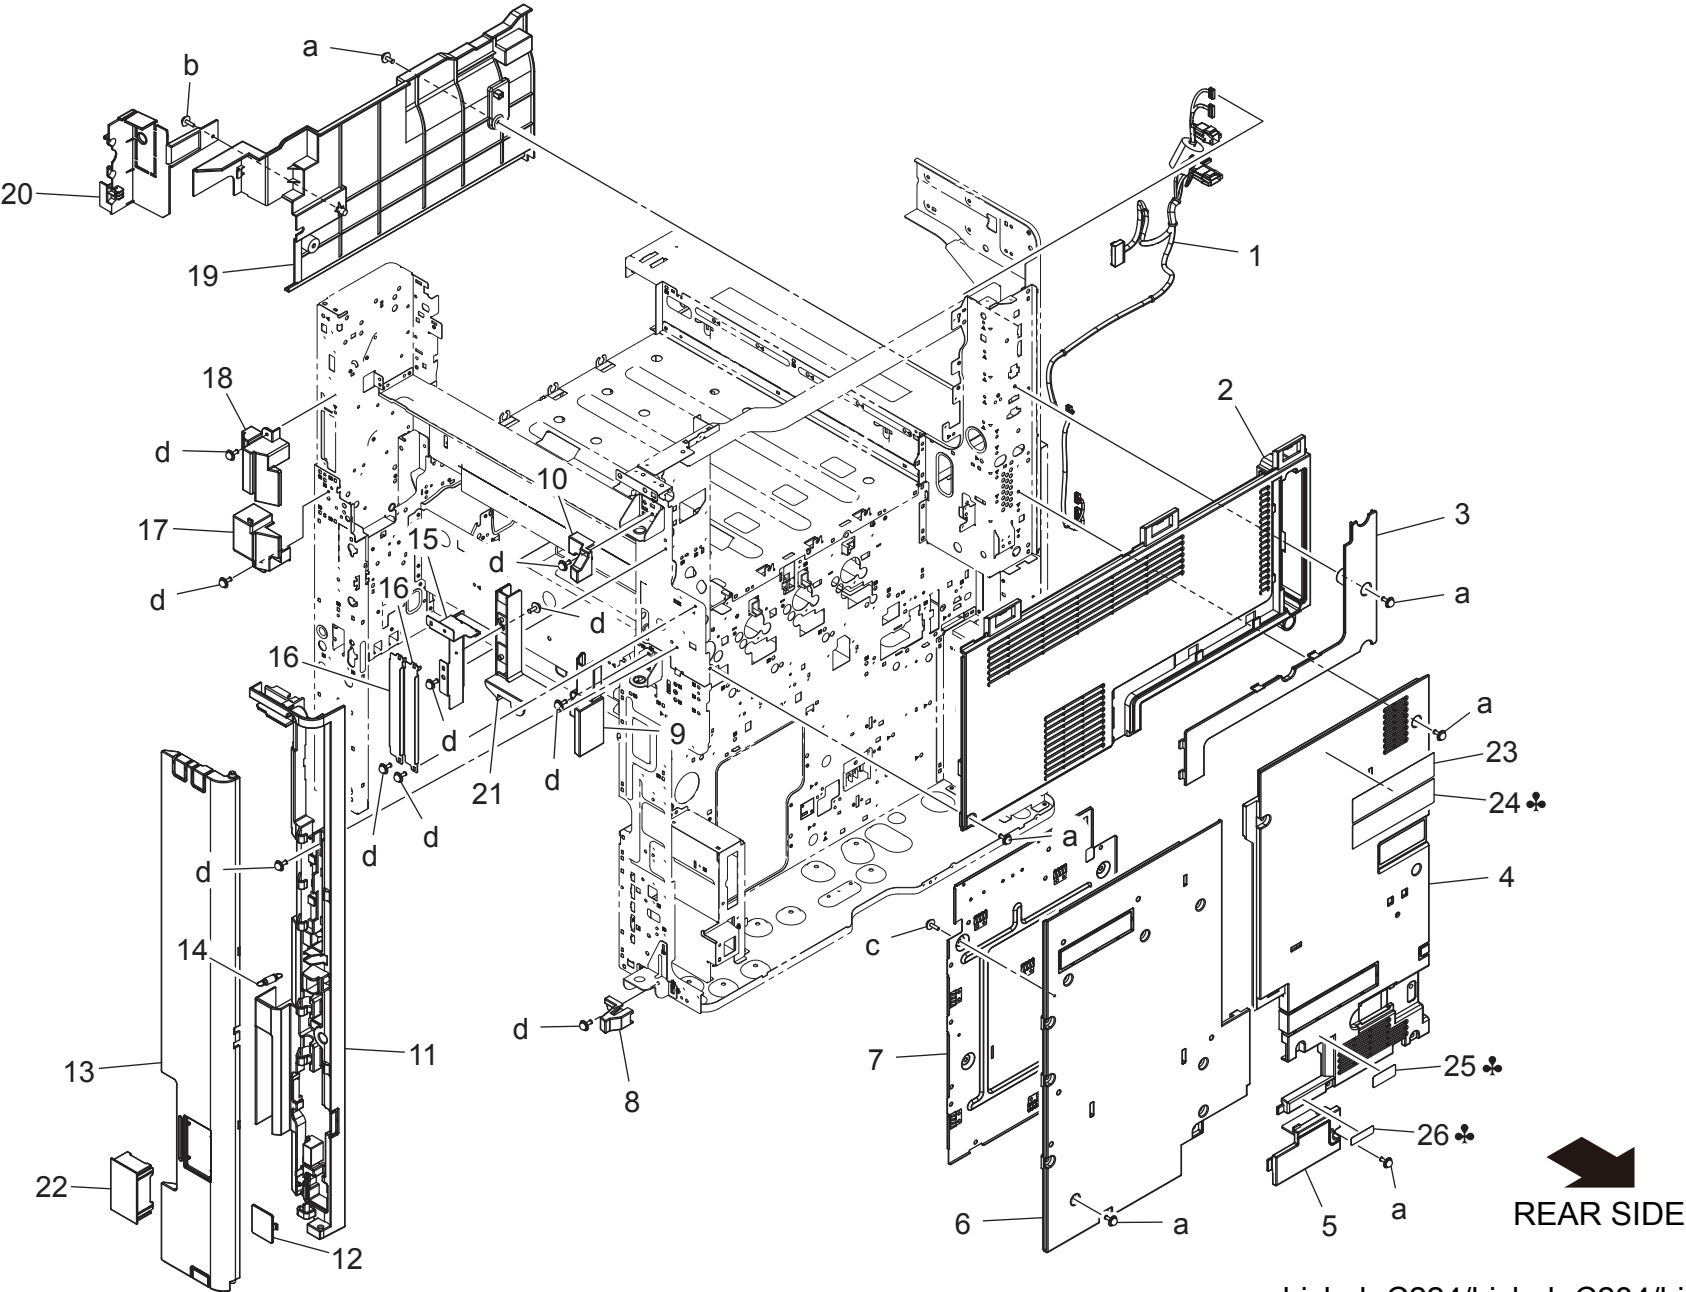


bizhub C224/bizhub C284/bizhub C364

EXTERNAL PARTS

Page. 2

Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A161N10M04	FNS Relay harness	F N S 中継束線 (A D F)	D	1	a-V116030804 b-V153030804 c-V153030803 d-V116030803
2	A161162102	Cover	カバー (背面・上)	C	1	
3	A161163501	Cover	カバー (目隠し・後上)	C	1	
4	A161166300	Cover	カバー (背面・左)	C	1	
5	A161166101	Cover	カバー (背面・下)	C	1	
6	A161160605	Cover	カバー (背面・右)	C	1	
7	A161132302	Shield Cover	シールドカバー (シールドボックス)	C	1	
8	A161164800	Regulating Part /Lower	規制部材／下	D	1	
9	A161164702	Regulating Part /Middle	規制部材／中	D	1	
10	A161164600	Regulating Part /Upper	規制部材／上	D	1	
11	A161161804	Cover	カバー (右後・固定)	C	1	
12	A161164401	Cover	蓋	C	1	
13	A161160902	Cover	カバー (右後・開閉)	C	1	
14	A161163900	Pulling Coil spring	引張りコイルばね	C	1	
15	A161135600	Mounting Plate	取付板 (F A X A s s y)	D	1	
16	A161139800	Cover	カバー (F a x)	D	2	
17	A161161201	Cover	カバー (右前・定着 1 次)	D	1	
18	A161162900	Cover	カバー (右前・定着 2 次)	D	1	
19	A161162201	Cover	カバー (排紙・奥)	C	1	
20	A161162801	Cover	カバー (排紙・奥右)	C	1	
21	A161132000	Guide	ガイド (F A X)	D	1	
22	A161166400	Cover	カバー (右後・小)	C	1	
23	A2X0945700	Label	ラベル (2 プラグ注意)	C	1	
24	A2X0945000	Label	ラベル (アース注意)	C	1	
25	A02E149900	Label	ラベル (定格)	C	1	
26	A00J945201	Label 220-240V 0.65A	ラベル	C	1	


INNER COVER SECTION

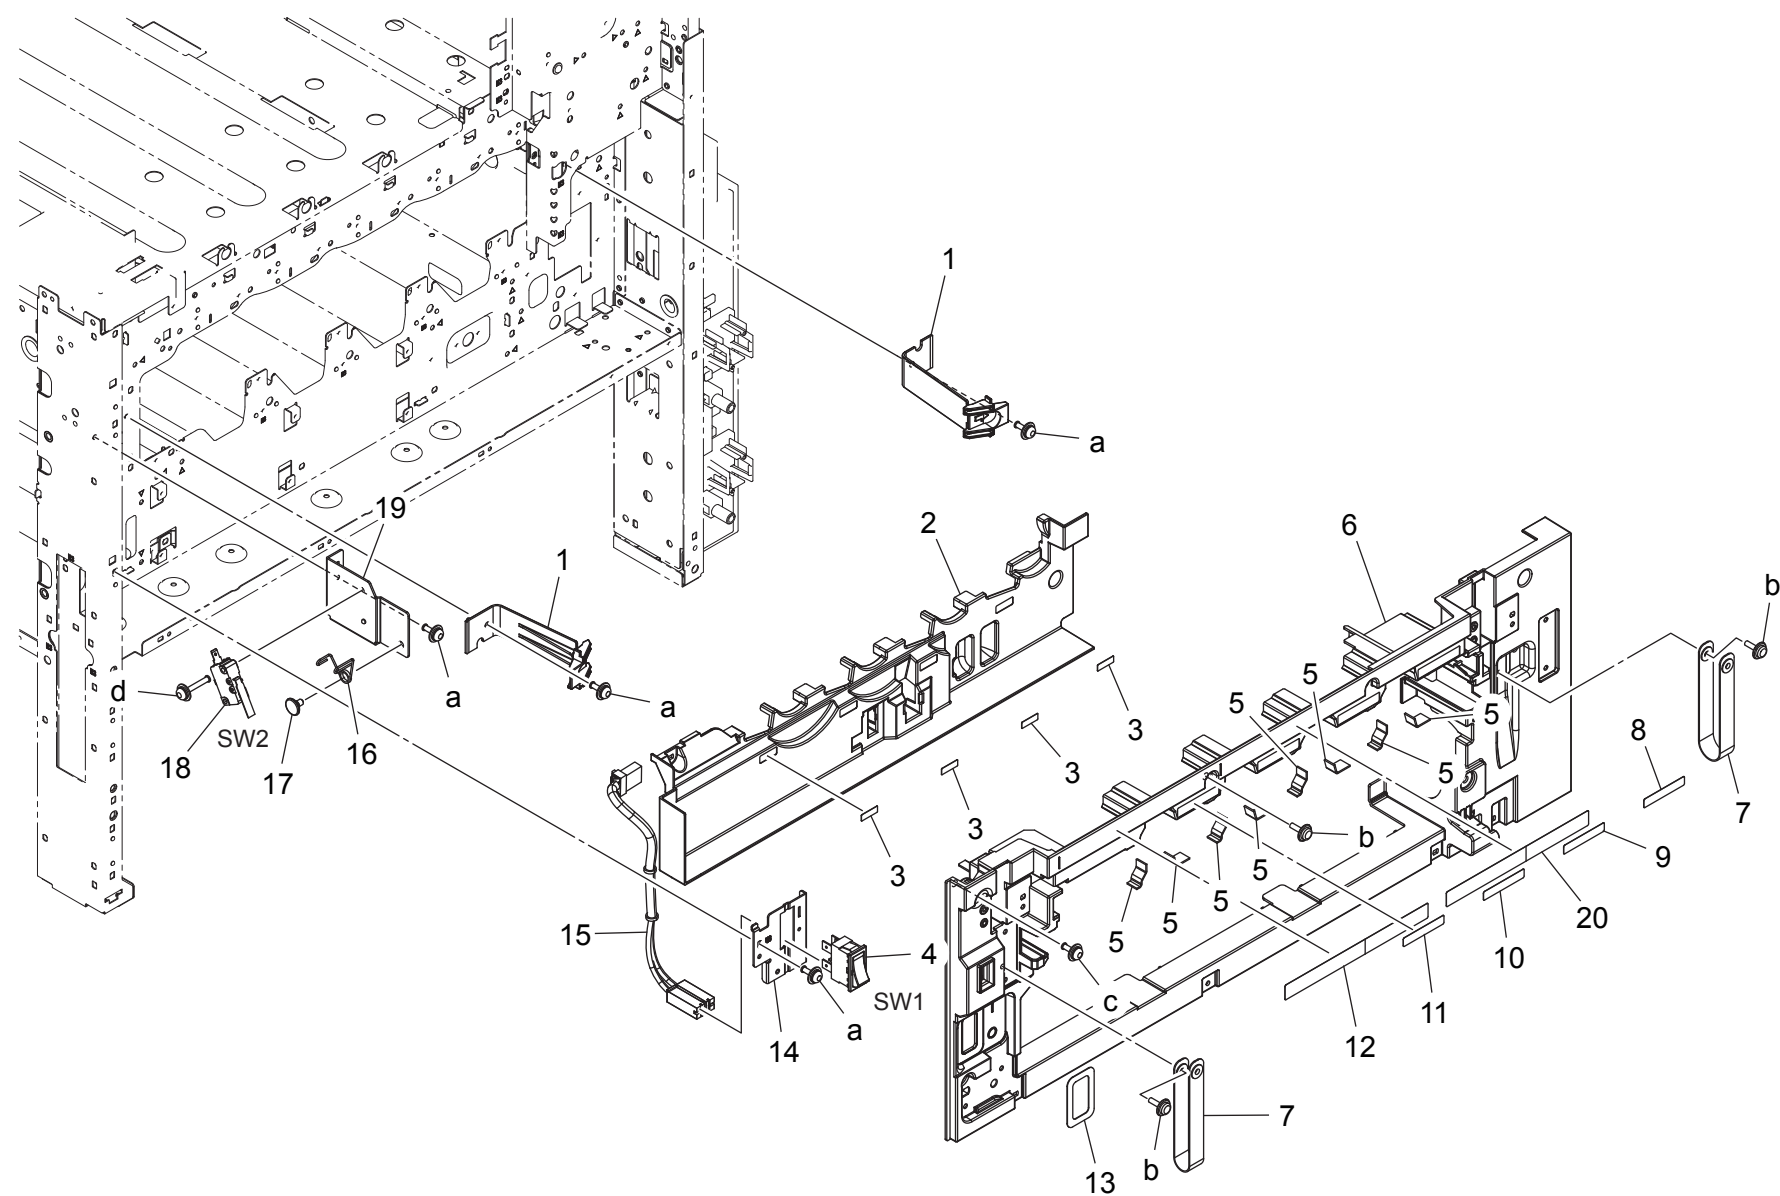

INNER COVER SECTION


Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A161165700	Fixing Claw	固定爪	D	2	a-V116030803 b-V153030804 c-V116030804 d-V116031603
2	A161F16100	Cover Front(2nd)	カバー前 (2次)	C	1	
3	A161943000	Label	ラベル	C	4	
4	4038M60000	SEESAW-SWITCH	波形スイッチ	C	1	
5	A161165300	Protection Part	保護材	C	8	
6	A161165005	Cover /Front	カバー／前 (2次)	C	1	
7	A0ED162401	Band	バンド	D	2	
8	A161942500	Label DR/K	ラベル DR 挿入目標 K	D	1	
9	A161942400	Label DR/C	ラベル DR 挿入目標 C	D	1	
10	A161942300	Label DR/M	ラベル DR 挿入目標 M	D	1	
11	A161942200	Label DR/Y	ラベル DR 挿入目標 Y	D	1	
12	A161942101	Label	ラベル (TN 操作 3・1)	D	1	
13	A161942000	Label	ラベル (電源 SW)	D	1	
14	A161135100	Mounting Plate	取付板 (メイン SW)	D	1	
15	A161N12A00	AC Wiring /A	A C 束線／A	D	1	
16	A161151300	Torsion Coil spring	ねじりコイルばね	D	1	
17	4038228702	SHOULDER SCREW	段ねじ	C	1	
18	9J06M60100	MICRO SWITCH	マイクロスイッチ	C	1	
19	A161151100	Mounting Plate	取付板 (安全 SW 前カバー)	D	1	
20	A161942600	Label	ラベル (TN 操作 4・1)	D	1	

OPERATION PANEL SECTION

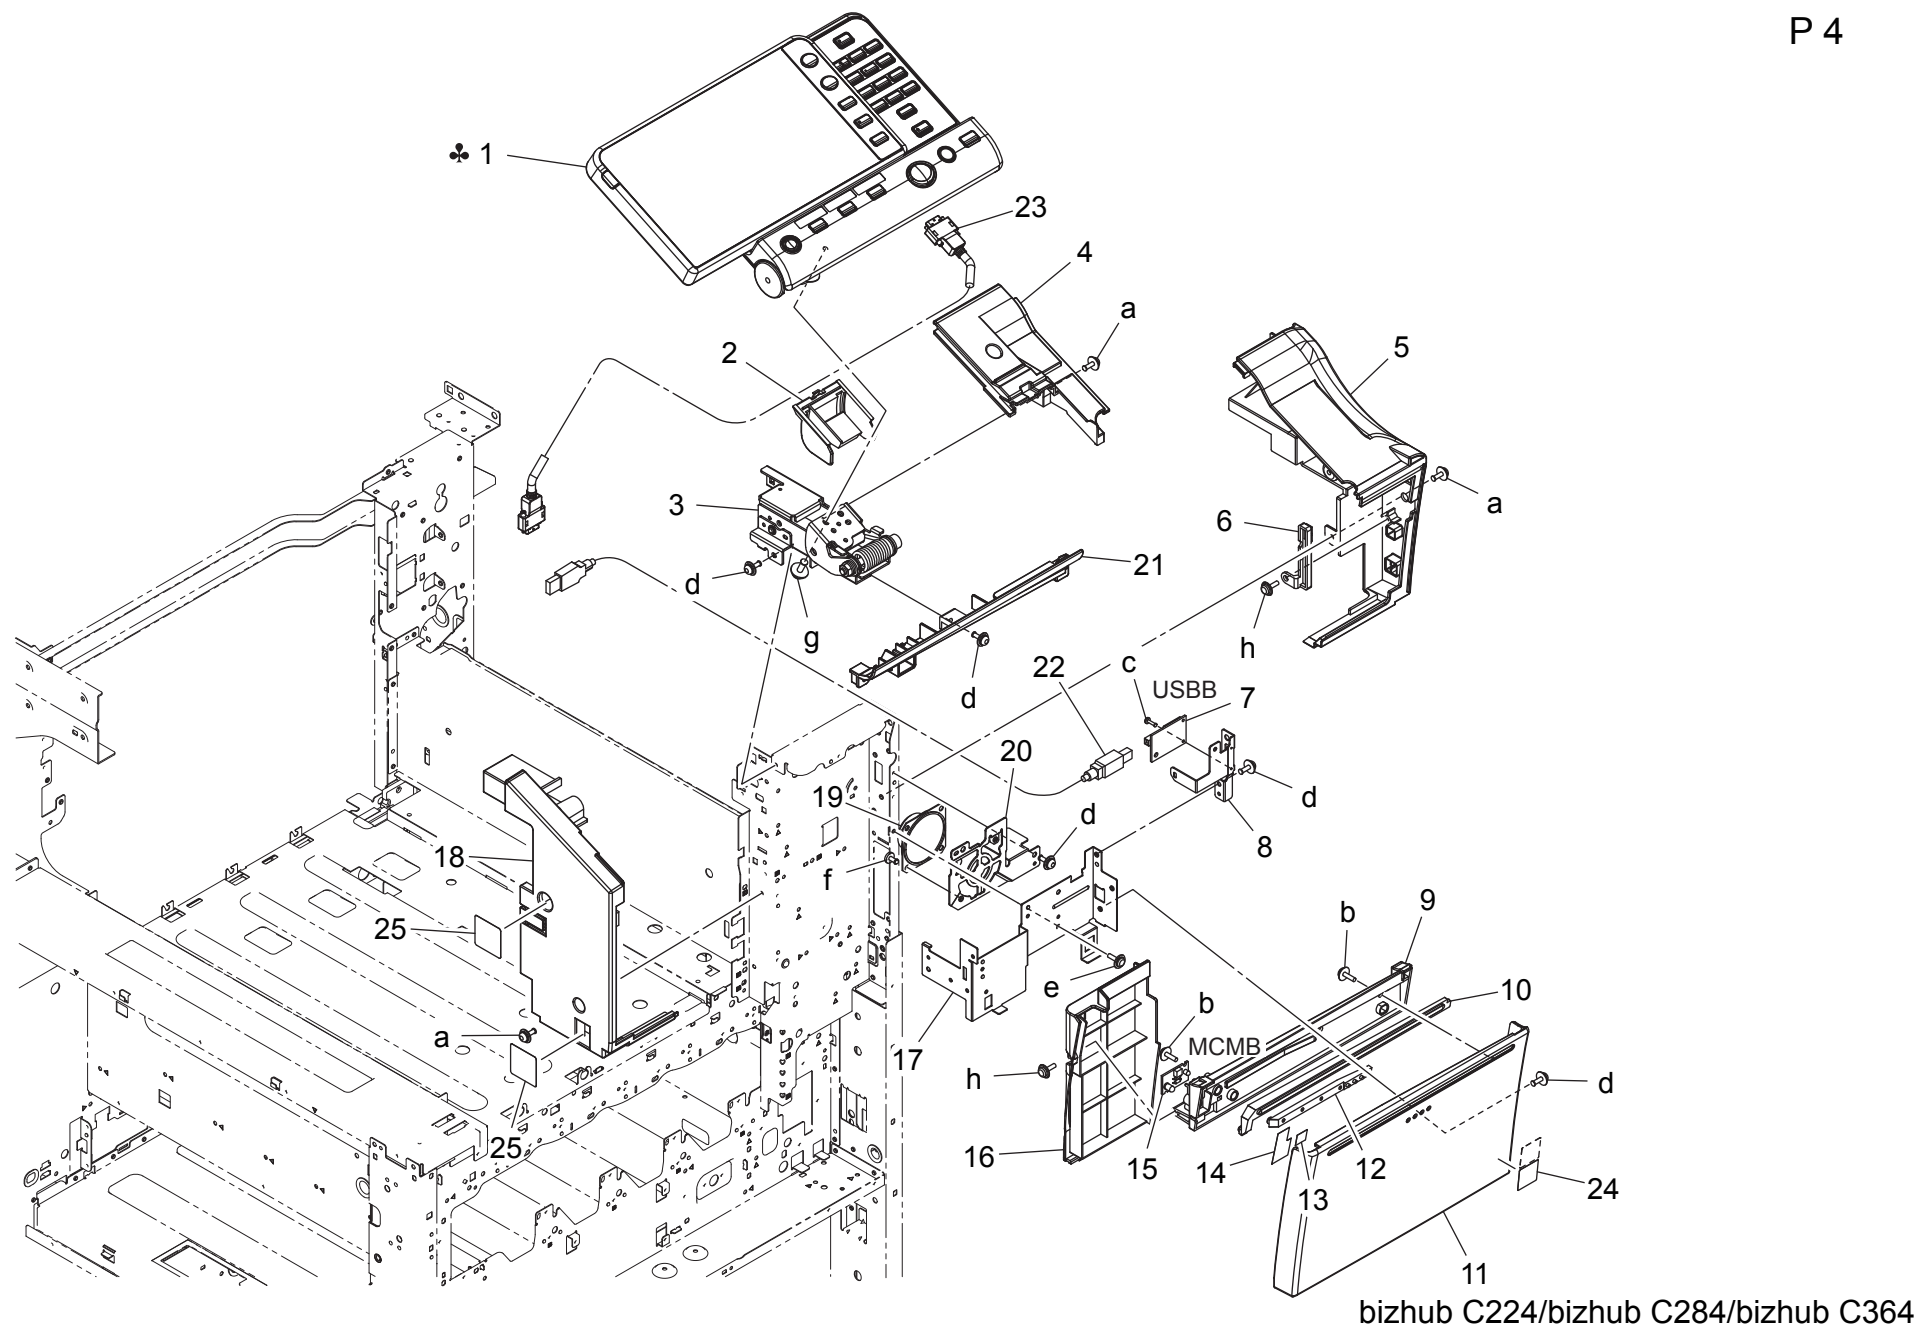

OPERATION PANEL SECTION


Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A161M70503	Panel assembly	操作パネル A S S Y (国内)	I	1	a-V116030804 b-V153030803 c-V111020603 d-V116030803 e-V137030803 f-V126030603 g-V116041003 h-V153030804
1	A161M70603	Panel assembly	操作パネル A S S Y (北米)	I	1	
1	A161M70703	Panel assembly	操作パネル A S S Y (欧州)	I	1	
2	A161190900	Cover	カバー (操作パネル下・ヒンジ)	C	1	
3	A161R72000	Mounting Plate Assy	操作パネル取付板 A s s y	C	1	
4	A161162602	Cover	カバー (I R 前柱・中)	C	1	
5	A161161503	Cover	カバー (I R 前柱・右)	C	1	
6	A161164000	Cover	カバー (目隠し・U S B)	D	1	
7	A0P0H02500	PWB assembly(PWB-UCN ASSY)	基板 A S S Y (PWB- U C N A S S Y)	D	1	
8	A161138002	Mounting Plate	取付板 (U S B ポート)	D	1	
9	A161167200	Light blocking Cover	遮光カバー (パネル下)	D	1	
10	A161167000	Lens	レンズ (ライトガイド・上)	D	1	
11	A161161700	Cover	カバー (パネル下)	C	1	
12	A161167100	Lens	レンズ (ライトガイド・中)	D	1	
13	A161167400	Light blocking Sheet /2	遮光シート／2	D	1	
14	A161167300	Light blocking Sheet /1	遮光シート／1	D	1	
15	A161H00U01	PWB Assembly(PWB-LED ASSY)	基板 A S S Y (PWB- L E D A S S Y)	C	1	
16	A161161900	Cover	カバー (パネル下・内左)	D	1	
17	A161164103	Mounting Plate	取付板 (パネル下)	D	1	
18	A161161401	Cover	カバー (I R 前柱・左)	C	1	
19	A0P0M73100	Speaker	スピーカ	D	1	
20	A161137302	Mounting Plate	取付板 (F A X スピーカ)	D	1	
21	A161162702	Cover	カバー (目隠し・パネルヒンジ)	D	1	
22	A0P0N15300	Cable	ケーブル	C	1	
23	A161N15602	Interface Cable	インターフェースケーブル	C	1	
24	A011946200	Label Emperon	ラベル E m p e r o n	D	1	
25	A161162400	Seal	シール (目隠し)	C	2	

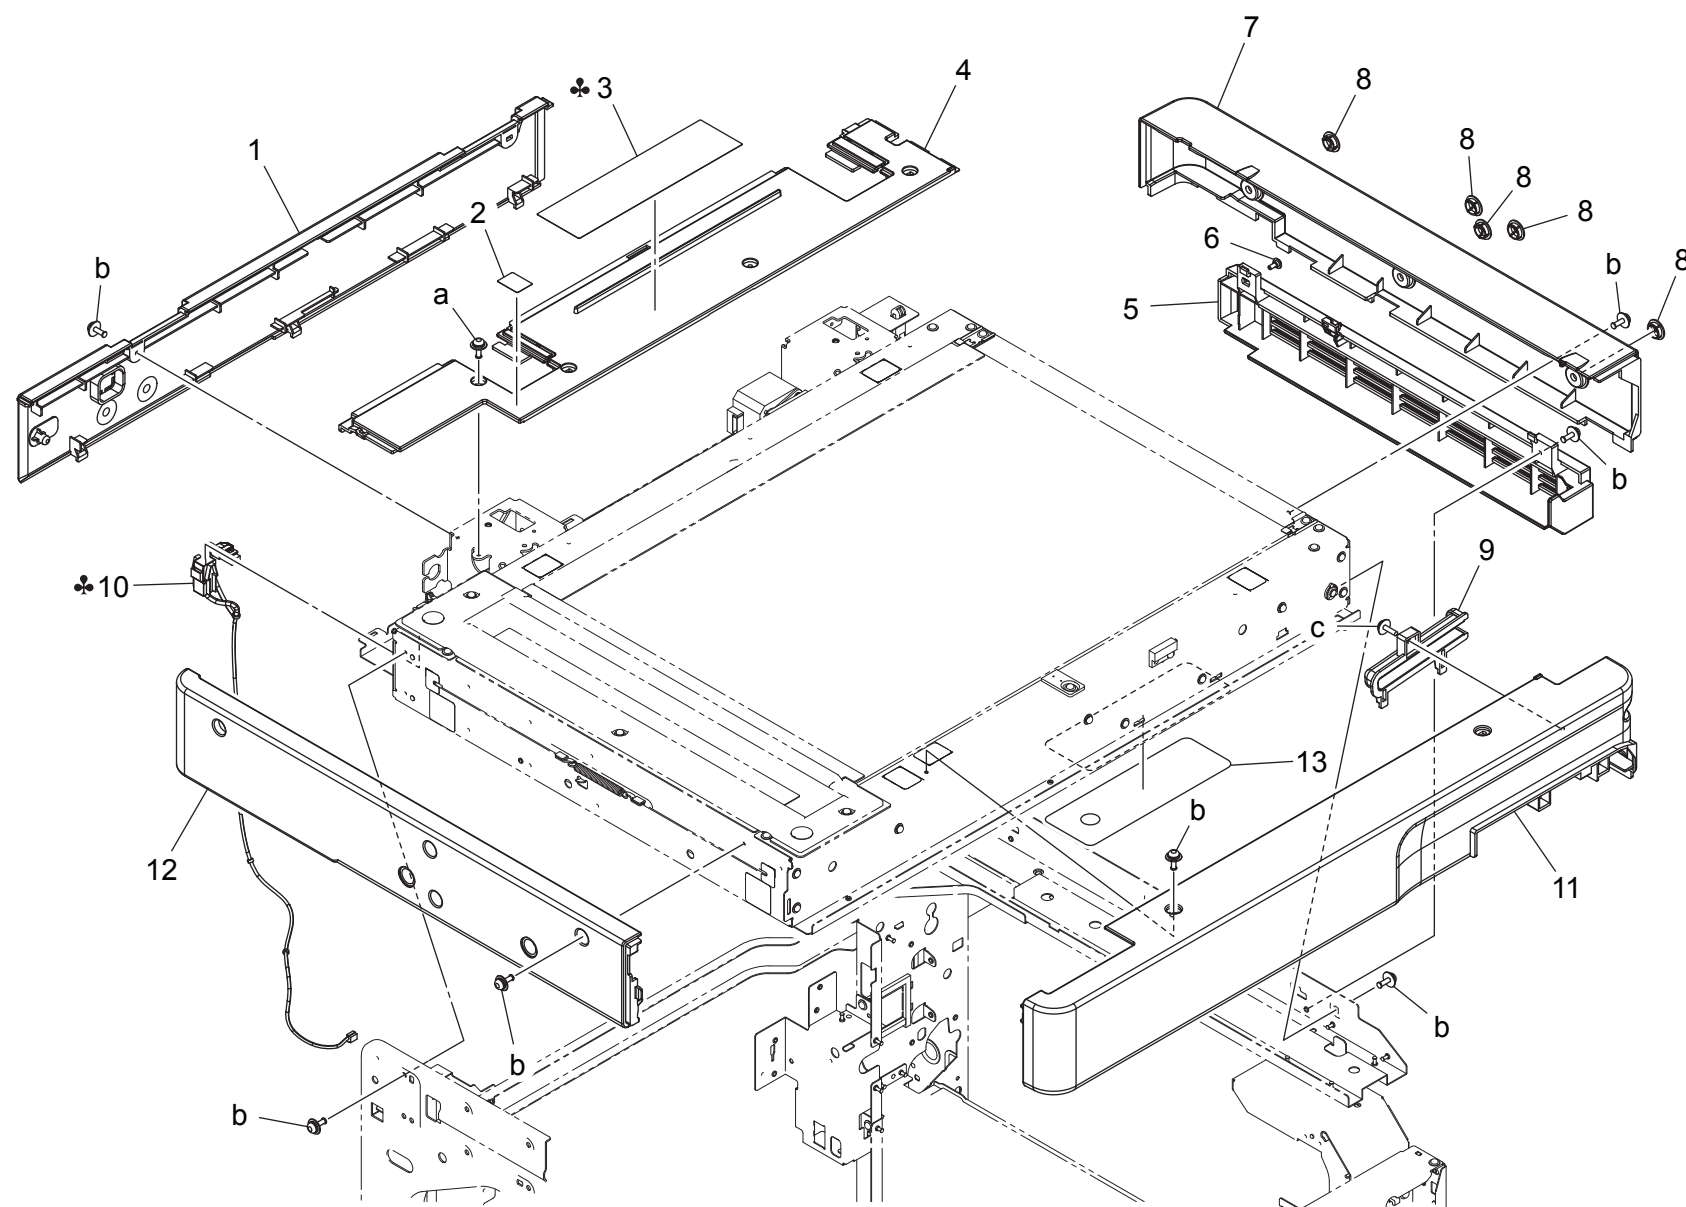

IR COVER SECTION


Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A161170203	Read Cover /Rear		C	1	a-V116030804 b-V116030803 c-V153030803
2	A161940602	Label		D	1	
3	A00J940100	Label Legal Restriction		C	1	
3	A161941500	Label	B,G2	D	1	
4	A161170701	Read Cover	A,A1	C	1	
5	A161170601	Read Cover		C	1	
6	A00J169300	Shoulder screw		C	1	
7	A161170400	Read Cover /Right		C	1	
8	A02E167700	Cover		C	5	
9	A161170800	Holder		D	1	
10	A161N11C01	Scanner Relay harness /100V		D	1	
11	A161170100	Read Cover /Front	A,A1	C	1	
12	A161170300	Read Cover /Left		C	1	
13	A161282100	Ground Sheet		D	1	

SCANNER SECTION

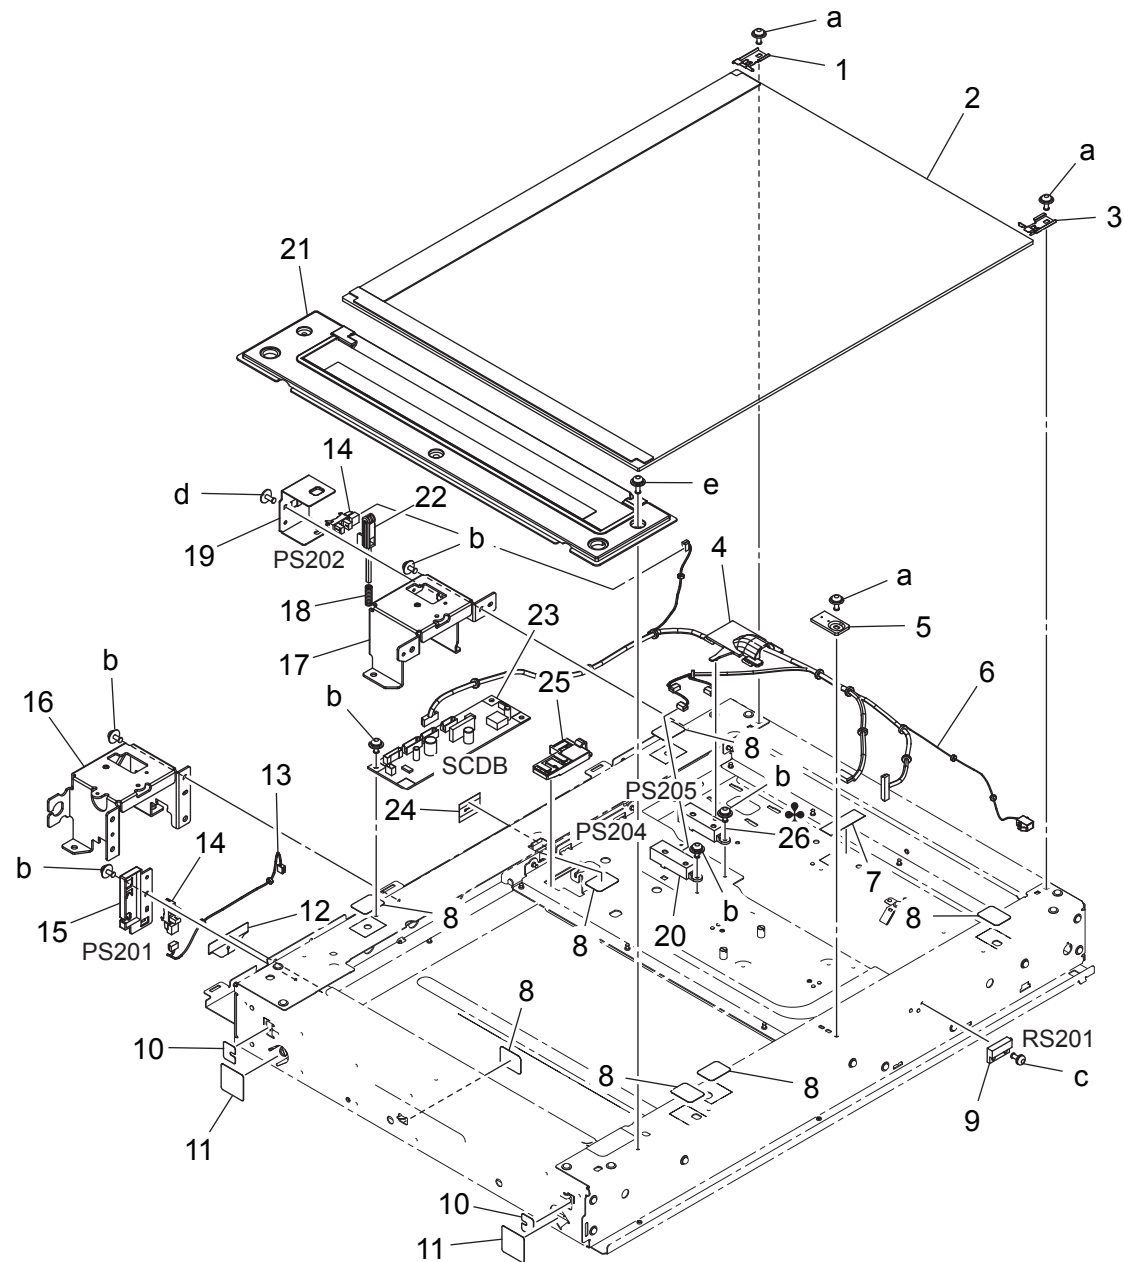

SCANNER SECTION


Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A161268300	Holding Plate		D	1	a-V121030604 b-V116030603 c-V115030603 d-V137030603 e-V116030804
2	A161R72200	Original Glass Assy		C	1	
3	A161268200	Holding Plate		D	1	
4	A161281600	Guide		D	1	
5	A00J265300	Regulating Plate		C	1	
6	A161N14100	Scanner Wiring /1	スキャナー束線／1 (CCD 電源部)	D	1	
7	4036307501	TAPE	テープ	D	1	
8	4581162501	SEAL	シール	C	7	
9	A1UDM50200	Lead Switch	リードスイッチ	C	1	
10	A161262700	Seal	シール (ワイヤ・左)	D	2	
11	A0ED262500	Seal	シール (ワイヤ)	D	2	
12	A161263000	Seal	シール (防湿ヒーター)	D	1	
13	A161N14200	Scanner Wiring /2	スキャナー束線／2 (HOME センサ部)	D	1	
14	A108M50100	Photointerrupter	透過型センサ	B	2	
15	A161262200	Cover	カバー (HS)	D	1	
16	A161261902	Frame	フレーム (ADF・左)	D	1	
17	A161262002	Frame	フレーム (ADF・右)	D	1	
18	A161280300	Compressing Coil spring	圧縮コイルばね	C	1	
19	A161280101	Mounting Plate	取付板 (20 deg)	D	1	
20	A161M50A00	APS Photoreflector	APS 反射型センサ (原稿サイズ検知)	C	1	
21	A161R72300	Slit Glass Assy	スリットガラス Assy	C	1	
22	A161280200	Lever	レバー (20 deg)	D	1	
23	A161H01A00	PWB Assembly(PWB-ID ASSY)	基板 ASSY (PWB-ID ASSY)	I	1	
24	A161281300	Seal	シール (close センサ)	D	1	
25	A161281100	Guide	ガイド (LED ハーネス)	D	1	
26	A161M50A00	APS Photoreflector	APS 反射型センサ (原稿サイズ検知)	C	1	D1,D3,E,F2,G1,I,K A,A1,B,C,G2 (OPTION)
26	A161M50A00	APS Photoreflector	APS 反射型センサ (原稿サイズ検知)	C	1	

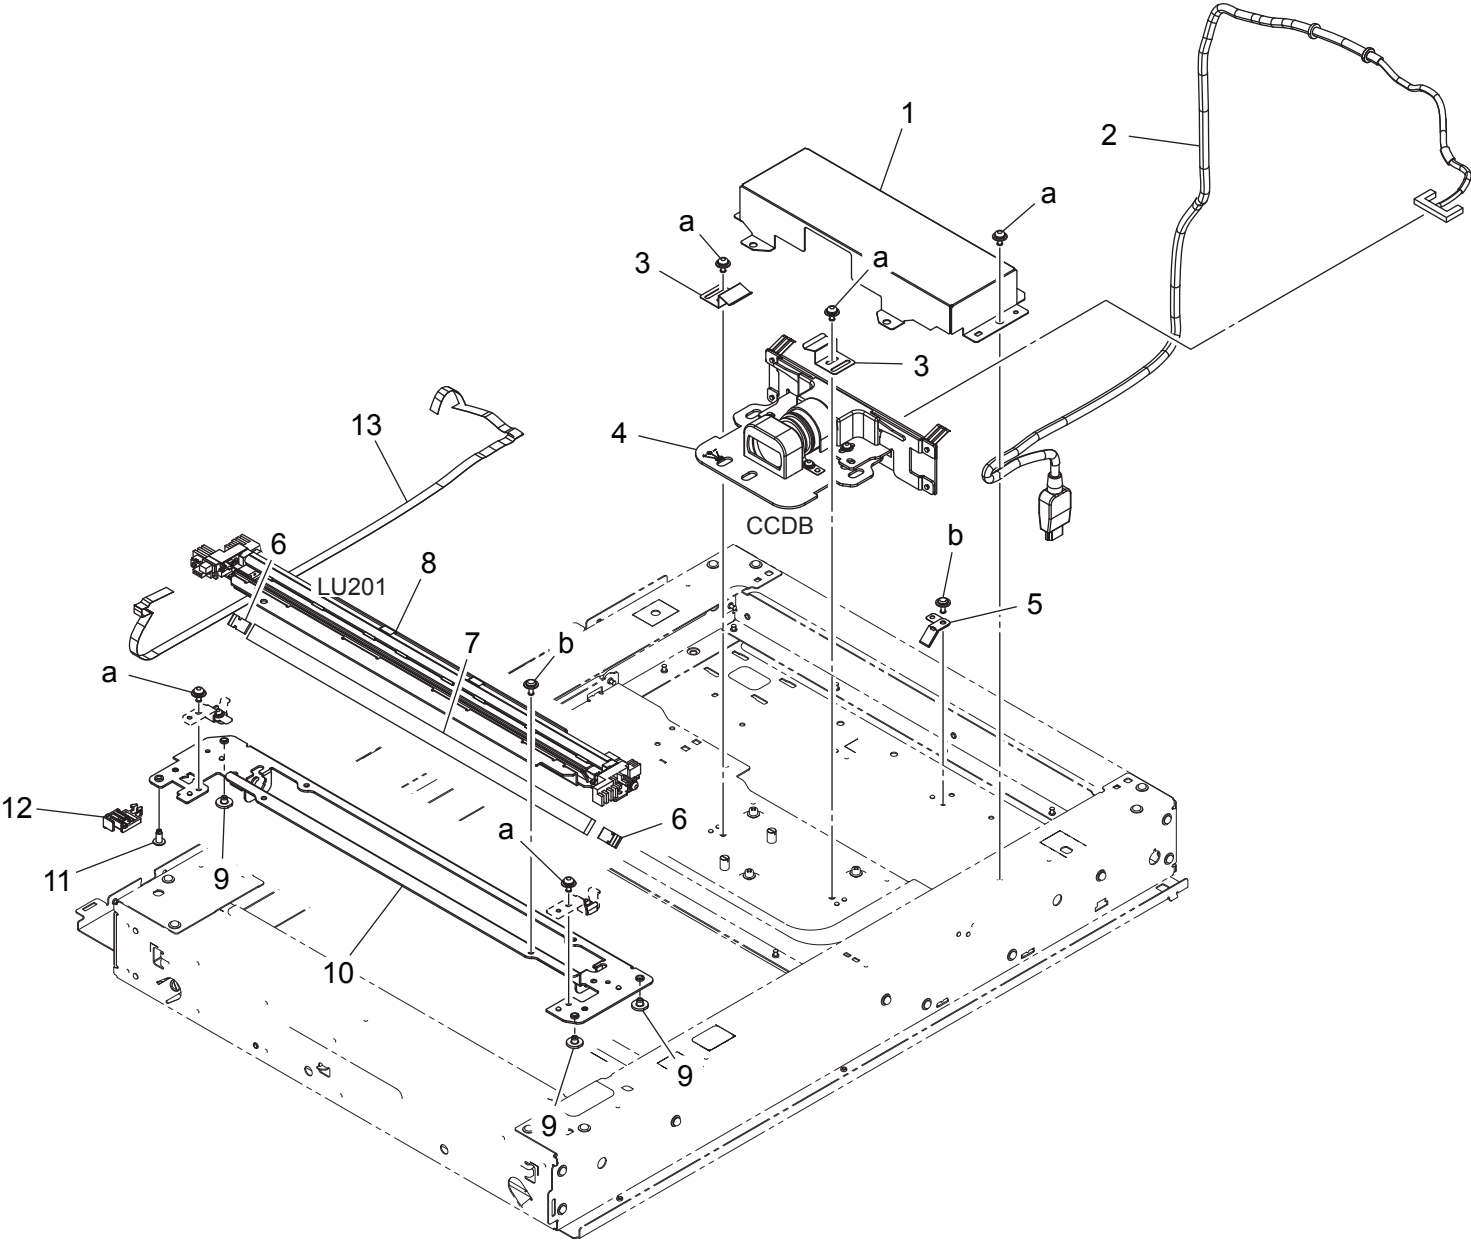

SCANNER SECTION


Page. 7

Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A161278600	Cover		D	1	a-V116030603 b-V137030603
2	A161N14401	CCD Cable		D	1	
3	A161278900	Plate spring		D	2	
4	A161R72100	CCD Lens Assy		I	1	
5	A161281700	Plate spring /1		D	1	
6	A0ED271300	Plate spring		D	2	
7	A0ED271200	Mirror		D	1	
8	A161M31001	Lamp		C	1	
9	A161271000	Bushing		D	3	
10	A161270102	Frame		D	1	
11	A161271100	Bushing		D	1	
12	A161270600	Guide		D	1	
13	A161N14000	Scanner Wiring /4		D	1	

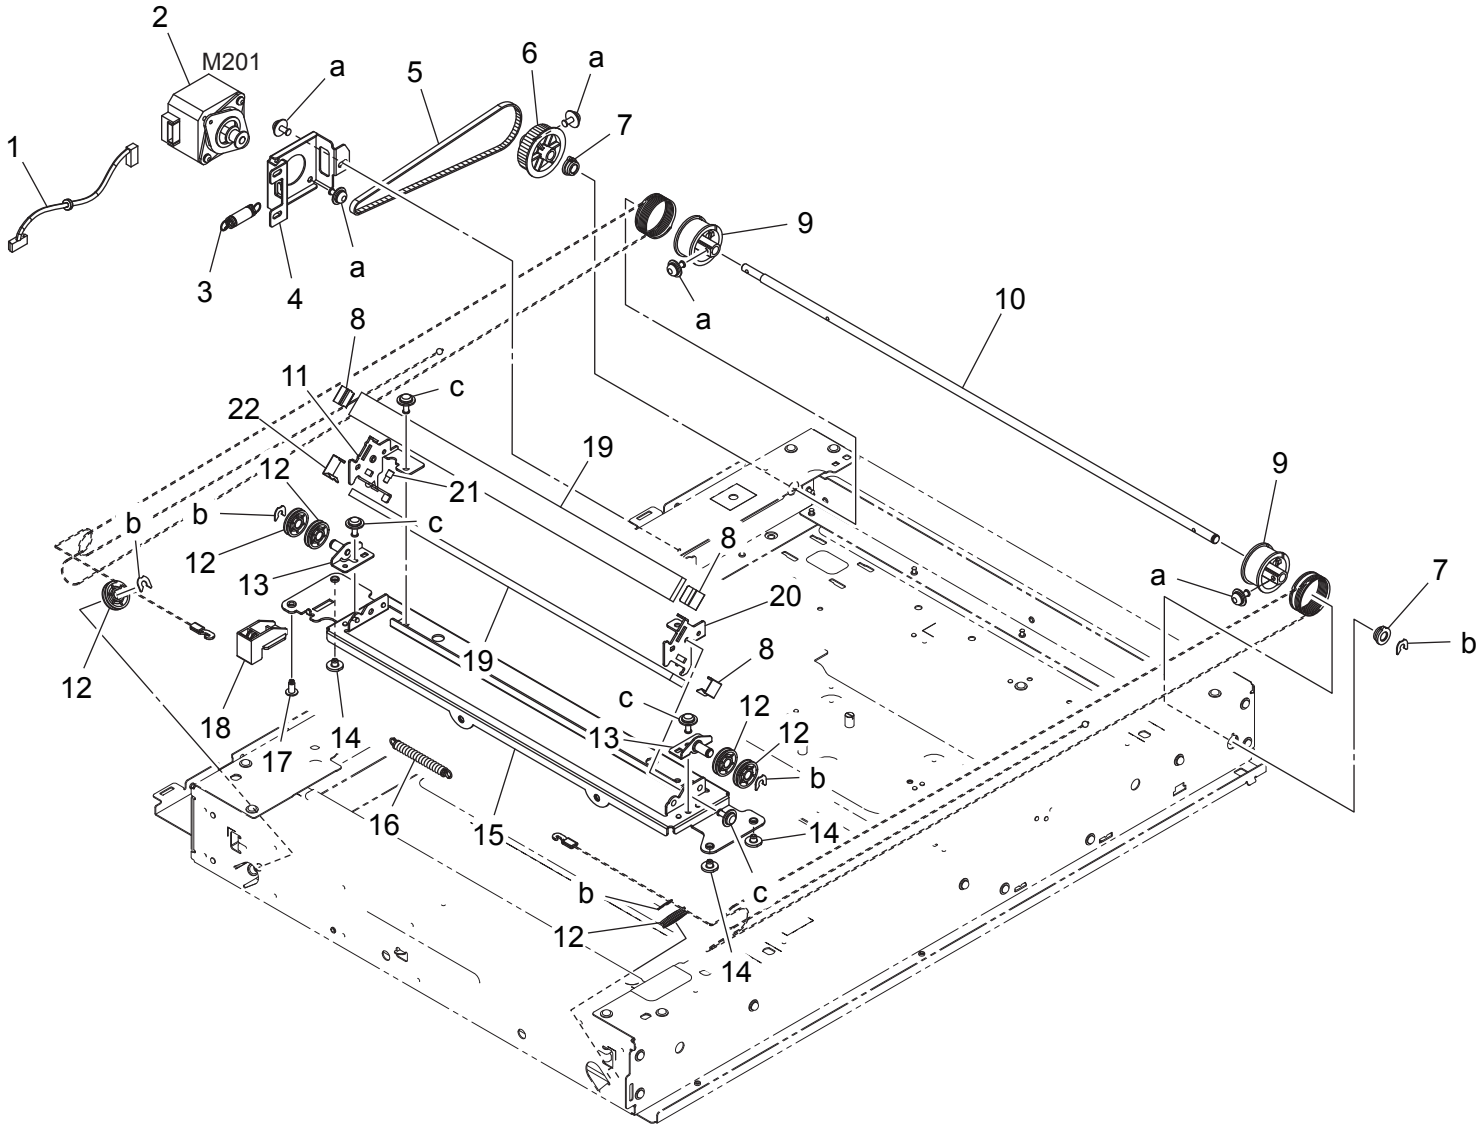

SCANNER SECTION


Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A161N14300	Scanner Wiring /3		D	1	a-V116030603 b-V218040086 c-V137030603
2	A161M10A00	Stepping motor		C	1	
3	A161275700	Pulling Spring		D	1	
4	A161276000	Mounting Plate		D	1	
5	A161275600	Timing belt 335L		D	1	
6	A161275500	Pulley 103T		D	1	
7	A161276500	Bearing		D	2	
8	A0ED274400	Plate spring		D	3	
9	A161275300	Pulley		D	2	
10	A161275400	Shaft		D	1	
11	A161273701	Mounting Plate		D	1	
12	A0ED273600	Pulley		C	6	
13	A161273401	Mounting Plate		D	2	
14	A161271000	Bushing		D	3	
15	A161273100	Frame		D	1	
16	A0ED276301	Pulling Spring		D	1	
17	A161271100	Bushing		D	1	
18	A161273500	Guide Part		D	1	
19	A0ED274300	Mirror		D	2	
20	A161273800	Mounting Plate		D	1	
21	A161274600	Adjusting Screw		C	1	
22	A161274500	Plate spring /1		D	1	

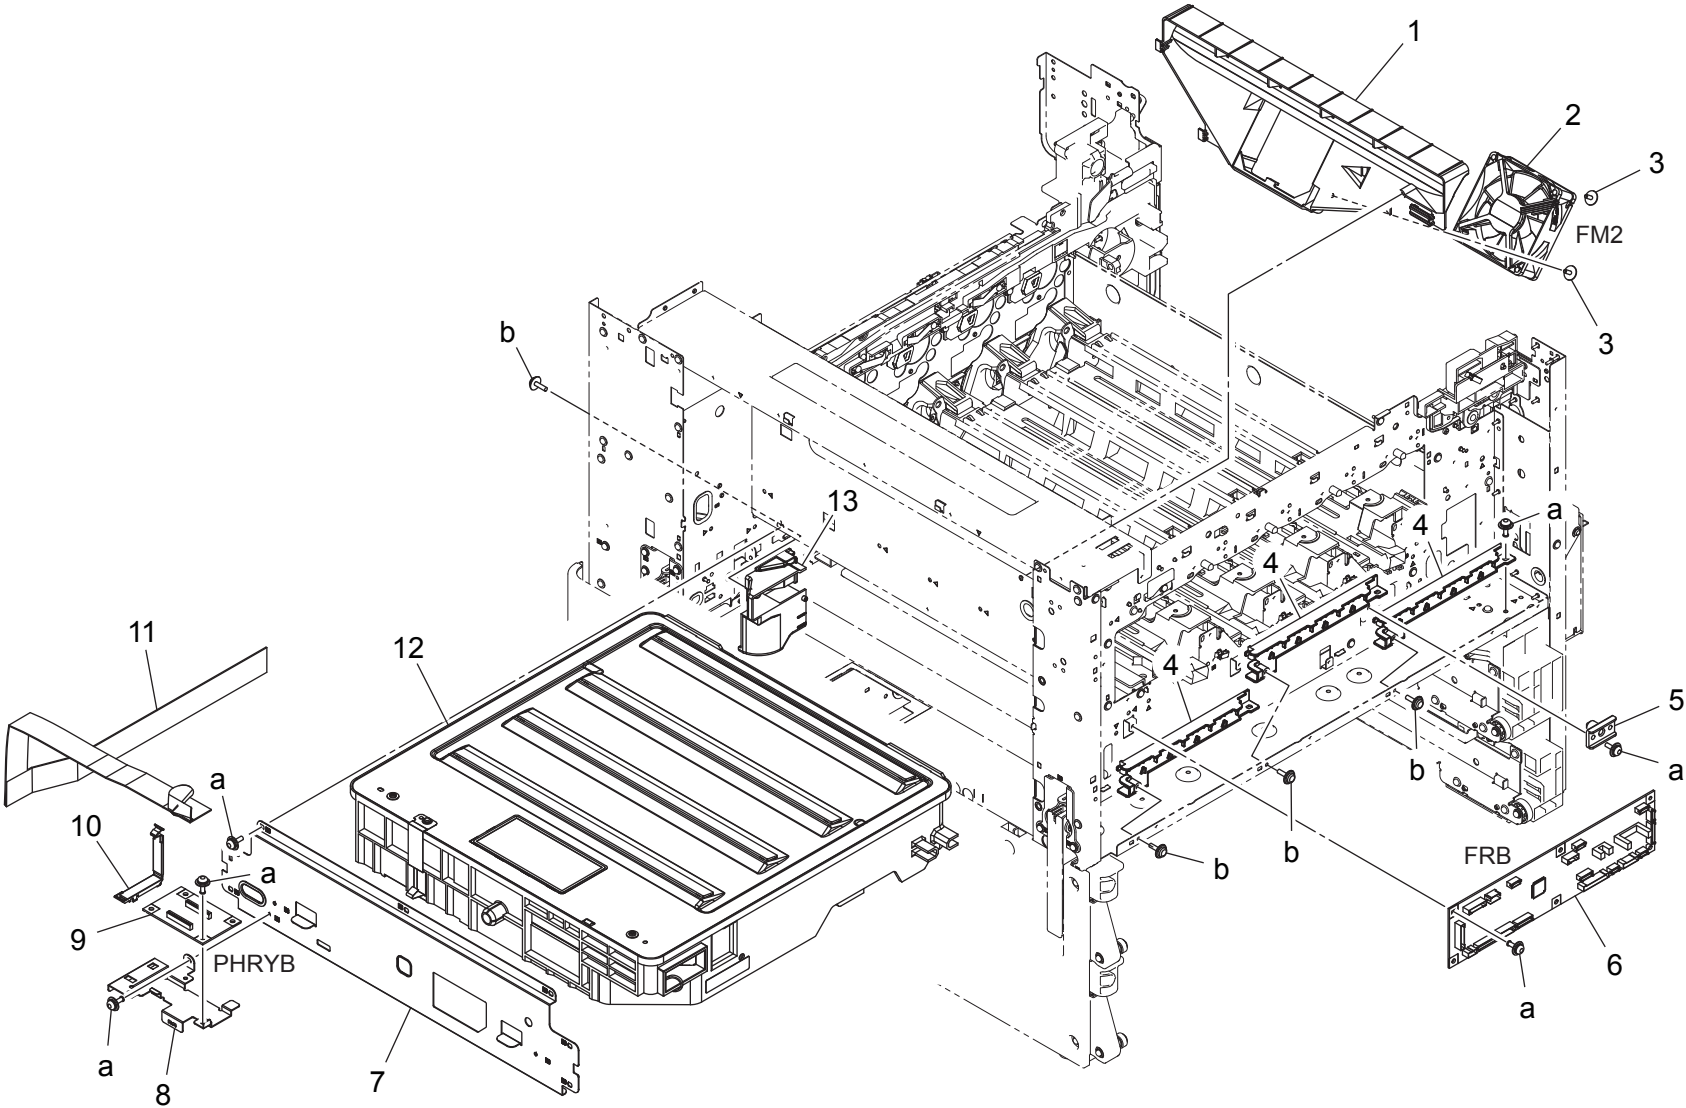

Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A161140200	Duct		D	1	a-V116030803 b-V153030803
2	4139M10000	FAN MOTOR		B	1	
3	4163529301	SCREW		C	2	
4	A161135300	Guide		D	3	
5	A161105400	Positioning Plate		D	1	
6	A161H00501	PWB Assembly(PWB-FR ASSY)		I	1	
7	A161101802	Mounting Plate		D	1	
8	A161130301	Mounting Plate		D	1	
9	A161H00800	PWB Assembly(PWB-VD2 ASSY)		C	1	
10	A161137802	Holder		D	1	
11	A161N11901	Flatcable /25		C	1	
12	A161R70900	Print Head Assy	{C364}	I	1	
12	A4FKR70000	Print Head Assy	{C224/C284}	I	1	
13	A161147401	Duct		D	1	

TONER SUPPLY SECTION


P 10

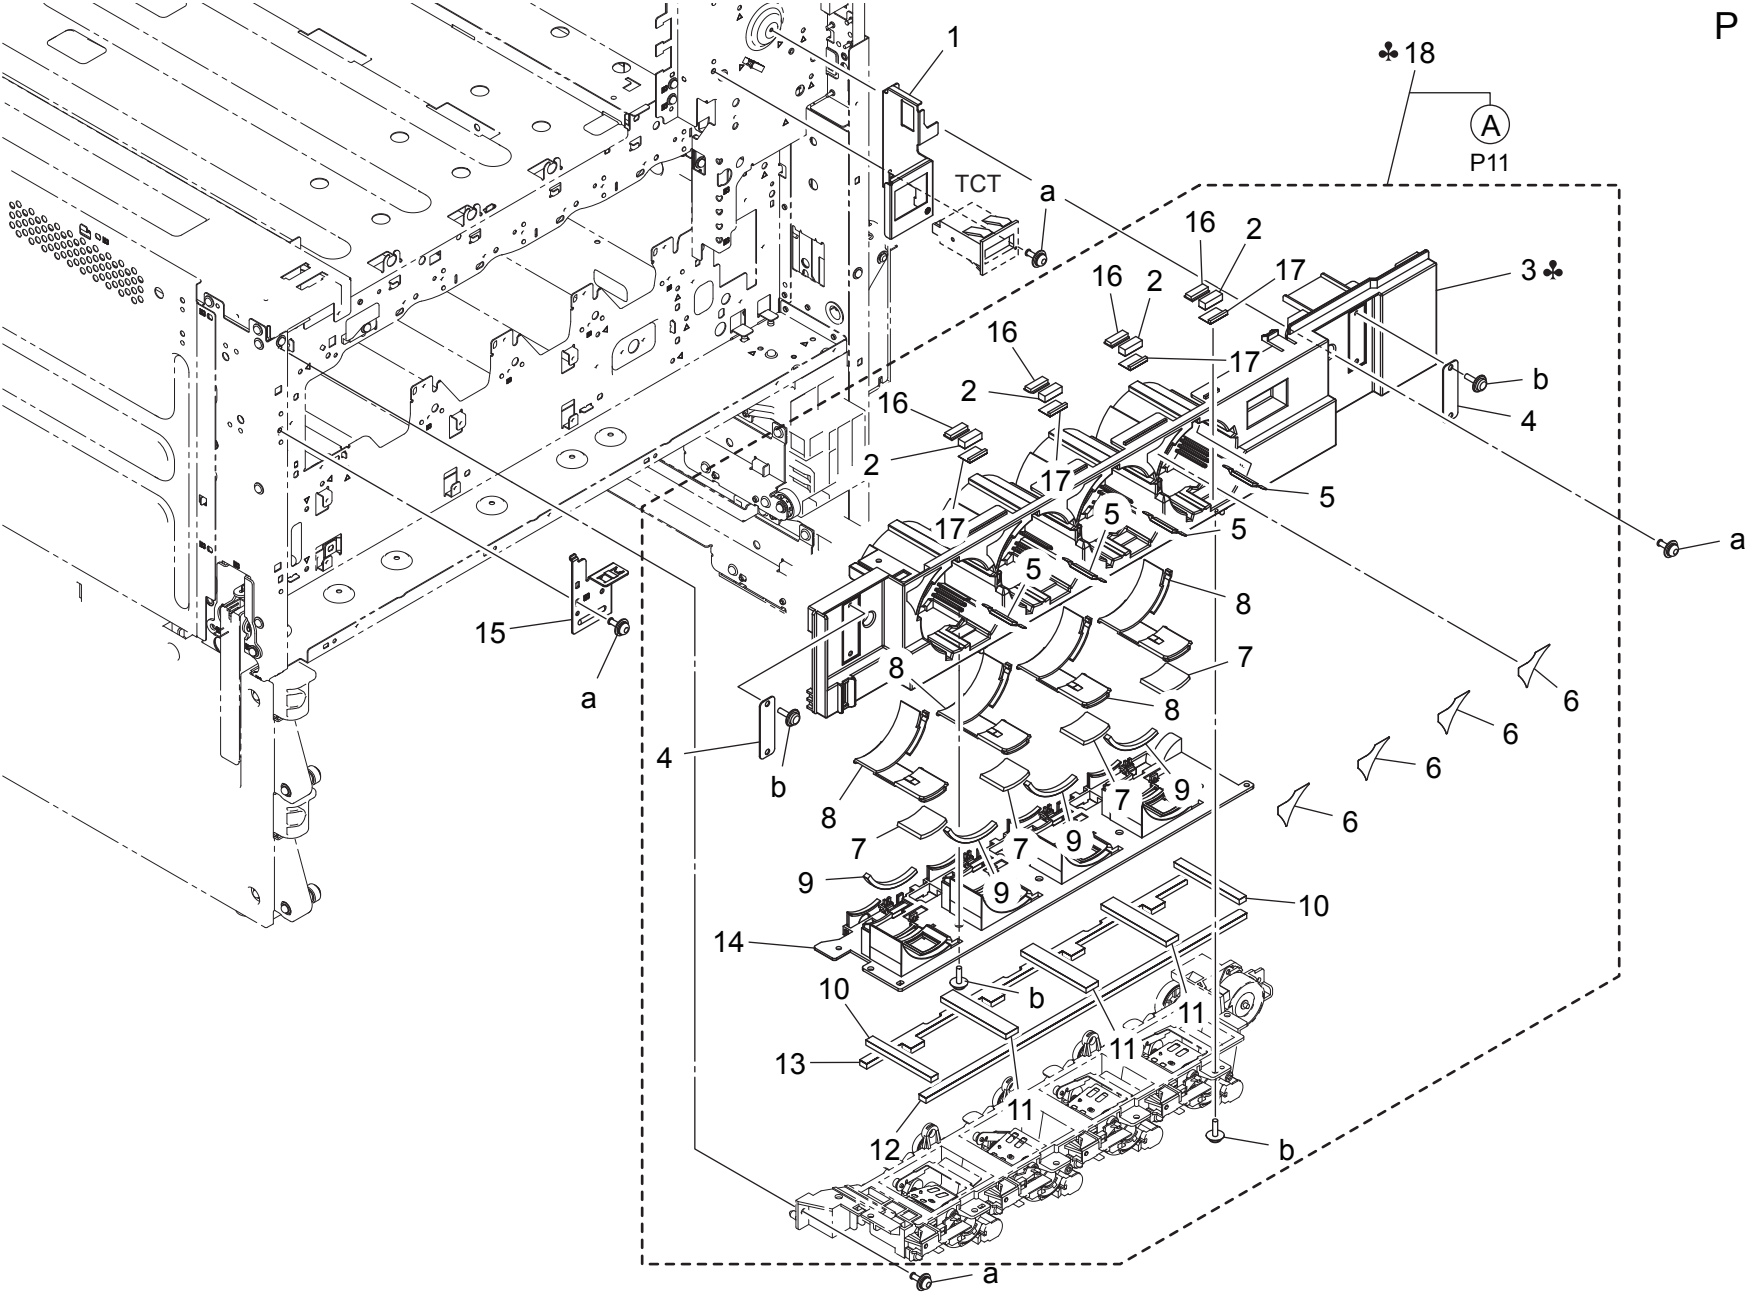

TONER SUPPLY SECTION

Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A161120701	Reinforce Plate		D	1	a-V116030803 b-V153030803
2	A161403701	Seal		D	4	
3	A161402002	Cover	A,A1	D	1	
3	A161405102	Cover	B,G2	D	1	
3	A161405202	Cover	C	D	1	
3	A161405300	Cover		D	1	
4	4038101401	SUCTION PLATE	D1,D3,E,F2,G1,I,K	D	2	
5	A161403901	Spacer		D	4	
6	A0ED940600	Label Toner 1		D	4	
7	A161402501	Seal		D	4	
8	A161402401	Shutter		D	4	
9	A161403800	Seal		D	4	
10	A161403500	Seal		D	2	
11	A161403600	Seal		D	3	
12	A161403300	Seal		D	1	
13	A161403400	Seal		D	1	
14	A161402101	Cover		D	1	
15	A161135502	Mounting Plate		D	1	
16	A161404001	Seal /1		D	4	
17	A161404100	Seal /2		D	4	
18	A161R71000	Sub Hopper Assy (Zeus1JP)	A,A1	S	1	
18	A161R71100	Sub Hopper Assy (Zeus1US)	B,G2	S	1	
18	A161R71200	Sub Hopper Assy (Zeus1EU)	C	S	1	
18	A161R72900	Sub Hopper Assy (Zeus1AP)	D1,D3,E,F2,G1,I,K	S	1	


TONER SUPPLY SECTION

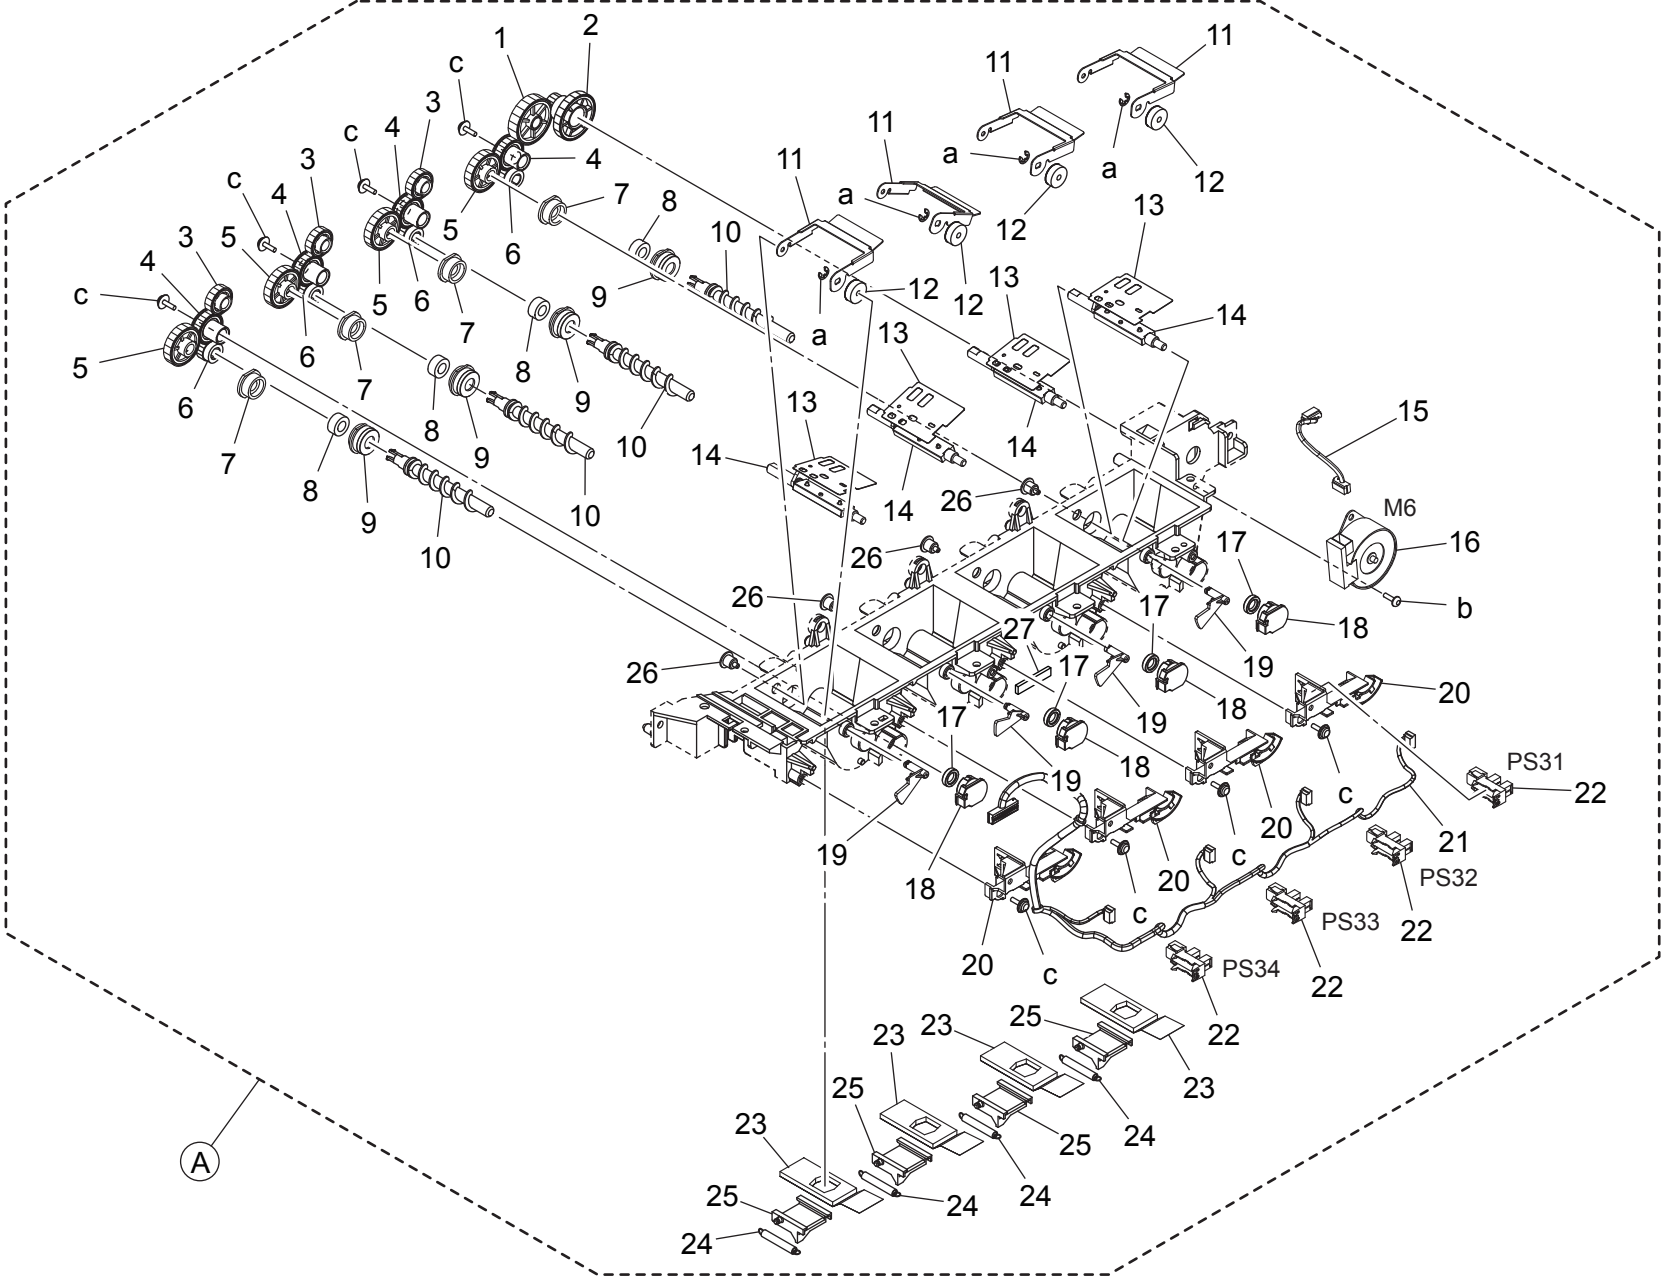

TONER SUPPLY SECTION

Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A161401400	Gear 43T		C	1	a-V217030001 b-V145030803 c-V153030803
2	A161401300	Gear 17/65T		C	1	
3	A161401500	Gear 25T		C	3	
4	A161401200	Gear 28T		C	4	
5	A161401100	Gear 36T		C	4	
6	A161401000	Gear 18T		C	4	
7	4163510201	BUSHING		C	4	
8	4576536301	SEAL		D	4	
9	A161403100	Holder		C	4	
10	A161400100	Screw		C	4	
11	A161400400	Detecting Plate		D	4	
12	A161400601	Detecting Seal		D	4	
13	A161400300	Agitating Part		D	4	
14	A161400200	Agitating Shaft		D	4	
15	A161N12801	Toner Drive harness /K		D	1	
16	A02EM10400	Stepping motor		C	1	
17	4333501201	SEAL		D	4	
18	A161403000	Bushing		D	4	
19	A161400501	Detecting Actuator		D	4	
20	A161400701	Mounting Plate		D	4	
21	A161N10F01	Toner Detection harness /1		D	1	
22	A108M50100	Photointerrupter		B	4	
23	A161403200	Seal		D	4	
24	4036534801	TENSION SPRING		C	4	
25	A0ED401000	Shutter		D	4	
26	A161400800	Pin		D	4	
27	A161146800	Seal		D	1	

WASTE TONER BOX SECTION

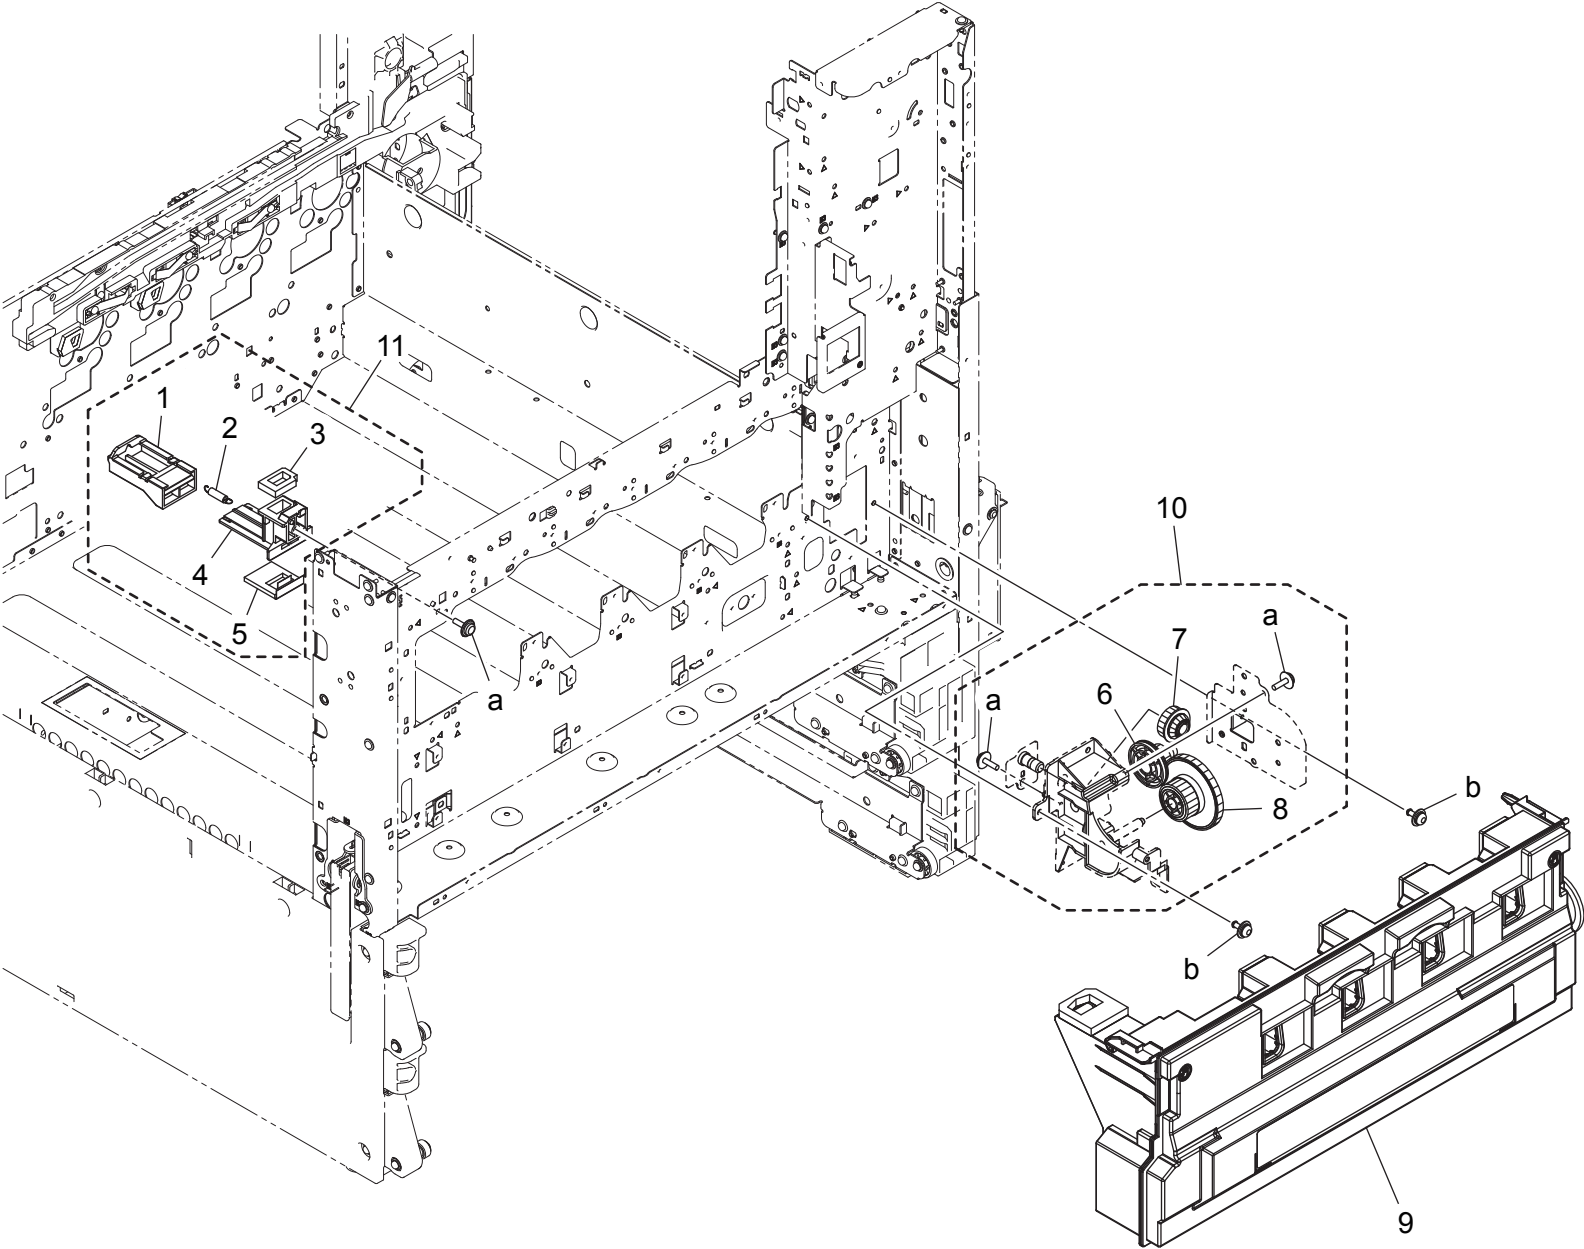


WASTE TONER BOX SECTION

Page. 12

Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A0ED363100	Shutter		D	1	a-V153030803 b-V125030818
2	A0ED363200	Pulling Coil spring		D	1	
3	A0ED363400	Seal		D	1	
4	A0ED363000	Pipe		D	1	
5	A0ED363300	Seal		D	1	
6	A161245100	Gear 16/40T		D	1	
7	A0ED245000	Gear 20/20T		D	1	
8	A161245400	Gear 16/51T		D	1	
9	A4NNWY1	WASTE TONER BOX		A	1	
10	A161F21000	Waste Toner Drive		C	1	
11	A0EDF36000	Waste Toner Pipe		C	1	


ERASE LAMP SECTION

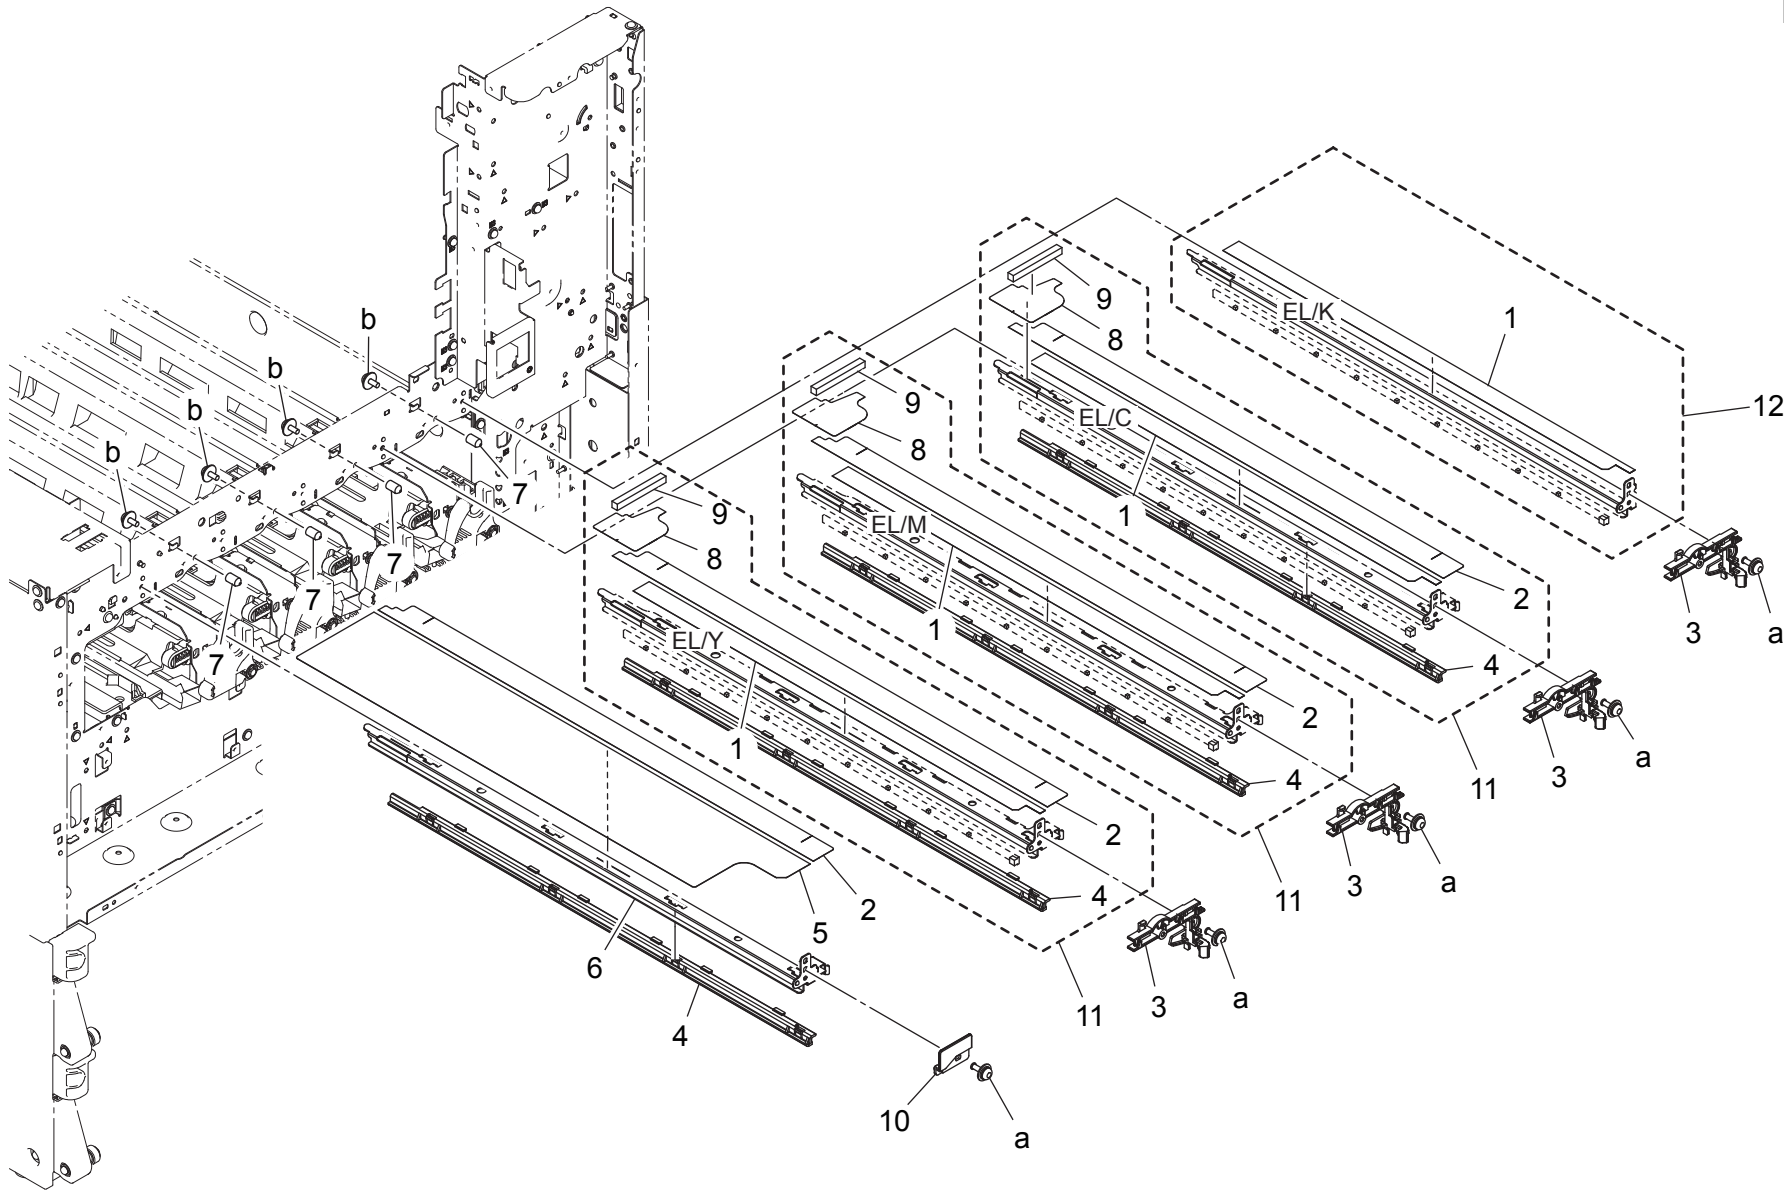

ERASE LAMP SECTION

Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A0ED105500	Light blocking Part		D	4	a-V116030803 b-V116030603
2	A161107300	Seal		D	4	
3	A161130101	Holder		D	4	
4	A0ED105400	Rail		D	4	
5	A161102800	Seal		D	1	
6	A161105600	Rail		D	1	
7	A0ED103100	Pin		D	4	
8	A161107200	Seal		D	3	
9	A161107100	Seal		D	3	
10	A161138500	Guide		D	1	
11	A161R70100	Eraser (YMC) Assy		C	3	
12	A161R70000	Eraser (Black) Assy		C	1	

DV LOCK LEVER SECTION

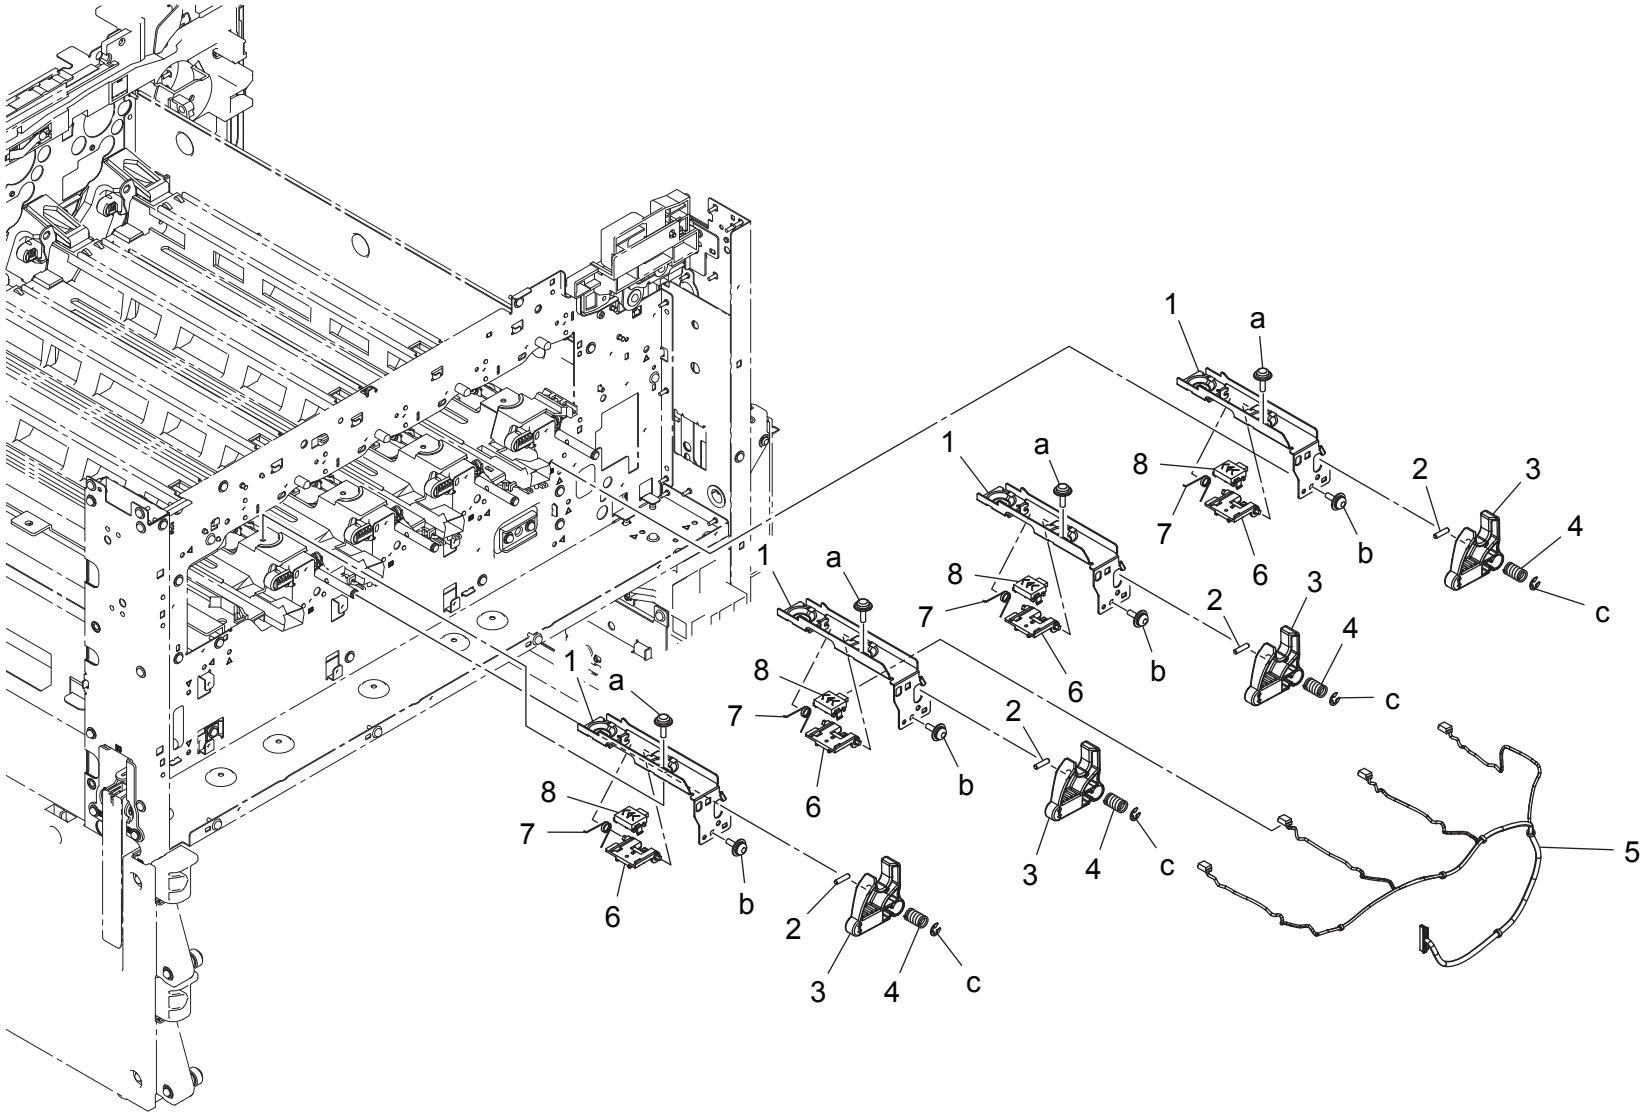


DV LOCK LEVER SECTION

[illegible]

TRANSFER UNIT

P 15

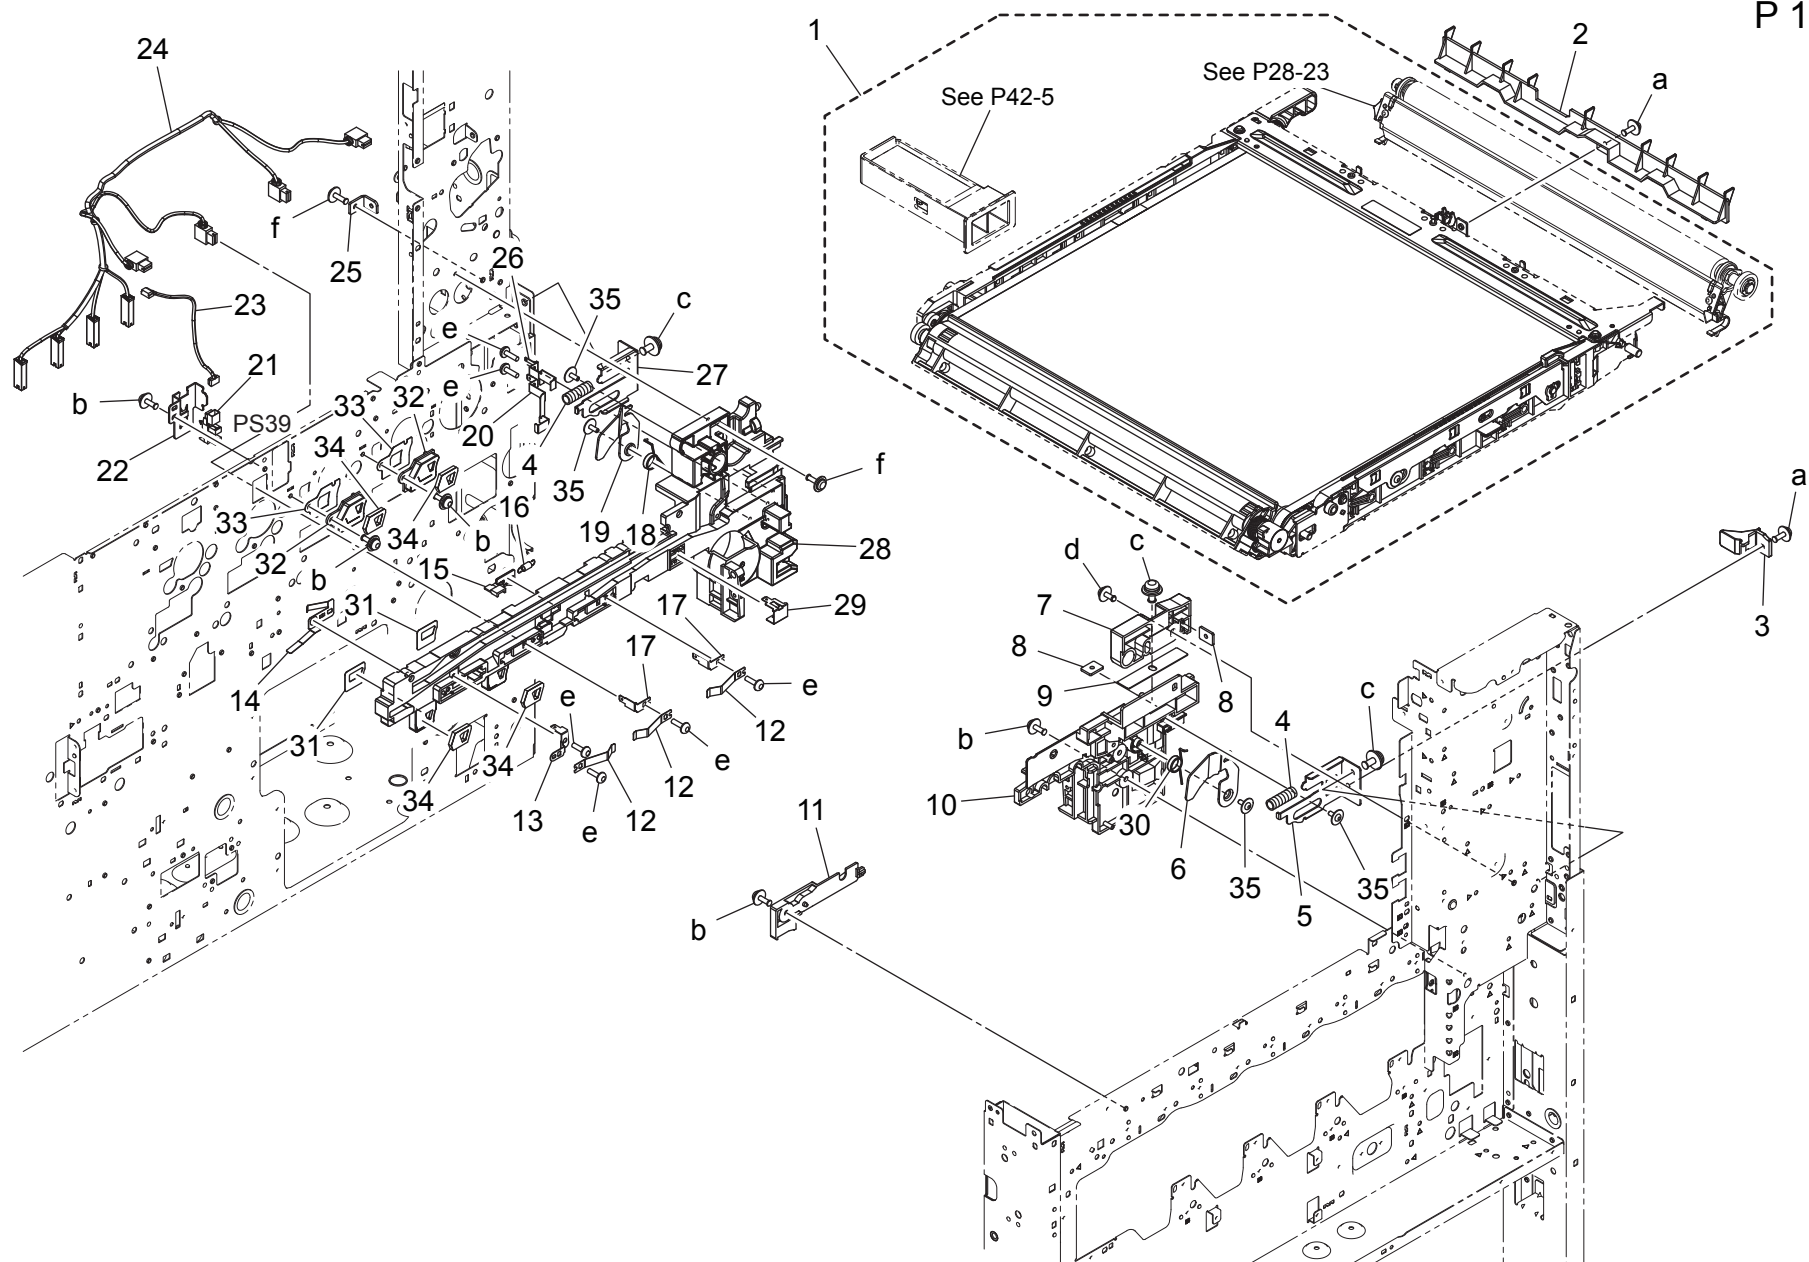


TRANSFER UNIT

Key	Part No.	Description		Destinations	Class	QTY	Standard parts
1	A161R71300	Intermediate Image Transfer Kit	中間転写キット		A	1	a-V116030804 b-V116030803 c-V116040803 d-V125030818 e-V145030803 f-V137030803
2	A161508400	Guide	ガイド (転写後)		C	1	
3	A161110601	Lock Part	ロック部材		D	1	
4	A0ED111000	Compressing Coil spring	圧縮コイルばね		D	2	
5	A161112500	Lever /Front	レバー／前		D	1	
6	A161112800	Arm /Front	アーム／前		D	1	
7	A161110400	Fusing Rail /Front	定着レール／前		D	1	
8	A161112200	Mounting Plate	取付板 (板ナット)		D	2	
9	A161112600	Adjusting Plate	調整板		D	1	
10	A161110201	Rail	レール (中転前)		D	1	
11	A161110300	Rail	レール (中転前従動)		D	1	
12	A0ED111500	Contact /Color	接点／カラー		D	3	
13	A161112000	Contact	接点 (中継2)		D	1	
14	A0ED112000	Contact	接点 (グラウンド)		D	1	
15	A161110500	Detecting Plate	検出板 (1次センサ)		D	1	
16	A0ED110900	Pulling Coil spring	引張りコイルばね (センサ)		C	1	
17	A0ED111700	Contact	接点 (中継1)		D	2	
18	A0ED111200	Torsion Coil spring /R	ねじりコイルばね／ R		D	1	
19	A161112900	Arm /Rear	アーム／後		D	1	
20	A161112300	Contact	接点 (2次転写)		D	1	
21	A108M50100	Photointerrupter	透過型センサ		B	1	
22	A0ED112100	Mounting Plate	取付板		D	1	
23	A161N10J00	Connecting Detection harness	連結検知束線 (一次転圧接離間検知)		D	1	
24	A161N11200	Transfer Wiring /1	転写束線／1		D	1	
25	A161112700	Mounting Plate	取付板		D	1	
26	A161112400	Contact	接点 (除電)		D	1	
27	A161112100	Lever /Rear	レバー／後		D	1	
28	A161110102	Rail	レール (中転後)		D	1	
29	A0ED111400	Contact /K	接点／ K		D	1	
30	A0ED111100	Torsion Coil spring /F	ねじりコイルばね／ F		D	1	
31	A161144900	Seal	シール		C	2	
32	A161141700	Duct	ダクト		D	2	
33	A161146200	Seal	シール		D	2	
34	A161144801	Seal	シール		C	4	
35	4163529301	SCREW	ねじ		C	4	

PAPER FEED SECTION

P 16

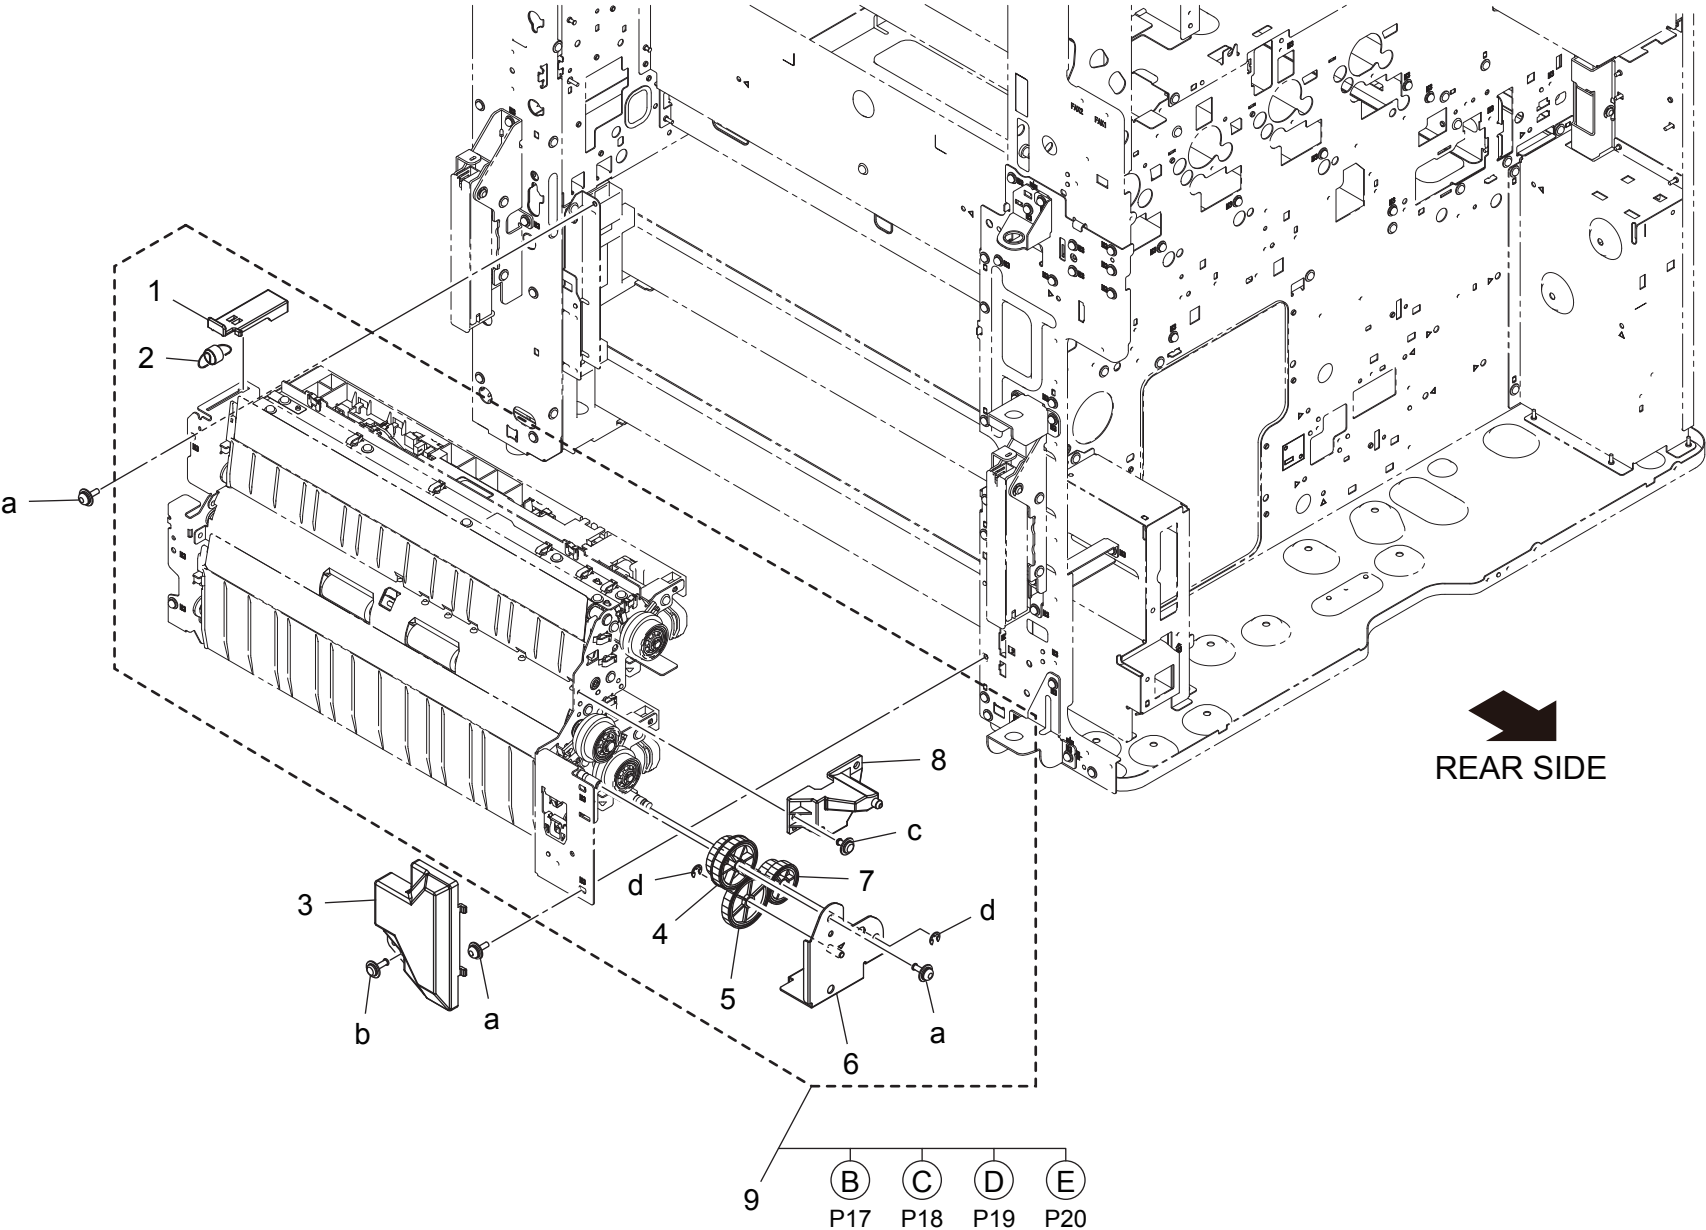


REAR SIDE

PAPER FEED SECTION


[illegible]

1ST PAPER FEED SECTION

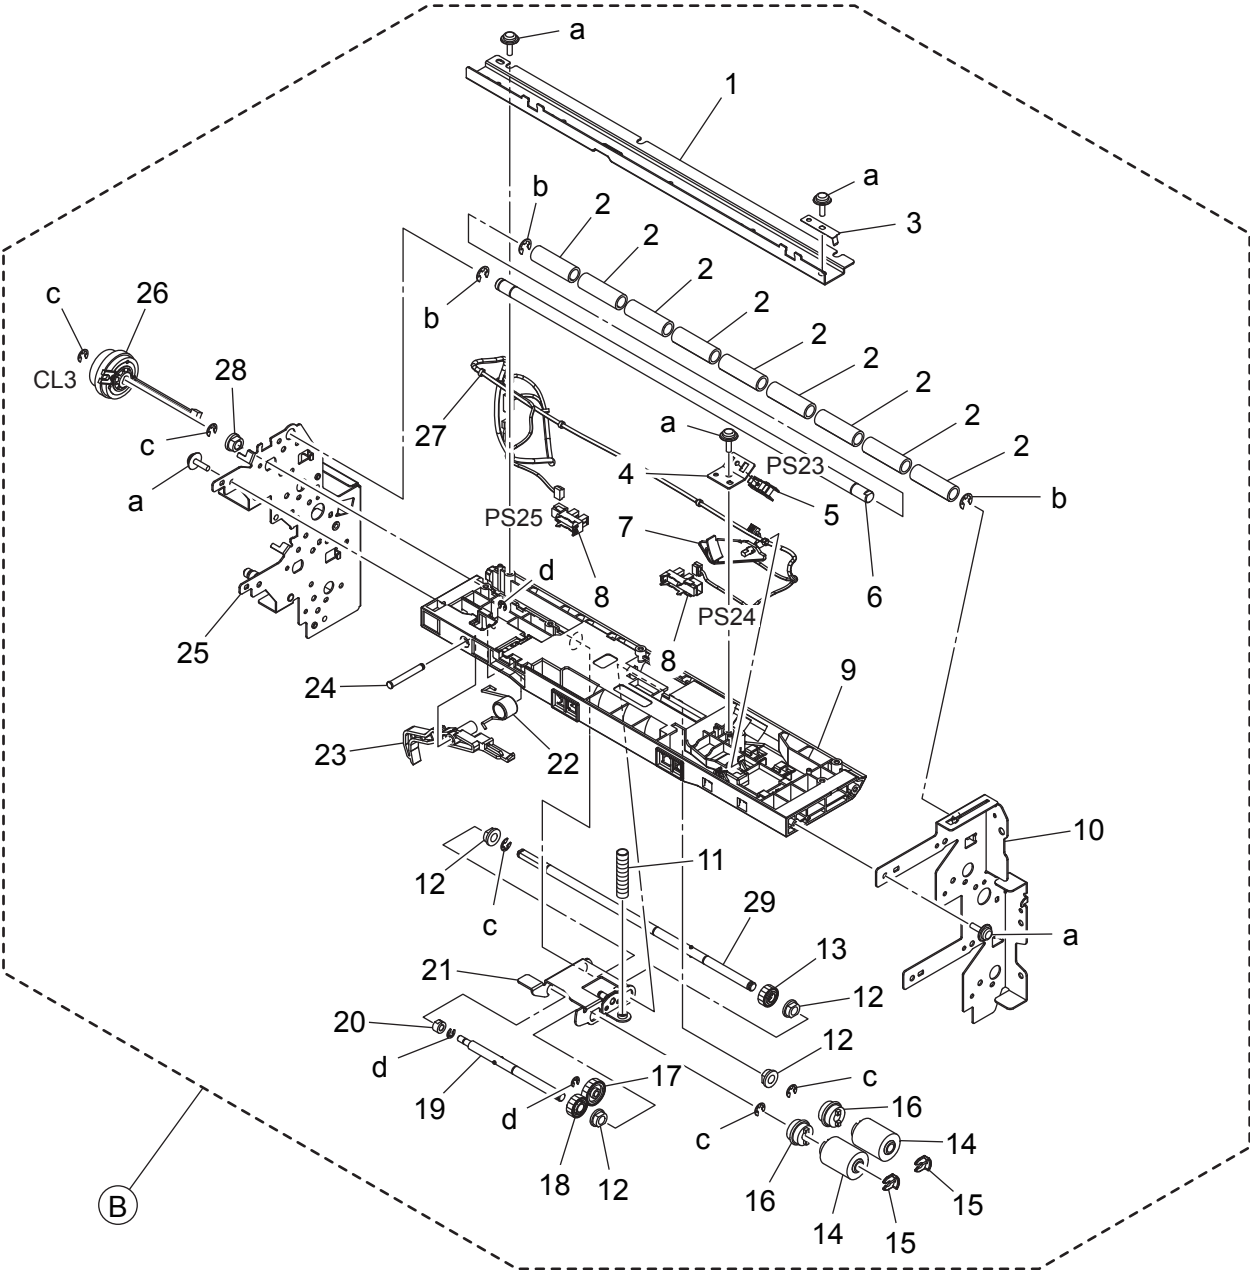


1ST PAPER FEED SECTION

Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A161566000	Reinforce Plate	補強板 (1 s t)	D	1	a-V153030803 b-V217050001 c-V217040001 d-V217030001
2	4034352501	ROLLER	ローラ	C	9	
3	A161560600	Ground Plate	アース板	D	1	
4	A161560900	Mounting Plate	取付板 (給紙用反射センサ)	D	1	
5	A0EDM50100	Photorelector	反射型センサ (アンプ内蔵)	I	1	
6	A161565500	Shaft	軸	D	1	
7	A161561600	Actuator	アクチュエータ (P E)	C	1	
8	A108M50100	Photointerrupter	透過型センサ	B	2	
9	A161565300	Paper feed Frame	給紙フレーム (1 s t)	D	1	
10	A161560101	Frame /Front	フレーム／前	D	1	
11	A161562800	Compressing Coil spring	圧縮コイルばね	C	1	
12	4131300301	BUSHING	軸受	C	4	
13	A161562400	Gear 26T	ギア 26 T	C	1	
14	A00J563600	Roller	ローラ	A	2	
15	56AA40490	SHAFT STOPPER 4	軸ストッパ 4	C	2	
16	A02E561100	Clutch	クラッチ	C	2	
17	A161562300	Gear 34T	ギア 34 T	C	1	
18	A161562600	Gear 28T	ギア 28 T	C	1	
19	A161562000	Shaft	軸 (ピック)	D	1	
20	A161562500	Bushing	すべり軸受	C	1	
21	A161562101	Holder	ホルダ (ピック)	D	1	
22	A161567400	Torsion Spring	ねじりばね (ピック解除)	C	1	
23	A161567300	Lever	レバー (ピック解除)	C	1	
24	A02E560800	Shaft	シャフト	D	1	
25	A161F56002	Caulking(Frame)	フレームカシメ	D	1	
26	A02EM20200	Clutch	クラッチ	C	1	
27	A161N10P01	Paperfeed Wiring /1	給紙束線／1	D	1	
27	A4FMN10201	Paperfeed Wiring /1	給紙束線／1 (3)	D	1	
28	A00J663200	Bushing	すべり軸受	C	1	
29	A161560500	Shaft	軸 (給紙)	D	1	

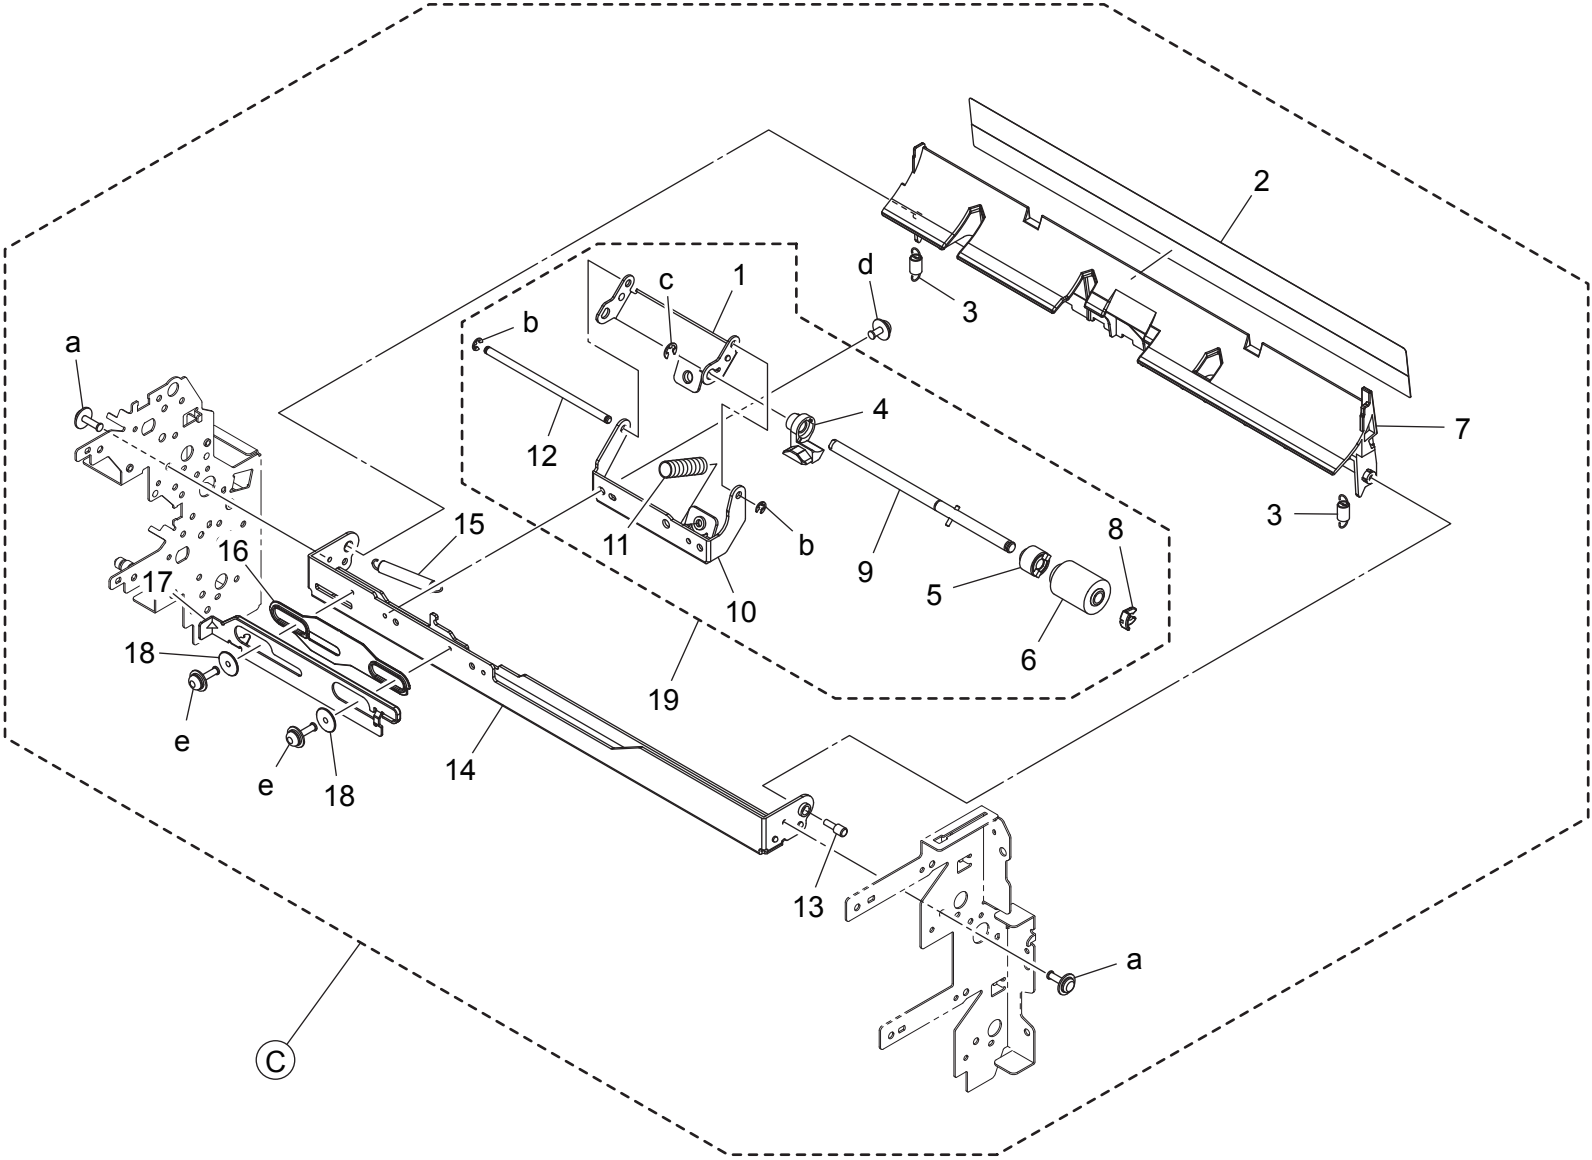

1ST PAPER FEED SECTION


Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A161563100	Holder		D	1	a-V137030803 b-V217030001 c-V217040001 d-V116030603 e-V116031003
2	A161568500	Guide		C	1	
3	A161568600	Pulling Coil spring		C	2	
4	A161563501	Guide		D	1	
5	A0ED563900	Torque limiter		C	1	
6	A00J563600	Roller		A	1	
7	A161568401	Guide Plate		C	1	
8	56AA40490	SHAFT STOPPER 4		C	1	
9	A161563400	Shaft		D	1	
10	A161564001	Mounting Plate		D	1	
11	4030301703	PRESSURE SPRING		C	1	
12	A161563300	Shaft		D	1	
13	4532341001	SHOULDER SCREW		D	1	
14	A161563901	Mounting Plate		D	1	
15	A161564400	Pulling Coil spring		C	1	
16	A161564200	Spacer		D	1	
17	A161564100	Lever		D	1	
18	A161564300	Spacer		D	2	
19	A161R72500	Separation Roller Assy		C	1	

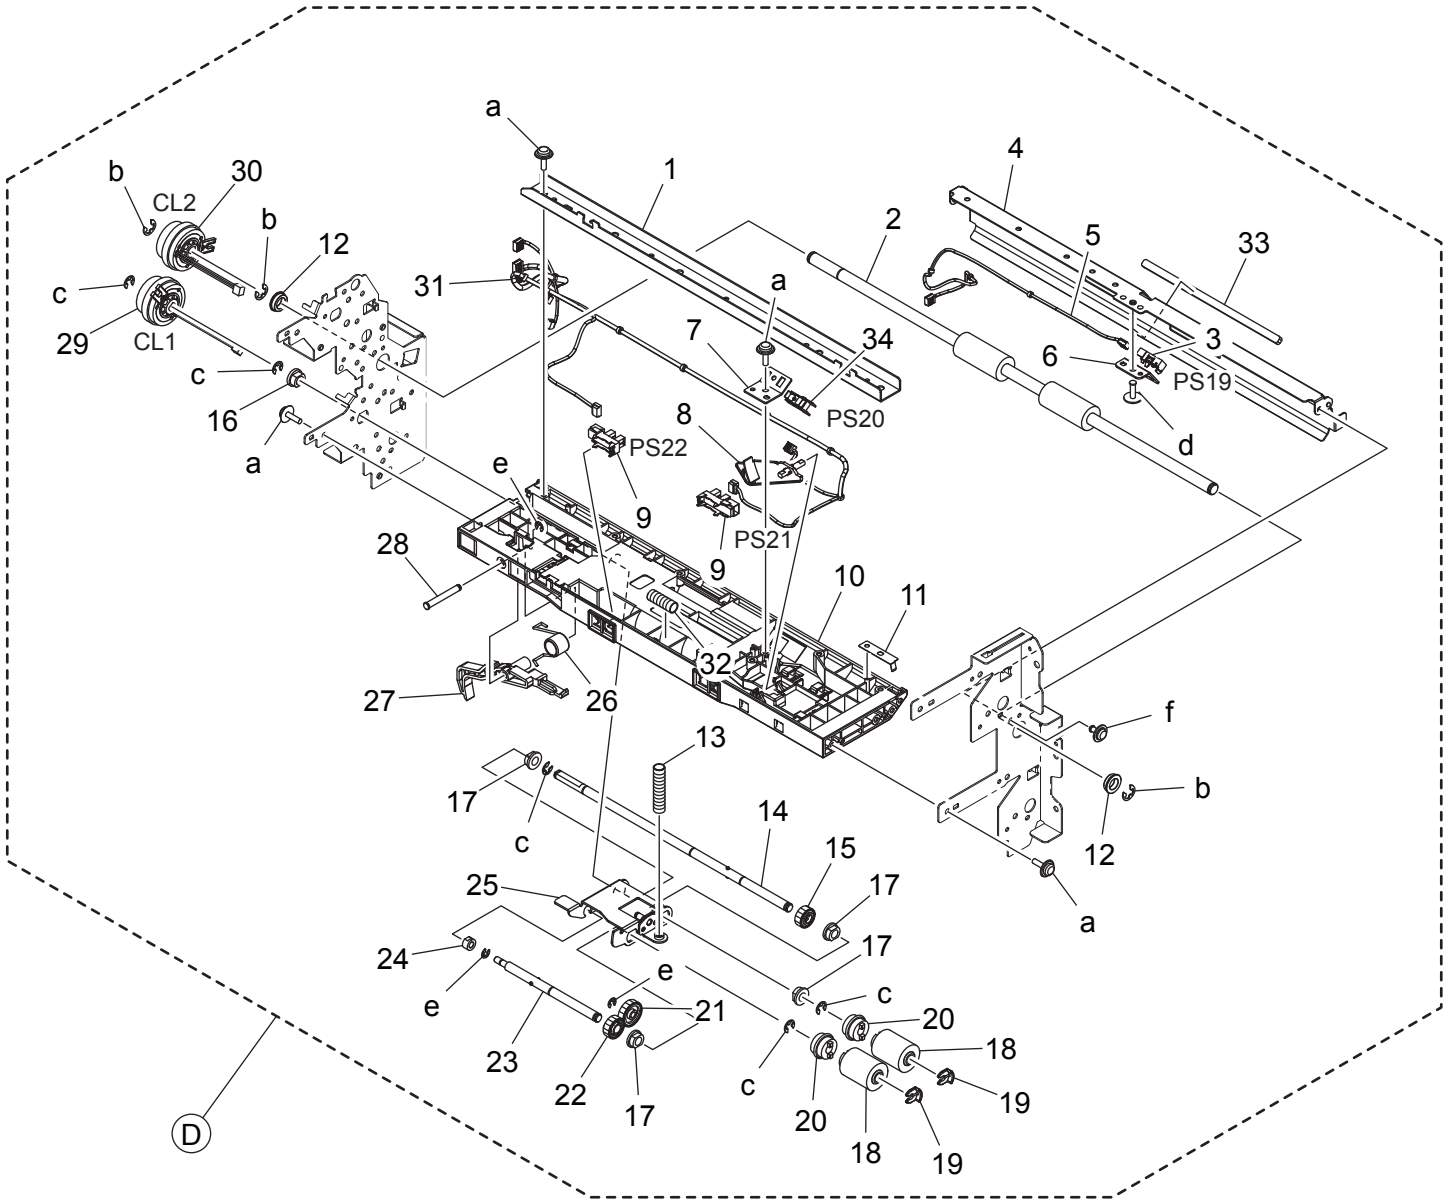

2ND PAPER FEED SECTION

Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A161561000	Reinforce Plate		D	1	a-V153030803 b-V217050001 c-V217040001 d-V137030803 e-V217030001 f-V144030603
2	A161578100	Drive Roller		C	1	
3	A0EDM50100	Photorelector		I	1	
4	A161578200	Guide Plate		D	1	
5	A161N12701	Conveyance Detection harness		D	1	
6	A161571100	Mounting Plate		D	1	
7	A161560900	Mounting Plate	{C284/C364}	D	1	
8	A161561600	Actuator		C	1	
9	A108M50100	Photointerrupter		B	2	
10	A161560300	Paper feed Frame		D	1	
11	A161560600	Ground Plate		D	1	
12	A00J617900	Ball Bearing		B	2	
13	A161562800	Compressing Coil spring		C	1	
14	A161560500	Shaft		D	1	
15	A161562400	Gear 26T		C	1	
16	A00J663200	Bushing		C	1	
17	4131300301	BUSHING		C	4	
18	A00J563600	Roller		A	2	
19	56AA40490	SHAFT STOPPER 4		C	2	
20	A02E561100	Clutch		C	2	
21	A161562300	Gear 34T		C	1	
22	A161562600	Gear 28T		C	1	
23	A161562000	Shaft		D	1	
24	A161562500	Bushing		C	1	
25	A161562101	Holder		D	1	
26	A161567400	Torsion Spring		C	1	
27	A161567300	Lever		C	1	
28	A02E560800	Shaft		D	1	
29	A02EM20200	Clutch		C	1	
30	A02EM20000	Clutch		C	1	
31	A161N10Q02	Paperfeed Wiring /2	{C284/C364}	D	1	
31	A4FMN10302	Paperfeed Wiring /2	{C224}	D	1	
32	A161563000	Compressing Coil spring		C	1	
33	A161578700	Cushion		C	1	
34	A0EDM50100	Photorelector	{C284/C364}	I	1	


2ND PAPER FEED SECTION

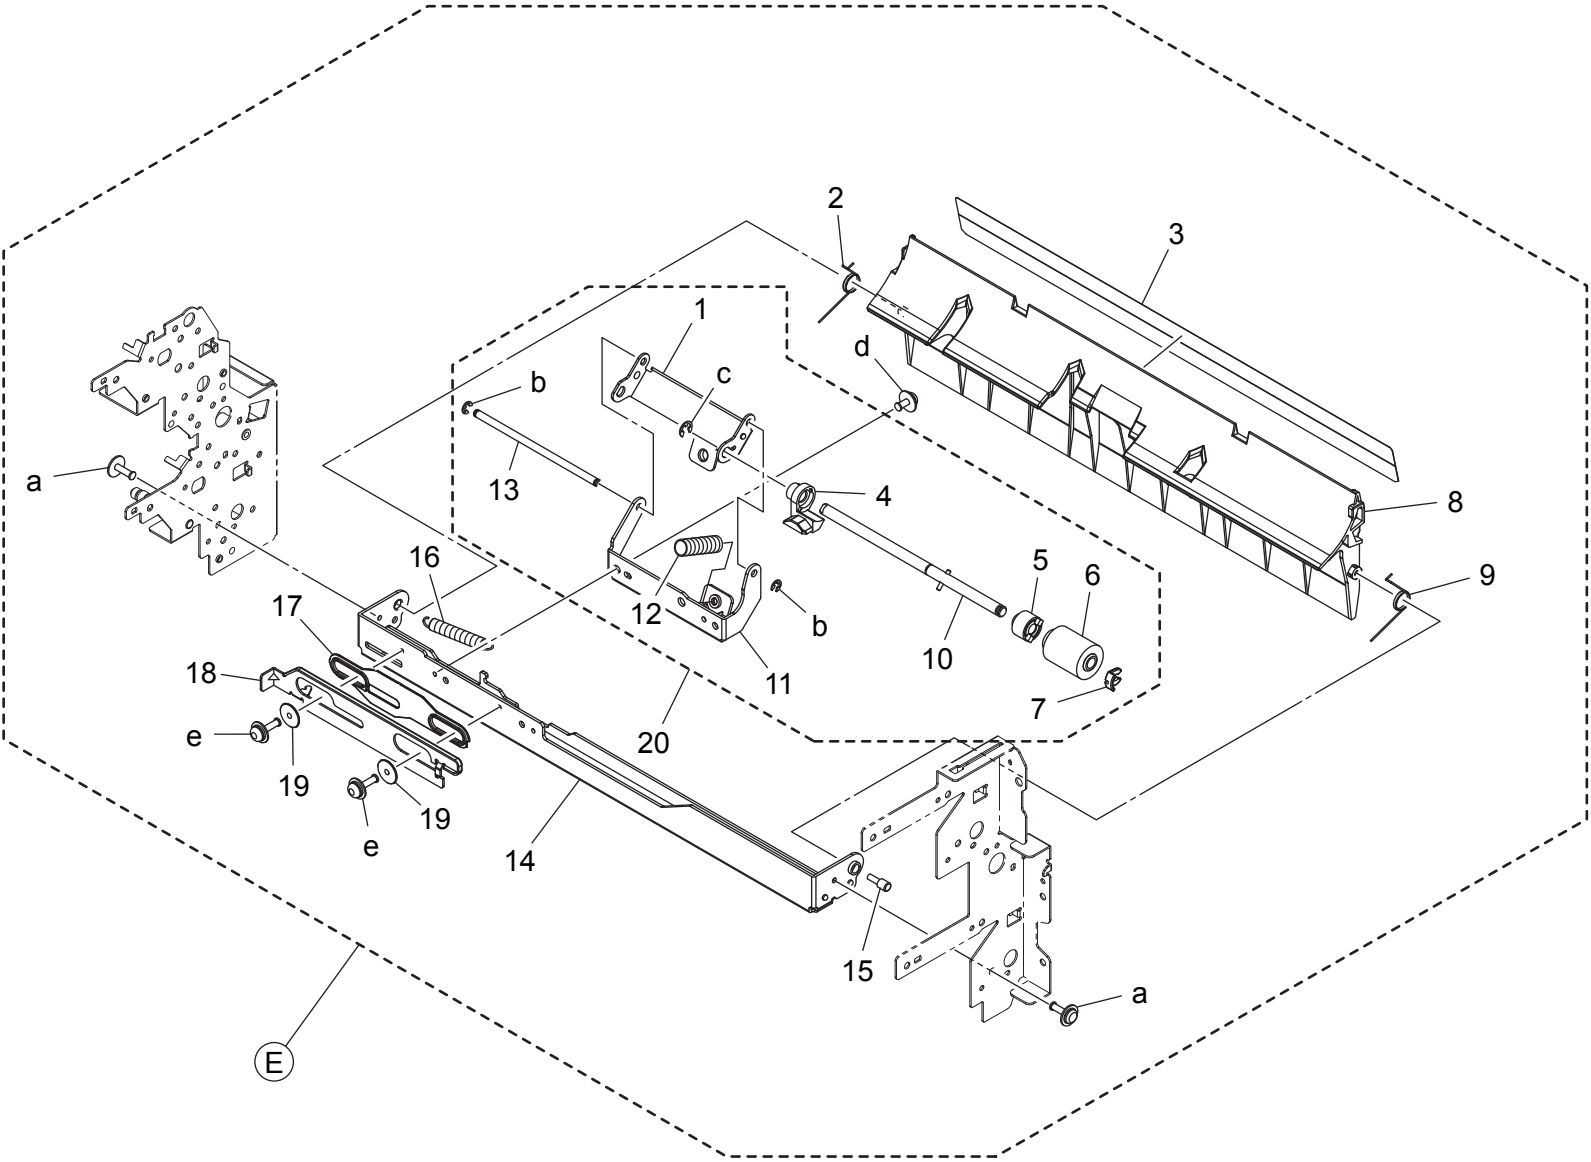

2ND PAPER FEED SECTION

Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A161563100	Holder		D	1	a-V137030803 b-V217030001 c-V217040001 d-V116030603 e-V116031003
2	A161568800	Torsion Coil spring		C	1	
3	A161578500	Guide		C	1	
4	A161563501	Guide		D	1	
5	A0ED563900	Torque limiter		C	1	
6	A00J563600	Roller		A	1	
7	56AA40490	SHAFT STOPPER 4		C	1	
8	A161578401	Guide Plate		C	1	
9	A161568700	Torsion Coil spring		C	1	
10	A161563400	Shaft		D	1	
11	A161564001	Mounting Plate		D	1	
12	4030301703	PRESSURE SPRING		C	1	
13	A161563300	Shaft		D	1	
14	A161563901	Mounting Plate		D	1	
15	4532341001	SHOULDER SCREW		D	1	
16	A161564400	Pulling Coil spring		C	1	
17	A161564200	Spacer		D	1	
18	A161564100	Lever		D	1	
19	A161564300	Spacer		D	2	
20	A161R72500	Separation Roller Assy		C	1	


CASSETTE RAIL SECTION

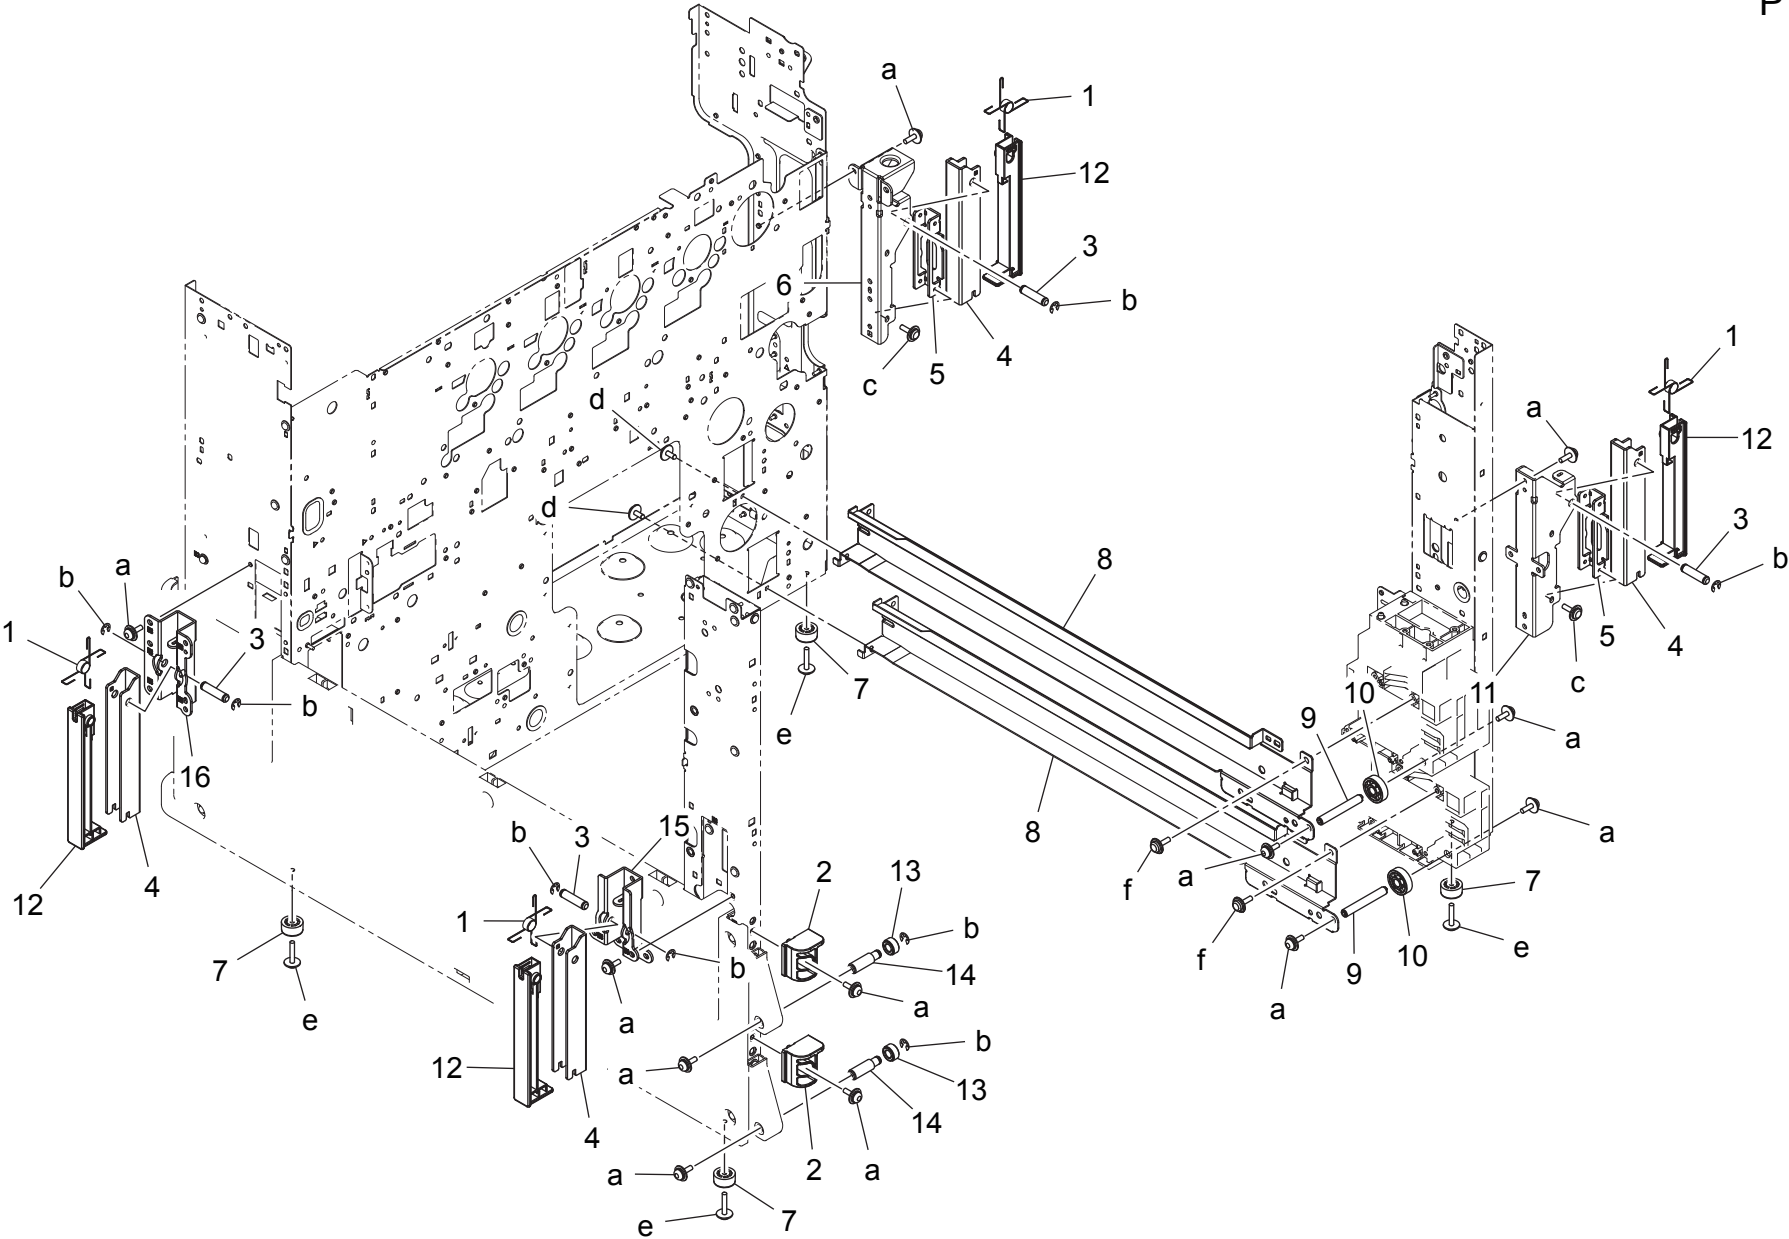

CASSETTE RAIL SECTION


Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A161104300	Torsion Coil spring		D	4	a-V116030803 b-V217040001 c-V137030803 d-V144030603 e-V137031203 f-V153030803
2	A161102300	Stopper		D	2	
3	A161104200	Shaft		D	4	
4	A161101900	Lever		D	4	
5	A161104701	Reinforce Plate		D	2	
6	A161104800	Mounting Plate		D	1	
7	0996305501	RUBBER FOOT		C	4	
8	A161101101	Rail		D	2	
9	A161105800	Shaft		D	2	
10	A161103901	Roll		D	2	
11	A161104400	Mounting Plate		D	1	
12	A161103700	Cover		D	4	
13	A161623400	Roll		D	2	
14	A161105200	Shaft		D	2	
15	A161101600	Mounting Plate		D	1	
16	A161101700	Mounting Plate		D	1	

PAPER SIZE DETECTION SECTION

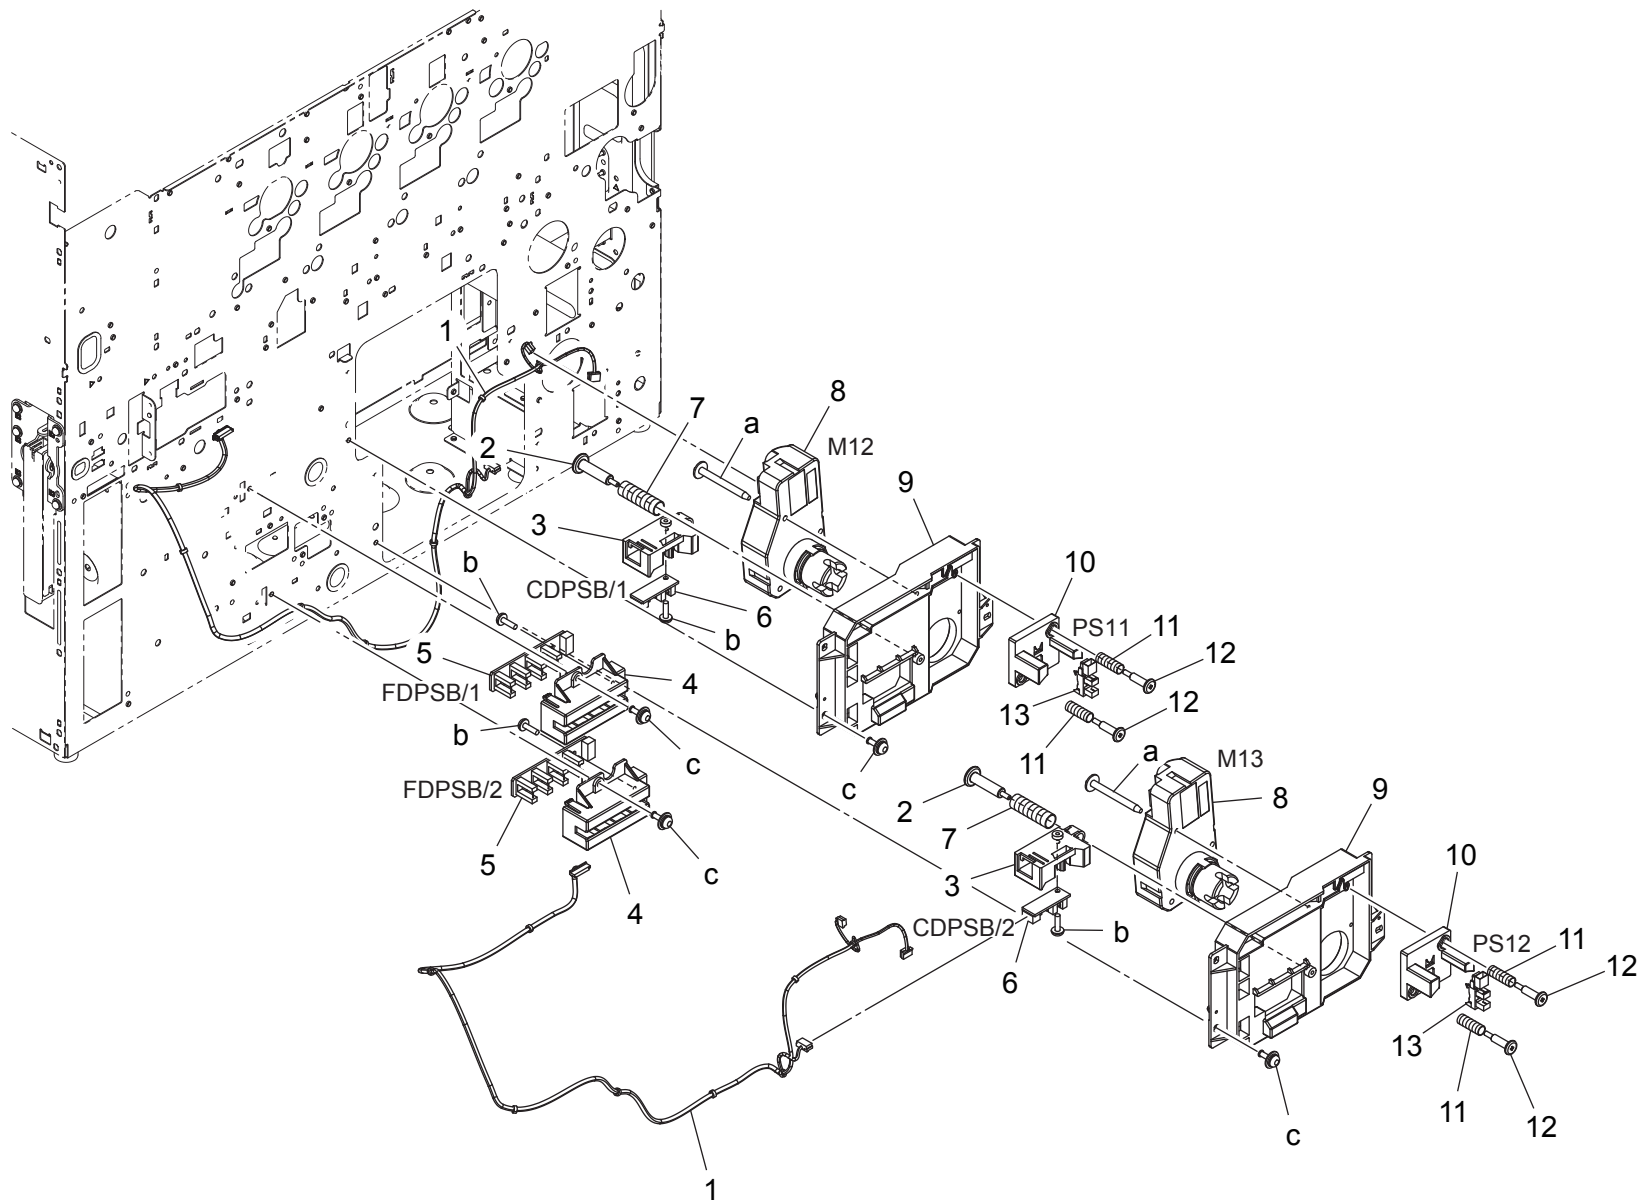

PAPER SIZE DETECTION SECTION


[illegible]

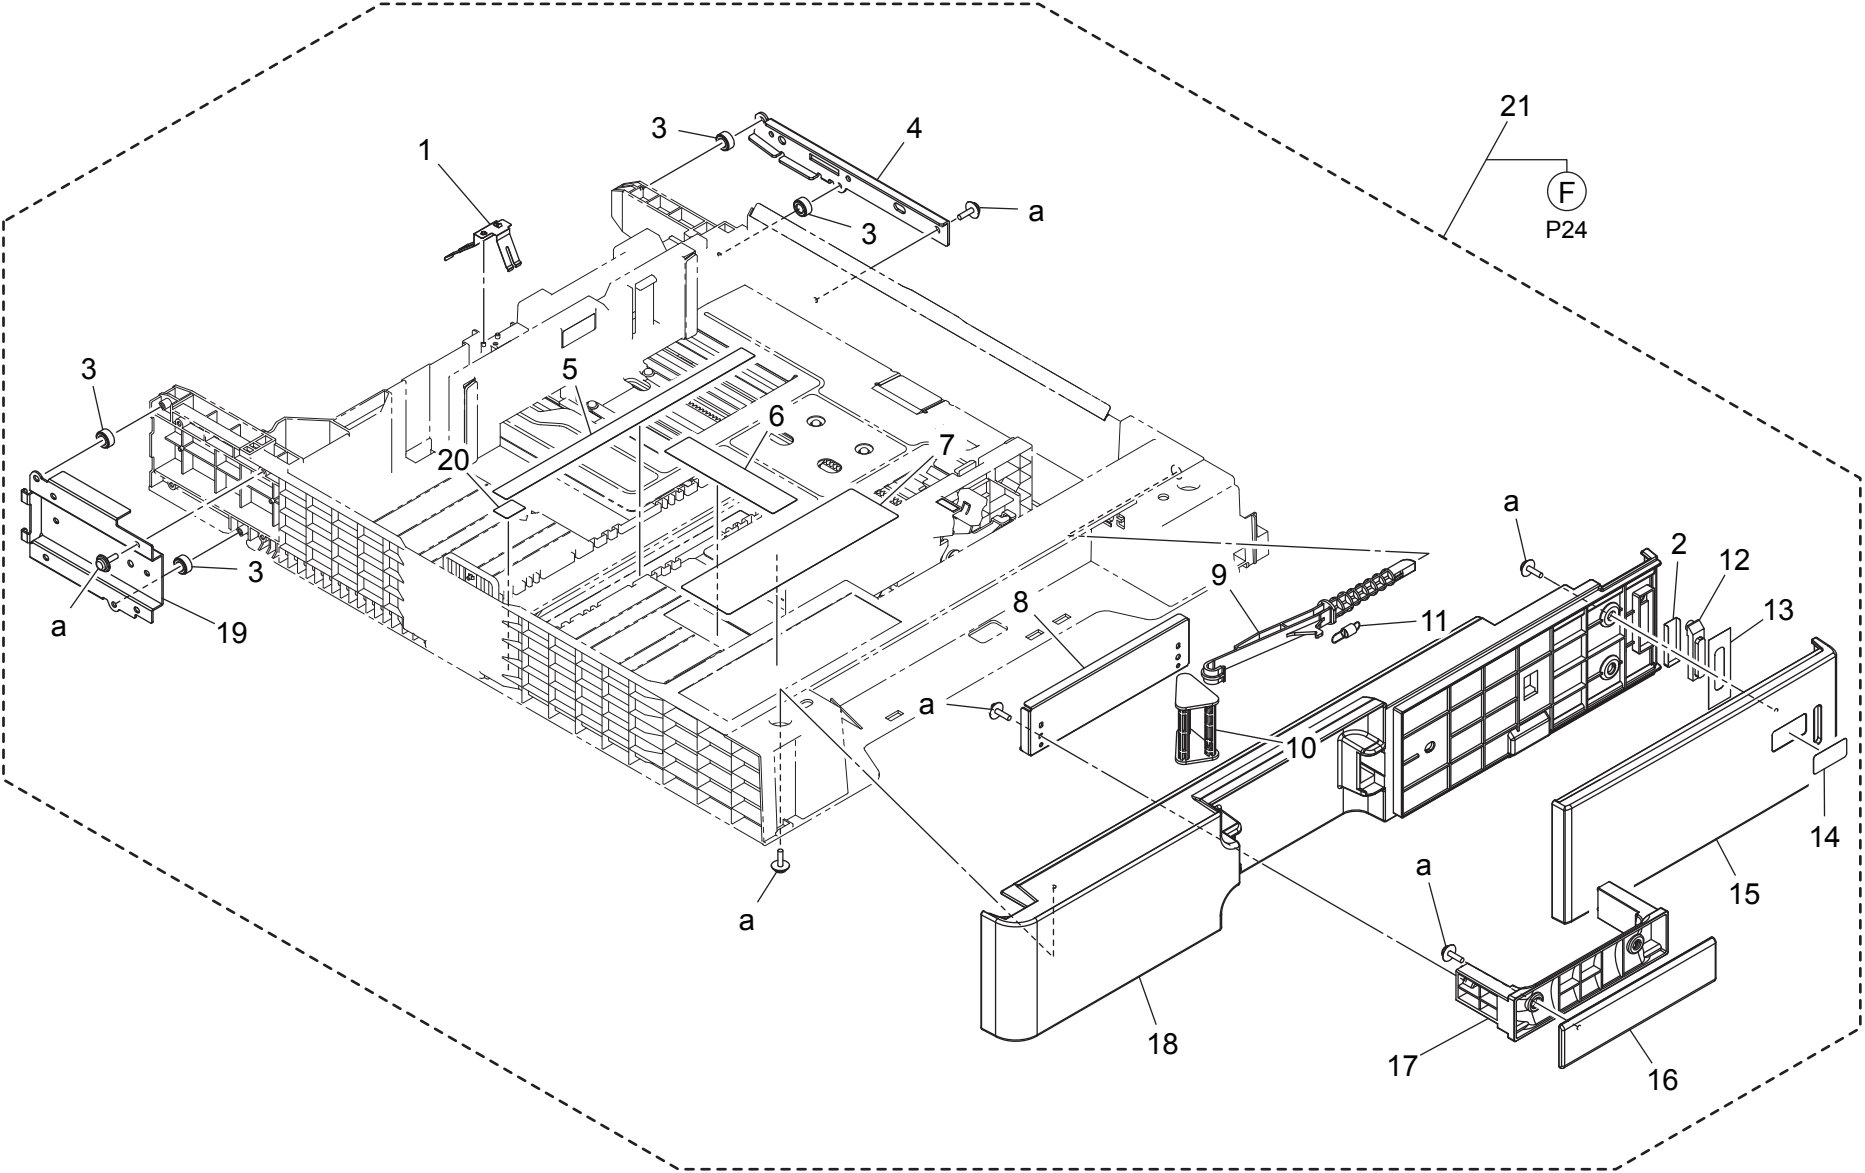

1ST CASSETTE SECTION

Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A161622100	Ground Plate	アース板 (カセット)	D	1	a-V153030803
2	A161626200	Sheet	シート (反射板)	D	1	
3	A161623400	Roll	ころ	D	4	
4	A161623101	Reinforce Plate /Right	補強板/右	D	1	
5	A00J942202	Label FD	ラベル F D	C	1	
6	A02E941500	Label Cd	ラベル C D	C	1	
7	A161943801	Label	ラベル (用紙補給)	C	1	
8	A161626300	Holder	ホルダ (取手)	D	1	
9	A161626502	Lever	レバー (ロック)	C	1	
10	A161626601	Lever	レバー (解除)	C	1	
11	A161626800	Pulling Coil spring	引張りコイルばね (ロックレバー)	C	1	
12	A161626000	Lens	レンズ (ライトガイド・給紙)	D	1	
13	A161626100	Light blocking Sheet	遮光シート	D	1	
14	A161943100	Label 1	ラベル 給紙段数表示 1	C	1	
15	A161625000	Cover	カバー (カセット右)	C	1	
16	A161625900	Cover	カバー (カセット取手)	C	1	
17	A161626900	Handle	取手 (カセット)	C	1	
18	A161625103	Cover	カバー (カセット 1 s t)	C	1	
19	A161623301	Reinforce Plate /Left	補強板/左	D	1	
20	A02E941300	Label Fd	ラベル F D	C	1	
21	A161F6200C	1st Cassette	1 段目カセット	S	1	


1ST CASSETTE SECTION

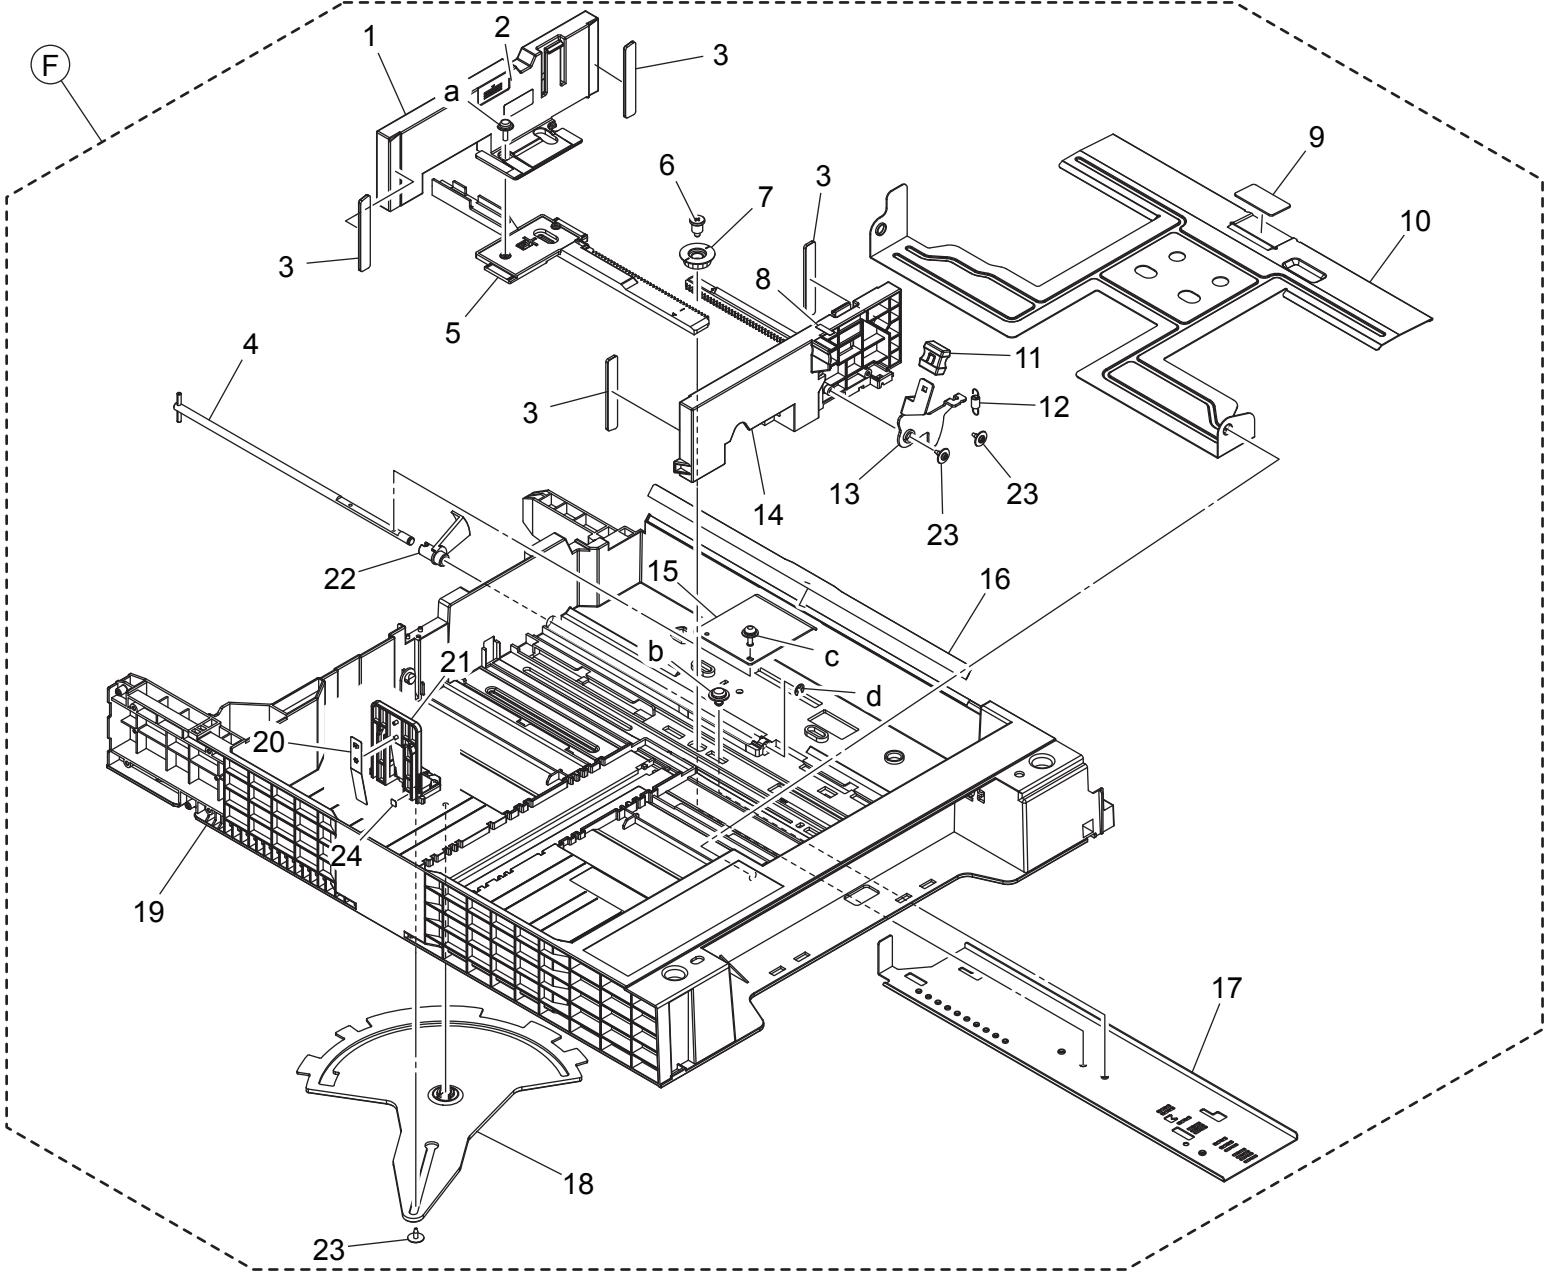

1ST CASSETTE SECTION

Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A161620903	Regulating Plate /Rear		C	1	a-V153030803 b-V144040603 c-V116030803 d-V217040001
2	A161943700	Label Max Level		C	1	
3	A161624100	Cushion		C	4	
4	A161621600	Lifting Shaft		D	1	
5	A161621100	Rack		C	1	
6	A161620600	Shoulder screw		D	1	
7	A161620701	Gear		D	1	
8	A161943000	Label		C	1	
9	4030322601	FRICTION SHEET		C	1	
10	A161620400	Lifting Plate		D	1	
11	4037320401	KNOB		C	1	
12	A0ED621400	Pulling Coil spring		D	1	
13	A161621300	Lever		D	1	
14	A161620802	Regulating Plate /Front		C	1	
15	4030320601	LEVER		D	1	
16	A0ED620200	Guide		C	1	
17	A161621900	Mounting Plate		D	1	
18	A161621400	Lever		C	1	
19	A161620103	Paper feed Cassette		D	1	
20	A161621800	Plate spring		C	1	
21	A161621701	Regulating Plate		C	1	
22	A0ED620701	Actuator		C	1	
23	4163529301	SCREW		C	3	
24	A02E940300	Label		C	1	


2ND CASSETTE SECTION

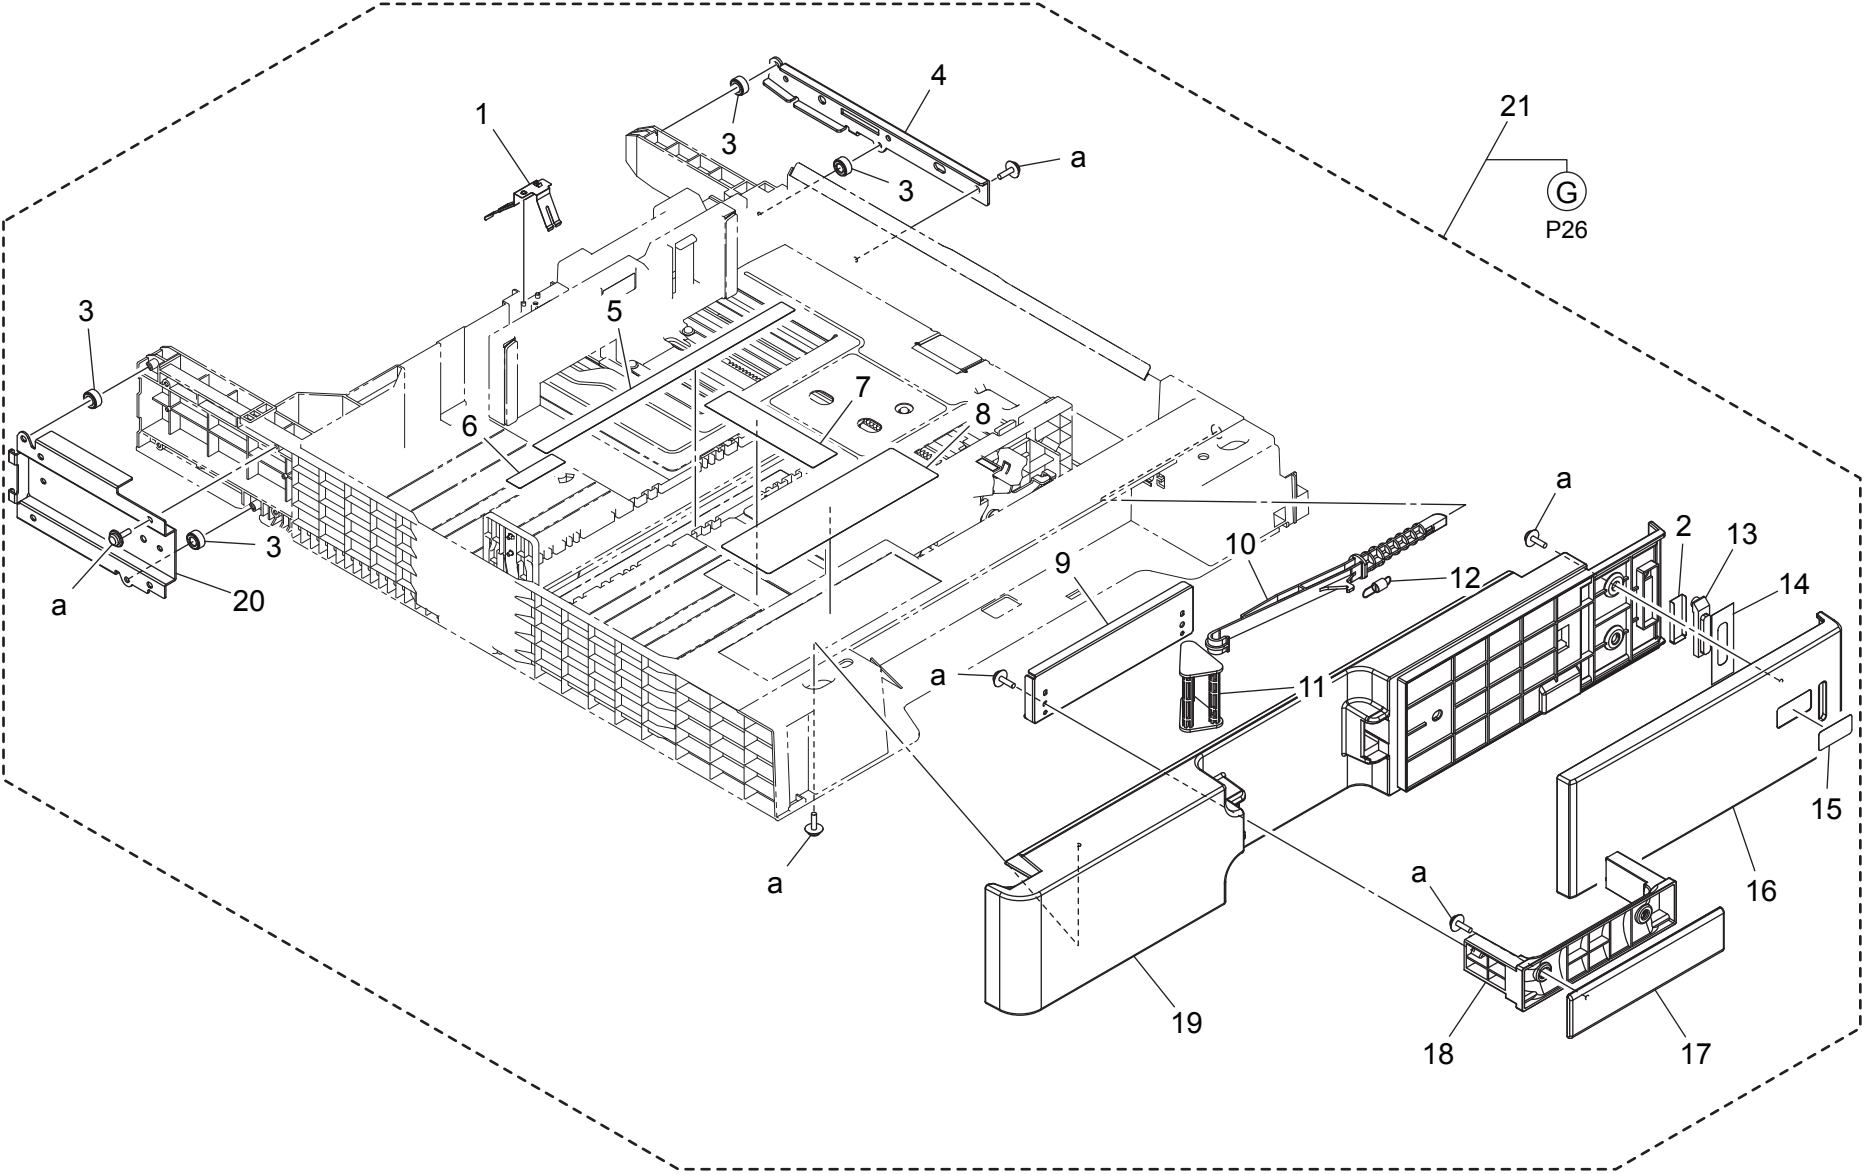

2ND CASSETTE SECTION


Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A161622100	Ground Plate	アース板 (カセット)	D	1	a-V153030803
2	A161626200	Sheet	シート (反射板)	D	1	
3	A161623400	Roll	ころ	D	4	
4	A161633101	Reinforce Plate /Right	補強板/右	D	1	
5	A00J942202	Label FD	ラベル F D	C	1	
6	A161943500	Label	ラベル (F D スケール)	C	1	
7	A161943601	Label	ラベル (C D スケール)	C	1	
8	A161943801	Label	ラベル (用紙補給)	C	1	
9	A161626300	Holder	ホルダ (取手)	D	1	
10	A161636502	Lever	レバー (ロック)	C	1	
11	A161626601	Lever	レバー (解除)	C	1	
12	A161626800	Pulling Coil spring	引張りコイルばね (ロックレバー)	C	1	
13	A161626000	Lens	レンズ (ライトガイド・給紙)	D	1	
14	A161626100	Light blocking Sheet	遮光シート	D	1	
15	A161943200	Label 2	ラベル 給紙段数表示 2	C	1	
16	A161635000	Cover	カバー (カセット右)	C	1	
17	A161625900	Cover	カバー (カセット取手)	C	1	
18	A161626900	Handle	取手 (カセット)	C	1	
19	A161635103	Cover	カバー (カセット 2 n d)	C	1	
20	A161633202	Reinforce Plate /Left	補強板/左	D	1	
21	A161F6300C	2nd Cassette	2 段目カセット	S	1	

2ND CASSETTE SECTION

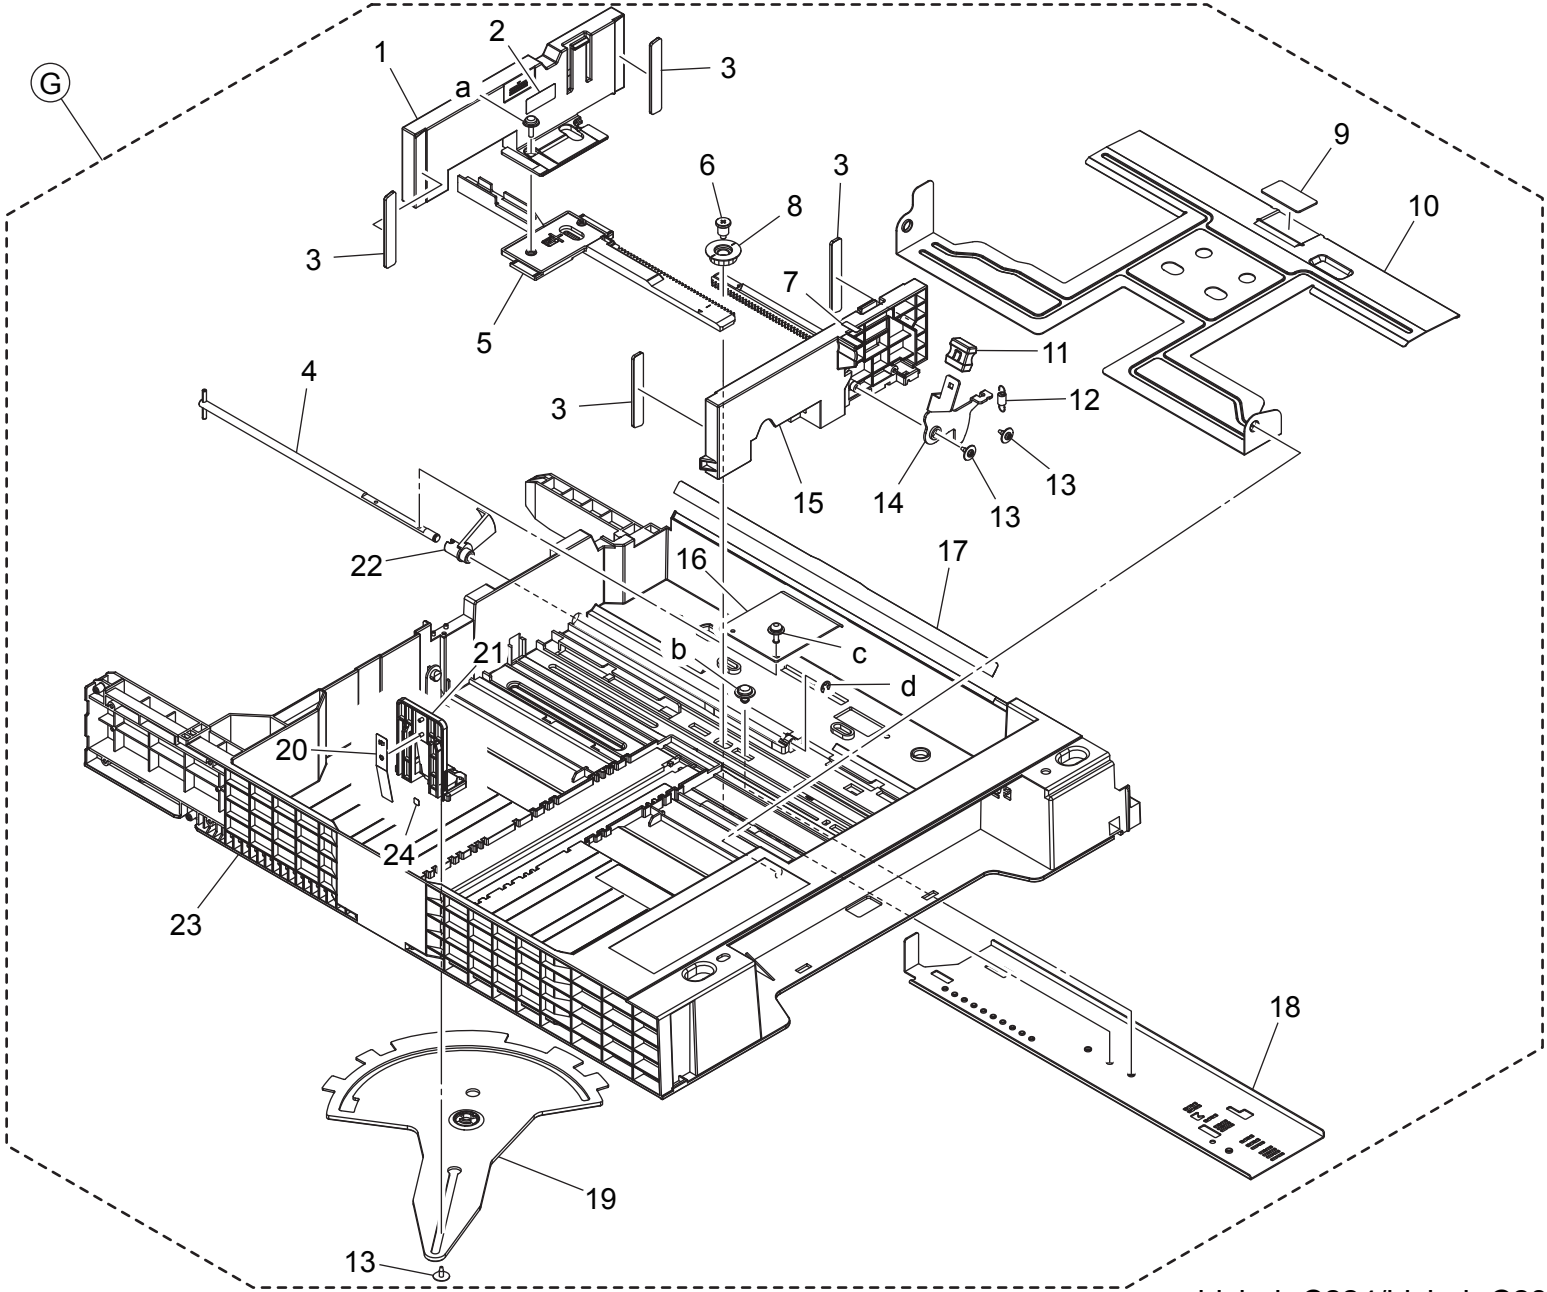

2ND CASSETTE SECTION

Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A161620903	Regulating Plate /Rear		C	1	a-V153030803 b-V144040603 c-V116030803 d-V217040001
2	A161943700	Label Max Level		C	1	
3	A161624100	Cushion		C	4	
4	A161621600	Lifting Shaft		D	1	
5	A161621100	Rack		C	1	
6	A161620600	Shoulder screw		D	1	
7	A161943000	Label		C	1	
8	A161620701	Gear		D	1	
9	4030322601	FRICTION SHEET		C	1	
10	A161620400	Lifting Plate		D	1	
11	4037320401	KNOB		C	1	
12	A0ED621400	Pulling Coil spring		D	1	
13	4163529301	SCREW		C	3	
14	A161621300	Lever		D	1	
15	A161620802	Regulating Plate /Front		C	1	
16	4030320601	LEVER		D	1	
17	A0ED620200	Guide		C	1	
18	A161621900	Mounting Plate		D	1	
19	A161631400	Lever		C	1	
20	A161621800	Plate spring		C	1	
21	A161621701	Regulating Plate		C	1	
22	A0ED620701	Actuator		C	1	
23	A161630102	Paper feed Cassette		D	1	
24	A02E940300	Label		C	1	

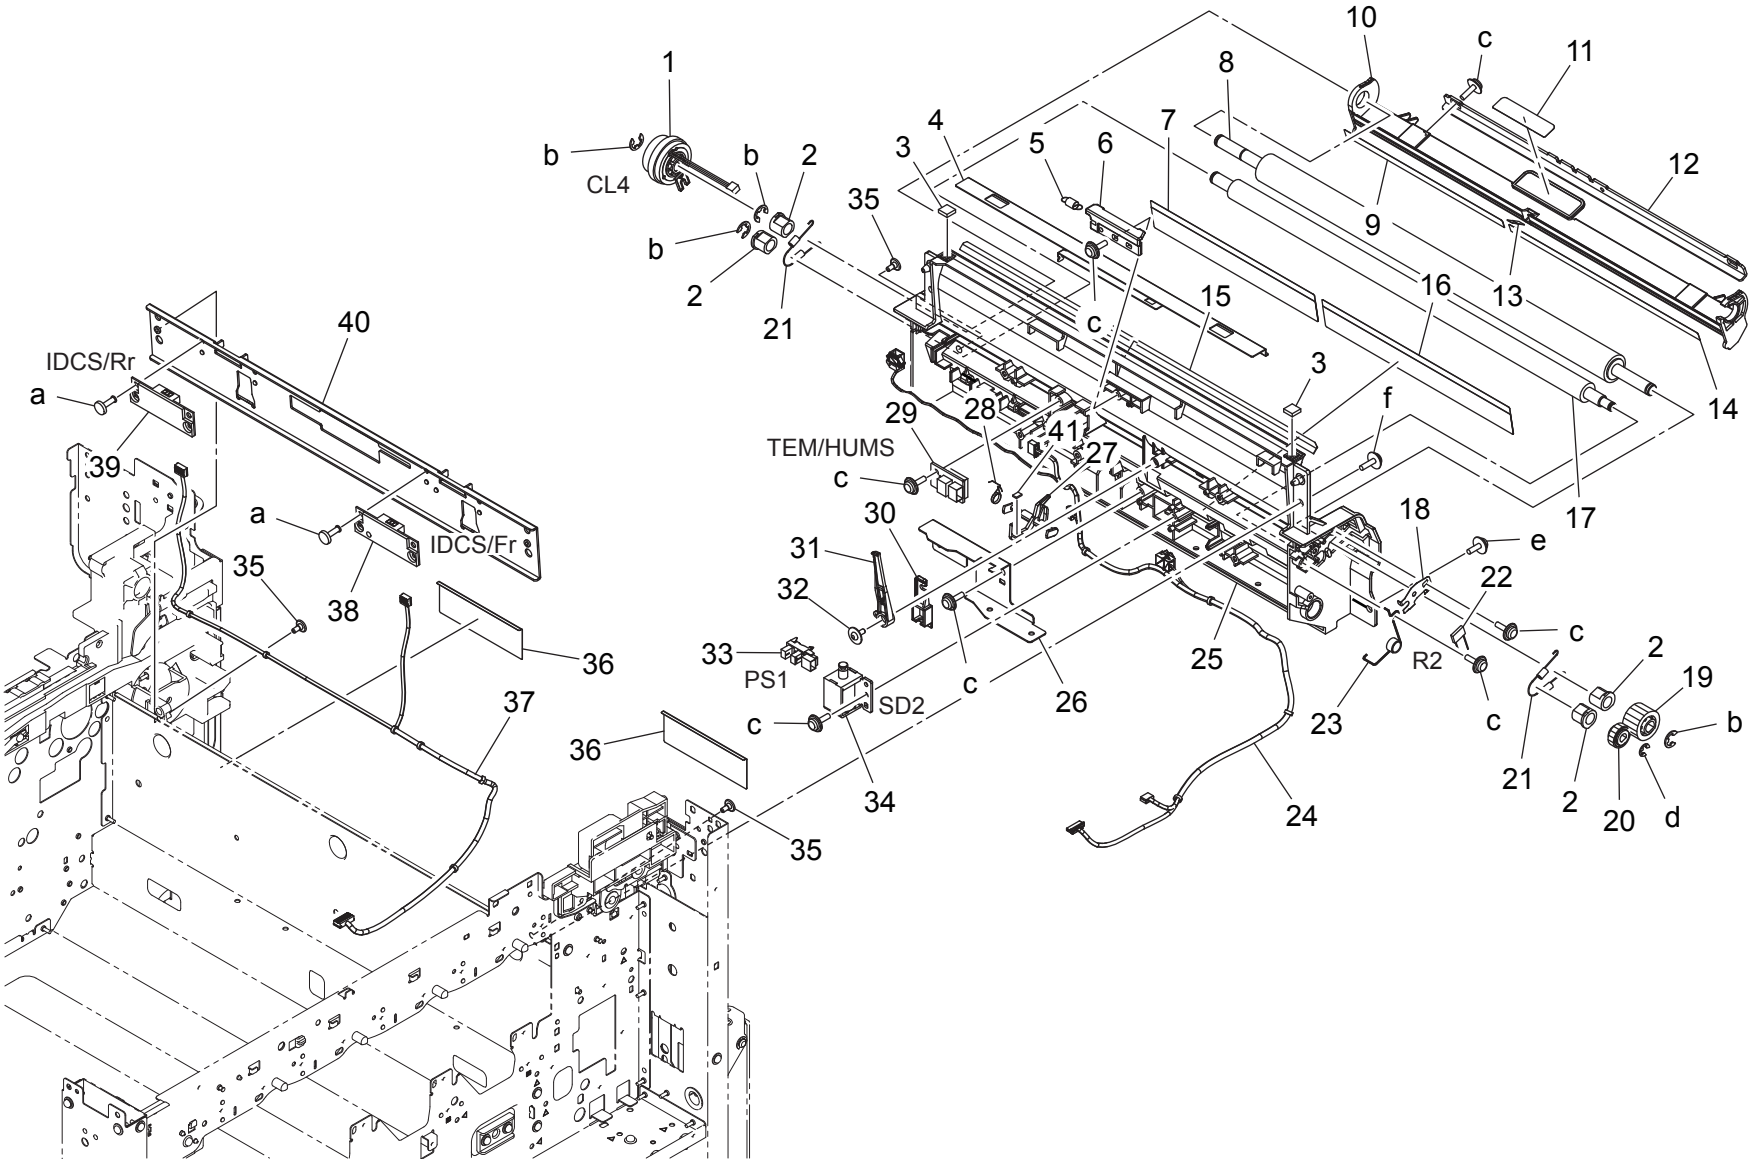


CONVEYANCE SECTION

Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A02EM20000	Clutch		C	1	a-V118030803 b-V217060001 c-V153030803 d-V217040001 e-V116030803 f-V153031003
2	4025357201	BUSHING		C	4	
3	A161701900	Seal /A		D	2	
4	A0ED705800	Cover		D	1	
5	A0ED702800	Pulling Spring		D	1	
6	A161706001	Holding Shutter		D	1	
7	A161701501	Guide Sheet /C		D	1	
8	A0ED700100	Roller		C	1	
9	4038353701	GUIDE		C	1	
10	A161700600	Guide Plate /Middle		D	1	
11	A161946300	Label M2		D	1	
12	A02E712900	Reinforce plate		D	1	
13	4038353901	GUIDE		C	1	
14	A0ED700600	Guide Sheet		D	1	
15	A161701301	Guide Sheet /A		C	1	
16	A161701401	Guide Sheet /B		D	1	
17	A0ED700200	Roller		D	1	
18	A161700800	Ground Plate /D		D	1	
19	A0ED700300	Gear 20T		D	1	
20	A0ED700700	Gear 14T		D	1	
21	A161702000	Conveyance Spring /A		C	2	
22	V800500300	FIXED POWER RESISTORS		D	1	
23	A0ED703200	Torsion Coil spring		D	1	
24	A161N10D00	Conveyance Detection harness /L		D	1	
25	A161700104	Guide Plate /Inside		D	1	
26	A161700300	Mounting Plate /B		D	1	
27	A161701703	Actuator /T		C	1	
28	A161701100	Spring /A		C	1	
29	A0P0M50400	Humidity sensor		C	1	
30	A161700700	Arm /2		D	1	
31	A161700401	Arm /1		D	1	
32	4163529301	SCREW		C	1	
33	A108M50100	Photointerrupter		B	1	
34	A034M20100	Conveyance Solenoid		C	1	
35	4011585202	SHOULDER SCREW		C	3	
36	A161701800	Protection Sheet		D	2	
37	A161N12H00	Sensor Wiring /3		D	1	
38	A161M50000	Photo sensing		I	1	
39	A161M50300	Photo sensing		I	1	
40	A161700901	Reinforce Plate		D	1	
41	A161702100	Cushion /C		C	1	

VERTICAL TRANSPORT SECTION


P 28

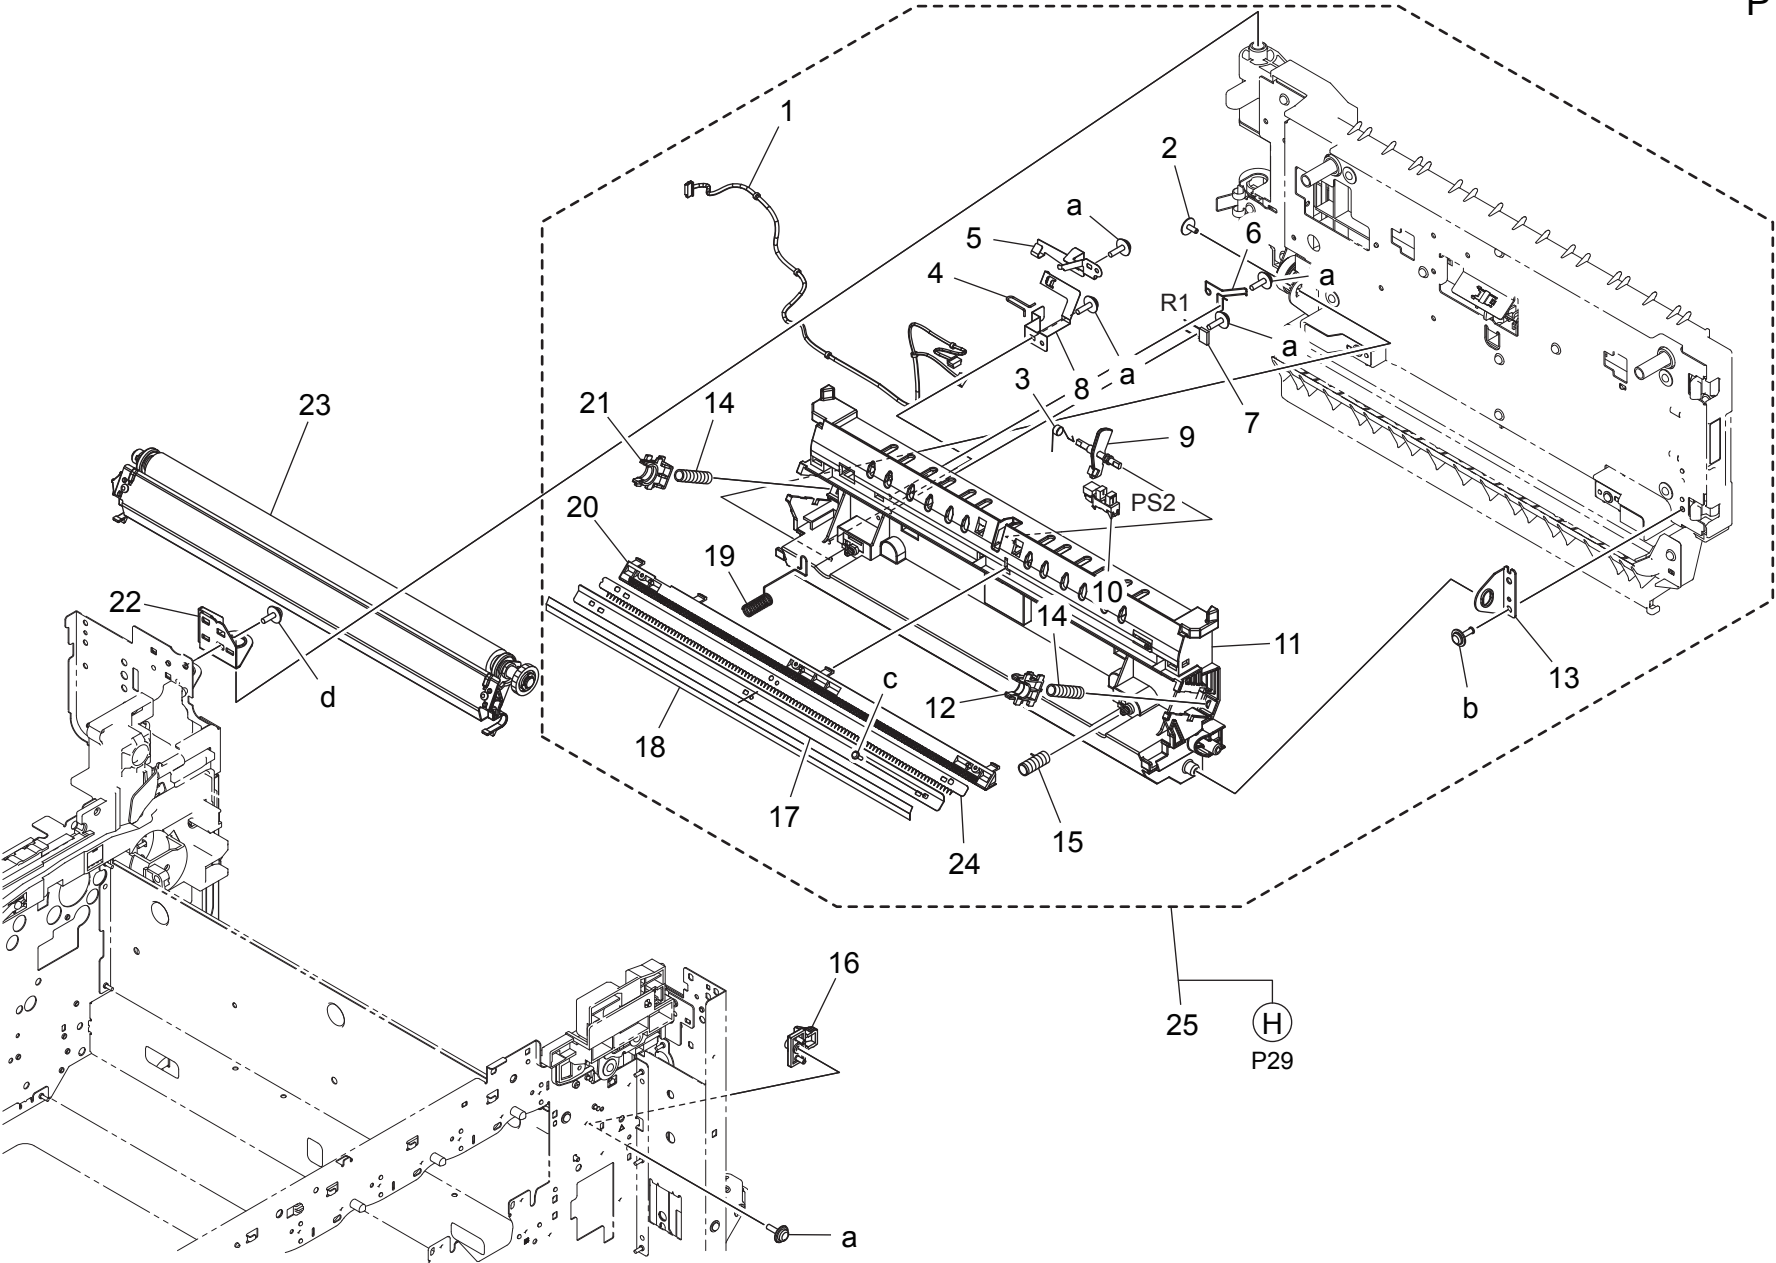

VERTICAL TRANSPORT SECTION

Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A161N10H01	Conveyance Wiring	搬送束線	D	1	a-V153030803 b-V137030803 c-V162020504 d-V116030803
2	4163529301	SCREW	ねじ	C	1	
3	A161712700	Spring /C	ばね / C	D	1	
4	A161712400	Ground Spring /A	アースばね / A	D	1	
5	A161711100	Ground Plate /C	アース板 / C	D	1	
6	A161711000	Ground Spring /B	アースばね / B	D	1	
7	V800500300	FIXED POWER RESISTORS	FIXED POWER RESISTOR	D	1	
8	A161710900	Ground Plate /A	アース板 / A (2次接点)	D	1	
9	A0ED703800	Actuator	アクチュエータ (ループセンサ)	D	1	
10	A108M50100	Photointerrupter	透過型センサ	B	1	
11	A161710102	Holder /A	ホルダ / A	D	1	
12	A161550700	Transfer Holder /2	転写ホルダ / 2	C	1	
13	A161711800	Support Plate /Front	支点板 / 前	D	1	
14	A0ED551000	Compressing Coil spring /2	圧縮コイルばね / 2	C	2	
15	A0ED551100	Compressing Coil spring	圧縮コイルばね (転前)	D	1	
16	A161712300	Fixing Part /Lower	固定部材 / 下	D	1	
17	A0ED550900	Mounting Plate	取付板 (除電上)	D	1	
18	A0ED551700	Guide Seal	ガイドシール	D	1	
19	A161712500	Ground Spring /C	アースばね / C	D	1	
20	A161551600	Mounting Plate	取付板 (除電下)	D	1	
21	A161551500	Transfer Holder /2	転写ホルダ / 2 (後 / Rear)	C	1	
22	A161104101	Adjusting Plate	調整板 (搬送扉上)	D	1	
23	A161R71400	2nd Image Transfer Rollor Assy	2次転写ローラー Assy	C	1	
24	A0ED550800	Neutralizing Part	除電部材	D	1	
25	A161R71622	Vertical Transport Assy	縦搬送 Assy	S	1	


VERTICAL TRANSPORT SECTION

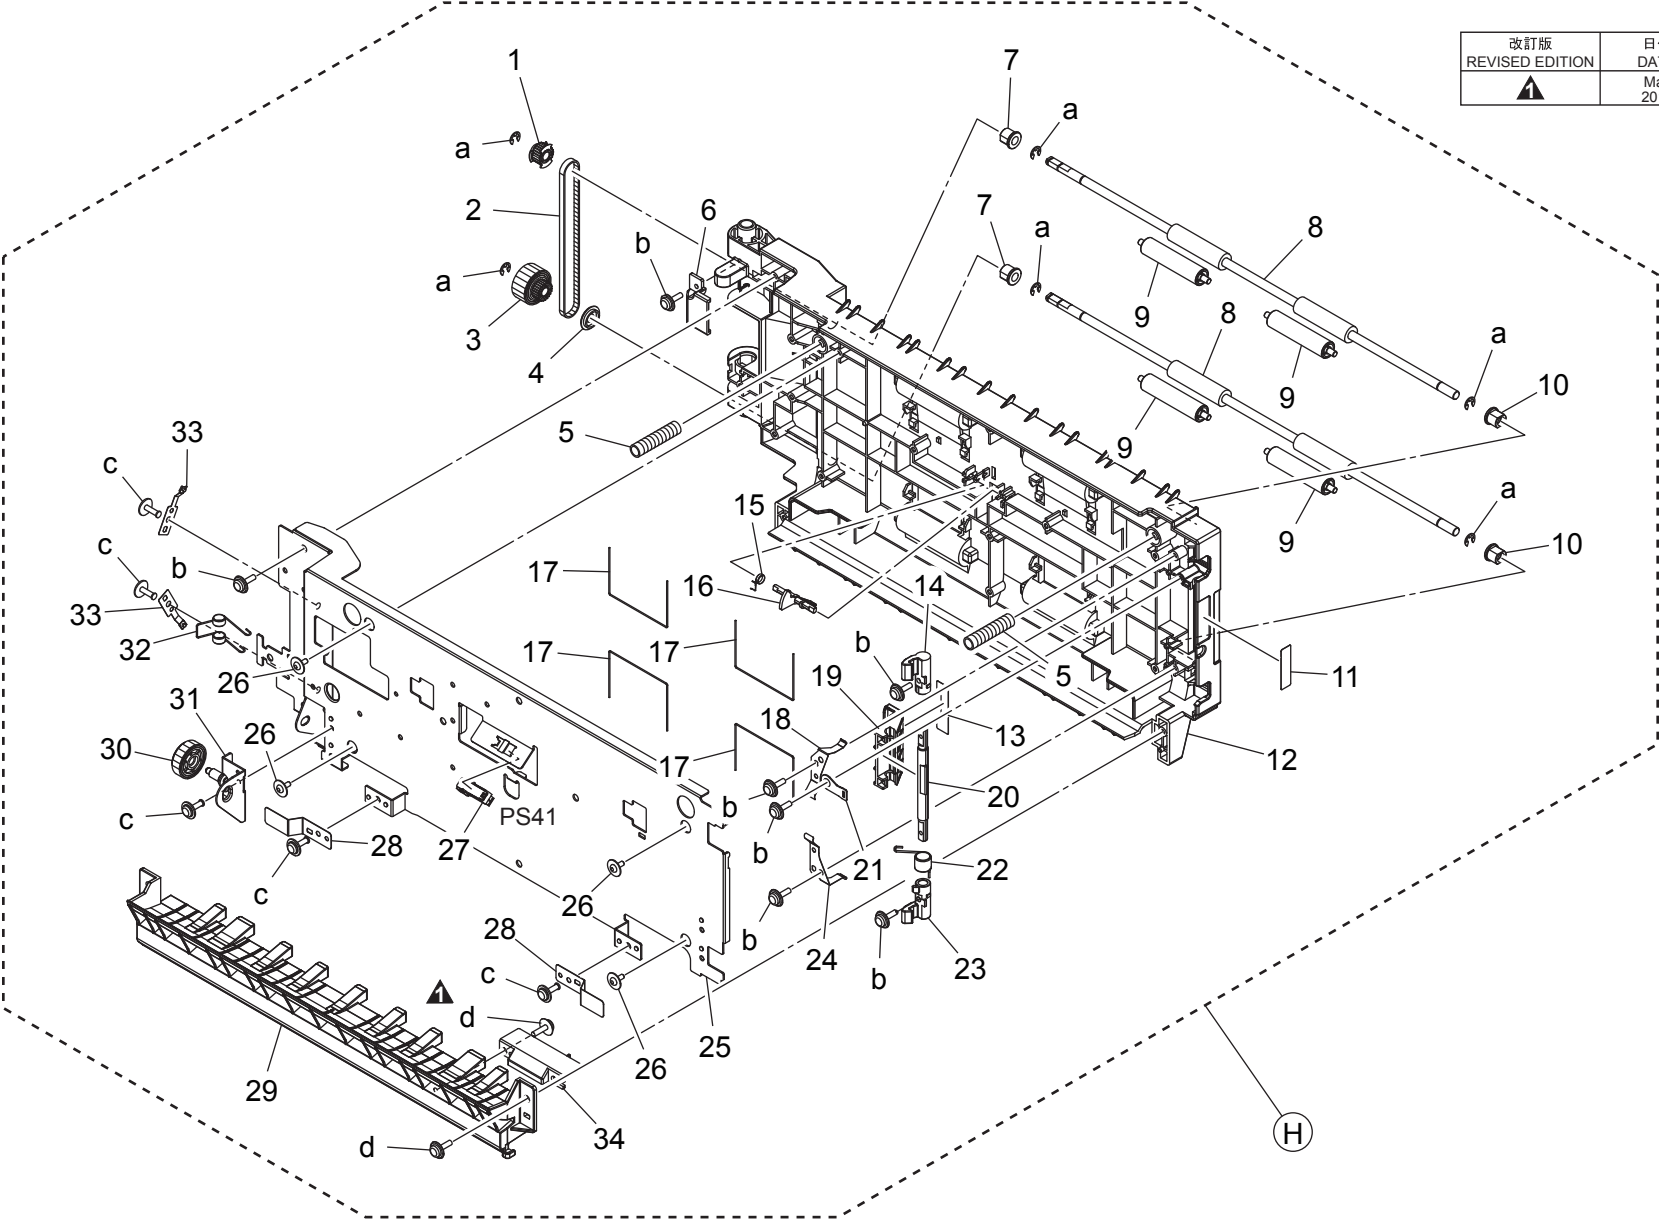

VERTICAL TRANSPORT SECTION

Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A0ED811700	Pulley 22T		C	1	a-V217040001 b-V153030803 c-V137030803 d-V153031003
2	A161719000	Drive Belt 266L		C	1	
3	A161709100	Gear 22/23T		D	1	
4	A0ED811900	Collar		D	1	
5	A161711200	Pressing Spring		D	2	
6	A161712600	Cover /C		D	1	
7	A161713100	Bushing /1		D	2	
8	A161710500	Roller /A		D	2	
9	A161825700	Idler Roller /A		D	4	
10	A02E815200	BUSHING		C	2	
11	A161946400	Label M6		D	1	
12	A161710202	Guide Plate /A		D	1	
13	A161946200	Label M1		D	1	
14	A161711300	Lock Shaft /A		C	1	
15	A161712800	Spring /D		D	1	
16	A161713500	Actuator		C	1	
17	A161714600	Conveyance Spring /B		D	4	
18	A161712000	Ground Plate /D		D	1	
19	A161711600	Open/close Lever		C	1	
20	A161711400	Lock Shaft /B		D	1	
21	A161714500	Fixing Part		D	1	
22	A161711700	Spring /B		C	1	
23	A161711500	Lock Shaft /C		C	1	
24	A161712100	Ground Plate /E		D	1	
25	A161710401	Mounting Plate		D	1	
26	4163529301	SCREW		C	4	
27	A108M50100	Photointerrupter		B	1	
28	A0ED702400	Plate spring		D	2	
29	A161710300	Guide Plate /B		D	1	
30	A161719100	Gear 23T		C	1	
31	A161711900	Support Plate /Rear		D	1	
32	A161712900	Ground Spring /D		D	1	
33	A161714800	Contact		D	2	
34	A161816300	Lock Plate		D	1	


VERTICAL CONVEYANCE DOOR SECTION

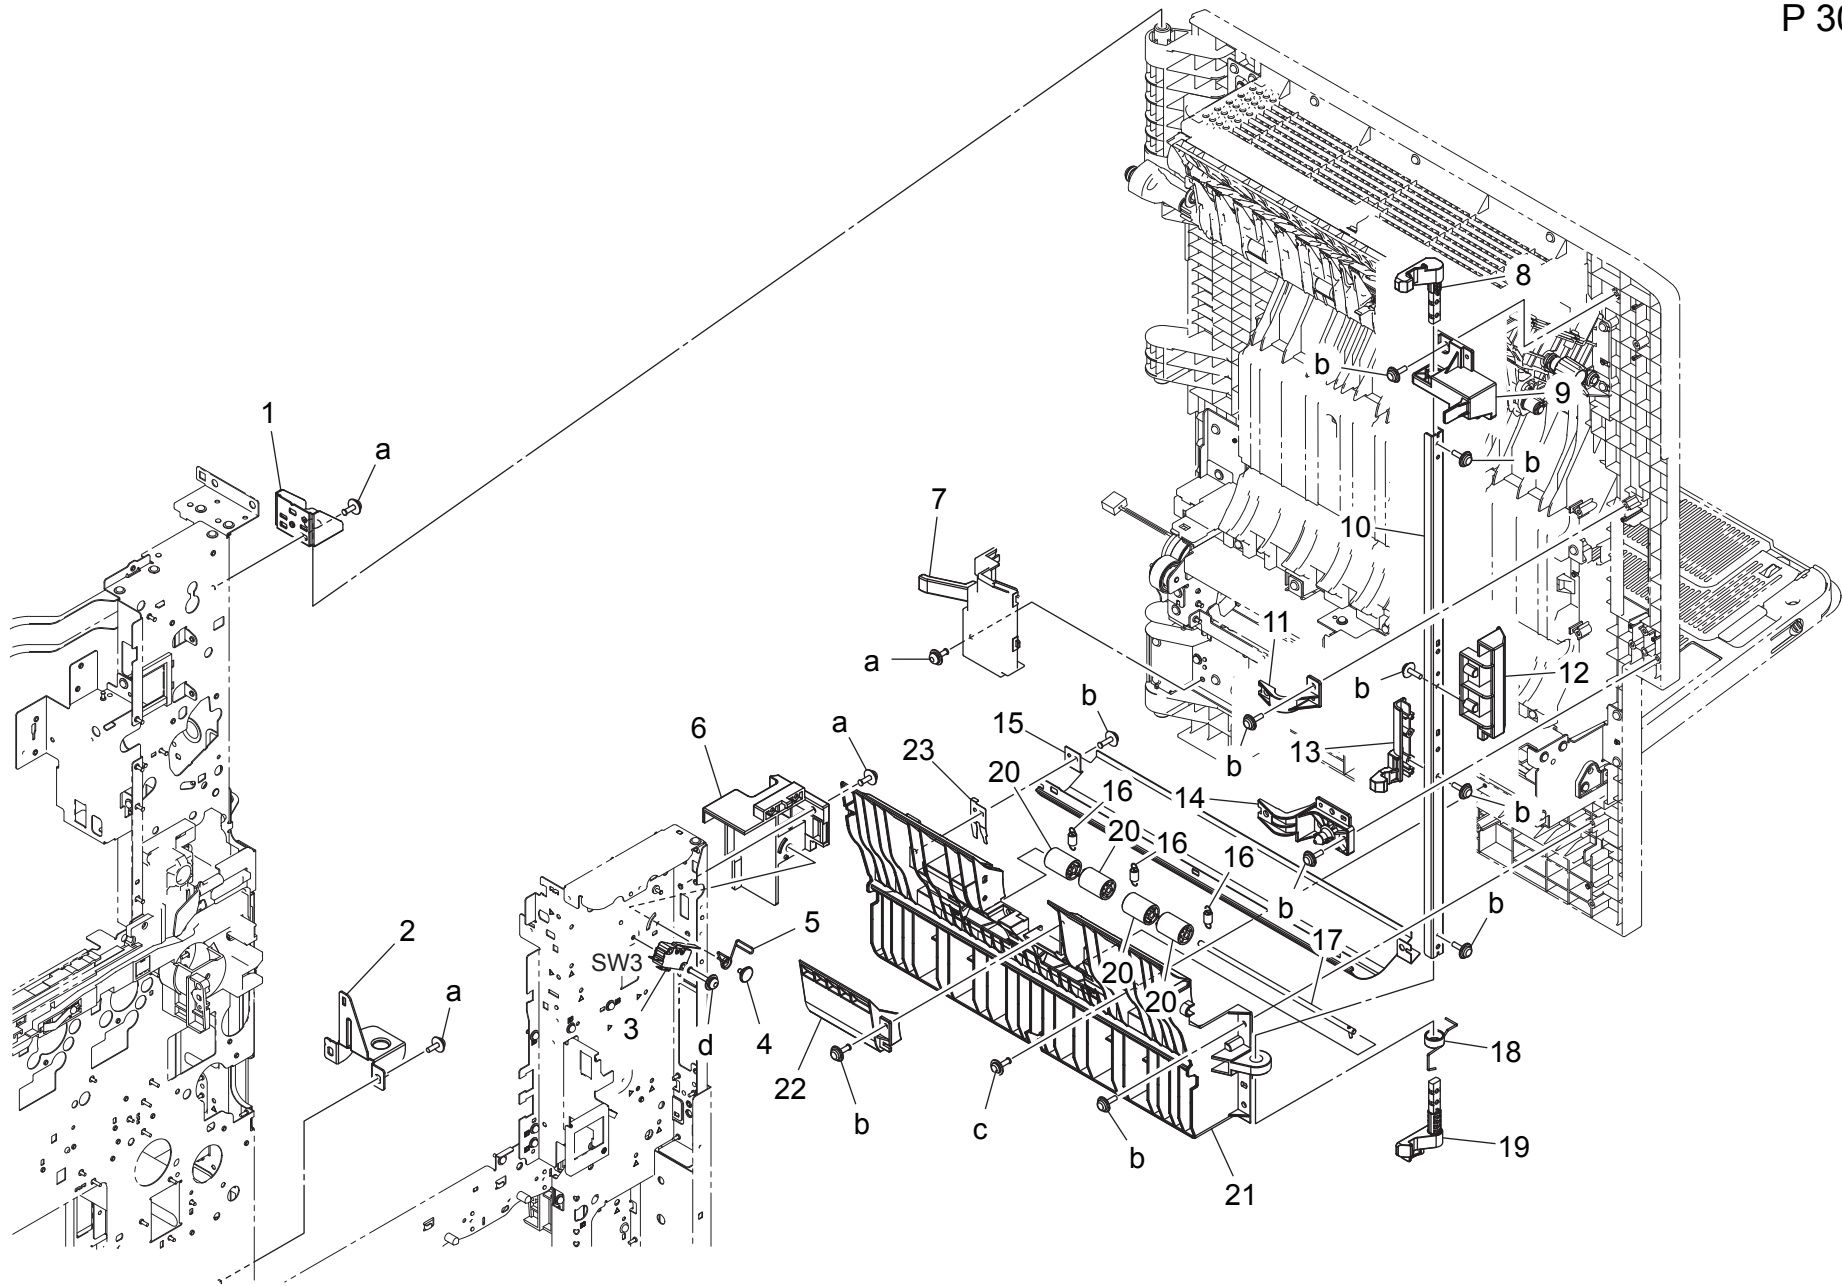

VERTICAL CONVEYANCE DOOR SECTION

Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A161121300	Adjusting Plate		D	1	a-V116030803 b-V153030803 c-V137030804 d-V116031603
2	A161102500	Adjusting Plate		D	1	
3	9J06M60100	MICRO SWITCH		C	1	
4	A161137100	Shoulder screw		D	1	
5	A161151200	Torsion Coil spring		D	1	
6	A161121200	Holder		D	1	
7	A161592900	Wiring Cover /B		D	1	
8	A0ED712100	Lock Claw		C	1	
9	A161811500	Support Part /Upper		D	1	
10	A161811000	Lock Plate		D	1	
11	A161811401	Lock Part /Middle		D	1	
12	A161811100	Open/close Handle		C	1	
13	A161815201	Lock /Middle		C	1	
14	A161811301	Lock Part /Lower		D	1	
15	A161815000	Guide Door		D	1	
16	A161815500	Pulling Spring		C	3	
17	A161815300	Shaft		D	1	
18	A161815900	Torsion Coil spring		C	1	
19	A161811600	Lock Claw /Lower		C	1	
20	A161815400	Roll		C	4	
21	A161810301	Guide Plate /2		D	1	
22	A161590500	Paper feed Guide		D	1	
23	A161816200	Ground Guide		D	1	

BYPASS TRAY SECTION

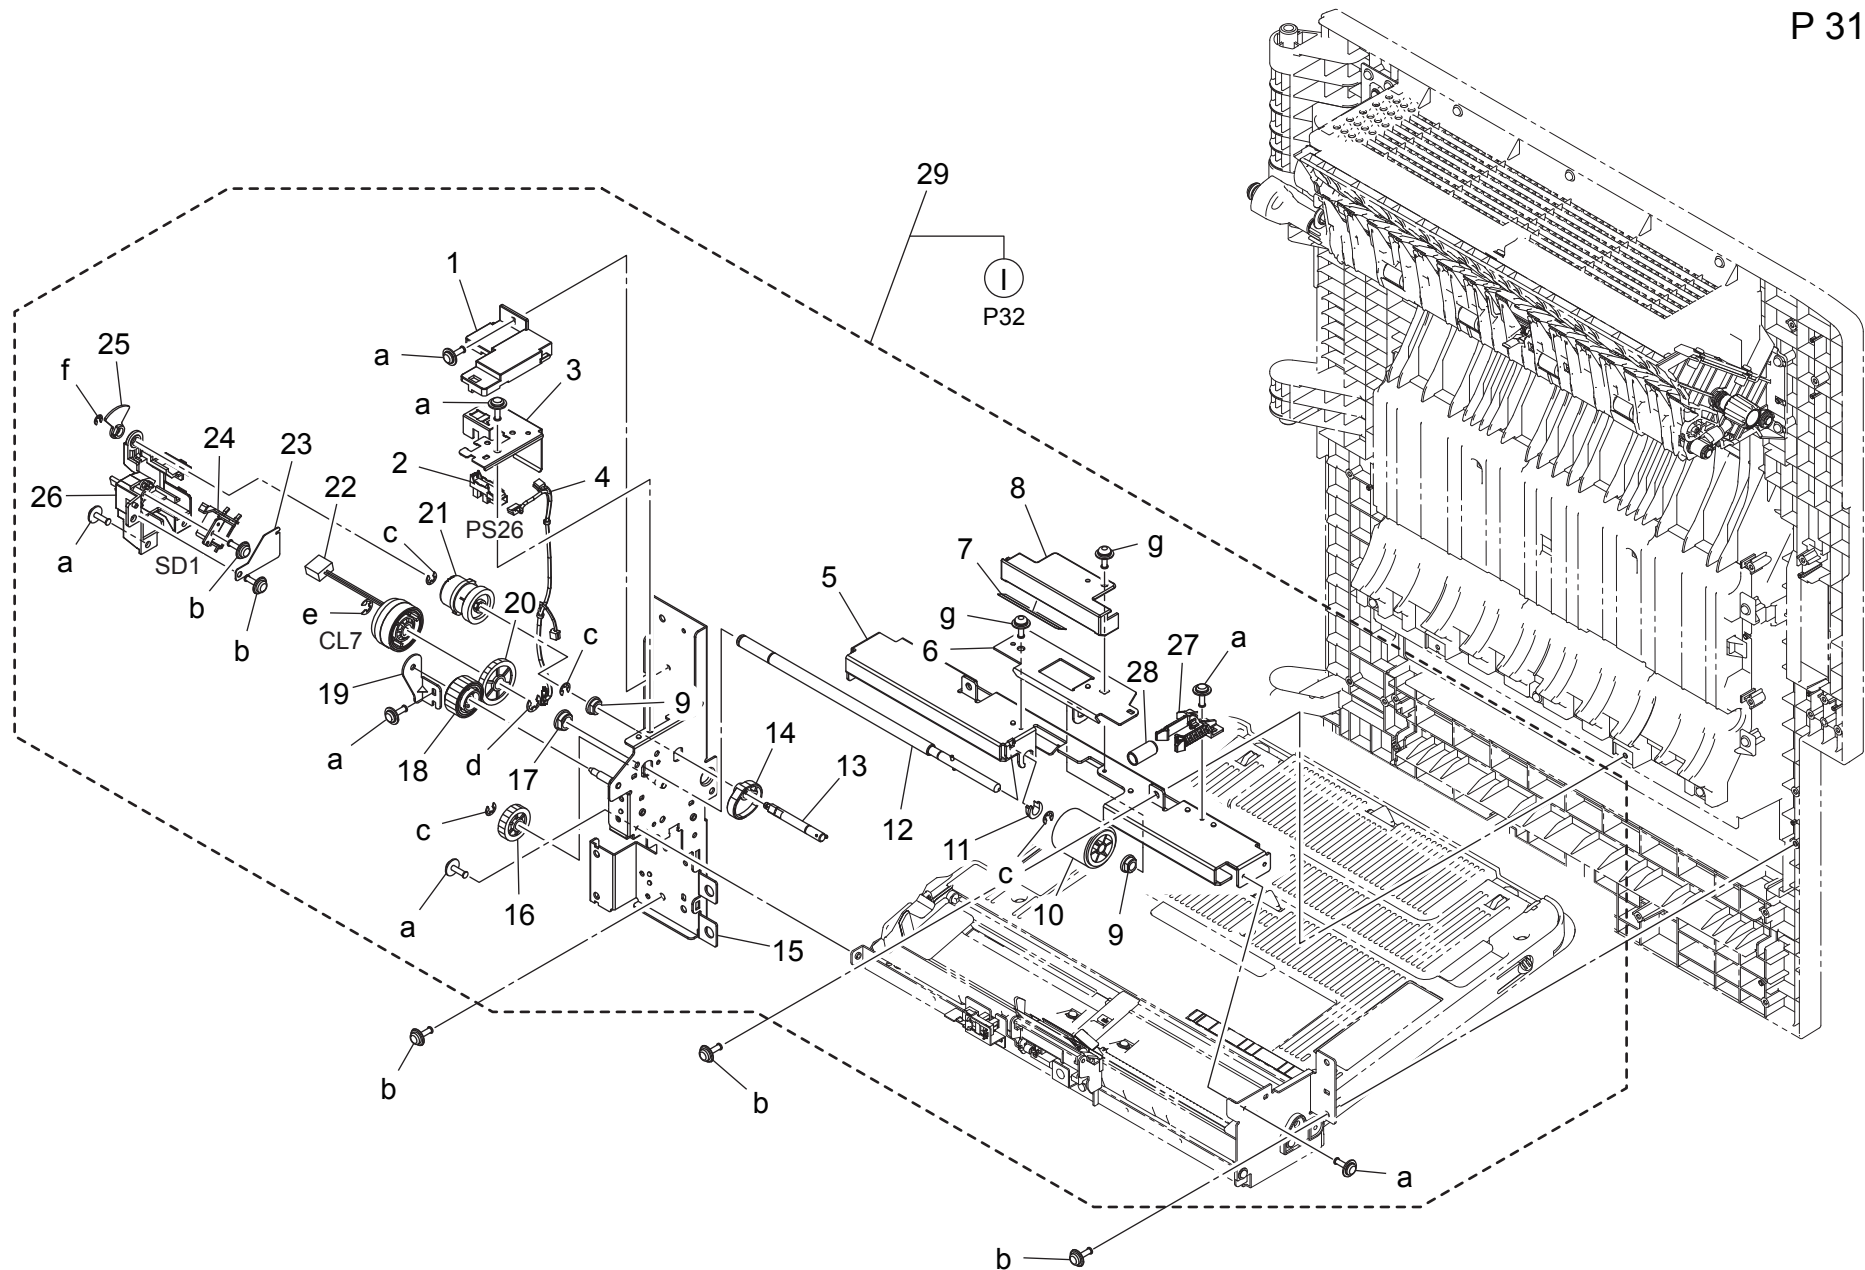


BYPASS TRAY SECTION

Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A161592800	Wiring Cover /A		D	1	a-V137030803 b-V153030803 c-V217040001 d-V217060001 e-V217050001 f-V217030001 g-V116030803
2	A108M50100	Photointerrupter		B	1	
3	A161591900	Mounting Plate		D	1	
4	A161N12200	Paperfeed Drive harness /1		D	1	
5	A161590201	Paper feed Frame		D	1	
6	A161594100	Reinforce Plate		D	1	
7	A161594700	Guide Sheet		C	1	
8	A161591700	Auxiliary Guide		D	1	
9	A02E596300	Bushing		C	2	
10	A00F623201	Roller		B	1	
11	A161594400	Slide Stopper		C	1	
12	A161591500	Paper feed Shaft		D	1	
13	A161591400	Drive Shaft		D	1	
14	A161593300	Paper feed Cam		C	1	
15	A161F59000	Caulking(Mounting Plate Drive Frame)		D	1	
16	A02E595400	Gear 22T		C	1	
17	4131353202	BUSHING		C	1	
18	A161590800	Bypass Gear 24T		C	1	
19	A161590600	Reinforce Plate		D	1	
20	A02E596100	Gear 30T		C	1	
21	A02E595100	Clutch assy		C	1	
22	A02EM20100	Clutch		C	1	
23	A0ED597800	Cover		D	1	
24	9J06M20000	SOLENOID		C	1	
25	A161591300	Light blocking Plate		C	1	
26	A161591200	Drive Cover		D	1	
27	A161594800	Hold Claw		C	1	
28	A161594900	Coil spring		C	1	
29	A161R72400	Multiple Bypass Tray Assy		S	1	


BYPASS TRAY SECTION

P 32

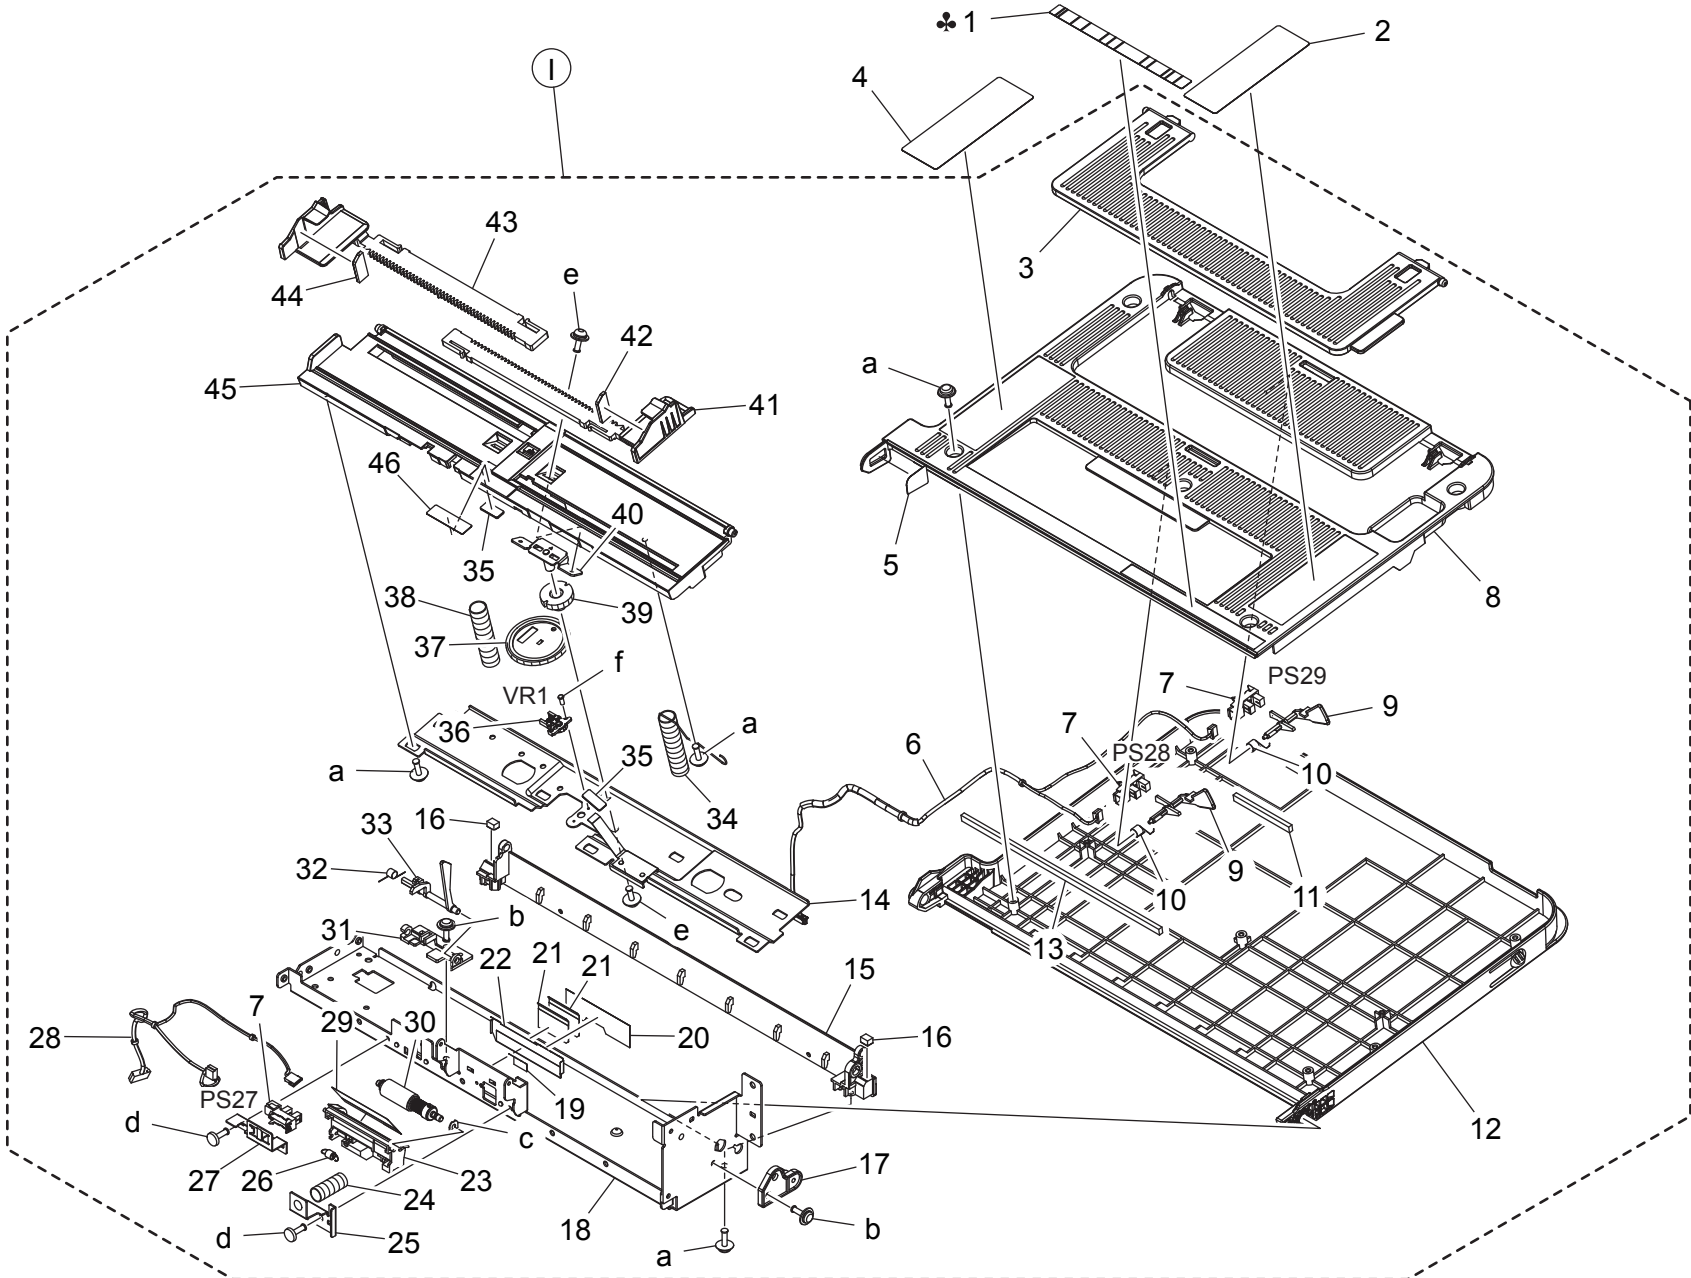


BYPASS TRAY SECTION

Key	Part No.	Description		Destinations	Class	QTY	Standard parts
1	A161944101	Label Scale/Metric	ラベル 手差しノメトリック	A,A1,C,D1,D3,E,F2,G 1,I,K B,G2	C	1	a-V153030803 b-V137030803 c-V218030086 d-V118030803 e-V116030804 f-V111170403
1	A161944201	Label Scale/Inch	ラベル 手差しノインチ		C	1	
2	A161944300	Label Paper Supply 1	ラベル 用紙補給 1		D	1	
3	A161592200	Auxiliary Tray	補助トレイ		C	1	
4	A161944400	Label Paper Supply 2	ラベル 用紙補給 2		D	1	
5	A161592700	Seal	シール		C	1	
6	A161N11Q01	Paperfeed Detection harness /1	給紙検知束線ノ 1 (マル手 F D)		D	1	
7	A108M50100	Photointerrupter	透過型センサ		B	3	
8	A161592100	Bypass Tray /Upper	手差しトレイノ上		C	1	
9	A161592400	Actuator	アクチュエータ		C	2	
10	A161592500	Torsion Spring	ねじりばね		C	2	
11	A161592600	Holding Cover /2	押さえカバーノ 2		D	1	
12	A161592002	Bypass Tray	手差しトレイ		C	1	
13	A161592300	Holding Cover	押さえカバー		D	1	
14	A161593701	Mounting Plate	取付板		D	1	
15	A161590303	Support Holder	支点ホルダ		D	1	
16	A161594201	Cushion	クッション		D	2	
17	A161591600	Hold Plate	保持板		C	1	
18	A161590101	Bypass Frame	手差しフレーム		D	1	
19	A161595600	Slide Guide	すべりガイド		C	1	
20	A161595100	Seal	シール		C	1	
21	4030340301	GUIDE	ガイド		C	2	
22	A161595300	Separating Plate	分離板		C	1	
23	A161595000	Holder	ホルダ		D	1	
24	4030347501	PRESSURE SPRING	圧縮コイルばね		C	1	
25	A161595400	Hold Plate	保持板		D	1	
26	A161595200	Pulling Coil spring	引張りコイルばね		C	1	
27	A161591800	Sensor Holder	センサホルダ		D	1	
28	A161N10X00	Paperfeed Detection harness /2	給紙検知束線ノ 2 (マル手 C D)		D	1	
29	A02E597600	Guide	ガイド (捌き後)		C	1	
30	4658015106	Roller Assy	ローラ A S S Y		A	1	
31	A161591100	Sensor Holder	センサホルダ		D	1	
32	A161591000	Torsion Spring	ねじりばね (P E)		C	1	
33	A161590901	Actuator	アクチュエータ (P E)		C	1	
34	A161593600	Compressing Coil spring	圧縮コイルばね		C	1	
35	A161593800	Friction Plate	摩擦板		C	2	
36	A161M50400	VR	ボリューム		D	1	
37	A161594300	Regulating Gear 41T	規制ギア 4 1 T		C	1	
38	A161593400	Compressing Coil spring	圧縮コイルばね		C	1	
39	A02E592100	Gear 20T	ギヤ 2 0 T		C	1	
40	A161R7A000	Caulking Gear Mounting Plate	ギア取付板カシメ A s s y		D	1	
41	A161593101	Regulating Plate /L	規制板ノ L		C	1	
42	A161594600	Brake Part /F	ブレーキ材ノ F		C	1	
43	A161593200	Regulating Plate /R	規制板ノ R		C	1	
44	A161594500	Brake Part	ブレーキ材		C	1	
45	A161593001	Lifting Plate	押上げ板		D	1	
46	A161594000	Separating Sheet	分離シート		C	1	

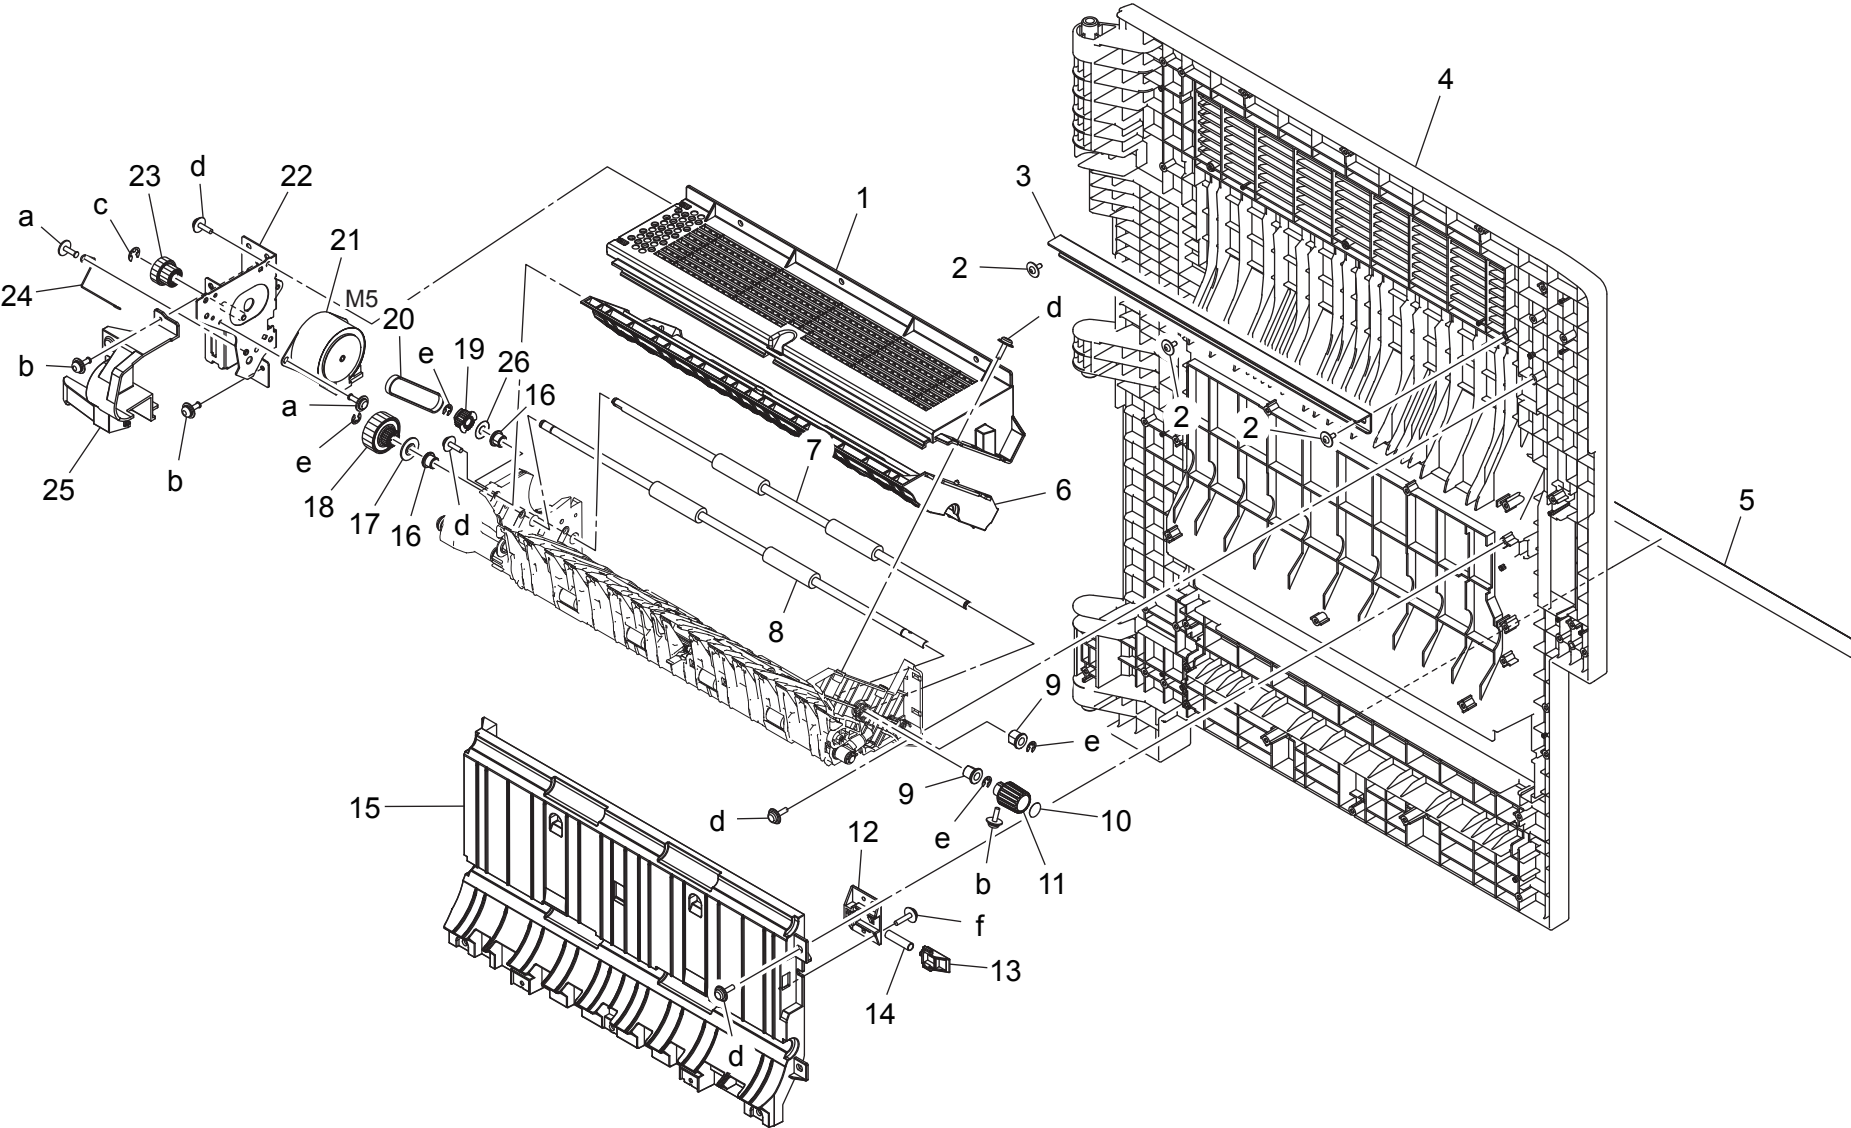

REVERSAL UNIT


[illegible]

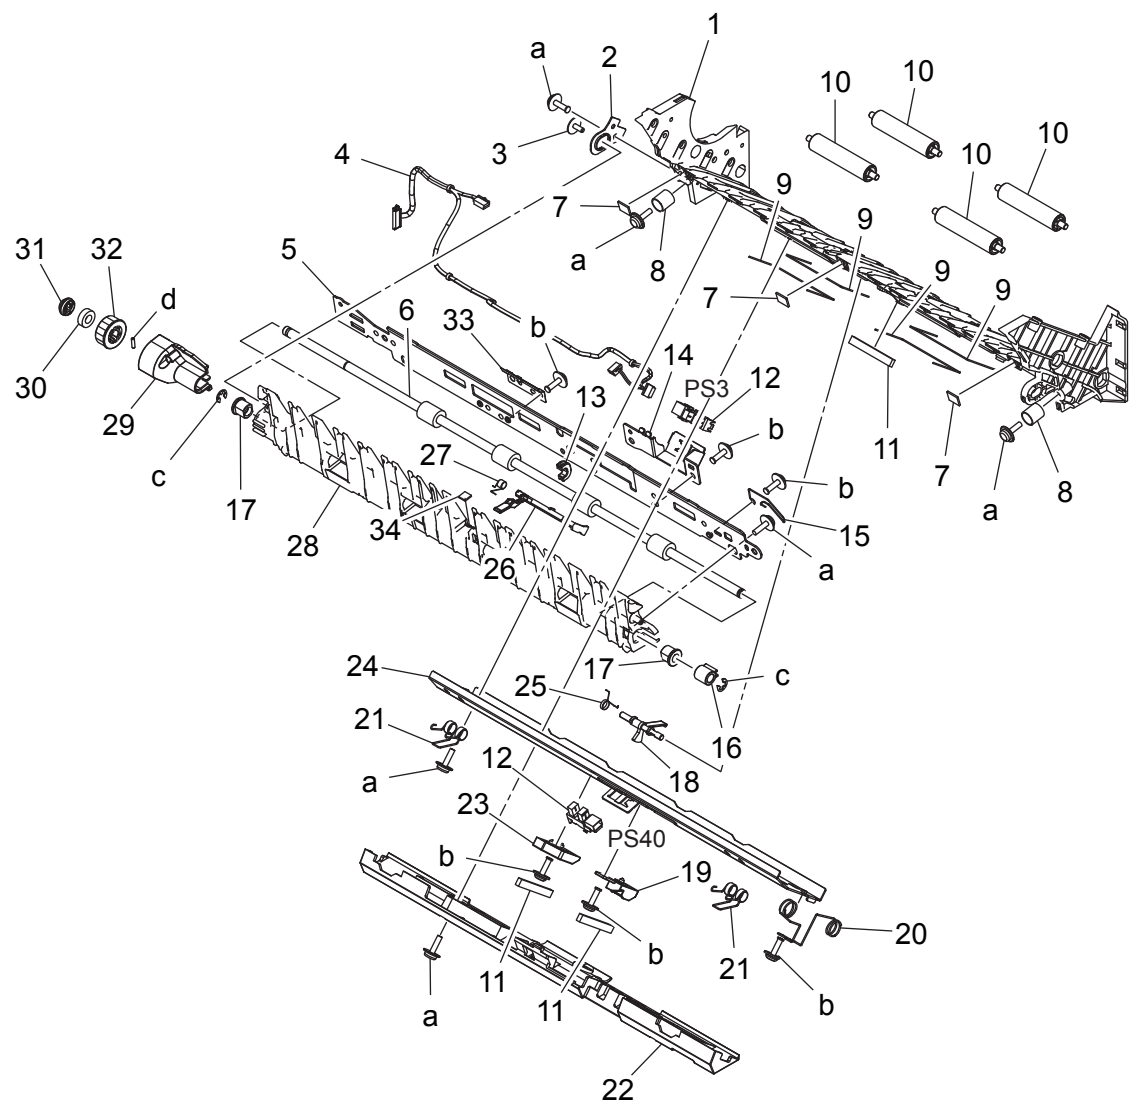

REVERSAL UNIT


Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A161810400	Guide Plate /3		D	1	a-V153030803 b-V137030803 c-V217040001 d-V237200850
2	A161814401	Mounting Plate /3		D	1	
3	4163529301	SCREW		C	1	
4	A161N12100	Conveyance Drive harness /Upper		D	1	
5	A161810801	Mounting Plate /2		D	1	
6	A161810600	Roller /1		C	1	
7	A161825300	Cushion /A		D	3	
8	A161813600	Pressing Spring /A		C	2	
9	A0ED815100	Holding Part		D	4	
10	A161825700	Idler Roller /A		D	4	
11	A161825800	Cushion /B		D	3	
12	A108M50100	Photointerrupter		B	2	
13	A161819500	Bushing /C		C	1	
14	A161825100	Mounting Plate /4		D	1	
15	A161819400	Contact /C		D	1	
16	A161814500	Bushing /B		C	1	
17	A02E815200	BUSHING		C	2	
18	A161813200	Actuator		C	1	
19	A161825400	Wiring Part		D	1	
20	A161814202	Contact /A		D	1	
21	A161813400	Torsion Coil spring		D	2	
22	A161813902	Cover /A		D	1	
23	A161825600	Wiring Part /2		D	1	
24	A161810900	Mounting Plate /1		D	1	
25	A161712800	Spring /D		D	1	
26	A161813001	Actuator		C	1	
27	A161813100	Torsion Coil spring		C	1	
28	A161810503	Guide Plate /4		D	1	
29	A161825500	Cover /D		D	1	
30	A0TK397501	Ball bearing		C	1	
31	A161825000	Bushing		C	1	
32	A161819200	Gear 18T		C	1	
33	A161825901	Ground Contact /D		D	1	
34	A161826000	Cushion /B		D	1	

FUSING SECTION

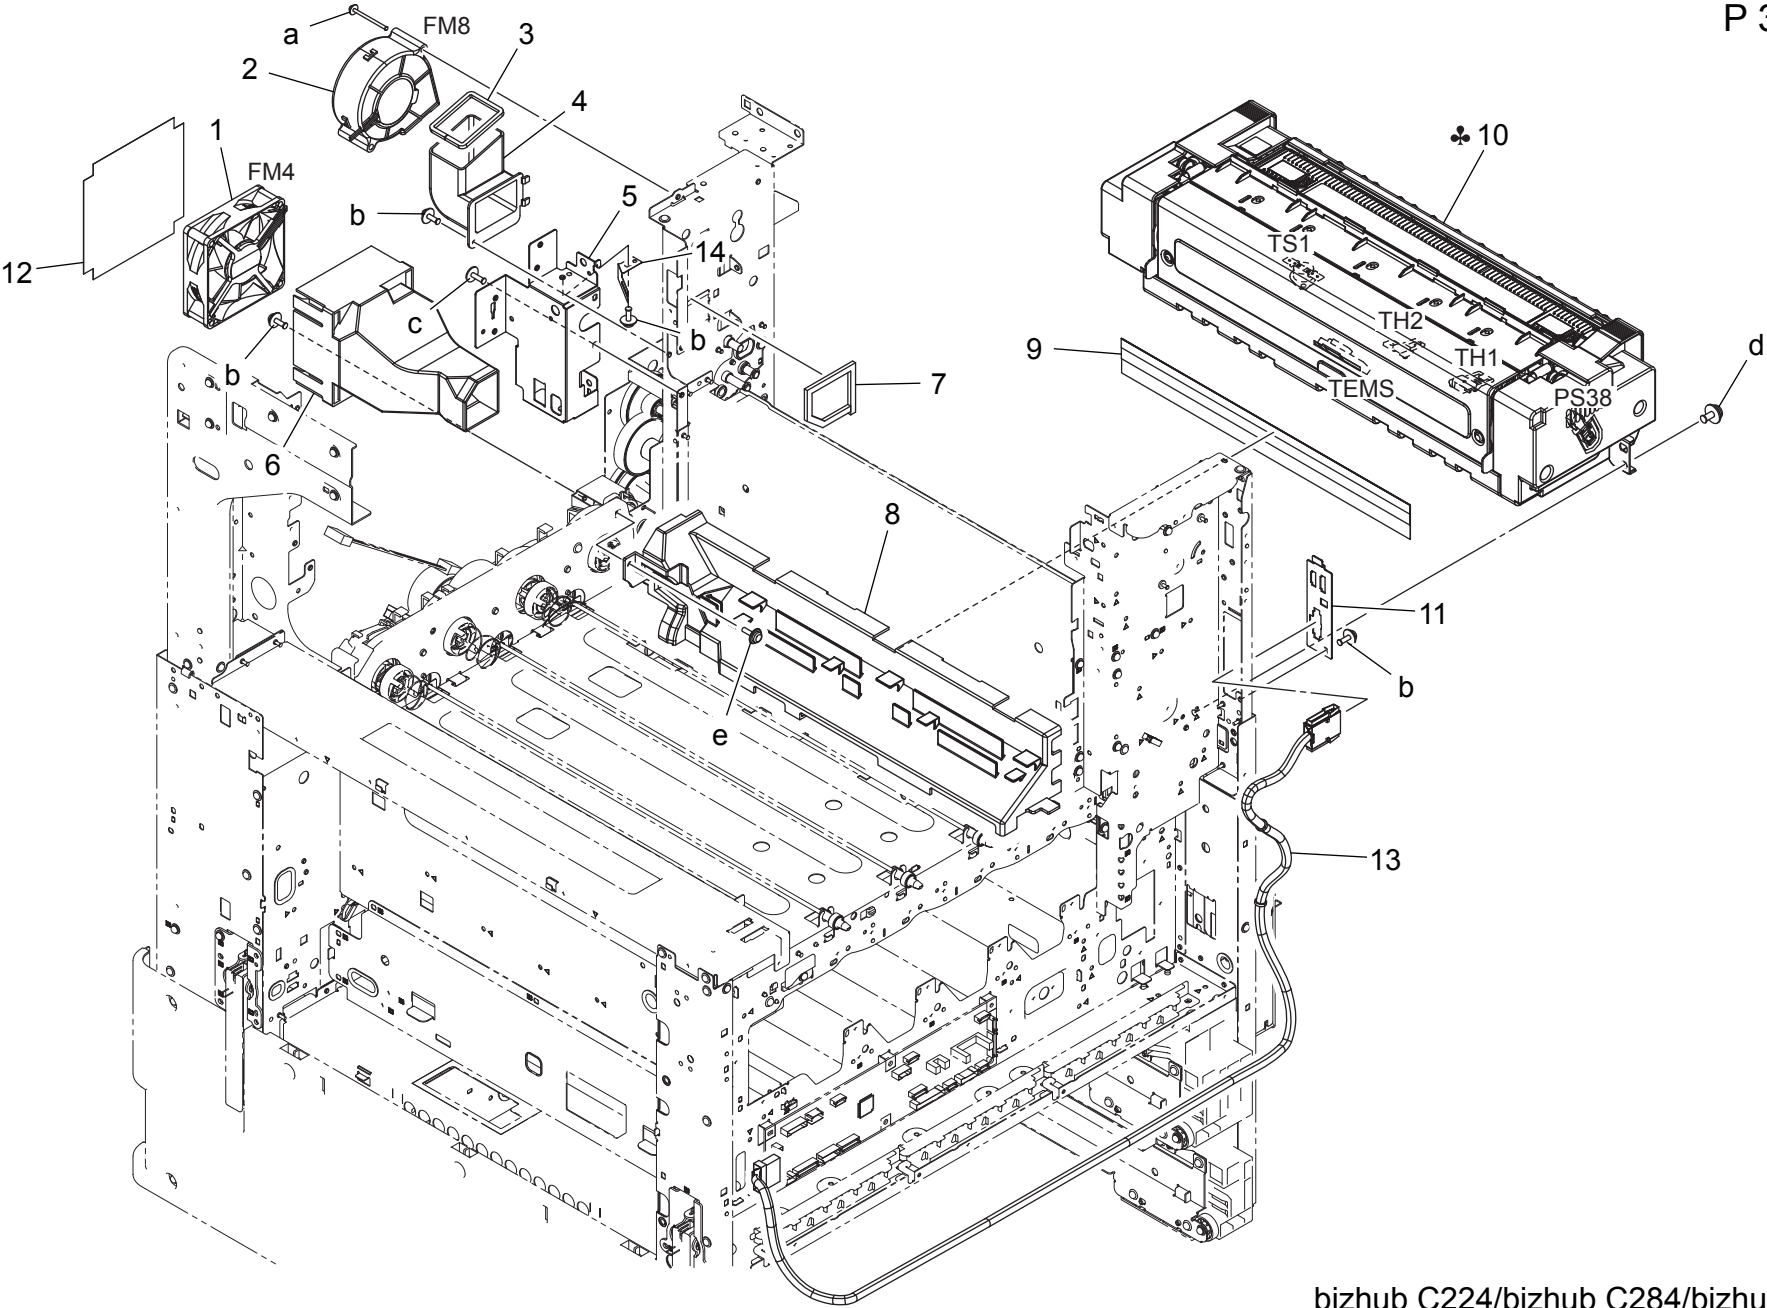

FUSING SECTION


Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	4139M10000	FAN MOTOR		B	1	a-V116033503 b-V116030803 c-V137030803 d-V116040803 e-V153030803
2	9313110033	FAN MOTOR		C	1	
3	A161143000	Seal		D	1	
4	A161140300	Duct		D	1	
5	A161121103	Mounting Plate		D	1	
6	A161140500	Duct		D	1	
7	A161121401	Seal /Upper		D	1	
8	A161140400	Duct		D	1	
9	A161102700	Seal		D	1	
10	A161R71711	Fuser Unit100V(1/2/3)	A,A1	A	1	
10	A161R71811	Fuser Unit120V(1/2/3)	B,G2	A	1	
10	A161R71911	Fuser Unit230V(1/2/3)	C,D1,D3,E,F2,G1,I,K	A	1	
11	A161137202	Mounting Plate		D	1	
12	A0ED146900	Filter		C	1	
13	A161N10602	Heater Relay harness /1		D	1	
14	A161122500	Ground Plate		D	1	

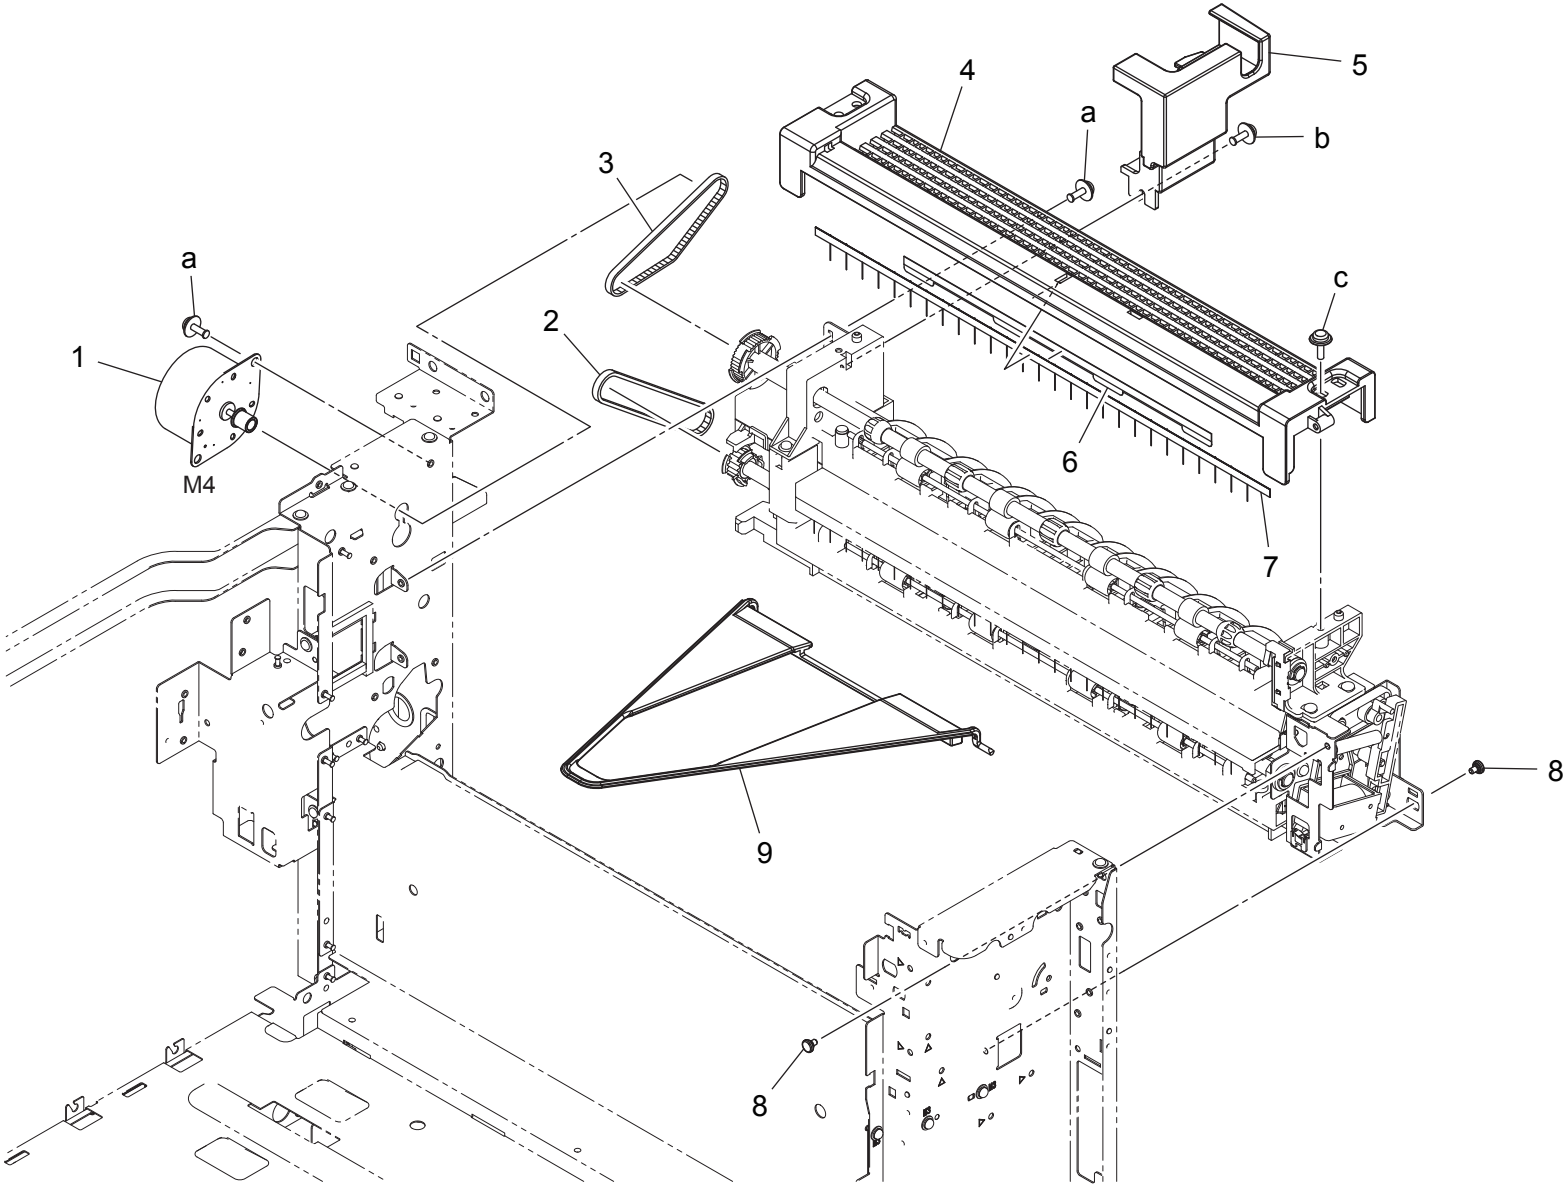

PAPER EXIT SECTION

Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A0EDM10300	Stepping motor		C	1	a-V116030803 b-V116030804 c-V153030803
2	A161891401	Timing belt 231L		D	1	
3	4640392001	BELT		C	1	
4	A161895300	Paper exit Cover		D	1	
5	A161162302	Cover		D	1	
6	A161894100	Sheet		D	1	
7	A161894000	Neutralizing Brush		C	1	
8	A0P0742300	Shoulder screw		C	2	
9	A161897200	Guide Part		C	1	


PAPER EXIT SECTION

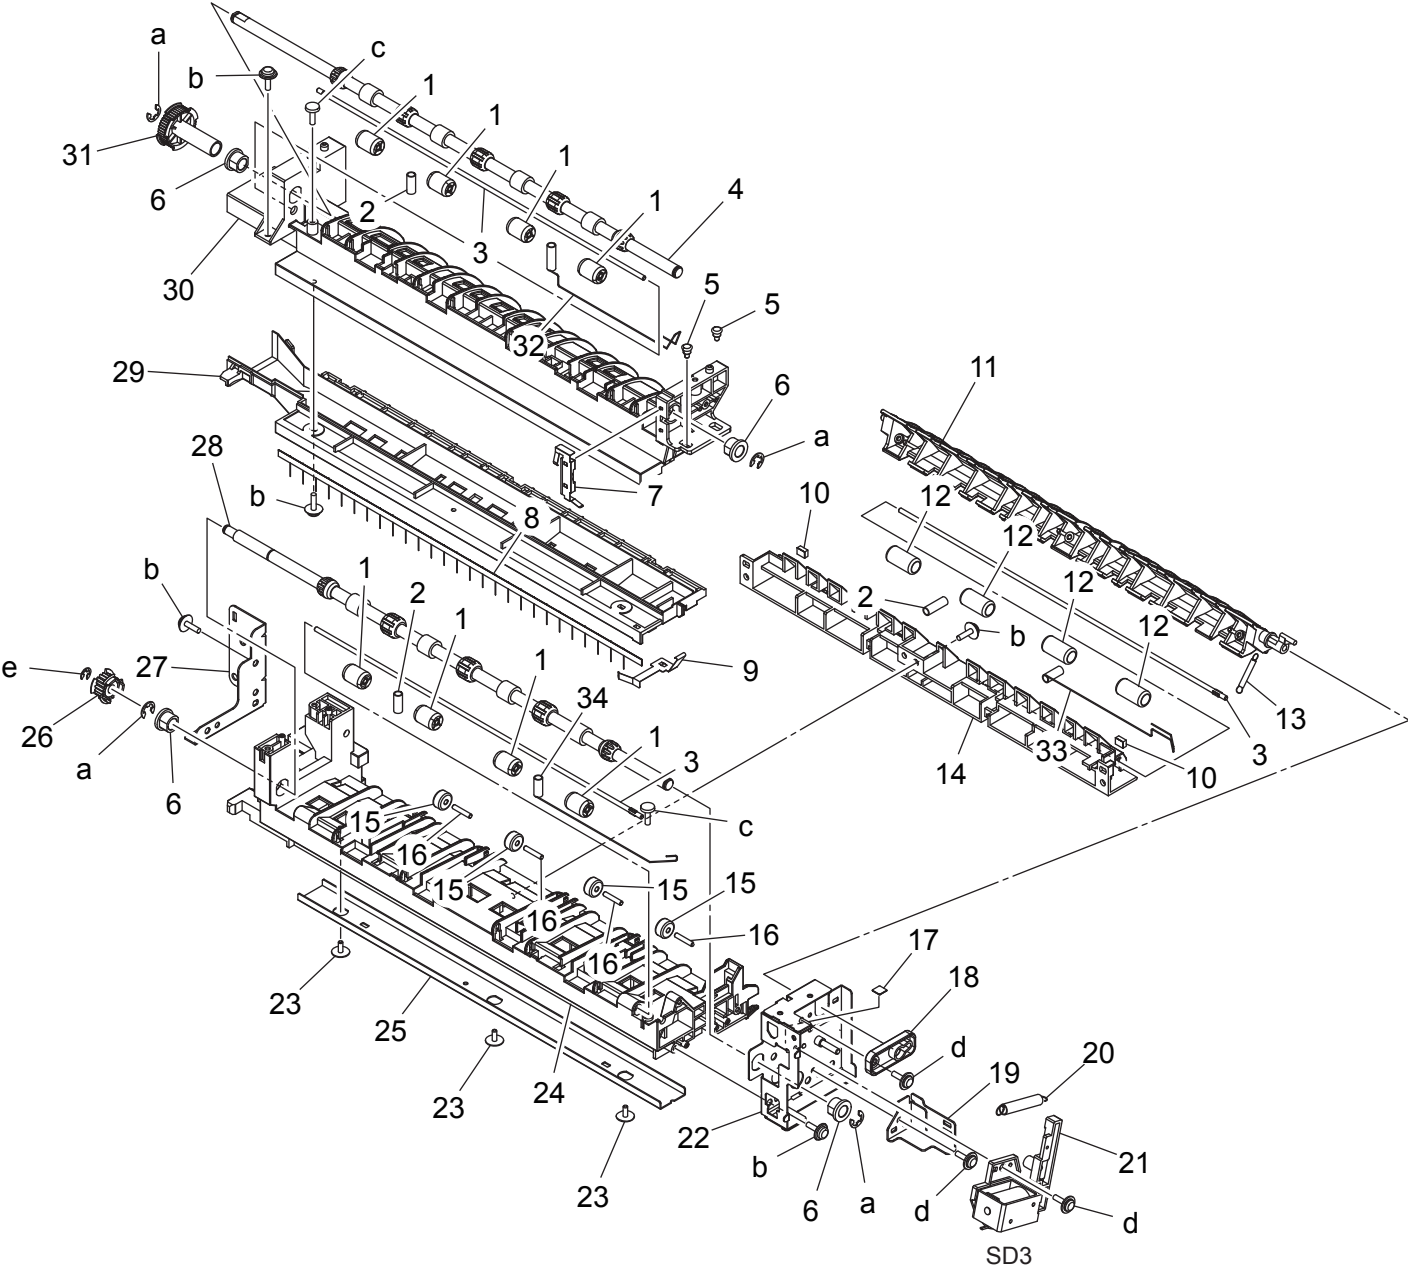

PAPER EXIT SECTION

Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	4004590301	ROLL		C	8	a-V217060001 b-V153030803 c-V149030803 d-V137030803 e-V217040001
2	A161892400	Spring		C	3	
3	4025598401	SHAFT		D	3	
4	A161895400	Roller		C	1	
5	1164202801	SHOULDER SCREW		D	2	
6	A0ED891100	Bushing		D	4	
7	A161895502	Ground Contact /Upper		D	1	
8	A161894000	Neutralizing Brush		C	1	
9	A161895600	Ground Contact /Lower		D	1	
10	A161893600	Cushion		D	2	
11	A161890401	Guide Lever		D	1	
12	A0P0901100	Roll		C	4	
13	A161892100	Spring		C	1	
14	A161890202	Guide Part /Lower		D	1	
15	A0ED897700	Collar		C	4	
16	4036254901	PIN		D	4	
17	A161893800	Seal		D	1	
18	A161891000	Bushing		D	1	
19	A161892300	Mounting Plate		D	1	
20	A161892000	Spring		D	1	
21	A161R72600	Solenoid Assy		C	1	
22	A161F89001	Caulking(Mounting Plate)		D	1	
23	4163529301	SCREW		C	3	
24	A161890102	Paper exit Main body		D	1	
25	A161893500	Regulating Plate		D	1	
26	A161891301	Pulley 18T		D	1	
27	A161892901	Fixing Part		D	1	
28	A161890300	Roller		C	1	
29	A161895201	Paper exit Guide /Lower		D	1	
30	A161895102	Paper exit Guide /Upper		D	1	
31	A161895800	Pulley 44T		D	1	
32	A161900201	Ground Spring		C	1	
33	A161900300	Ground Spring		C	1	
34	A161900100	Ground Spring		C	1	

MAIN DRIVE/ PAPER FEED DRIVE SECTION

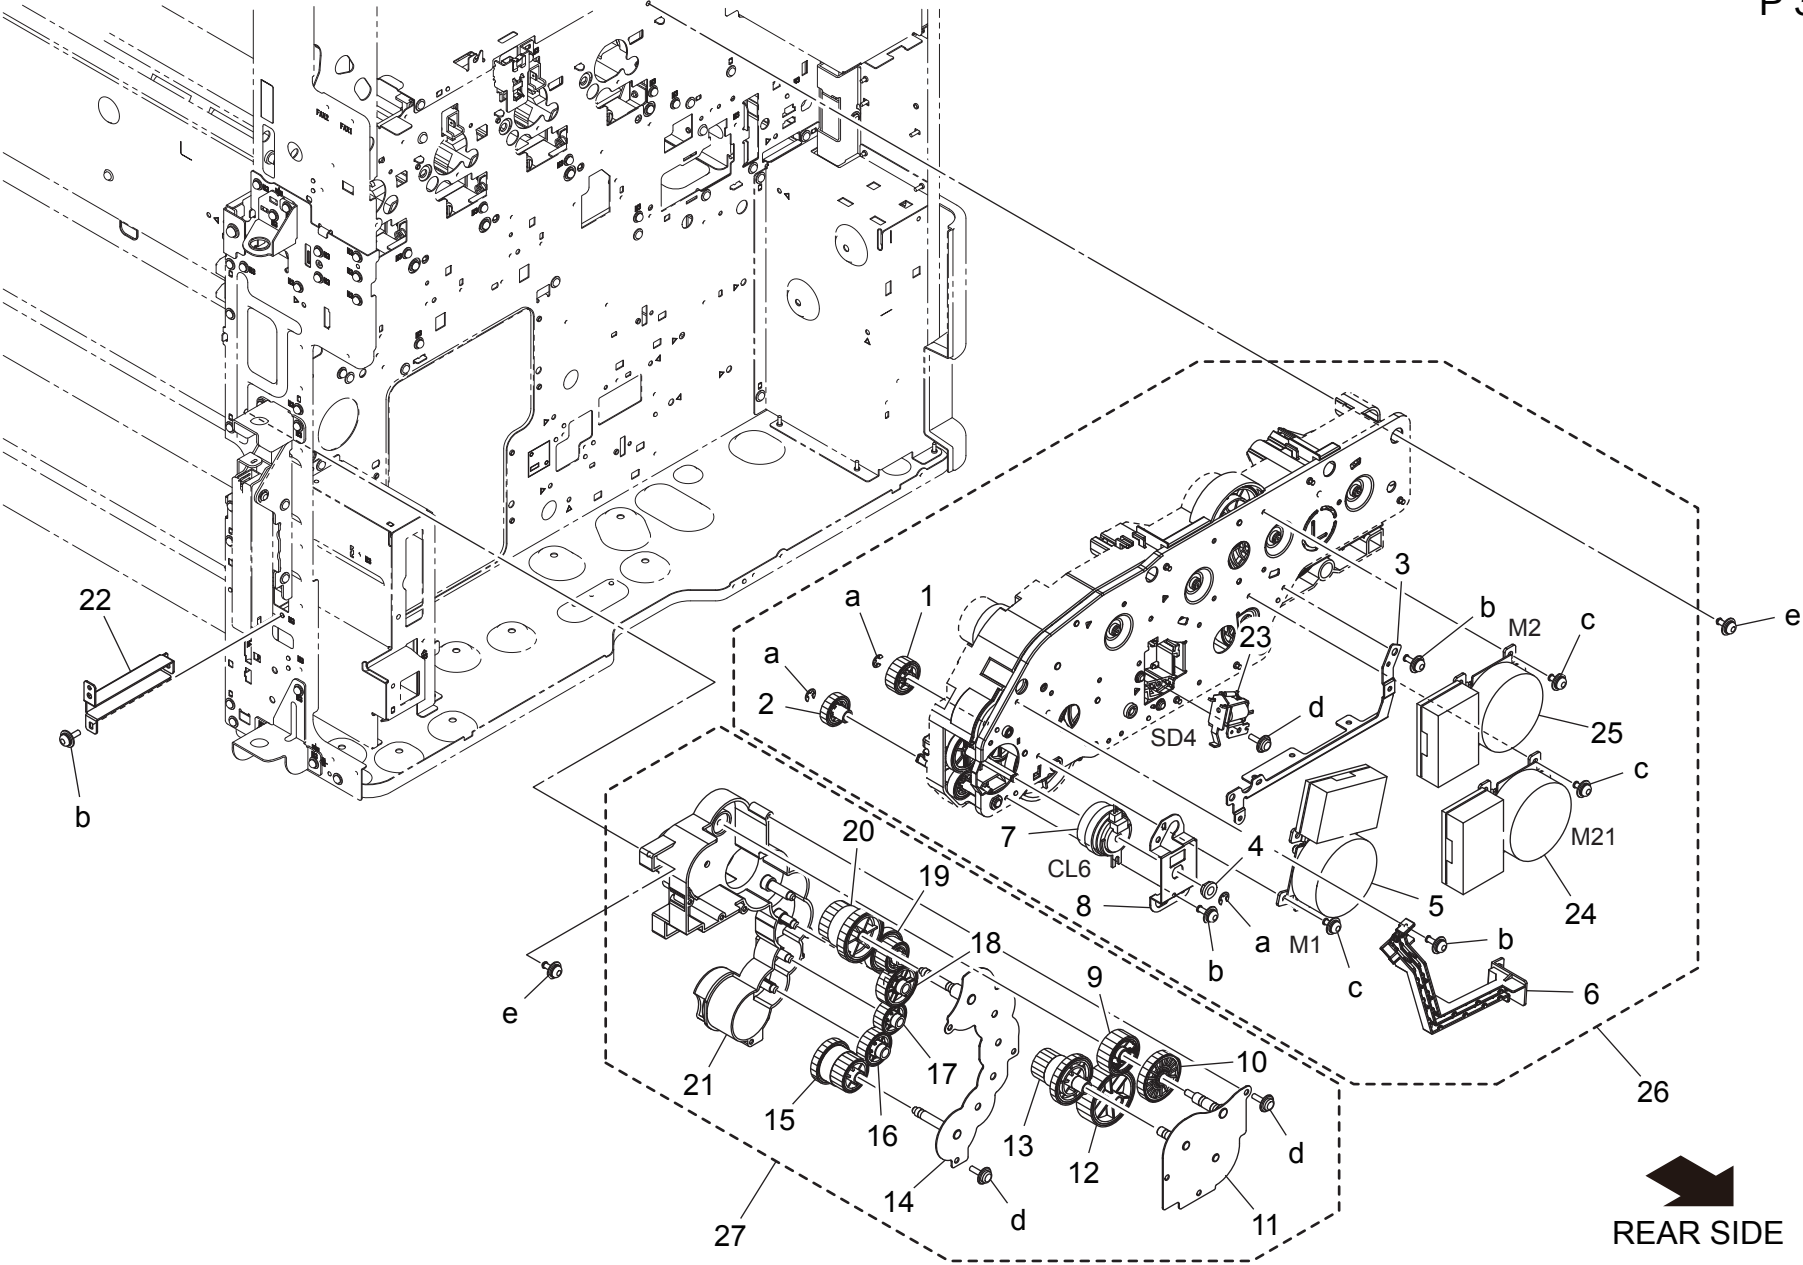


REAR SIDE

MAIN DRIVE/ PAPER FEED DRIVE SECTION

Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A161254000	Gear 22T		C	1	a-V217040001 b-V116030803 c-V116030603 d-V153030803 e-V125030818
2	A161257800	Gear 20T		C	1	
3	A161216101	Mounting Plate		D	1	
4	A161210200	Bushing		D	1	
5	A161M10001	brushless Motor /40		I	1	
6	A161134701	Guide		D	1	
7	A161M20200	Clutch		C	1	
8	A161253900	Hold Plate		D	1	
9	A161253600	Gear 26T		D	1	
10	A161253500	Gear 53T		D	1	
11	A161F21100	Caulking(Hold Plate Paper Feed DriveL)		D	1	
12	A161253100	Gear 38T		D	1	
13	A161259800	Gear 19/32T		D	1	
14	A161F21200	Caulking(Hold Plate Paper Feed Drive2)		D	1	
15	A161220700	Gear 28/28T		D	1	
16	A161220600	Gear 28T		D	1	
17	A161220500	Gear 26T		D	1	
18	A161220400	Gear 35T		D	1	
19	A161220200	Gear 25/27T		D	1	
20	A161220100	Gear 26/34T		D	1	
21	A161221001	Holder		D	1	
22	A161105500	Reinforce Plate		D	1	
23	A161M20300	Flapper solenoid		C	1	
24	A2XKM10300	Brushless motor		C	1	
25	A161M10200	brushless Motor /20		C	1	
26	A161R70600	Main Drive Assy		S	1	
27	A161R70500	Paper Feed Drive Assy		S	1	


TONER BOTTLE DRIVE SECTION

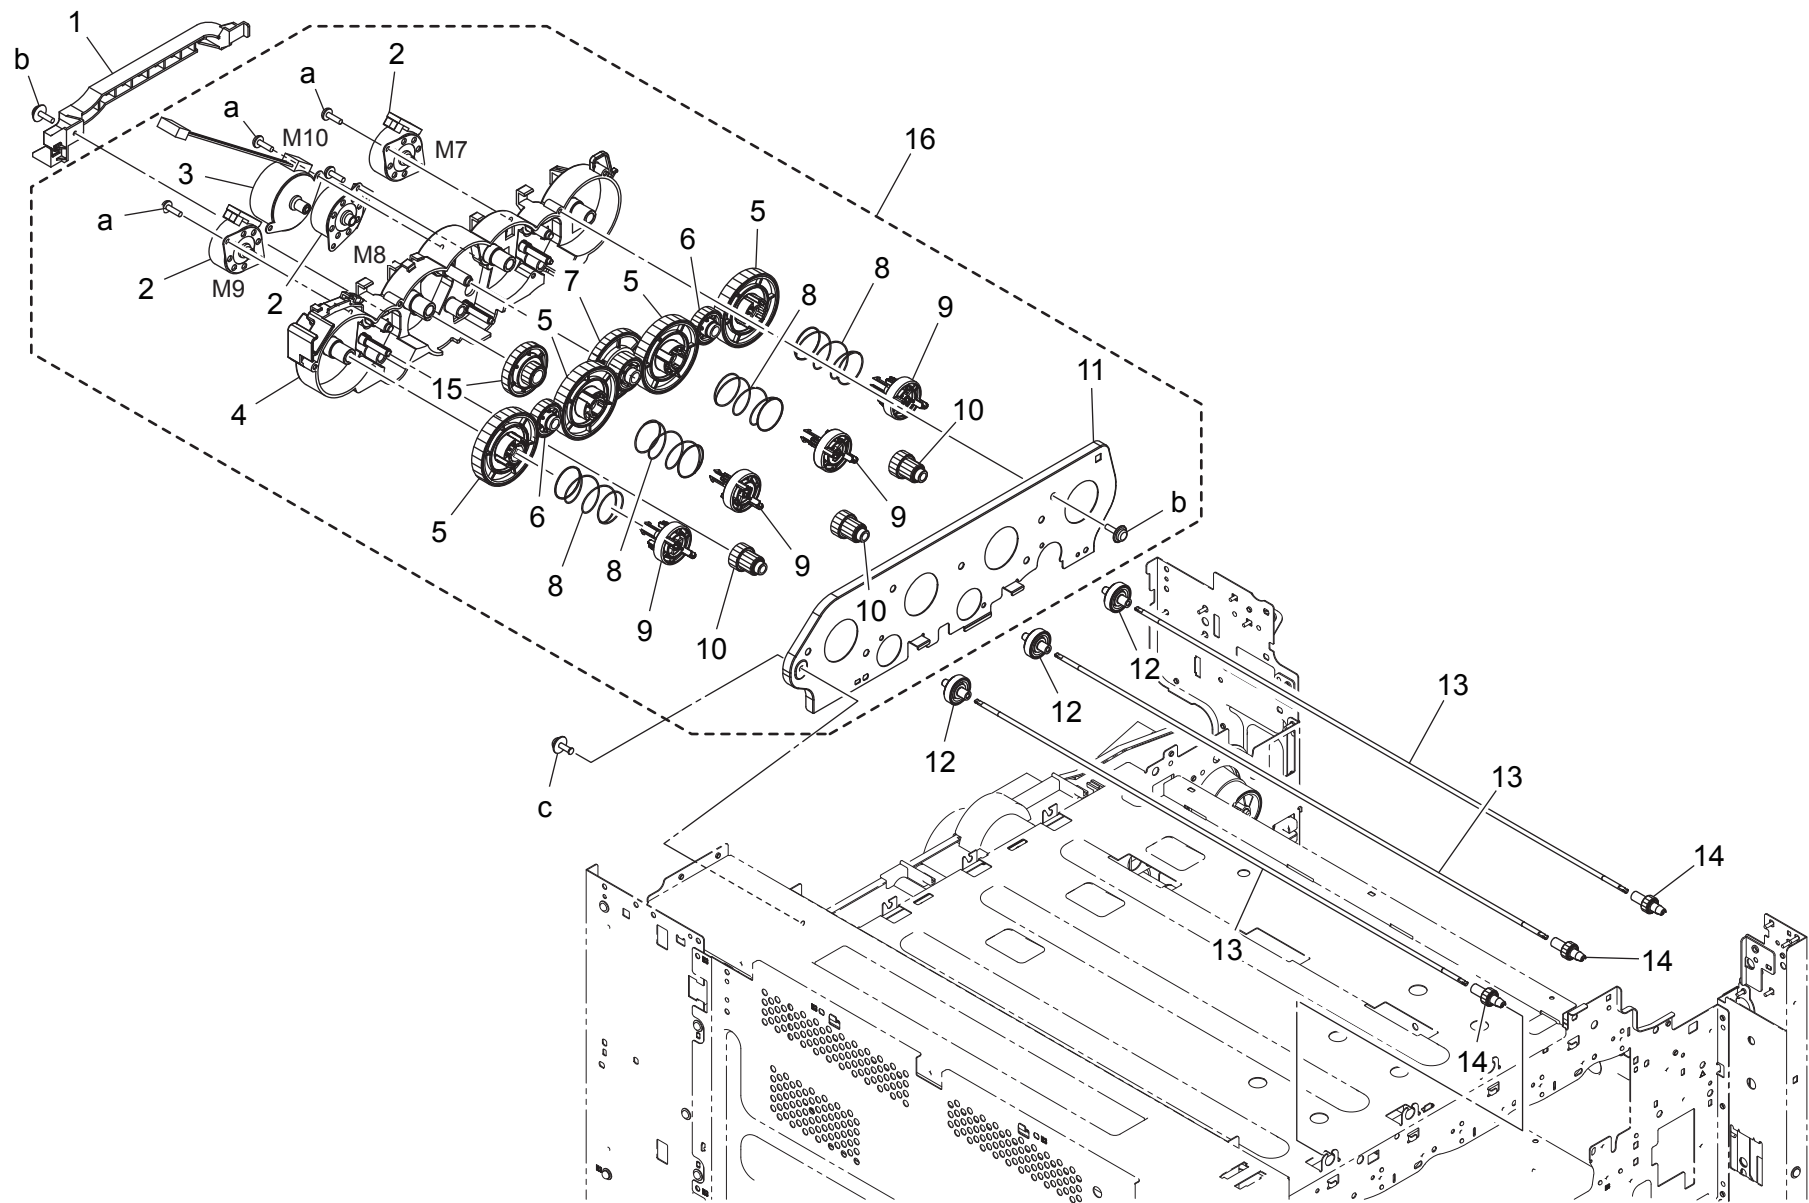

TONER BOTTLE DRIVE SECTION

Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A161241600	Guide		D	1	a-V145030803 b-V153030803 c-V116030803
2	A02EM10400	Stepping motor		C	3	
3	A161M10300	Stepping motor		C	1	
4	A161240100	Drive Holder		D	1	
5	A161240600	Gear 65T		D	4	
6	A161240500	Gear 29T		D	2	
7	A161240400	Gear 29/62T		D	1	
8	4038541202	PRESSURE SPRING		C	4	
9	A161240700	Joint		C	4	
10	A161240900	Gear 20/42T		D	3	
11	A161241500	Mounting Plate		D	1	
12	A161241000	Gear 31T		C	3	
13	A161241200	Shaft		D	3	
14	A161241400	Gear 17T		C	3	
15	A161240300	Gear 18/91T		D	1	
16	A161R70800	Toner Bottle Drive Assy		S	1	


FUSING DRIVE SECTION

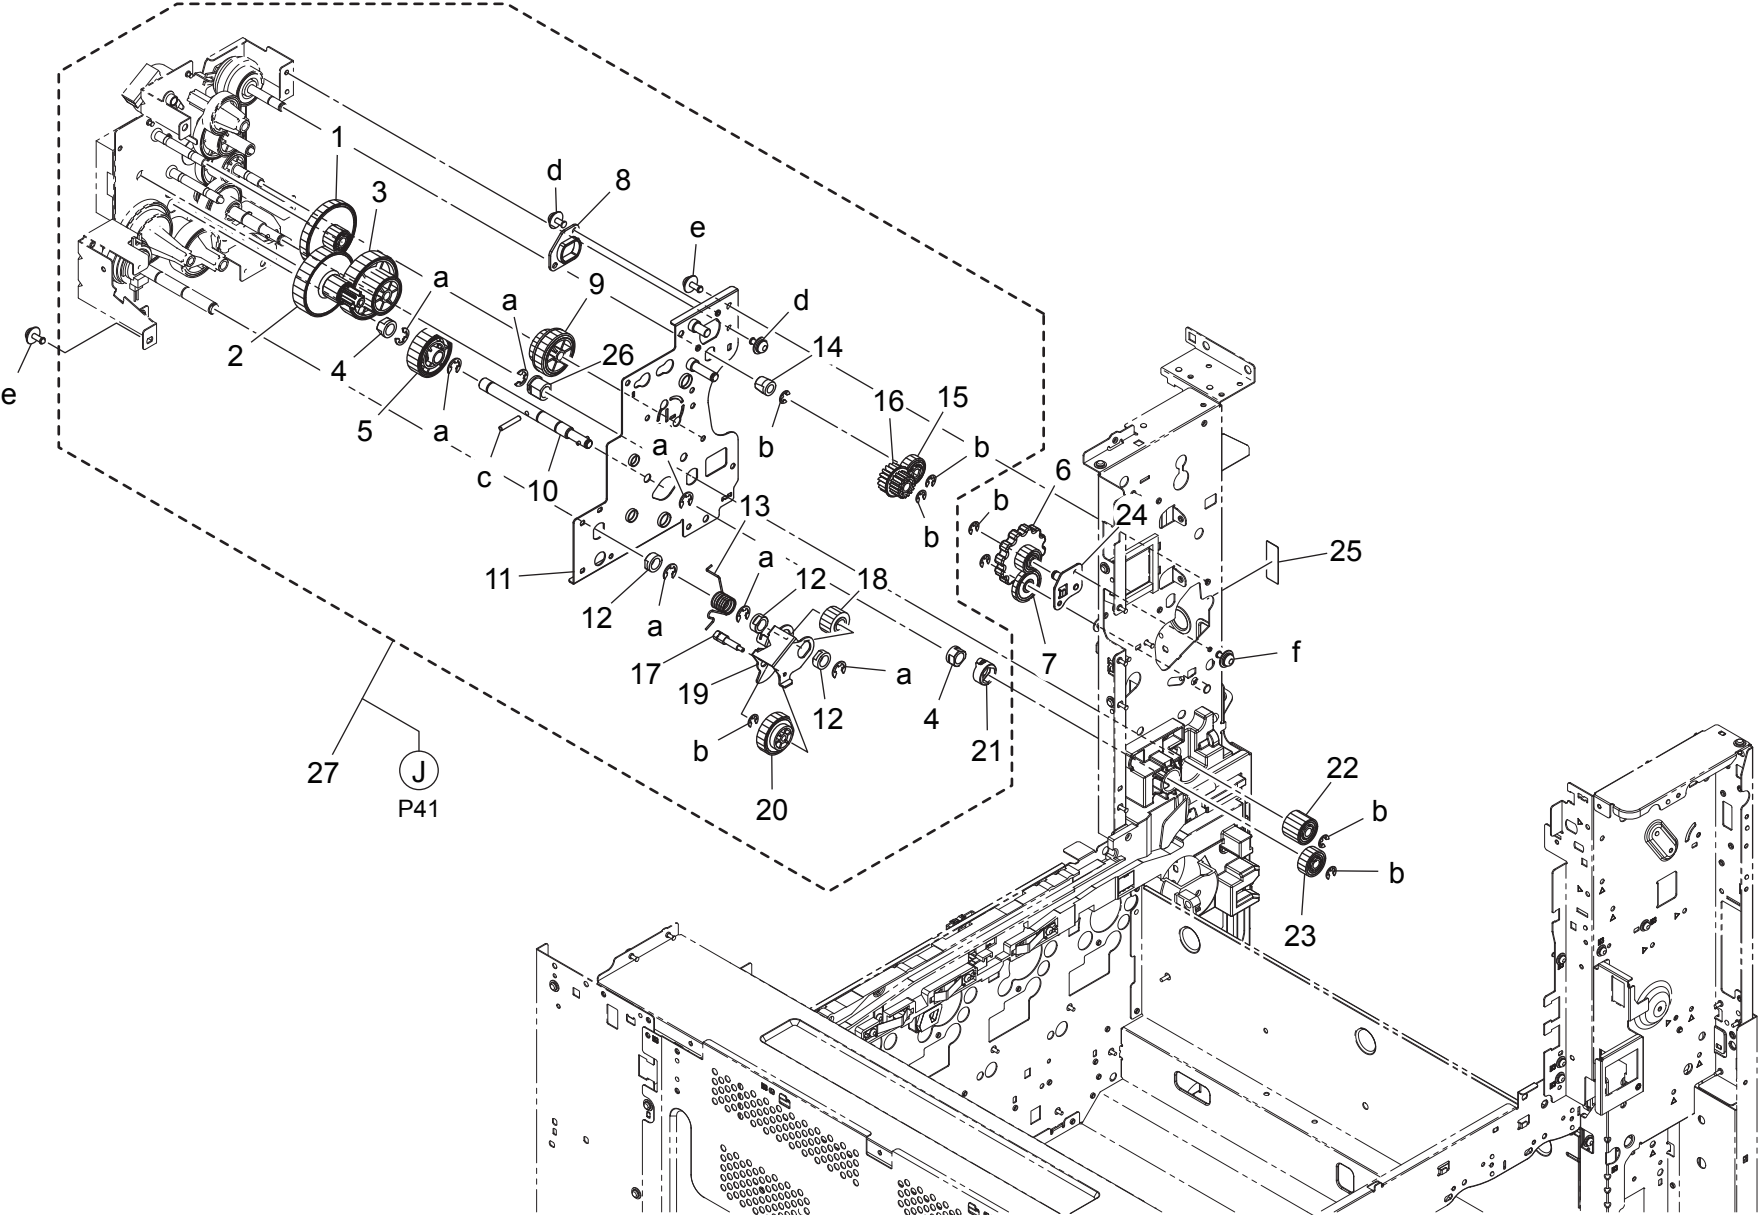

FUSING DRIVE SECTION

Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A161254200	Gear 18/115T	ギア 18／115 T	D	1	a-V217060001 b-V217040001 c-V237301850 d-V116030603 e-V125030818 f-V116030803
2	A161254300	Gear 18/57T	ギア 18／57 T	D	1	
3	A161254400	Gear 33/55T	ギア 33／55 T	D	1	
4	A161254700	Bushing	すべり軸受	D	2	
5	A161254500	Gear 38T	ギア 38 T	D	1	
6	A161122002	Gear 12T	ギア 12 T	D	1	
7	A161121900	Gear 17T	ギア 17 T	D	1	
8	A161232200	Bushing	すべり軸受 (排紙ドッキング)	D	1	
9	A161228800	Gear 22/23T	ギア 22／23 T	D	1	
10	A161256300	Shaft	軸 (定着離間)	D	1	
11	A161F25102	Caulking(Mounting Plate Fuser Drive 2L)	取付板 (定着駆動 2 L) カシメ	D	1	
12	A0ED259700	Bushing	すべり軸受 (Φ 8 小判)	C	3	
13	A161232501	Torsion Coil spring	ねじりコイルばね (一次離間)	D	1	
14	A161232300	Bushing	すべり軸受 (φ 6)	D	1	
15	A161230700	Gear 18T	ギア 18 T	C	1	
16	A161231301	Gear 18/18T	ギア 18／18 T	C	1	
17	A161259400	Shaft	軸 (一次離間 2)	D	1	
18	4038258001	GEAR 16T	ギア 16 T	C	1	
19	A161258800	Mounting Plate	取付板 (一次離間)	D	1	
20	A0ED257500	Gear 26T	ギア (一次離間アイドル) 26 T	C	1	
21	A161232401	Collar	カラー (ガイド)	D	1	
22	A161228700	Gear 16T	ギア 16 T	C	1	
23	A161254600	Gear	ギア (定着離間 5)	C	1	
24	A161F10901	Caulking	取付板カシメ	D	1	
25	A161941100	Label M4	ラベル M 4	D	1	
26	4025357201	BUSHING	軸受	C	1	
27	A161R70700	Fuser Drive Assy	定着駆動 (L) A s s y	S	1	


FUSING DRIVE SECTION

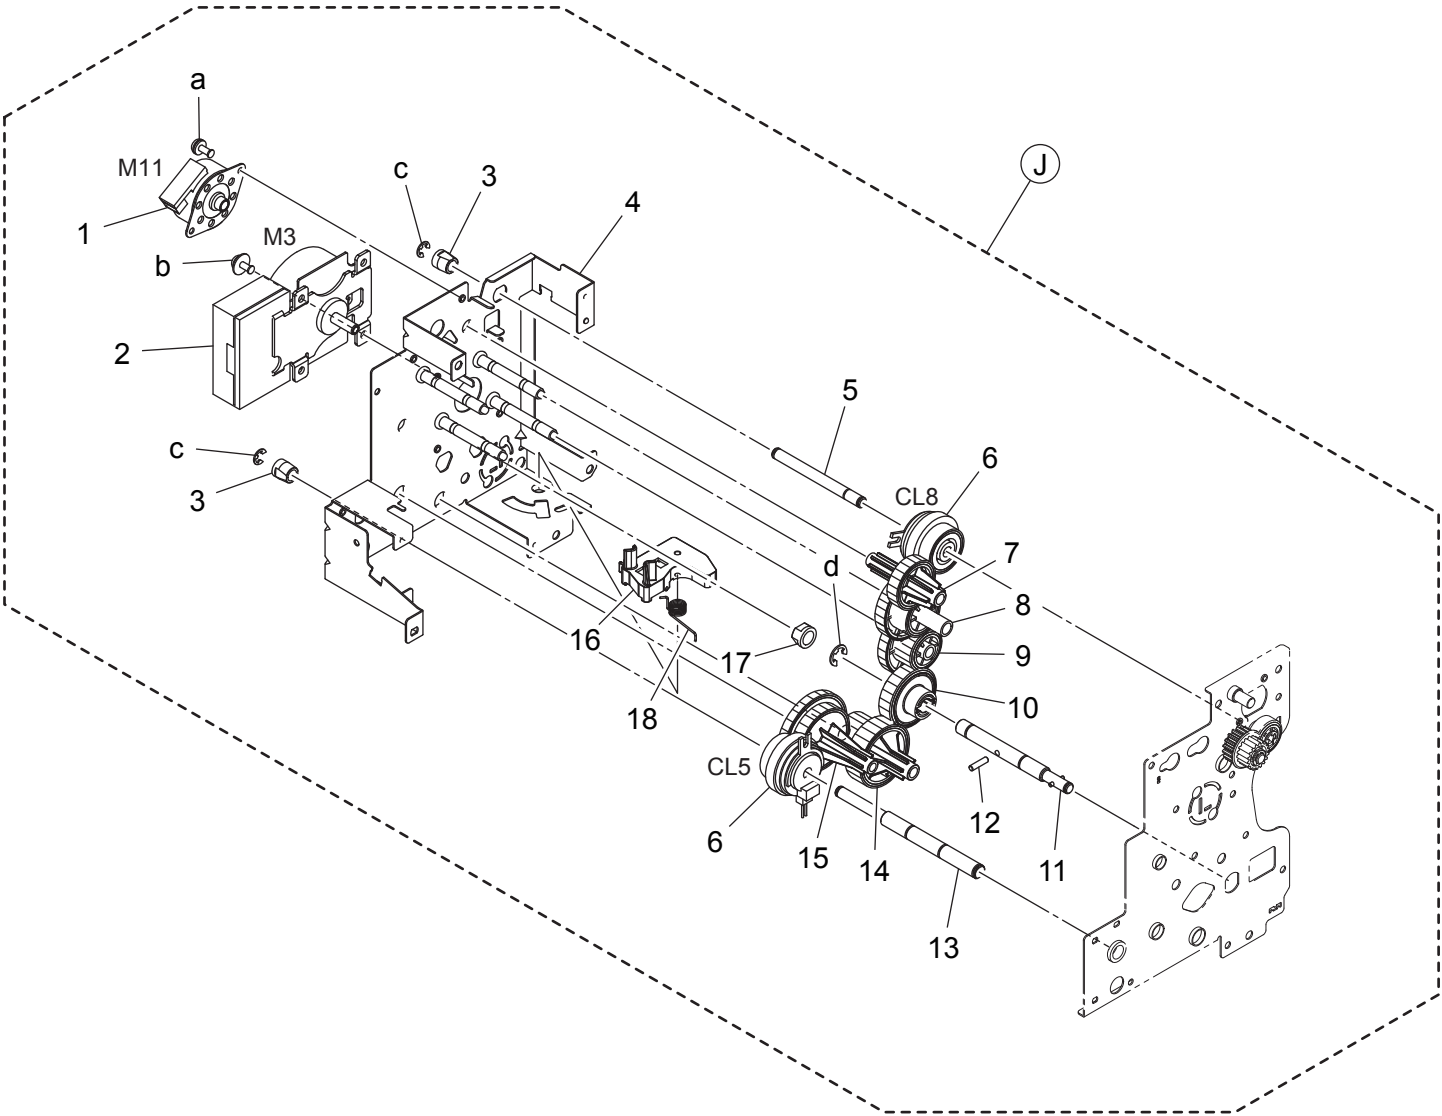

FUSING DRIVE SECTION

Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A02EM10400	Stepping motor		C	1	a-V115030603 b-V116030603 c-V217040001 d-V217060001
2	A161M10200	brushless Motor /20		C	1	
3	A161232300	Bushing		D	2	
4	A161F25001	Caulking(Mounting Plate Fuser Drive L)		D	1	
5	A161231800	Shaft		D	1	
6	A161M20100	Clutch		C	2	
7	A161230600	Gear 27T		D	1	
8	A161230500	Gear 24/70T		D	1	
9	A161228000	Gear 22/70T		D	1	
10	A161228100	Gear 33T		D	1	
11	A161228301	Shaft		D	1	
12	56AA17471	PIN B 3X12		C	1	
13	A161258700	Shaft		D	1	
14	A161259100	Gear 26/35T		D	1	
15	A161259200	Gear 35/45T		D	1	
16	A161228600	Lever		D	1	
17	A161254700	Bushing		D	1	
18	A161258501	Torsion Coil spring		D	1	

OZONE DUCT SECTION

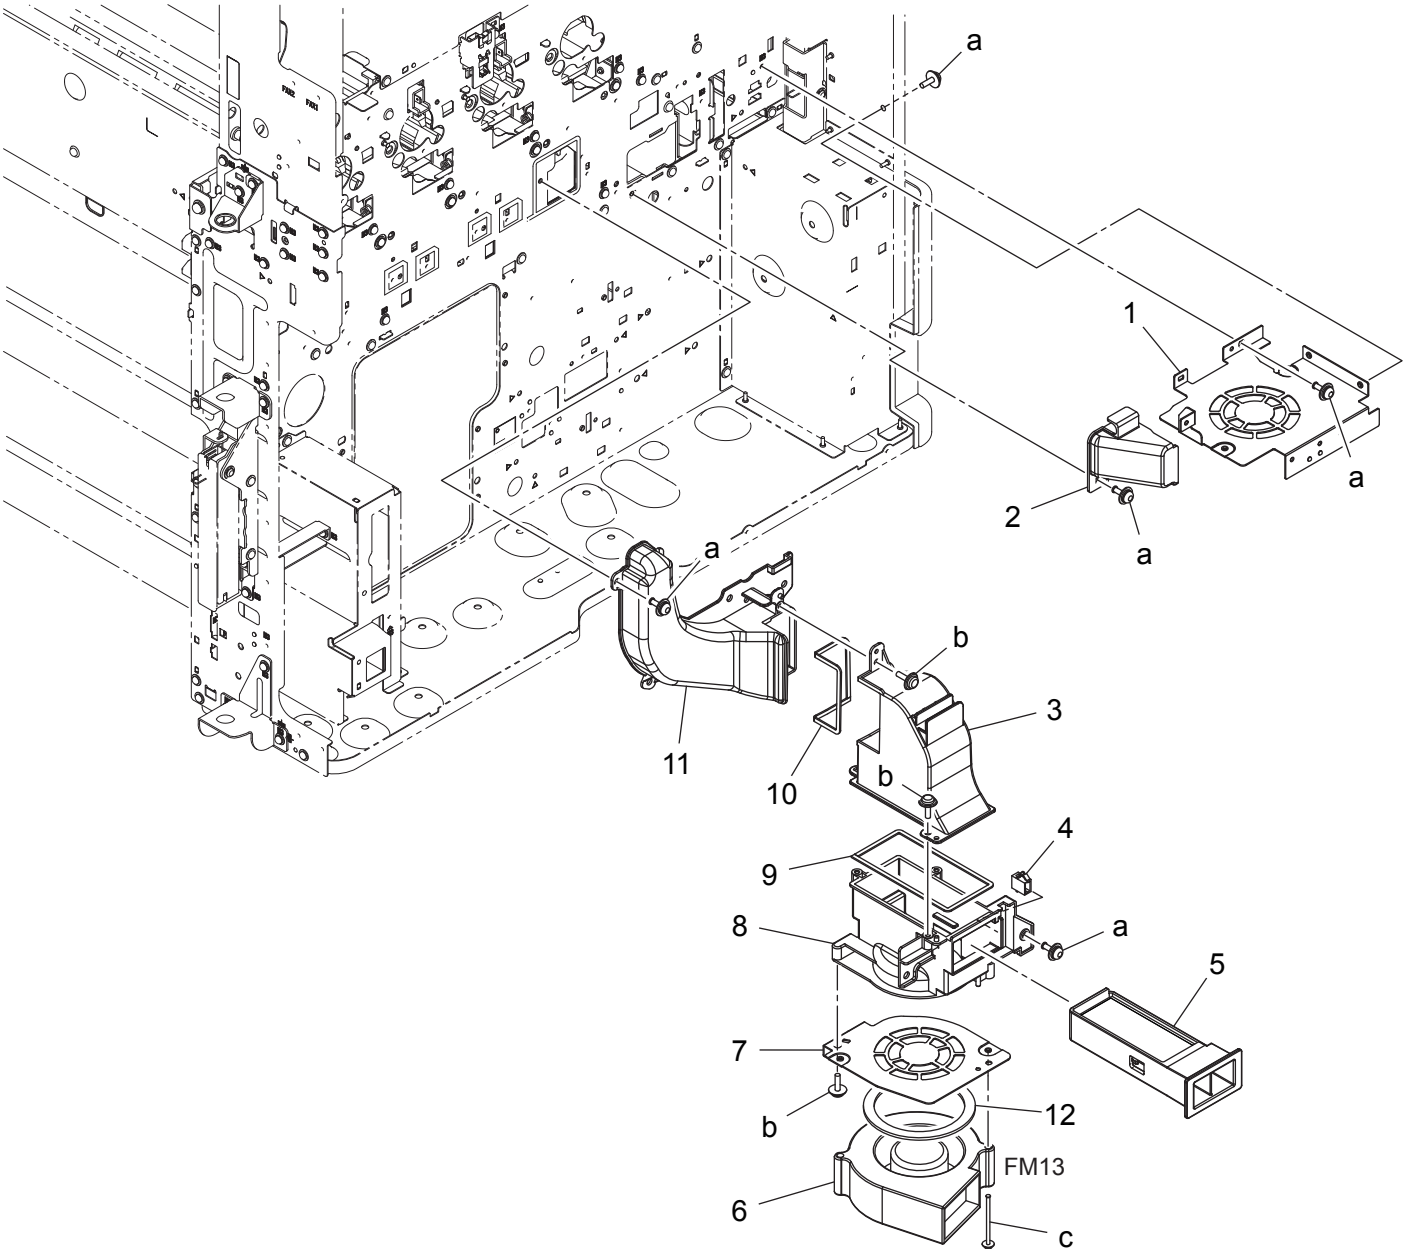


REAR SIDE

OZONE DUCT SECTION

Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A161142000	Mounting Plate		D	1	a-V116030803 b-V153030803 c-V116034003
2	A161141500	Duct /2		D	1	
3	A161141901	Duct /2		D	1	
4	V651010002	connector		D	1	
5	A161R72700	Ozone Filter Assy		C	1	
6	9313100072	FAN MOTOR		C	1	
7	A161142200	Mounting Plate		D	1	
8	A161147001	Duct /3		D	1	
9	A161145300	Seal /2		D	1	
10	A161145201	Seal /1		D	1	
11	A161141800	Duct /1		D	1	
12	A02E117300	Seal		C	1	

HIGH VOLTAGE SECTION

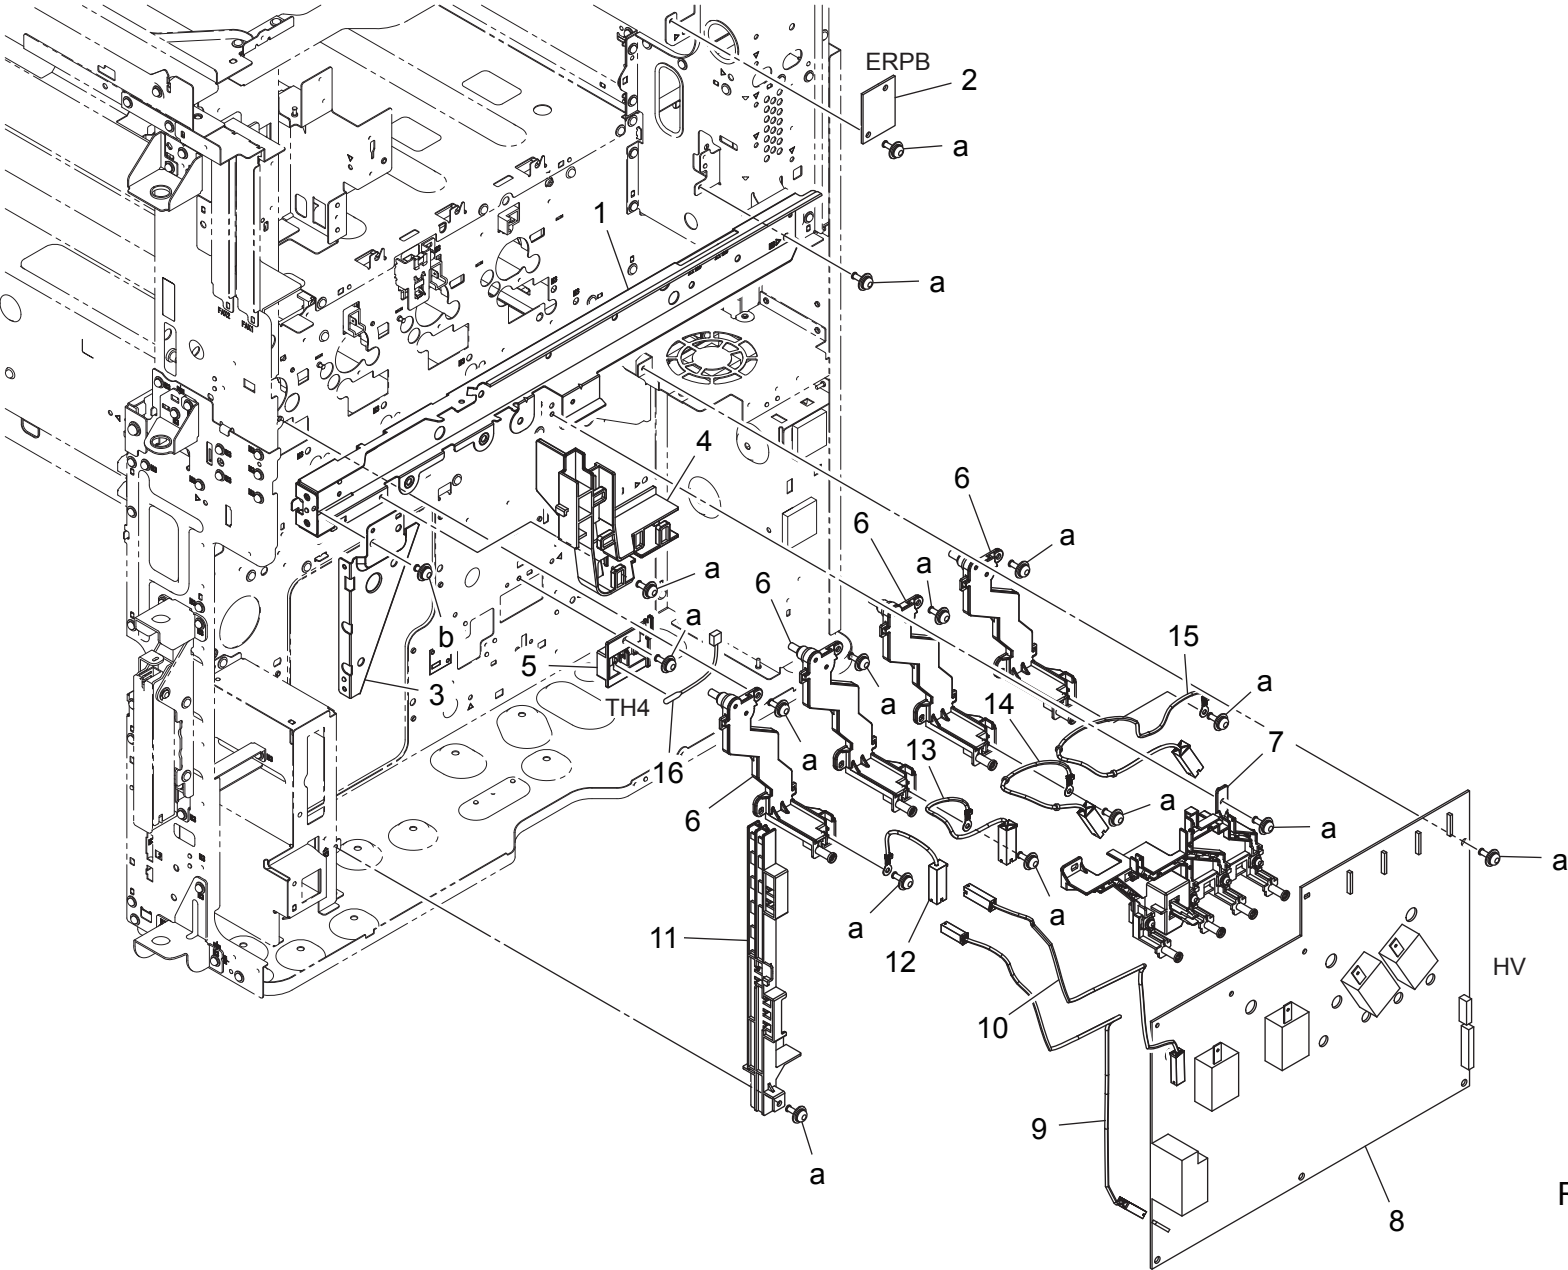


REAR SIDE

HIGH VOLTAGE SECTION


Key	Part No.	Description		Destinations	Class	QTY	Standard parts
1	A161132504	Mounting Plate	取付板 (コントローラ上)		D	1	a-V116030803 b-V116030603
2	A161H00C02	PWB Assembly(PWB-DC ASSY)	基板 ASSY (PWB-DC ASSY)		C	1	
3	A161132800	Reinforce Plate	補強板		D	1	
4	A161132100	Guide	ガイド (パネルハーネス)		D	1	
5	A161137701	Holder	ホルダ (温度検出)		D	1	
6	A161R70200	HV Contact Assy	HV 接点 Assy		D	4	
7	A161R70300	DV Contact Assy	現像接点 Assy		D	1	
8	A161M40601	High voltage unit	高圧電源		I	1	
9	A161N11K00	Neutralizing Wiring	除電束線		D	1	
10	A161N11300	Transfer Wiring /2	転写束線 / 2		D	1	
11	A161134800	Guide	ガイド (HV 左)		D	1	
12	A161N12P01	Charging Wiring /K	帯電束線 / K		D	1	
13	A161N12N01	Charging Wiring /C	帯電束線 / C		D	1	
14	A161N12M01	Charging Wiring /M	帯電束線 / M		D	1	
15	A161N12K01	Charging Wiring /Y	帯電束線 / Y		D	1	
16	A0P0M50300	Thermistor	サーミスタ (用紙温度センサ)		C	1	

MAIN POWER SUPPLY SECTION

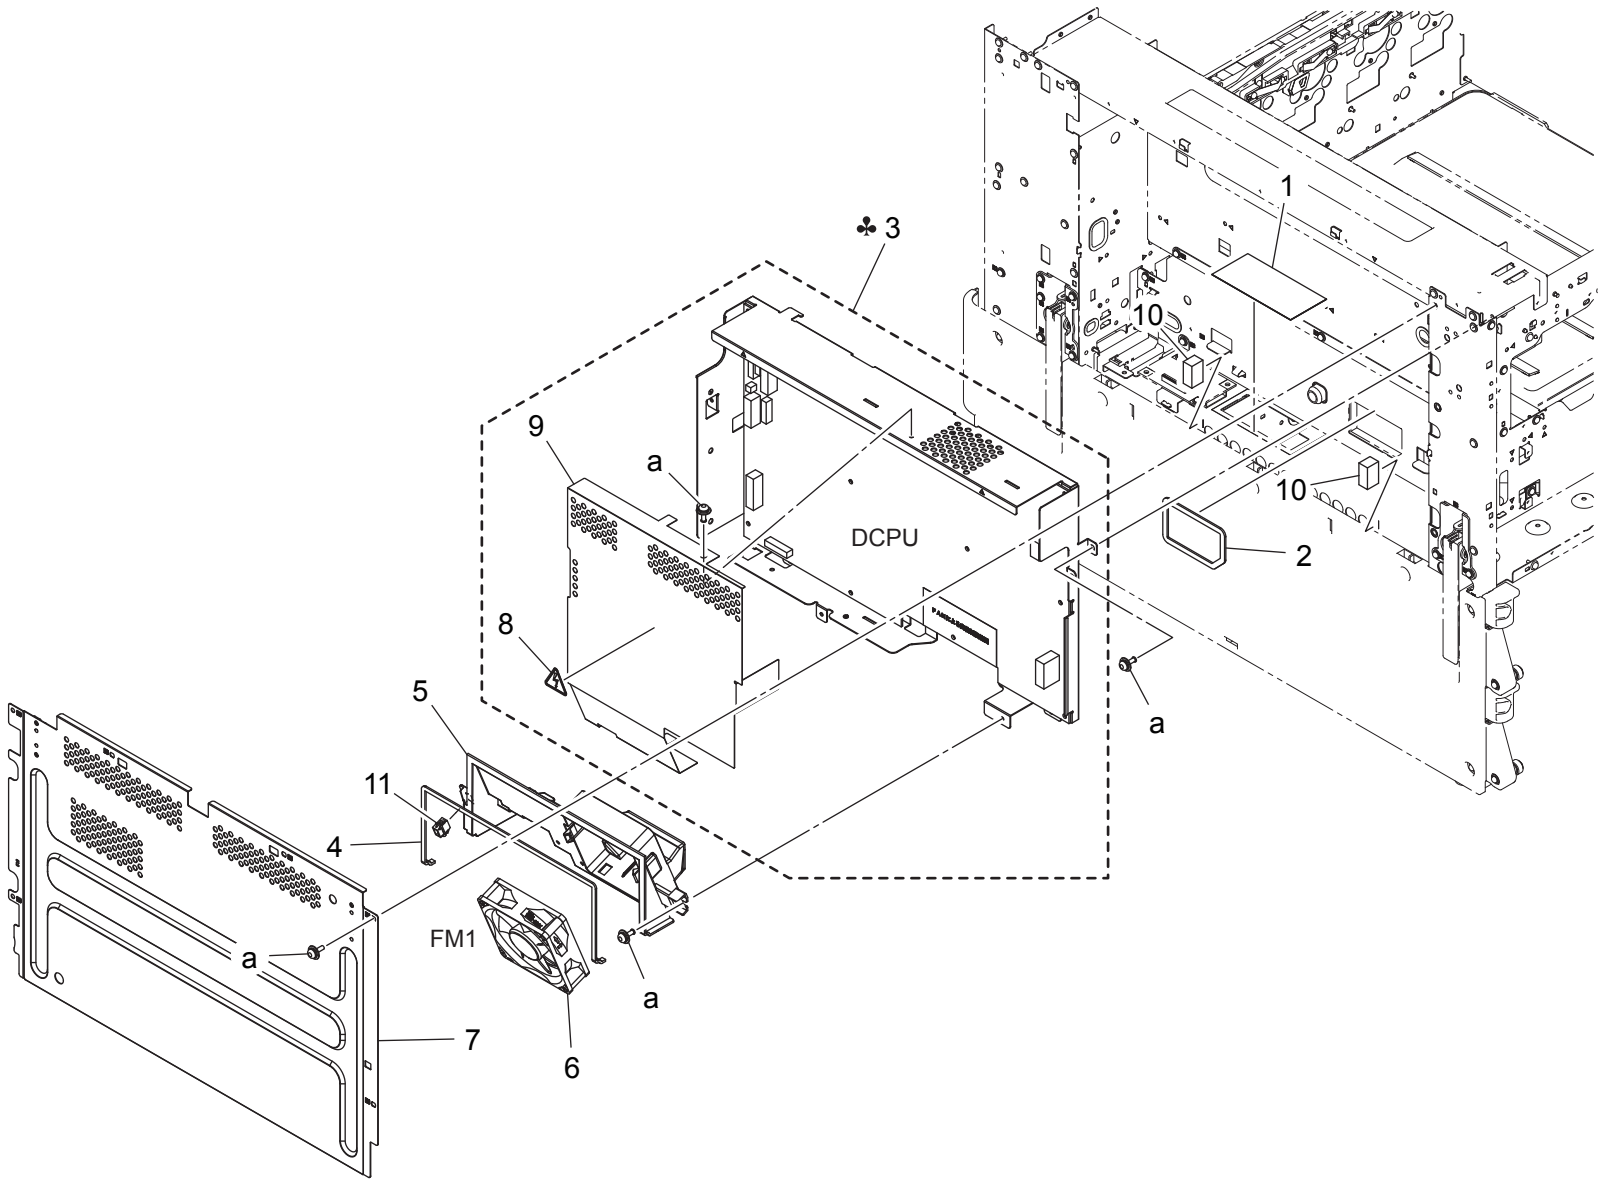

MAIN POWER SUPPLY SECTION


[illegible]

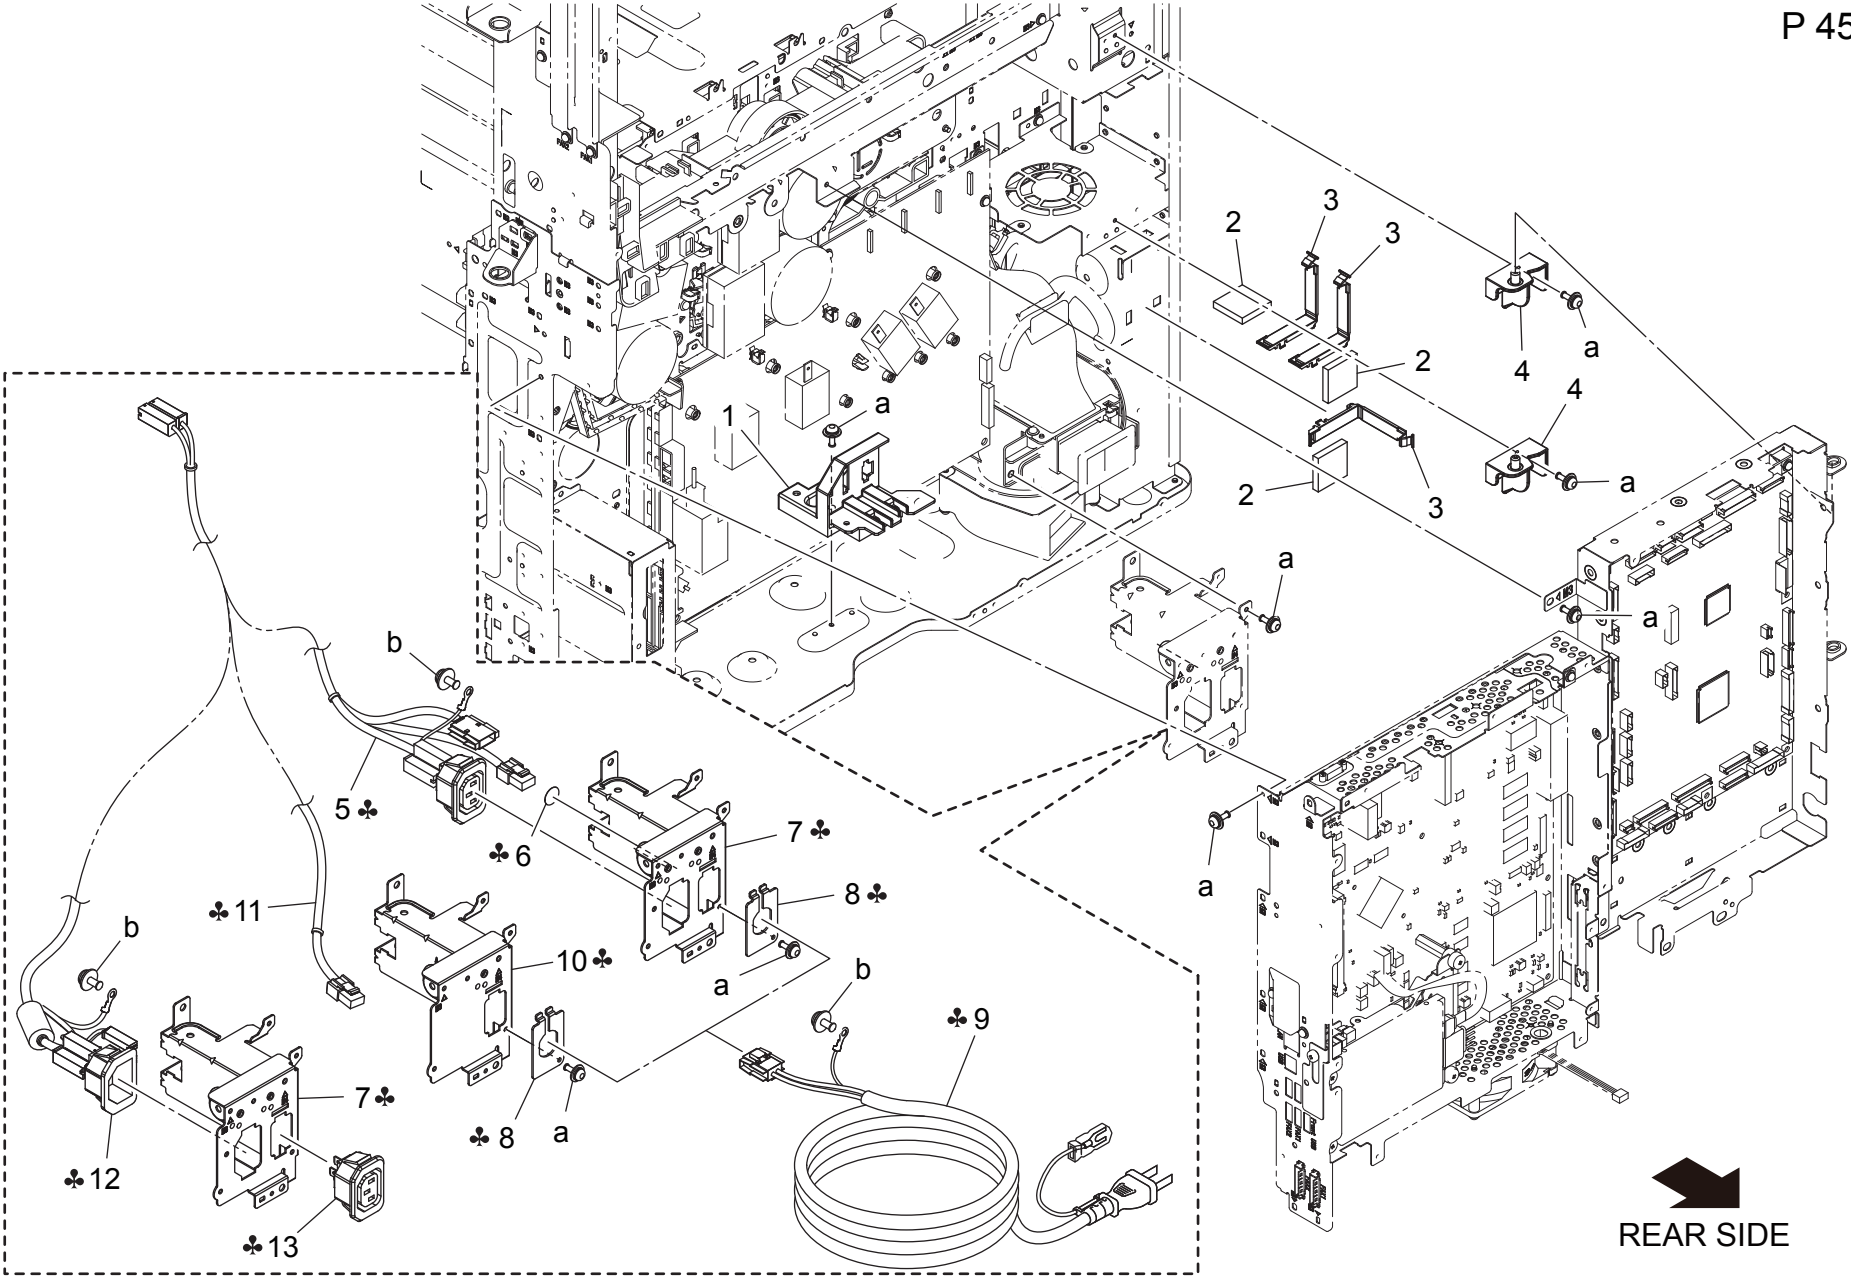

bizhub C224/bizhub C284/bizhub C364

Key	Part No.	Description		Destinations	Class	QTY	Standard parts
1	A161131400	Holder	ホルダ (CN)		D	1	a-V116030803 b-V116040803
2	A161136500	Spacer	スペーサ (FFC / 1)		C	3	
3	A161137802	Holder	ホルダ (FFC)		D	3	
4	A161130801	Support Shaft	支点軸		D	2	
5	A161N10002	AC Wiring /100V	AC 束線 / 100 V (ハロゲン)	A,A1	D	1	
6	9J06730101	LABEL	ラベル	A,A1	D	1	
7	A161130502	Mounting Plate	取付板 (インレット / 国・欧)	A,A1,C,D1,D3,E,F2,G 1,I,K	D	1	
8	A0ED135700	Mounting Plate	取付板 (電源コード)	A,A1,B,G2	D	1	
9	A0EDN30002	Power source Cord /100V	電源コード / 100 V	A,A1	D	1	
9	A1UDN30001	Power code /120V	電源コード / 120 V (北米, 15 A)	B,G2	C	1	
10	A161130603	Mounting Plate	取付板 (インレット / 北米)	B,G2	D	1	
11	A161N10102	AC Wiring /120V	AC 束線 / 120 V (ハロゲン)	B,G2	D	1	
12	A161N10202	AC Wiring /230V	AC 束線 / 230 V (ハロゲン)	C,D1,D3,E,F2,G1,I,K	D	1	
13	A02EN12512	Power supply Wiring	給電束線	C,D1,D3,E,F2,G1,I,K	D	1	

ELECTRICAL COMPONENTS

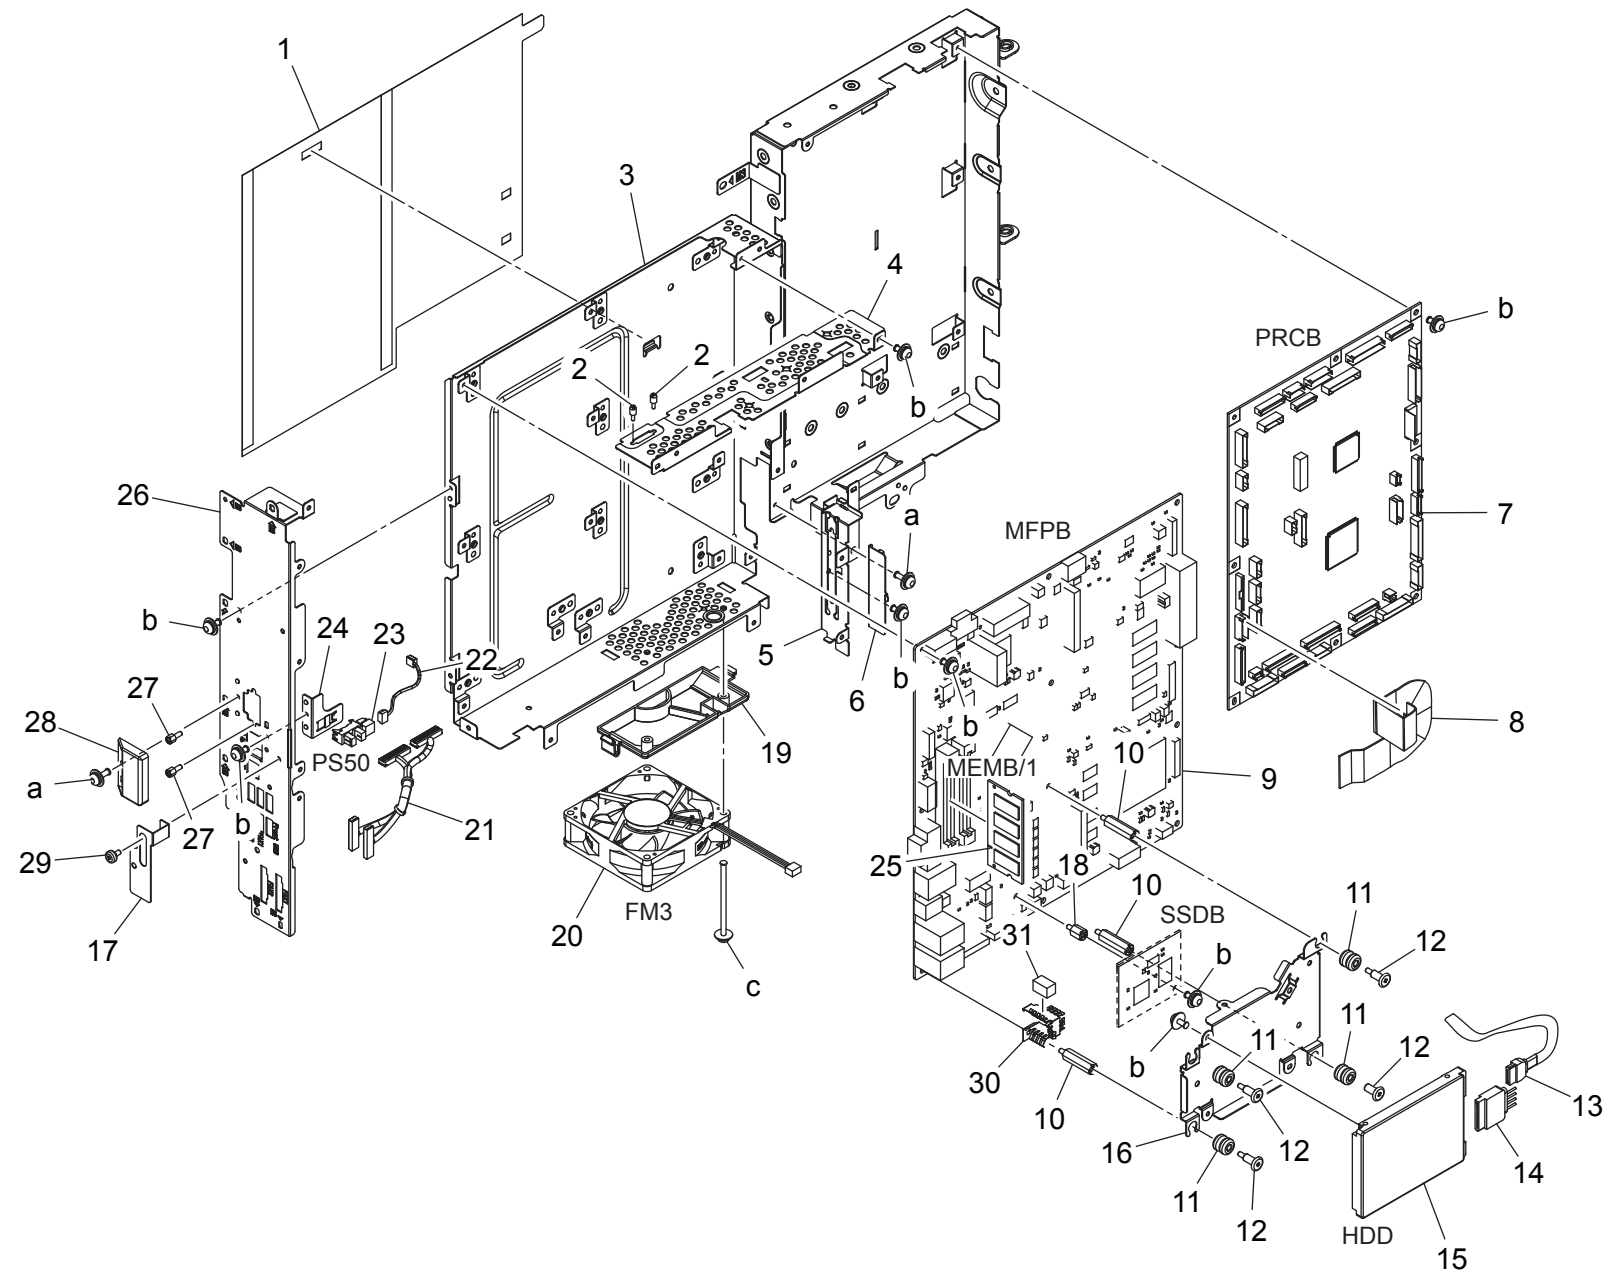


bizhub C224/bizhub C284/bizhub C364

ELECTRICAL COMPONENTS

Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	A161134500	Sheet		D	1	a-V116030803 b-V116030603 c-V116034003
2	A161138601	Shoulder screw		C	2	
3	A161131005	Shield Case		D	1	
4	A161137402	Mounting Plate		D	1	
5	A161138804	Mounting Plate		D	1	
6	A161137501	Cover		D	1	
7	A161H00108	PWB Assembly(PWB-MC ASSY)		I	1	
8	A161N11800	Flatcable /50		C	1	
9	A161H02104	PWB assembly(PWB-MFP ASSY)	{C284/C364}	I	1	
9	A4FMH02204	PWB assembly(PWB-MFP ASSY)	{C224}	I	1	
10	A161139901	Shoulder screw		D	3	
11	A0P0144400	Bushing		D	4	
12	A0P0144300	Shoulder screw		D	4	
13	A0P0N15100	Cable		C	1	
14	A0P0N15200	Cable		C	1	
15	A161M72000	HDD		I	1	
16	A161130700	Mounting Plate		D	1	
17	A161139500	Cover		D	1	
18	A161137600	Shoulder screw		D	1	
19	A161140101	Duct		D	1	
20	A0EDM10500	Fan motor		C	1	
21	A161N12602	Control Relay harness		D	1	
22	A161N11B00	Controller Detection harness		D	1	
23	A108M50100	Photointerrupter		B	1	
24	A161139400	Mounting Plate		D	1	
25	V865300026	MEMORY MODULES		C	1	
26	A161132203	Mounting Plate		D	1	
27	A161137900	Screw		C	2	
28	A0ED131900	Cover		D	1	
29	A0P0149100	Shoulder screw		C	1	
30	A0P0145900	Ground Plate		D	1	
31	A161136200	Cushion		D	1	

WIRING


P 47

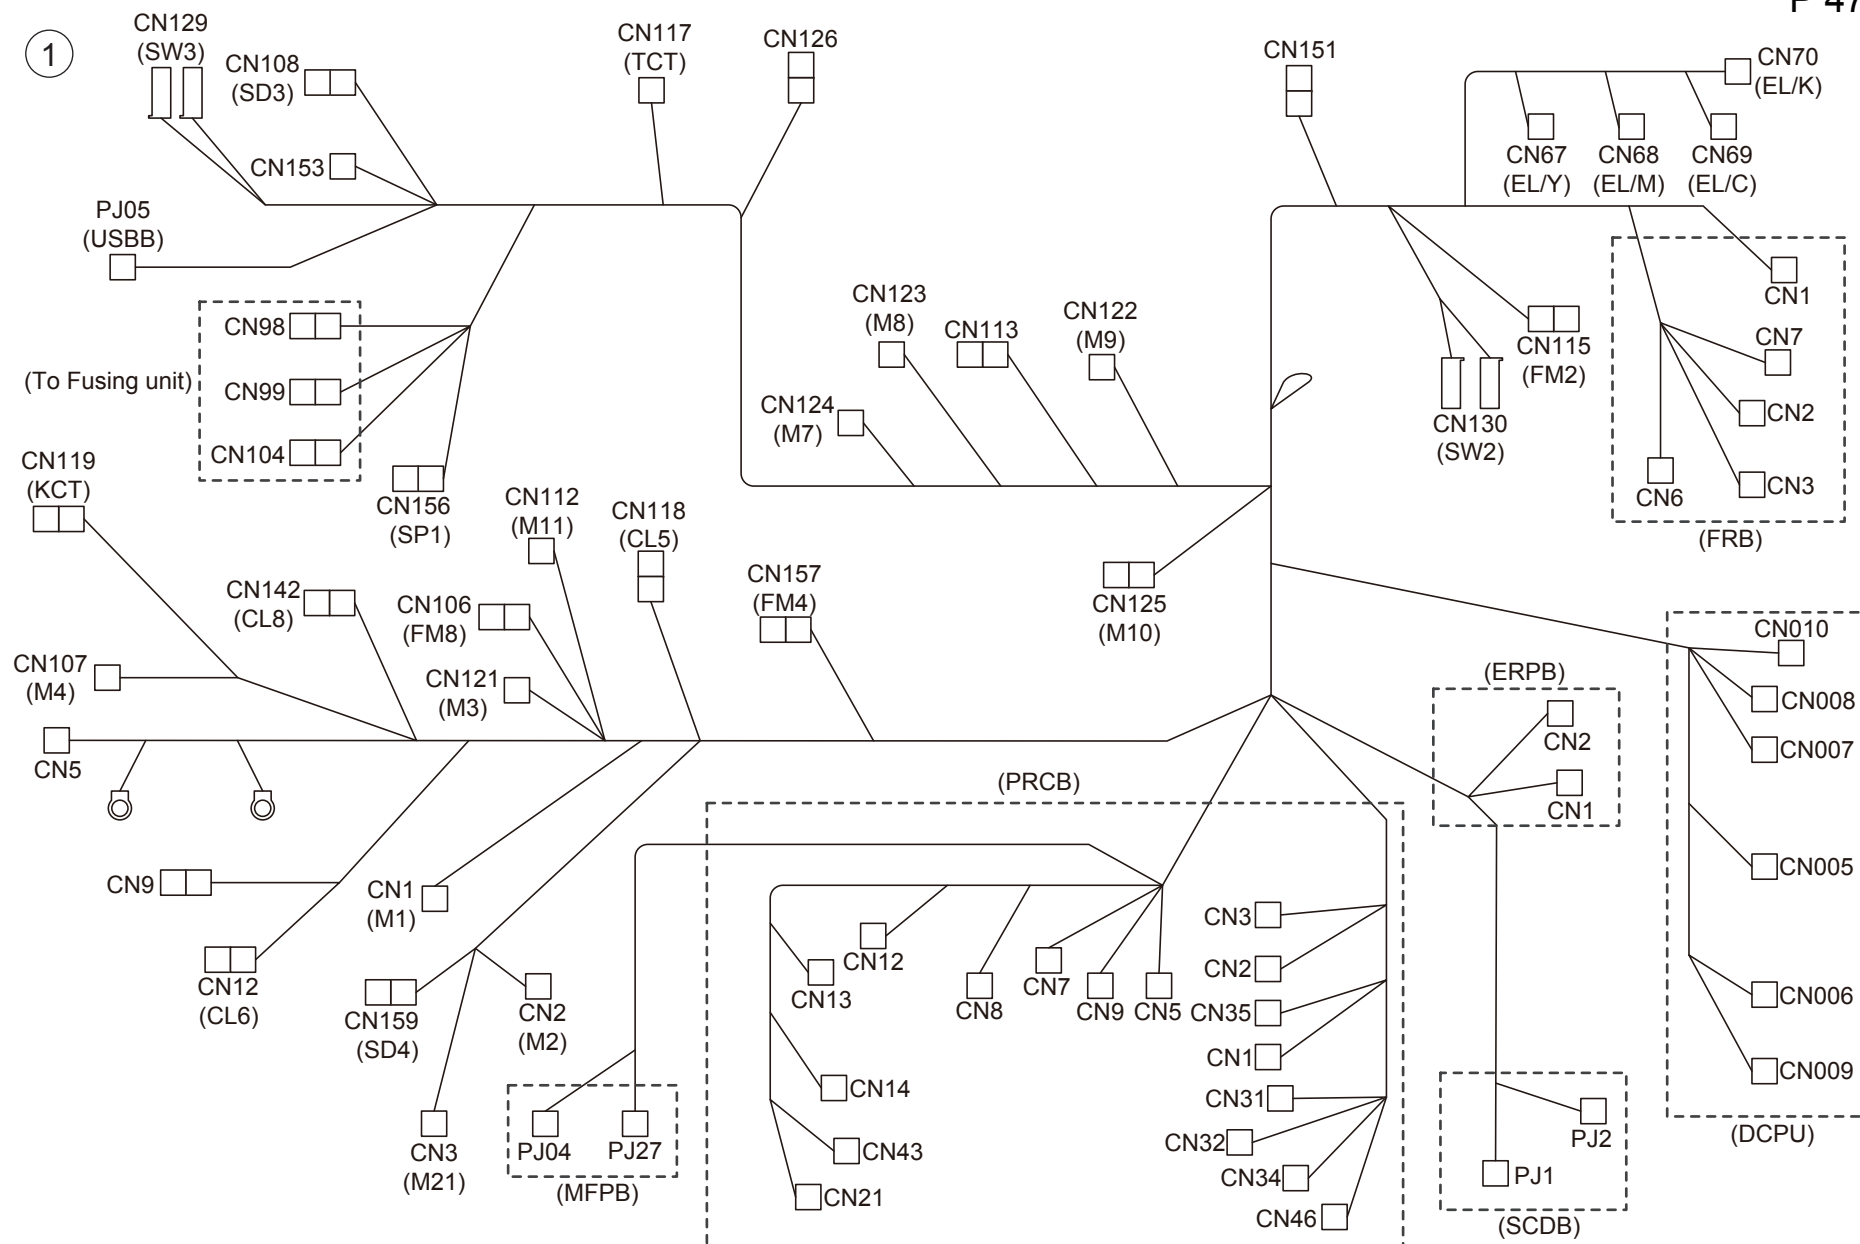

bizhub C224/bizhub C284/bizhub C364
















Key	Part No.	Description		Destinations	Class	QTY	Standard parts
1	A161N11S03	Main body Wiring /Front	本体束線／前 (1)	{C364}	D	1	
1	A4FKN10003	Main body Wiring /Front	本体束線／前 (2)	{C284}	D	1	
1	A4FMN10003	Main body Wiring /Front	本体束線／前 (3)	{C224}	D	1	

1

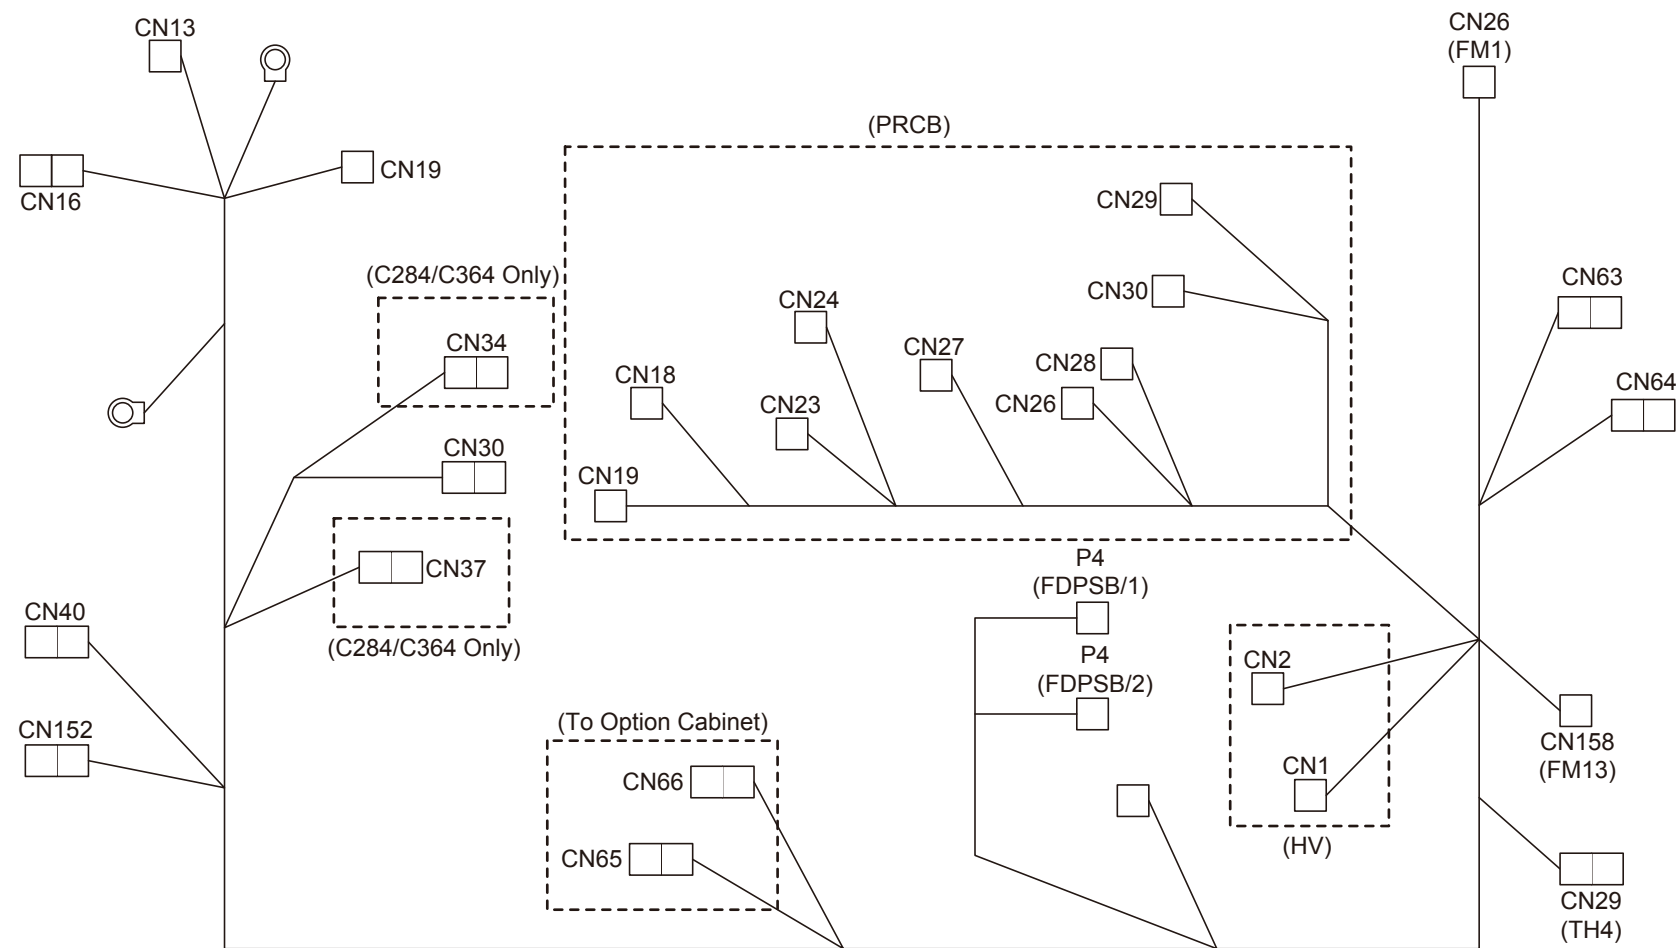

Key	Part No.	Description		Destinations	Class	QTY	Standard parts
1	A161N10A03	Main body Wiring /Rear	本体束線／奥 (L)	{C284/C364}	D	1	
1	A4FMN10103	Main body Wiring /Rear	本体束線／奥 (3)	{C224}	D	1	

WIRING ACCESSORIES AND JIGS










1 	6 White 	11 	16	21	26	31	36
2 	7 	12 	17	22	27	32	37
3 	8 	13 	18	23	28	33	38
4 	9 	14 	19	24	29	34	39
5 	10 	15 ♣ 	20	25	30	35	40

WIRING ACCESSORIES AND JIGS

Page. 49

Key	Part No.	Description	Destinations	Class	QTY	Standard parts
1	V500010003	Saddle	ロッキングワイヤーサドル	D		
2	V500010005	saddle	ロッキングワイヤーサドル	D		
3	V500010007	saddle	ロッキングワイヤーサドル	D		
4	V500010008	saddle	ロッキングワイヤーサドル	D		
5	V500010020	Saddle	ミニロッキングワイヤーサドル	D		
6	V500010046	saddle	ミニロッキングワイヤーサドル	D		
7	V500010052	SADDLE	ロッキングワイヤーサドル	D		
8	V500010061	saddle	ミニロッキングワイヤーサドル	D		
9	V500020052	bushing	コードブッシュ	D		
10	V500020082	Clamping for FFC	F F C 用クランプ	D		
11	V570010021	Saddle	エッジサドル	D		
12	V570010057	Wing Edge Saddle	ウィングエッジサドル	D		
13	V570010059	Wing Edge Saddle	ウィングエッジサドル	D		
14	V570010060	Wing Edge Saddle	ウィングエッジサドル	D		
15	V500020094	FG Clamp	F G クランプ	D	C,D1,D3,E,F2,G1,I,K	

ACCESSORY PARTS

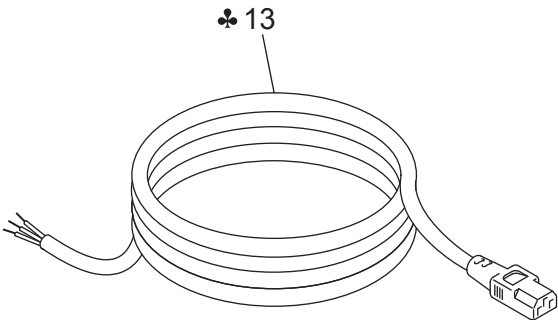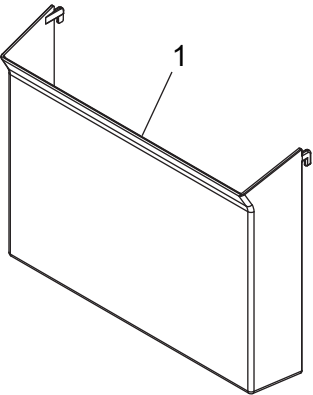

ACCESSORY PARTS

Page. 50

Key	Part No.	Description		Destinations	Class	QTY	Standard parts
1	A0ED166200	Holder	ホルダ (マニュアル)		C	1	
2	A0ED166100	Installing Spacer	設置スペーサ		D	1	
3	A00J169100	Cover	蓋		C	2	
4	A02E167700	Cover	蓋		C	2	
5	A161192000	Panel	パネル (ペン A s s y)		C	1	
6	A161947000	Label	ラベル (パネルシート)	A,A1,B,G2,C,D1,D3,E,F2,G1,I,K	C	1	
7	A00J940100	Label Legal Restriction	ラベル	C,D1,D3,E,F2,G1,I,K	C	1	
8	A161943300	Label Paper Size/Metric	ラベル 集合ラベル M	A,A1,C,D1,D3,E,F2,G1,I,K	C	1	
9	A161943400	Label Paper Size/Inch	ラベル 集合ラベル I	B,G2	C	1	
10	V500020040	clamp	ナイロンクランプ	C,D1,D3,E,F2,G1,I,K	D	2	
11	V116033003	Screw	なべ小ねじ・セムス 2	C,D1,D3,E,F2,G1,I,K	V	1	
12	V153030803	Screw	カップ頭タッピンねじ B タイ	C,D1,D3,E,F2,G1,I,K	V	1	
13	A0EDN30201	Power source Cord /230V	電源コード / 2 3 0 V	D1,D3,E,F2,G1,I,K	D	1	

MAINTENANCE LIST

1/2

● The items with no Page/Key numbers are not handled as spare parts.

No.	Section	PM Parts Description	Maintenance Cycle (K=1,000)		Parts No.	Destinations	Page/Key	Note
			QTY	Replace				
1	Paper feed section	Tray 1 pick-up roller	1	300k	A00J563600		P17-14	*2, *4
2		Tray 1 feed roller	1	300k	A00J563600		P17-14	*2, *4
3		Tray 1 separation roller	1	300k	A00J563600		P18-6	*2, *4
4		Tray 2 pick-up roller	1	300k	A00J563600		P19-18	*2, *4
5		Tray 2 feed roller	1	300k	A00J563600		P19-18	*2, *4
6		Tray 2 separation roller	1	300k	A00J563600		P20-6	*2, *4
7		Manual bypass tray feed roller	1	200k	A00F623201		P31-10	*2, *4
8		Manual bypass tray separation roller assy	1	200k	4658015106		P32-30	*2, *4
9	Processing section	Toner cartridge/Y,M,C *1	1	25k	-	bizhub C364		
10			1	25k	-	bizhub C284		
11			1	25k	-	bizhub C224		
12		Toner cartridge/K *1	1	27k	-	bizhub C364		
13			1	27k	-	bizhub C284		
14			1	27k	-	bizhub C224		
15		Drum unit/Y,M,C *1	1	90k	-	bizhub C364		*3
16			1	75k	-	bizhub C284		*3
17			1	55k	-	bizhub C224		*3
18		Drum unit/K *1 	1	120k	-	bizhub C364		*3
19			1	120k	-	bizhub C284		*3
20			1	70k	-	bizhub C224		*3
21		Developing unit/Y,M,C,K	1	570k(JP)	-	bizhub C364		*3
22			1	590k(US)	-	bizhub C364		*3
23			1	600k(EU)	-	bizhub C364		*3
24			1	545k(JP)	-	bizhub C284		*3
25			1	590k(US)	-	bizhub C284		*3
26			1	600k(EU)	-	bizhub C284		*3
27			1	520k(JP)	-	bizhub C224		*3
28			1	590k(US)	-	bizhub C224		*3
29			1	600k(EU)	-	bizhub C224		*3
30		Ozone filter	1	300k	A161R72700	bizhub C364	P42-5	*3, *5
31			1	280k	A161R72700	bizhub C284	P42-5	*3, *5
32			1	225k	A161R72700	bizhub C224	P42-5	*3, *5
33		Waste toner box *1	1	40k	A4NNWY1		P12-9	*6
34	Image transfer section	Transfer belt unit	1	300k	A161R71300	bizhub C364	P15-1	*3
35			1	280k	A161R71300	bizhub C284	P15-1	*3
36			1	225k	A161R71300	bizhub C224	P15-1	*3
37		Transfer roller unit	1	300k	A161R71400	bizhub C364	P28-23	*3, *5
38			1	280k	A161R71400	bizhub C284	P28-23	*3, *5
39			1	225k	A161R71400	bizhub C224	P28-23	*3, *5
40	Fusing section	Fusing unit 100V	1	570k	A161R71711	bizhub C364	P35-10	*3
41			1	545k	A161R71711	bizhub C284	P35-10	*3
42			1	520k	A161R71711	bizhub C224	P35-10	*3
43		Fusing unit 120V	1	590k	A161R71811	bizhub C364	P35-10	*3
44			1	590k	A161R71811	bizhub C284	P35-10	*3
45			1	590k	A161R71811	bizhub C224	P35-10	*3
46		Fusing unit 230V	1	600k	A161R71911	bizhub C364	P35-10	*3
47			1	600k	A161R71911	bizhub C284	P35-10	*3
48			1	600k	A161R71911	bizhub C224	P35-10	*3

*1: The parts can be replaced either by user or service engineer.

bizhub C224/bizhub C284/bizhub C364

- *2: Actual durable cycle (life counter value)
- *3: Field standard yield
- *4: Replace those three parts at the same time.
- *5: The ozone filter and the transfer roller unit are furnished with the transfer belt unit so that all of them are replaced at same time.
- *6: A waste toner full condition is detected with detecting the actual waste toner emissions.

メンテナンスリスト

1/2

● ページ / キーナンバーのないものは、アフターサービス部品ではありません。

No.	区分	PM 部品名称	サイクル (K=1,000)		部品番号	仕向地	頁 / キー	備考
			員数	交換				
1	給紙部	トレイ1 ピックアップローラー	1	300k	A00J563600		P17-14	*2, *4
2		トレイ1 給紙ローラー	1	300k	A00J563600		P17-14	*2, *4
3		トレイ1 分離ローラー	1	300k	A00J563600		P18-6	*2, *4
4		トレイ2 ピックアップローラー	1	300k	A00J563600		P19-18	*2, *4
5		トレイ2 給紙ローラー	1	300k	A00J563600		P19-18	*2, *4
6		トレイ2 分離ローラー	1	300k	A00J563600		P20-6	*2, *4
7		手差しトレイ給紙ローラー	1	200k	A00F623201		P31-10	*2, *4
8		手差しトレイ分離ローラー Assy	1	200k	4658015106		P32-30	*2, *4
9	プロセス部	トナーカートリッジ /Y,M,C *1	1	25k	-	bizhub C364		
10			1	25k	-	bizhub C284		
11			1	25k	-	bizhub C224		
12		トナーカートリッジ /K *1	1	27k	-	bizhub C364		
13			1	27k	-	bizhub C284		
14			1	27k	-	bizhub C224		
15		ドラムユニット /Y,M,C *1	1	75k	-	bizhub C364		*3
16			1	60k	-	bizhub C284		*3
17			1	55k	-	bizhub C224		*3
18		ドラムユニット /K *1	1	120k	-	bizhub C364		*3
19			1	115k	-	bizhub C284		*3
20			1	70k	-	bizhub C224		*3
21		現像ユニット /Y,M,C,K	1	570k(JP)	-	bizhub C364		*3
22			1	590k(US)	-	bizhub C364		*3
23			1	600k(EU)	-	bizhub C364		*3
24			1	545k(JP)	-	bizhub C284		*3
25			1	590k(US)	-	bizhub C284		*3
26			1	600k(EU)	-	bizhub C284		*3
27			1	520k(JP)	-	bizhub C224		*3
28			1	590k(US)	-	bizhub C224		*3
29			1	600k(EU)	-	bizhub C224		*3
30		オゾンフィルター	1	300k	A161R72700	bizhub C364	P42-5	*3, *5
31			1	220k	A161R72700	bizhub C284	P42-5	*3, *5
32			1	215k	A161R72700	bizhub C224	P42-5	*3, *5
33		廃棄トナーボックス *1	1	40k	A4NNWY1		P12-9	*6
34	転写部	転写ベルトユニット	1	300k	A161R71300	bizhub C364	P15-1	*3
35			1	220k	A161R71300	bizhub C284	P15-1	*3
36			1	215k	A161R71300	bizhub C224	P15-1	*3
37		転写ローラーユニット	1	300k	A161R71400	bizhub C364	P28-23	*3, *5
38			1	220k	A161R71400	bizhub C284	P28-23	*3, *5
39			1	215k	A161R71400	bizhub C224	P28-23	*3, *5
40	定着部	定着ユニット 1 0 0 V	1	570k	A161R71711	bizhub C364	P35-10	*3
41			1	545k	A161R71711	bizhub C284	P35-10	*3
42			1	520k	A161R71711	bizhub C224	P35-10	*3
43		定着ユニット 1 2 0 V	1	570k	A161R71811	bizhub C364	P35-10	*3
44			1	545k	A161R71811	bizhub C284	P35-10	*3
45			1	520k	A161R71811	bizhub C224	P35-10	*3
46		定着ユニット 2 3 0 V	1	570k	A161R71911	bizhub C364	P35-10	*3
47			1	545k	A161R71911	bizhub C284	P35-10	*3
48			1	520k	A161R71911	bizhub C224	P35-10	*3

*1: ユーザー / サービス交換の選択が可能。

bizhub C224/bizhub C284/bizhub C364

*2: ライフカウンター値

*3: 市場標準印刷枚数値

*4: 同時交換する。

*5: 転写ベルトユニット (A161R713) に同梱されており、同時交換する。

*6: 廃棄トナーフル検知は、実際の廃棄トナー充填量を検知して行う。

DESTINATION

Destination No.		Destinations		V	Hz	Model No.
A	A1	JAPAN		100	50/60	A161001/ A4FK001/ A4FM001
	A2	JAPAN				
B		USA, CANADA		120	60	A161011/ A4FK011/ A4FM011
C		EUROPEAN TYPE		220-240	50/60	A161021/ A4FK021/ A4FM021
D	D1	S.E ASIA TYPE	THAILAND, SRI LANKA, SINGAPORE, MALAYSIA, HONG KONG, PAKISTAN, INDIA, BANGLADESH, INDONESIA	220-240	50/60	A161041/ A4FK041/ A4FM041
	D3	OCEANIA TYPE	AUSTRALIA, NEW ZEALAND	220-240	50/60	A161041/ A4FK041/ A4FM041
E		PHILIPPINES		220-240	50/60	A161041/ A4FK041/ A4FM041
F	F1	SAUDI ARABIA				
	F2	SAUDI ARABIA		220-240	50/60	A161041/ A4FK041/ A4FM041

Destination No.		Destinations	V	Hz	Model No.
G	G1	C.S AMERICA	220-240	50/60	A161041/ A4FK041/ A4FM041
	G2	C.S AMERICA	120	60	A161011/ A4FK011/ A4FM011
H		TAIWAN			
I		JORDAN, LEBANON, SYRIA, SOUTH AFRICA, IRAQ, IRAN, N.YEMEN, CAME- ROON, UAE, BAHRAIN, OMAN, QATAR, KUWAIT, KENYA, TUNISIA, IVORY COAST, MOROCCO	220-240	50/60	A161041/ A4FK041/ A4FM041
J		CHINA			
K		KOREA	220-240	50/60	A161041/ A4FK041/ A4FM041