

CODE:00ZMX4500E041

デジタルフルカラー複合機
Digital Full Color Multifunction System

Revised Edition

MX-3500FN/MX-3500N
MX-3501FN/MX-3501N
MX-4500FN/MX-4500N
MODEL MX-4501FN/MX-4501N

このパーツガイドに掲載されている表示価格ランクは消費税抜きです。

CONTENTS

- | | |
|---|--|
| 1 外装 1(Exteriors 1) | 47 後フレーム部 2(Rear frame section 2) |
| 2 外装 2(Exteriors 2) | 48 フレーム部 (Frame section) |
| 3 原稿検知ユニット (Document detect unit) | 49 ハネ部 (Wiring section) |
| 4 操作部 (Operation unit) | 50 RSPF 外装部 (RSPF Exteriors) |
| 5 スキャナユニット 1(Scanner unit 1) | [MX-3500FN/N, MX-4500FN/N] |
| 6 スキャナユニット 2(Scanner unit 2) | 51 RSPF 原稿トレイ (RSPF Original tray) |
| 7 ランプユニット (Lamp unit) | [MX-3500FN/N, MX-4500FN/N] |
| 8 500 カセット (500 cassette) | 52 RSPF 給紙部 (RSPF Paper feeding section) |
| 9 カセット給紙ユニット 1(Cassette paper feed unit 1) | [MX-3500FN/N, MX-4500FN/N] |
| 10 カセット給紙ユニット 2(Cassette paper feed unit 2) | 53 RSPF 分離部 (RSPF Separation section) |
| 11 給紙搬送部 (Paper feed transport section) | [MX-3500FN/N, MX-4500FN/N] |
| 12 右下ドアユニット (Right lower door unit) | 54 RSPF 搬送部 1(RSPF Transport section 1) |
| 13 マルチトレイユニット (Multi tray unit) | [MX-3500FN/N, MX-4500FN/N] |
| 14 マルチ給紙ユニット 1(Multi paper feed unit 1) | 55 RSPF 搬送部 2(RSPF Transport section 2) |
| 15 マルチ給紙ユニット 2(Multi paper feed unit 2) | [MX-3500FN/N, MX-4500FN/N] |
| 16 PS ユニット 1(PS unit 1) | 56 RSPF 搬送部 3(RSPF Transport section 3) |
| 17 PS ユニット 2(PS unit 2) | [MX-3500FN/N, MX-4500FN/N] |
| 18 トナー搬送パイプユニット (Toner transport pipe unit) | 57 RSPF 中間トレイ (RSPF Middle tray) |
| 19 レジストセンサユニット (Resist sensor unit) | [MX-3500FN/N, MX-4500FN/N] |
| 20 LSU 部 (LSU section) | 58 RSPF 駆動ユニット (RSPF Drive unit) |
| 21 DV ユニット 1(DV unit 1) | [MX-3500FN/N, MX-4500FN/N] |
| 22 DV ユニット 2(DV unit 2) | 59 DSPF 外装部 (DSPF Exteriors) |
| 23 プロセスユニット (Process unit) | [MX-3501FN/N, MX-4501FN/N] |
| 24 1 次転写クリーナーユニット (1st transfer cleaner unit) | 60 DSPF 原稿トレイ部 (DSPF Original tray) |
| 25 1 次転写ユニット 1(1st transfer unit 1) | [MX-3501FN/N, MX-4501FN/N] |
| 26 1 次転写ユニット 2(1st transfer unit 2) | 61 DSPF 給紙ユニット (DSPF Paper feed unit) |
| 27 1 次転写ユニット 3(1st transfer unit 3) | [MX-3501FN/N, MX-4501FN/N] |
| 28 2 次転写ユニット 1(2nd transfer unit 1) | 62 DSPF 分離ユニット (DSPF Separation unit) |
| 29 2 次転写ユニット 2(2nd transfer unit 2) | [MX-3501FN/N, MX-4501FN/N] |
| 30 定着部 1(Fusing unit 1) | 63 DSPF 上ドアユニット (DSPF Upper door unit) |
| 31 定着部 2(Fusing unit 2) | [MX-3501FN/N, MX-4501FN/N] |
| 32 定着部 3(Fusing unit 3) | 64 DSPF 上搬送ユニット (DSPF Upper transport unit) |
| 33 定着部 4(Fusing unit 4) | [MX-3501FN/N, MX-4501FN/N] |
| 34 右ドアユニット 1(Right door unit 1) | 65 DSPF 下搬送ユニット 1(DSPF Lower transport unit 1) |
| 35 右ドアユニット 2(Right door unit 2) | [MX-3501FN/N, MX-4501FN/N] |
| 36 右ドアユニット 3(Right door unit 3) | 66 DSPF 下搬送ユニット 2(DSPF Lower transport unit 2) |
| 37 排紙ユニット 1(Delivery unit 1) | [MX-3501FN/N, MX-4501FN/N] |
| 38 排紙ユニット 2(Delivery unit 2) | 67 DSPF 縮小光学ユニット (DSPF Reduction optical unit) |
| 39 給紙駆動部 (Paper feed drive section) | [MX-3501FN/N, MX-4501FN/N] |
| 40 メイン駆動部 1(Main drive section 1) | 68 DSPF 排紙ユニット (DSPF Delivery unit) |
| 41 メイン駆動部 2(Main drive section 2) | [MX-3501FN/N, MX-4501FN/N] |
| 42 コントロール BOX 1(Control BOX 1) | 69 DSPF 駆動ユニット (DSPF Drive unit) |
| 43 コントロール BOX 2(Control BOX 2) | [MX-3501FN/N, MX-4501FN/N] |
| 44 電源ユニット (Power supply unit) | 70 DSPF フレーム部 (DSPF Frame section) |
| 45 前フレーム部 (Front frame section) | [MX-3501FN/N, MX-4501FN/N] |
| 46 後フレーム部 1(Rear frame section 1) | 71 DSPF ハネ部 (DSPF Wiring section) |
| | [MX-3501FN/N, MX-4501FN/N] |
| | 72 梱包及び付属品 (Packing material & Accessories) |

DEFINITION

- Rank A : Maintenance parts, and consumable parts which are not included in but closely related to maintenance parts
Rank B : Performance/function parts (sensors, clutches, and other electrical parts), consumable parts
Rank E : Unit parts including PWB
Rank D : Preparation parts (External fitting, packing, parts packed together)
Rank C : Parts other than the above (excluding sub components of PWB)

Because parts marked with "△" is indispensable for the machine safety maintenance and operation, it must be replaced with the parts specific to the product specification.

- Other than this Parts Guide, please refer to documents Service Manual(including Circuit Diagram)of this model.
- Please use the 13 digit code described in the right hand corner of front cover of the document, when you place an order.
- For U.S. only-Use order codes provided in advertising literature. Do not order from parts department.

[NOTE]

* These parts are supplied by SMF

Note for use of the revised Parts Guide

Interchangeability of parts is expressed by No1~6 as shown in the table below.

<Interchangeability>

1	Interchangeable.
2	Current type can be used in place of new type. New type cannot be used in place of current type.
3	Current type cannot be used in place of new type. New type can be used in place of current type.
4	Not interchangeable.
5	Interchangeable if replaced with same types of related parts in use.
6	Others.

New & Addition, Change, Abolition, and Quantity change are expressed with the marks shown in the table below.

<Change of Division>

New & Addition	
Change	
Abolition	
Q'antity (increase) Other	
Q'antity (decrease)	
Correction	

Running Change of Effective Time is expressed as R/C.


<Effective Time>

R / C	Running Change
-------	----------------

1 Exteriors 1

[illegible]

1 Exteriors 1

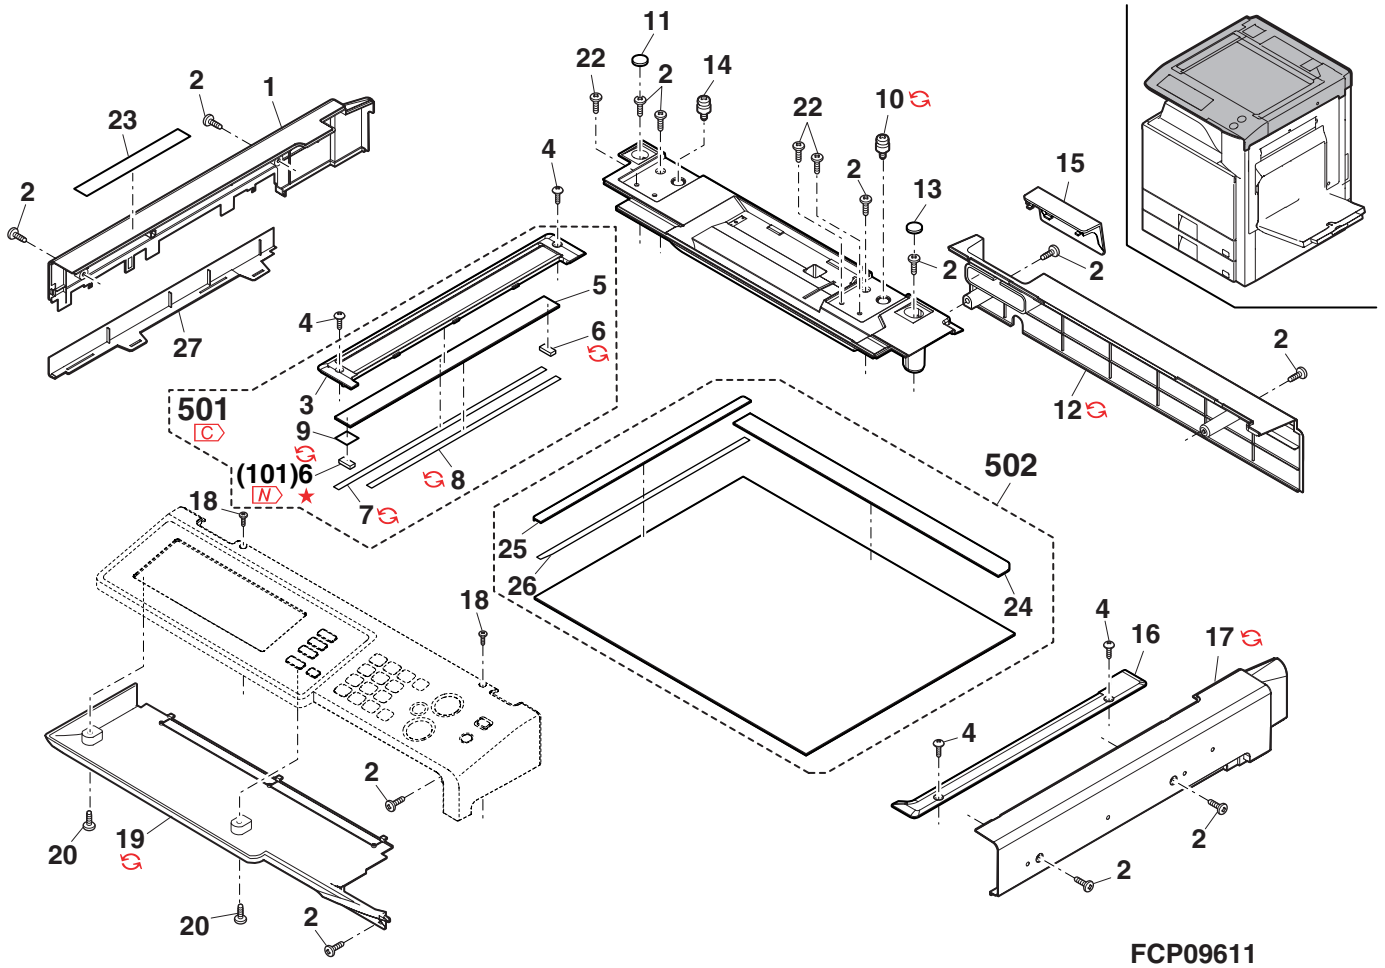


2 Exteriors 2

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	GC0V-0242FCZ1		AR		D	Delivery cover		
2	XHBS740P08000		AA		C	Screw(4x8)		
	GCAB-1102FCZZ		AP		D	Delivery tray cabinet left		
3	GCAB-1102FCZ1	3	AP		D	Delivery tray cabinet left [Improve performance]		- R/C
4	XCAB-1097FCZZ		AK		D	Left cabinet R		
5	XEBS740P08000		AA		C	Screw(4x8)		
6	GCAB-1103FCZZ		AU		D	Delivery tray rear joint cabinet		
	GCAB-1101FCZZ		BC		D	Delivery tray cabinet		
8	GCAB-1101FCPZ	3	BC		D	Delivery tray cabinet [Improve performance]		05/12
	GCAB-1101FCP2	3	BC		D	Delivery tray cabinet [Improve performance]		08/08 R/C
9	GCAB-1116FCZZ		AS		D	Left cabinet lower rear		
10	XHBS730P06000		AC		C	Screw(3x6)		
	PFTA-0135FCPZ		AD		D	Connector cover B		
11	PFTA-0135FCP1	1	AD		D	Connector cover B		08/09 R/C
12	GCAB-1115FCZZ		AC		D	Desk joint cover		
	GCAB-1096FCZZ		BC		D	Left cabinet		
13	GCAB-1096FCZ1	1	BC		D	Left cabinet		08/06
	GCAB-1096FCZ2	3	BC		D	Left cabinet [Improve performance]		- R/C
	GCAB-1096FCZ3	1	BA	N	D	Left cabinet		- R/C
14	GCAB-1114FCZZ		BC		D	Rear cabinet		
16	LHLDW1152FCZZ		AC		C	Bush		
17	GCAB-1118FCZ1		AP	N	D	Right joint cabinet [MX-3500FN,MX-3501FN,MX-4500FN,MX-4501FN]		
	GCAB-1118FCZZ		AP	N	D	Right joint cabinet [MX-3500N,MX-3501N,MX-4500N,MX-4501N]		
19	GFTA-0027FCZZ		AG		D	Desk joint cover R		
20	GCAB-1150FCZZ		AR	N	D	Right cabinet R cover		
21	PC0VP1934FCZZ		AF	N	D	Ozone filter cover		
22	GCAB-1119FCZZ		AW	N	D	Right cabinet R		
25	GCAB-1120FCZZ		AX	N	D	Right cabinet F		
26	PFTA0150FCZZ		AC		D	Card reader cover		
27	GCAB-1122FCZZ		AN	N	D	Front cabinet upper		
28	GC0V-0248FCZZ		AX	N	D	Frame cover A		
	GC0V-0248FCZ2	1	AV		D	Frame cover A		07/08 R/C
29	PC0VP1919FCZ1		AQ	N	D	Front upper frame cover (AB series)		
	PC0VP1919FCZZ		AQ	N	D	Front upper frame cover (Inch series)		
	PC0VP1869FCZ1		AS		D	Frame cover B		
30	PC0VP1869FCZ2	1	AS	N	D	Frame cover B		1st lot
	PC0VP1869FCZ3	1	AS		D	Frame cover B		07/04 R/C
32	MHNG-0220FCZZ		AG		C	Front cabinet hinge		
	PBARP0045FCZZ		AE		D	LSU cleaning bar		
33	PBARP0045FCZ1	1	AE		D	LSU cleaning bar		07/11 R/C
	PBARP0045FCZ2	1	AE		D	LSU cleaning bar		08/09 R/C
35	CDAIU0699DS71		AK		E	LSU cleaning unit		
	CDAIU0699DS72	1	AH	N	E	LSU cleaning unit		10/03 R/C
36	XEBS730P08000		AC		C	Screw(3x8)		
37	LBNDZ0077FCZ1		AD		C	Front cabinet band		
38	LPLTM5027FCZZ		AC		C	MG catch plate S		
39	GCAB-1090FC01		BA		D	Front cabinet		
40	GFTA-0026FCZZ		AF		D	Rear cabinet cover		
42	PC0VP1870FCZZ		AE		D	Power supply switch cover		
43	PMAGT0015FCPZ		AF		C	Magnet catch(10P)		
	PMAGT0146FCZZ	1	AF	N	C	Magnet catch		10/03
44	MSPRC3507FCZZ		AC		C	Damper pressure spring		
45	MCAMP0118FCZZ		AC		C	Damper cam		
46	LHLDZ1712FCZZ		AC		C	Waste toner box holder L		
	LHLDZ1712FCZ1	1	AC	N	C	Waste toner box holder L		07/01 R/C
47	PSHEZ5455FCZ1		AG		C	Damper sheet L		
48	LX-BZ0747FCZZ		AB		C	Step screw(M4)		
	LX-BZ0747FCPZ	1	AB		C	Step screw(M4)		10/08
49	LHLDZ1713FCZZ		AC		C	Waste toner box holder R		
	LHLDZ1713FCZ1	1	AC	N	C	Waste toner box holder R		07/01 R/C
50	PSHEZ5456FCZ1		AG		C	Damper sheet R		
51	CYOK-0060DS52		AZ		A	Waste toner bottle		
	CYOK-0060DS54	3	AZ		A	Waste toner bottle	CCE535	07/11 mid
52	CBDDG0050FC07		AE	N	D	Model name plate [MX-3500FN]		
	CBDDG0050FC08		AE	N	D	Model name plate [MX-3500N]		
	CBDDG0050FC09		AE	N	D	Model name plate [MX-3501FN]		
	CBDDG0050FC10		AE	N	D	Model name plate [MX-3501N]		
	CBDDG0050FC11		AE	N	D	Model name plate [MX-4500FN]		
	CBDDG0050FC12		AE	N	D	Model name plate [MX-4500N]		
	CBDDG0050FC13		AE	N	D	Model name plate [MX-4501FN]		
	CBDDG0050FC14		AE	N	D	Model name plate [MX-4501N]		
53	HBDGD0048FCZZ		AP		D	Front cabinet badge		
	HBDGD0059FCZZ	1	AP	N	D	Front cabinet badge		07/12
54	PC0VP2022FCZZ		AP		D	Manual cover		
55	TCAUS1058FCZZ		AC	N	D	Laser caution label		
56	TLABZ5112FCZZ		AC		D	Heater switch label (Japan)		
58	TLABH5004FCZZ		AB		D	Plug caution label (Japan)		
59	TCAUA1069FCZZ		AC		D	Service caution label (Except Japan)		

2 Exteriors 2

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
101	 PPIPP0246FCZZ	-	BA		C	Waste toner box nozzle	CCE463	-
102	 PMLT-1425FCZ3	-	AL		C	Waste toner box cushion	CCE463	-
	 PMLT-1425FCZ5	3	AG		C	Waste toner box cushion [Improve performance]		08/07 R/C
	 PMLT-1425FCZ6	1	AG	N	C	Waste toner box cushion		10/10 R/C
501	CDAIU0699DS51		AL		E	LSU cleaning unit		


2 Exteriors 2

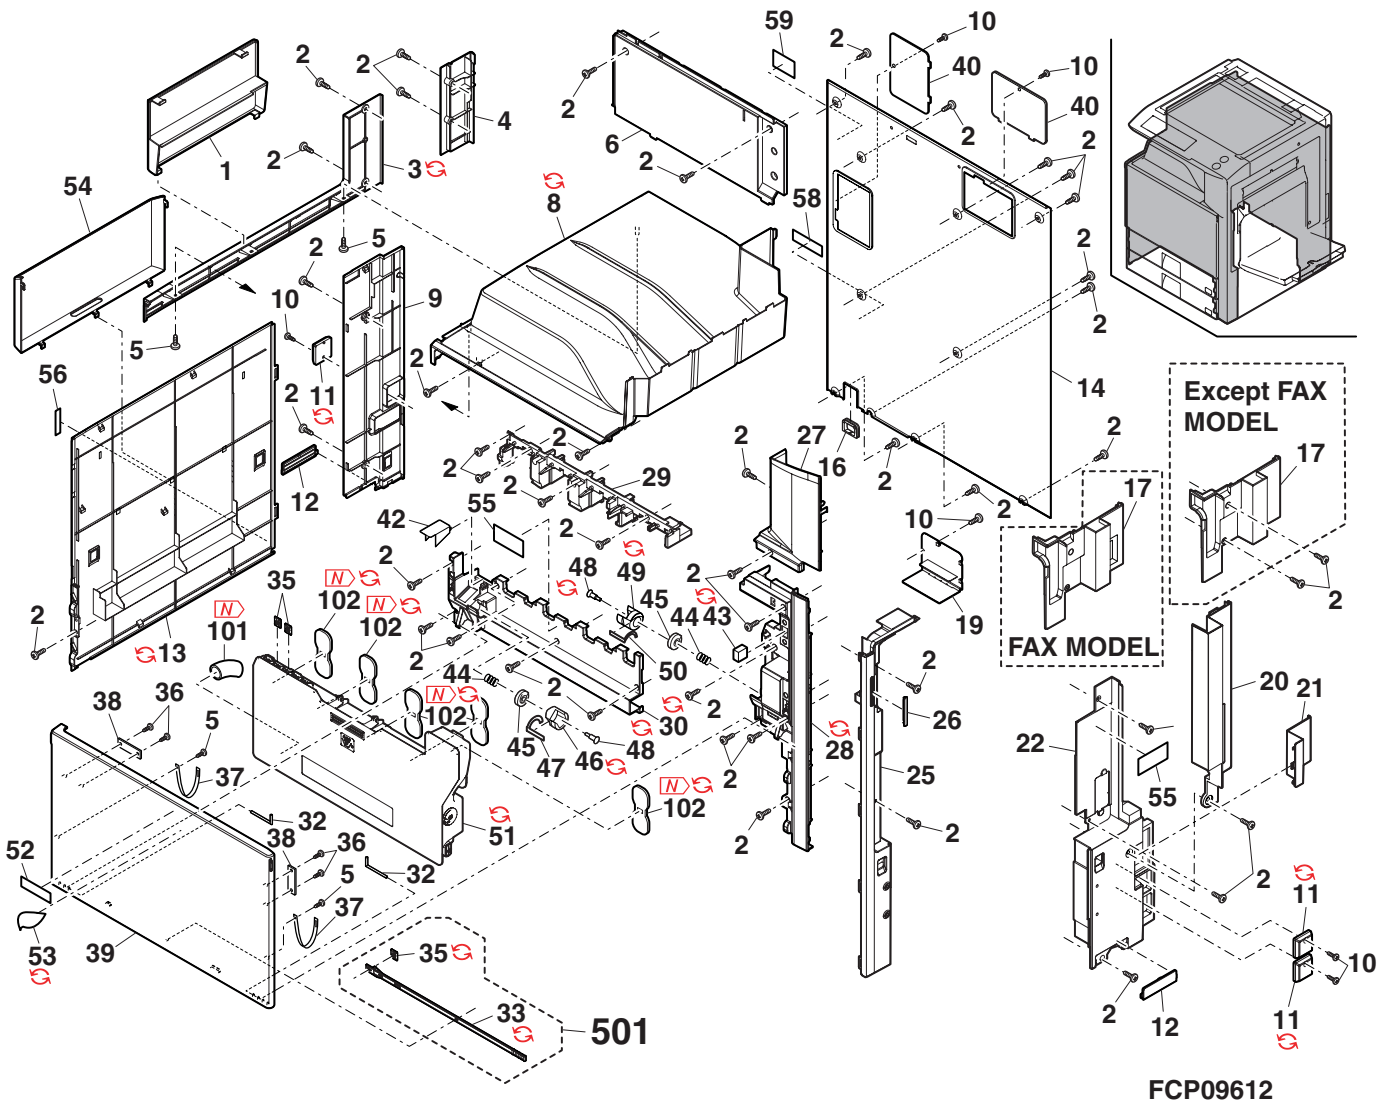

3 Document detect unit

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	NSFTZ1805FCPZ		AM		C	Document detect fulcrum shaft		
2	XRESP30-06000		AA		C	E ring(E3)		
3	MSPRT1563FCZZ		AC		C	Document detect spring		
4	XBPS730P06KS0		AB		C	Screw(3x6KS)		
5	MARMP0148FCZ3		AK		C	Document detect arm lower		
6	PSLDP0183FCZZ		AD		C	Document detect shading plate N		
7	CPWBF1453FCE3		AS		E	ORS LED PWB		
8	LHLDZ1085FCZ3		AE		C	Document detect fulcrum holder		
9	LBSHZ0364FCZZ		AB		C	Document detect bush		
10	MARMP0147FCZ3		AK		C	Document detect arm upper		
11	XEPS730P05000		AA		C	Screw(3x5)		
12	GCAB-1100FCZZ		BP		D	Top cabinet rear		
13	XEBS730P08000		AC		C	Screw(3x8)		
14	CARMP0147DS54		AZ		E	Document detect luminescence unit		


3 Document detect unit

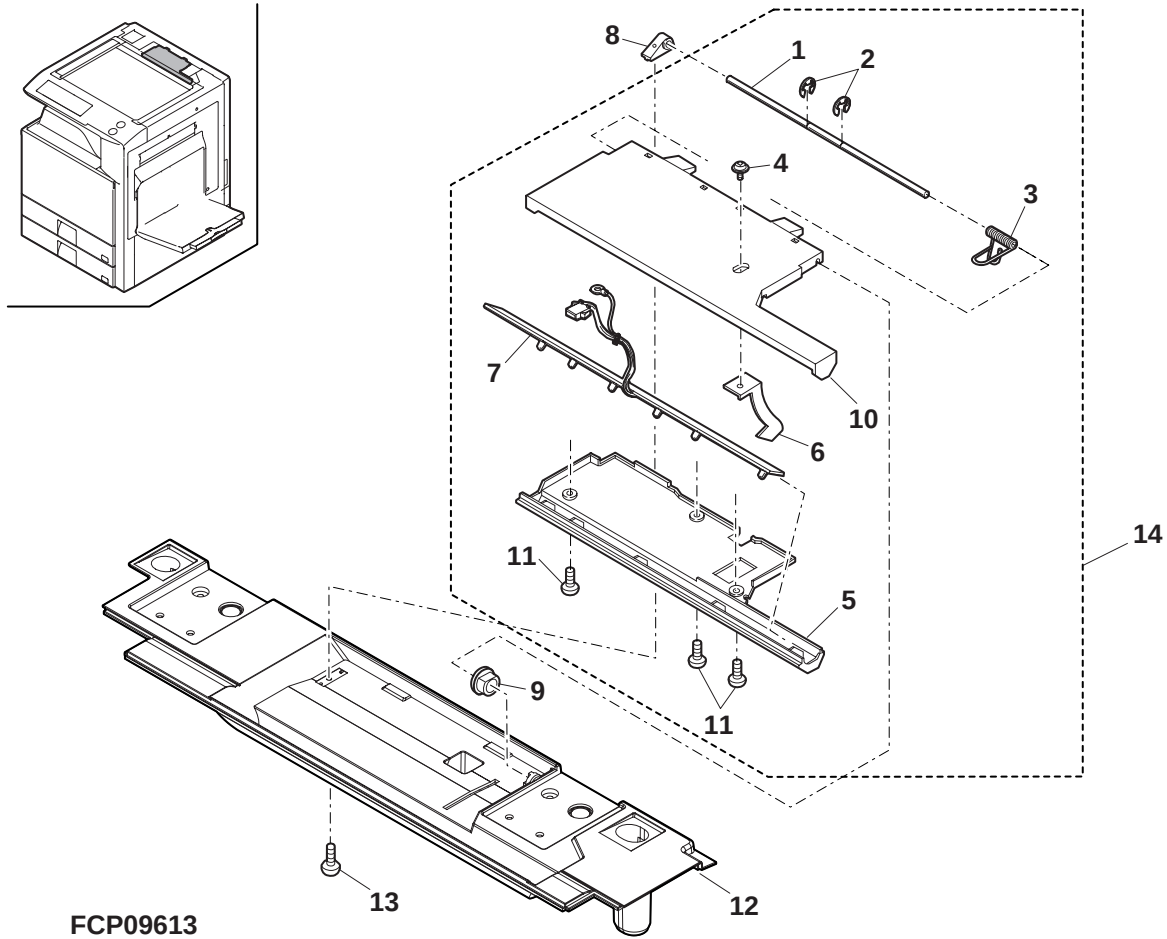

4 Operation unit

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	CF i L W 0 3 0 6 F C 0 1		AR	N	D	Operation filter		
1	 CF i L W 0 3 0 6 F C 0 1	-	AR		D	Operation filter [Illustration No. correction]		1st lot
2	PSHEZ5428FCZZ		AB	N	C	OP filter fixing sheet		
3	CF i L W 0 3 1 1 F C 0 1		AY	N	C	OP filter fixing B [MX-3500FN,MX-3501FN,MX-4500FN,MX-4501FN](Japan)		
	CF i L W 0 3 1 1 F C 0 3		AY	N	C	OP filter fixing B [MX-3500N,MX-3501N,MX-4500N,MX-4501N](Japan)		
	CF i L W 0 3 1 1 F C 0 2		AY	N	C	OP filter fixing B [MX-3500N,MX-3501N,MX-4500N,MX-4501N](Except Japan)		
	 CF i L W 0 3 1 1 F C 0 2	-	AY		C	OP filter fixing B [Illustration No. correction] [MX-3500N,MX-3501N,MX-4500N,MX-4501N](Except Japan)		1st lot
4	CPNLC0263FC01		AY	N	C	Operation panel [MX-3500FN,MX-3501FN,MX-4500FN,MX-4501FN](Japan)		
	CPNLC0263FC03		AY		C	Operation panel [MX-3500N,MX-3501N,MX-4500N,MX-4501N](Japan)		
	CPNLC0263FC02		AY		C	Operation panel [MX-3500N,MX-4500N](Except Japan)		
 CPNLC0263FC04	1	AY		C	Operation panel [MX-3500N,MX-4500N](Except Japan)		07/02 R/C	
6	CBTN-0281FC01		AN	N	C	Switch key		
7	CBTN-0274FC01		AM		C	10 key		
8	CBTN-0275FC01		AE		C	CA key [MX-3500FN/N,MX-3501FN/N,MX-4500FN/N,MX-4501FN/N](Japan)		
	CBTN-0275FC02		AE		C	CA key [MX-3500N,MX-3501N,MX-4500N,MX-4501N](Except Japan)		
9	CBTN-0276FC01		AE		C	Stop key		
10	PLNS-0084FCZZ		AC		B	LCD lens B		
11	CBTN-0279FC01		AH		C	Power supply switch key		
12	CBTN-0278FC01		AH		C	Power saving mode key		
13	CF i L W 0 3 0 3 F C 0 1		AE		D	Copy key ring		
14	CBTN-0272FC01		AR		C	Color copy key		
15	CBTN-0272FC02		AL		C	Monochrome copy key		
16	CPWBF1658FC31		AQ		E	Power switch PWB		
17	XEBS730P08000		AC		C	Screw(3×8)		
18	DHA i - 3 7 4 7 F C Z Z		AD		C	PSW harness		
	CPWBF1684FCE1		BB	N	E	MFP OPE PWB		
19	 CPWBF1684FCE2	1	BB		E	MFP OPE PWB		06/07
	 CPWBF1684FCE4	1	BC		E	MFP OPE PWB		10/08
20	HPNLH0266FCZZ		BF		D	Touch panel(8.1)		
	PSHEZ4906FCZZ		AC		C	Touch panel sheet		
21	 PSHEZ5764FCZZ	1	AC		C	Touch panel sheet		06/12
22	LHLDZ1703FCZZ		AM		C	LCD holder A		
	 LHLDZ1703FCZ1	1	AM		C	LCD holder A		07/04 R/C
23	VVL89HB1T06-1		CE	N	B	LCD(HVBW8.9)		
25	LHLDZ1704FCZZ		AL		C	LCD holder B		
	 LHLDZ1704FCZ1	1	AL		C	LCD holder B		07/04 R/C
26	CPWBF1677FC32		AX	N	E	LCD inverter PWB		
27	PSHEZ5495FCPZ		AH	N	C	Panel earth sheet LCD		
28	DHA i - 3 7 4 8 F C Z 1		AD		C	LCD inverter harness		
29	MSPRP3009FCZZ		AD		C	LCD earth plate		
30	CPWBN1685FCE1		AZ		E	LVDS PWB		
	 CPWBN1731FCE1	1	AZ	N	E	LVDS PWB		06/07
	PSHEZ5453FCZZ		AD		C	Panel earth sheet OP		
31	 PSHEZ5453FCZ1	1	AD	N	C	Panel earth sheet OP		07/01
33	PLNS-0087FCZZ		AD	N	D	Lens for FAX [MX-3500FN,MX-3501FN,MX-4500FN,MX-4501FN](Japan)		
34	LP i N S 0 0 1 4 Q S W Z		AC	N	C	Fixing pin		
	(Unit)							
901	CPNLC0263DS53		CE	N	E	Operation panel unit [MX-3500FN,MX-3501FN,MX-4500FN,MX-4501FN](Japan)		
	CPNLC0263DS55		CE	N	E	Operation panel unit [MX-3500N,MX-3501N,MX-4500N,MX-4501N](Japan)		
	CPNLC0263DS54		CL	N	E	Operation panel unit [MX-3500N,MX-3501N,MX-4500N,MX-4501N](Except Japan)		

4 Operation unit

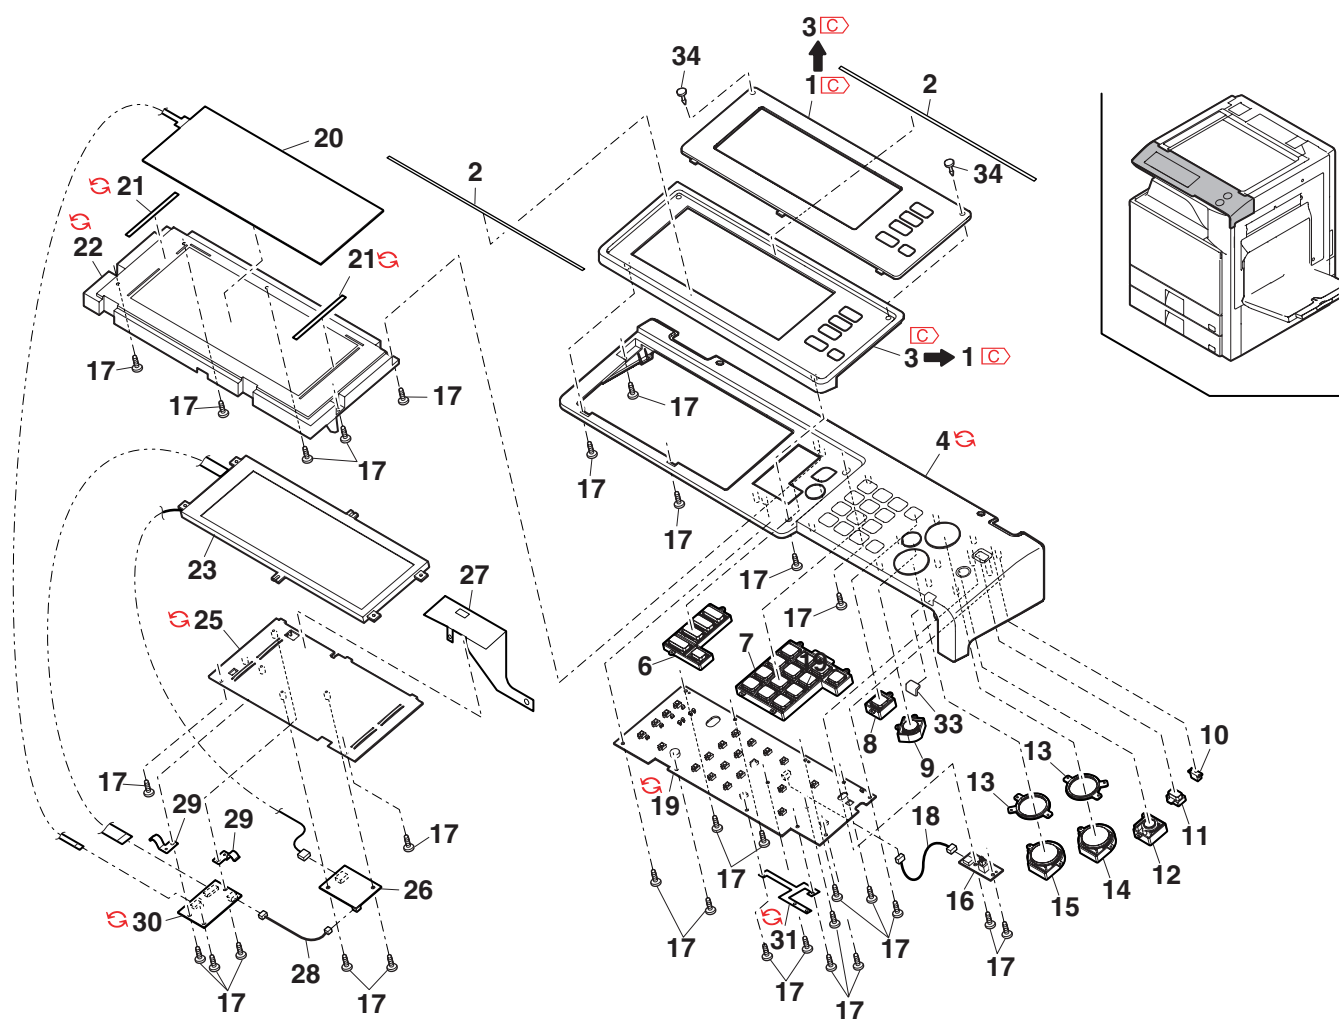


FCP09614

5 Scanner unit 1

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	XHBS730P05000		AA		C	Screw(3x5)		
	XHBS730P05000	-	AA		C	Screw(3x5) [U.S.A. for Government]		06/10
2	XHBS730P04000		AA		C	Screw(3x4)		
	XHBS730P04000	-	AA		C	Screw(3x4) [U.S.A. for Government]		06/10
3	DHAI-3738FCZ2		BE		C	CCD-F harness		
	DHAI-3970FCPZ	1	BE		C	CCD-F harness		- R/C
	DHAI-3738FCZ3	1	BE		C	CCD-F harness [Except South Africa,Taiwan]		06/10
	DHAI-3738FCZ4	1	BE		C	CCD-F harness [Except South Africa,Taiwan]		07/07
	DHAI-4202FCPZ	1	BE		C	CCD-F harness B N [South Africa,Taiwan]		07/07
5	PBOX-0151FCZZ		AK		D	Dark box		
6	PSHEZ5363FCZZ		AB		C	CL lead protect sheet		
7	PCOVP1864FCZZ		AG		D	FFC cover		
8	CPLTM6489DS51		CB	N	E	CCD unit		
9	XHBS730P08KS0		AC		C	Screw(3x8KS)		
10	DHAI-3751FCZ1		AR		C	RSPF interface harness [MX-3500FN/N,MX-4500FN/N]		
	DHAI-3751FCZ2	1	AR	N	C	RSPF interface harness [MX-3500FN/N,MX-4500FN/N]		07/08
11	LPLTM6668FCZZ		AE		C	SPF connector fixing plate [MX-3500FN/N,MX-4500FN/N]		
	LPLTM6774FCZZ		AD	N	C	SPF connector fixing plate [MX-3501FN/N,MX-4501FN/N]		
12	XHBS740P06000		AA		C	Screw(4x6)		
14	PCOVP1857FCZZ		AL		D	SCN PWB cover		
15	XHBS730P06000		AC		C	Screw(3x6)		
16	LHLDW0825FCZZ		AB		C	Wire saddle		
17	LHLDW0595FCZZ		AC		C	Edge saddle(EDS2)		
	LHLDW1285FCZZ	1	AC		C	Edge saddle(EH11)		08/12
18	LPLTM6523FCZZ		AF		C	OC reinforce plate		
19	LPLTM6522FCZZ		AK		C	OC fixing plate		
20	LPLTM6495FCZZ		AC		C	OC hinge fixing plate		
21	DHAI-3813FCZ2		AH		C	SCN-WH harness 2		
	DHAI-4201FCPZ	5	AG		C	SCN-WH harness 2	CCE488	07/07
	DHAI-4201FCP1	1	BB		C	SCN-WH harness 2		08/05
22	XHBS740P08000		AA		C	Screw(4x8)		
	XHBS740P08000	-	AA		C	Screw(4x8) [Quantity correction]		1st lot
23	LBSHC0096FCZZ		AA		C	Edging(CE-016 L=30)		
	LBSHC0321FCZZ	1	AA		C	Edging(L=30)		06/10 R/C
24	PGIDM2111FCZZ		AC		C	Sensor guide		
25	VHPLG217L5S-1		AM		B	Photo sensor(LG217L-5S)		
26	XHBS730P08KS0		AC		C	Screw(3x8KS)		
27	LBNDJ0005FCZZ		AB		C	Clamp		
	LBNDJ0005FCZZ	-	AB		C	Clamp [U.S.A. for Government]		06/10
29	PHOG-2066SC15		AA		C	Edge protect(CE-012 15mm)		
	LBSHC0329FCZZ	1	AC		C	Edge protect(15mm)		06/10 R/C
30	LBNDJ0080FCPZ		AC		C	Aluminum clamp		
	LBNDJ0080FCPZ	-	AC		C	Aluminum clamp [U.S.A. for Government]		06/10
31	VHPLG217L5A-1		AM		B	Photo sensor(LG217L-5A)		
32	XHBS740P14000		AB		C	Screw(4x14)		
33	PSHEZ5362FCZZ		AC		C	FCC protect sheet		
	PSHEZ5362FCZ1	1	AC		C	FCC protect sheet		06/11 R/C
34	PSHEZ5364FCZZ		AC		C	CCD harness protect sheet		
35	PSHEZ5365FCZZ		AC		C	CCD harness lower sheet		
	PSHEZ5365FCZ1	1	AC		C	CCD harness lower sheet		06/11 R/C
36	DHAI-3744FCZZ		AF		C	MHPS harness		
37	LHLDZ1700FCZZ		AF	N	C	I/F cable holder lower [MX-3501FN/N,MX-4501FN/N]		
38	PCOVP1901FCZZ		AC		D	Interface harness cover [MX-3501FN/N,MX-4501FN/N]		
39	XHBS740P10000		AA		C	Screw(4x10) [MX-3501FN/N,MX-4501FN/N]		
100	PSHEZ5554FCPZ	-	AG		C	Earth sheet		1st lot
101	PSPO-0004FCPZ	-	AD		C	Sponge		1st lot
102	LHLDW7008XCZZ	-	AB		C	Wire saddle(LWS-1S) [Taiwan,South Africa]		06/11
103	PSHEP5127FCZZ	-	AC		C	Sheet [Taiwan,South Africa]		06/11
104	PGSK-0031QSZZ	-	AE		C	Gasket [South Africa]		06/09
105	PSHEZ0325QSZZ	5	AB		C	Frame lower sheet	CCE488	07/07
	PSHEZ0325QSZZ	-	AB		C	Frame lower sheet		09/04 R/C
(Unit)								
901	DUNT-7439DS13		CM	N	E	Scanner unit [MX-3501FN/N,MX-4501FN/N] (Include Block [1]-16,[3],[6],[7])		
	DUNT-7439DS26	5	CL	N	E	Scanner unit [With No.48-7][MX-3501FN/N,MX-4501FN/N] (Include Block [1]-16,[3],[6],[7])		- R/C
	DUNT-7439DS14		CM	N	E	Scanner unit [MX-3500FN/N,MX-4500FN/N] (Include Block [1]-16,[3],[6],[7])		
	DUNT-7439DS27	5	CL	N	E	Scanner unit [With No.48-7][MX-3500FN/N,MX-4500FN/N] (Include Block [1]-16,[3],[6],[7])		- R/C
	DUNT-7439DS17	1	CN		E	Scanner unit [MX-3500FN/N,MX-4500FN/N (South Africa)] (Include Block [1]-16,[3],[6],[7])		06/10
	DUNT-7439DS17	-	CN	N	E	Scanner unit (Include Block [1]-16,[3],[6],[7])[For Taiwan,South Africa]		06/10

5 Scanner unit 1

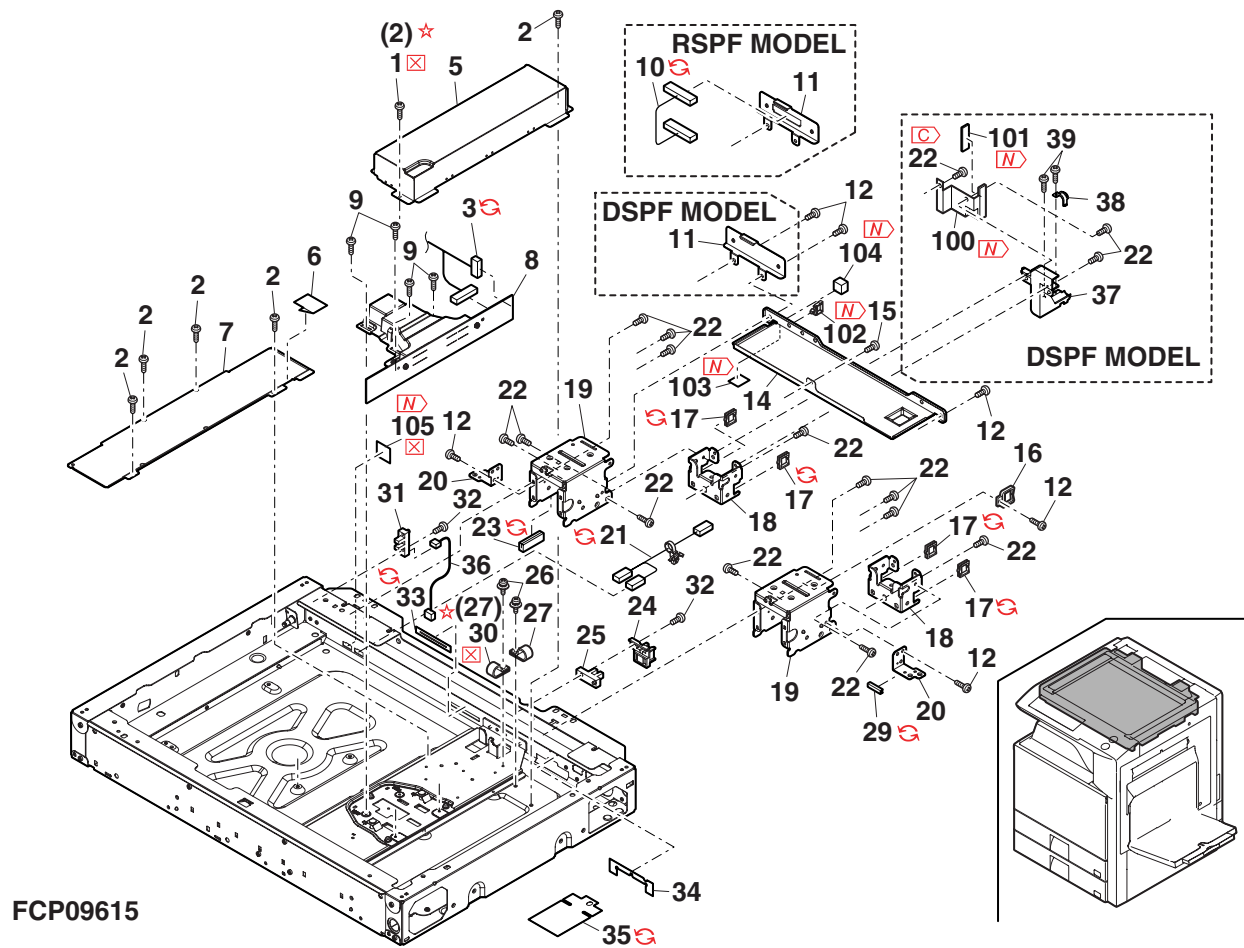


6 Scanner unit 2

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	PWIR-0191FCP1		AN		C	MB wire R		
2	CHLDZ1663FC31		BC		E	2nd,3rd mirror unit		
3	PGIDM1890FCZZ		AC		C	CL guide		
3	PGIDM1890FCZ1	1	AC	N	C	CL guide		07/08 R/C
4	XBBS740P06000		AA		C	Screw(4x6)		
5	LHLDZ1505FCZZ		AC		C	Wire holder		
6	CDAIU0619DS60		BP		E	Lamp unit		
7	NPLYZ0401FCZZ		BB		C	Pulley(50T)		
8	NBLTH0440FCZZ		AS		B	Winder drive belt		
9	LX-BZ0049FCPZ		AB		C	Screw(4x6)		
10	NPLYZ0031QSZZ		AL		C	Winder pulley		
11	NSFTZ2694FCPZ		AY		C	Winder drive shaft		
12	PWIR-0192FCP1		AN		C	MB wire F		
13	XHBS730P06000		AC		C	Screw(3x6)		
14	RMOTS0920FCPZ		BF	N	B	Scanner motor		
15	MSPRT3388FCZZ		AC		C	Mirror motor spring		
16	CPLTM6520FC01		AH		C	Mirror motor fixing plate		
17	NGERH1647FCZZ		AE		C	Mirror motor idle gear		
18	XRESP70-08000		AA		C	E ring(E7)		
19	VHI28F081L70C		AX	N	B	Scanner flash PWB(28F081L70C)		
20	CPWBX1713DS538		CE	N	E	Scanner PWB [MX-3500FN/N,MX-3501FN/N]		
	CPWBX1713DS808	1	CE		E	Scanner PWB [MX-3500FN/N,MX-3501FN/N](Except Taiwan)	CCE585	08/06
	CPWBX1713DS718	-	CB	N	E	Scanner PWB [MX-3500N](Taiwan)		1st lot
	CPWBX1713DS818	1	CB		E	Scanner PWB [MX-3500N](Taiwan)	CCE585	08/06
	CPWBX1713DS528		CE	N	E	Scanner PWB [MX-4500FN/N,MX-4501FN/N]		
	CPWBX1713DS738	1	CB		E	Scanner PWB [MX-4500FN/N,MX-4501FN/N](Except Taiwan)	CCE585	08/06
	CPWBX1713DS728	-	CB	N	E	Scanner PWB [MX-4500N](Taiwan)		1st lot
	CPWBX1713DS828	1	CB		E	Scanner PWB [MX-4500N](Taiwan)	CCE585	08/06
22	LPLTM6524FCZZ		AK		C	Scanner PWB fixing plate		
23	NBRGY0466FCZZ		AK		C	Bearing(φ8-16)		
	NBRGY0466FCZ1	1	AK		C	Bearing(φ8-16)		11/01 R/C
24	LFI-X-0537FCZZ		AD		C	Harness fixer		
25	LDAIU0610FCZZ		AE		D	Harness fixing base		
26	XHBS740P06000		AA		C	Screw(4x6)		
28	PGUMS0283FCZ1		AA	N	C	Table glass gum		
	PGUMS0283FCZ2	4	AA		C	Table glass gum [Productivity improvement]		06/11
	PGUMS0283FCZ1	-	AA		C	Table glass gum [To No.50]		06/11
29	XHBS740P08000		AA		C	Screw(4x8)		
30	NPLYZ0006QSZZ		AD		C	L pulley		
	NPLYZ0006QSZ1	1	AD		C	L pulley		06/12 R/C
31	PSHEZ4836FCZZ		AB		C	Screw protect sheet		
	PSHEZ5768FCZZ	4	AA		C	Screw protect sheet [Productivity improvement]		06/11 R/C
32	NPLYZ0005QSZZ		AG		C	Pulley		
33	LRALM0225FCZZ		AG		A	MB-B rail R		
34	LRALM0226FCZZ		AE		A	MB-B rail F		
35	LHLDZ1381FCZZ		AL		C	ORS PWB holder		
36	CPWBF1454FCE2		BN		E	ORS PWB		
37	XEPS740P06000		AB		C	Screw(4x6)		
38	LX-BZ0324FCPZ		AA		C	Screw		
39	PSHEP5301FCZZ		AB		C	Harness protect sheet		
40	LBNDJ0071FCZZ		AC		C	Band(RSG-100)		
41	LX-BZ0004QSPZ		AB		C	Red screw(3x6)		
42	XBTS740P06000		AA		C	Screw(4x6)		
43	DHAI-3658FCZZ		AE		C	ORS PD harness		
44	QCNW-0228FCZ2		AK	N	C	MFP OPE I/F harness		
	QCNW-0228FCZ3	1	AK	N	C	MFP OPE I/F harness		07/03
	QCNW-0245FCPZ	1	AK	N	C	MFP OPE I/F harness	CCE488	07/08
45	QCNW-0229FCZ2		AL	N	C	LVDS I/F harness		
	QCNW-0229FCZ3	1	AL	N	C	LVDS I/F harness		07/03
	QCNW-0246FCPZ	2	AK	N	C	LVDS I/F harness	CCE488	07/08
46	XBBS730P06000		AC		C	Screw(3x6) [MX-3501FN/N,MX-4501FN/N]		
47	CPWBX1695DS528	-	CE		E	DSPF memory PWB [Missing parts code]		1st lot
	CPWBX1695DS538	1	CE	N	E	DSPF memory PWB [MX-3501FN/N,MX-4501FN/N]		06/12
	CPWBX1695DS548	1	CE	N	E	DSPF memory PWB [MX-3501FN/N,MX-4501FN/N]		07/07
48	LPLTM6496FCZZ		AC	N	C	PWB support plate [MX-3501FN/N,MX-4501FN/N]		
49	PGSK-0067FCPZ		AD	N	C	SCN cover cushion		
	PGSK-0071FCPZ	1	AD		C	SCN cover cushion		06/09
50	PGUMS0336FCZZ	-	AB	N	C	Table glass gum [From No.28]		06/11
100	LX-WZ0119FCPZ		AC		C	Washer		
	LX-WZ0119FCP1	1	AC		C	Washer		07/10
101	RCORF0049FCZZ	-	AF		C	Core [From No.8] [South Africa]		06/09
102	LBNDJ0013FCZ1	-	AE		C	Band [South Africa]		06/09

6 Scanner unit 2

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
	(Unit)							
	DUNT-7439DS13		CM	N	E	Scanner unit [MX-3501FN/N,MX-4501FN/N] (Include Block [1]-16,[3],[5],[7])		
901	DUNT-7439DS26	5	CL	N	E	Scanner unit [With No.48-7][MX-3501FN/N,MX-4501FN/N] (Include Block [1]-16,[3],[5],[7])		- R/C
	DUNT-7439DS14		CM	N	E	Scanner unit [MX-3500FN/N,MX-4500FN/N] (Include Block [1]-16,[3],[5],[7])		
	DUNT-7439DS27	5	CL	N	E	Scanner unit [With No.48-7][MX-3500FN/N,MX-4500FN/N] (Include Block [1]-16,[3],[5],[7])		- R/C
	DUNT-7439DS17	1	CN		E	Scanner unit [MX-3500FN/N,MX-4500FN/N (South Africa)] (Include Block [1]-16,[3],[5],[7])		06/10
	DUNT-7439DS17	-	CN	N	E	Scanner unit (Include Block [1]-16,[3],[5],[7])(For Taiwan,South Africa)		06/10


6 Scanner unit 2

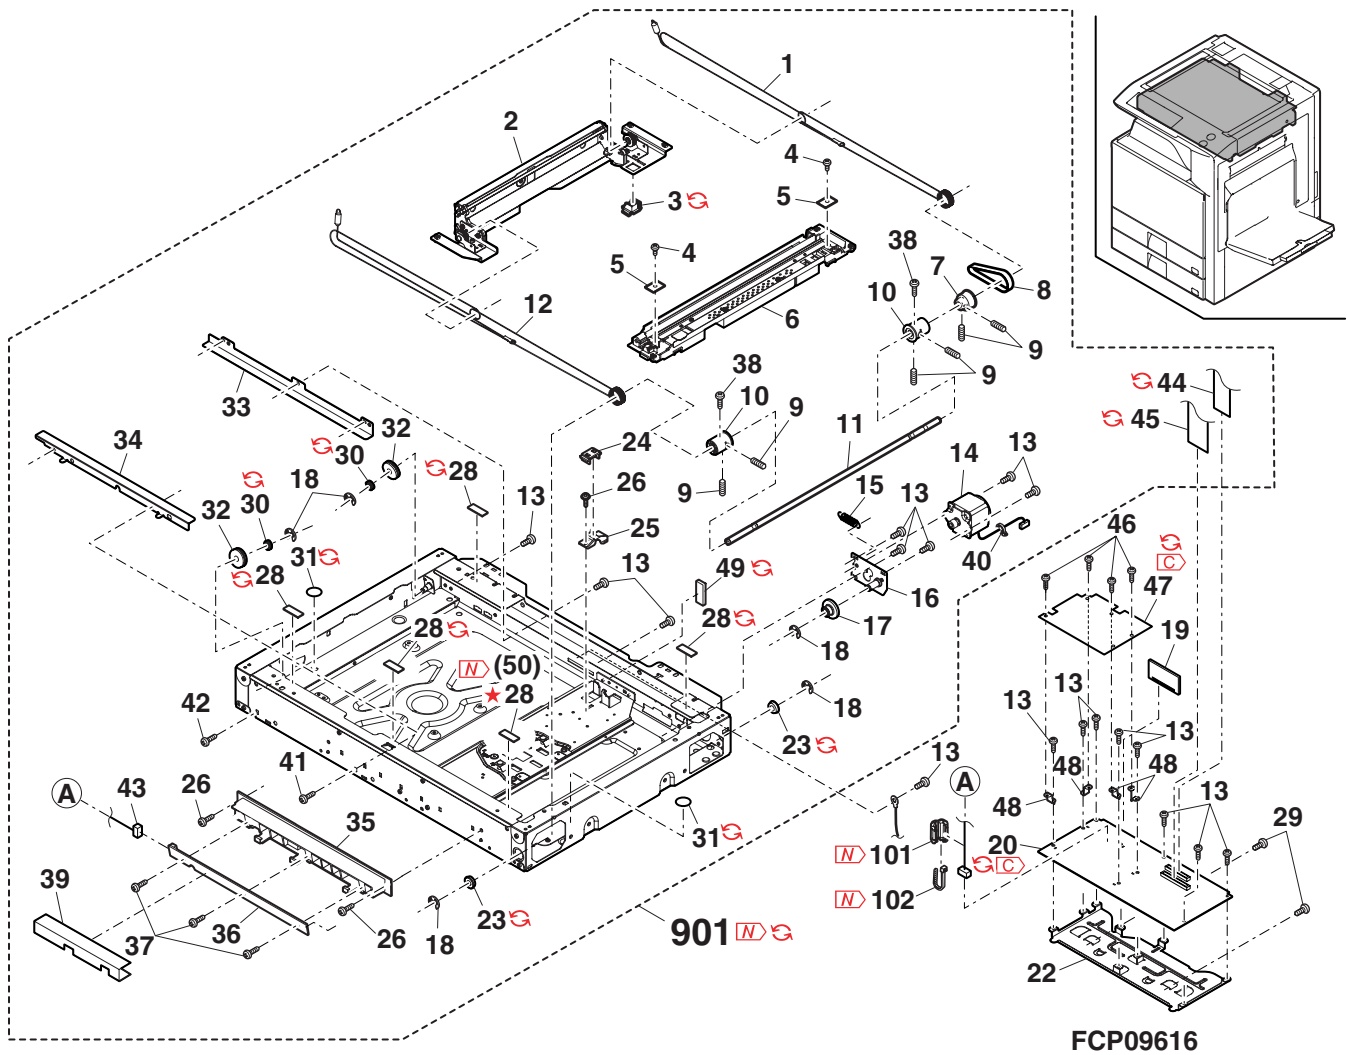

7 Lamp unit

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	RLMPD0703FCZZ		BD		B	Lamp		
2	XEBS730P08000		AC		C	Screw(3x8)		
3	XBBS730P12000		AA		C	Screw(3x12)		
4	MSPRP2825FCZZ		AC		C	Mirror spring		
5	TLABZ4335FCZZ		AB		D	High voltage caution label		
6	PREFL0173FCZZ		AN		C	Reflector		
7	MSLi-0138FCZZ		AC		C	Slider		
8	PCUSU0203FCZZ		AE		C	Cushion		
9	LSTYM0261FCZZ		AB		C	Wire support plate		
10	LDAiU0619FCZ1		AS		D	Lamp base		
12	PMiR-0164FCZZ		AP		B	1st mirror		
13	QCNW-0227FCZ1		AE		C	SCN-LAMP FFC		
14	LFiX-0545FCZZ		AC		C	CL lead harness fixer		
15	CPWBF1678FC31		BD		E	CL inverter		
16	PCUSF0334FCZZ		AP		C	Mirror cushion		
17	PSHEP5507FCZZ		AC		C	Lamp holder sheet		
	PSHEP5507FCZZ	-	AC		C	Lamp holder sheet		06/05 R/C
	(Unit)							
901	CDAiU0619DS60		BP		E	Lamp unit		

7 Lamp unit

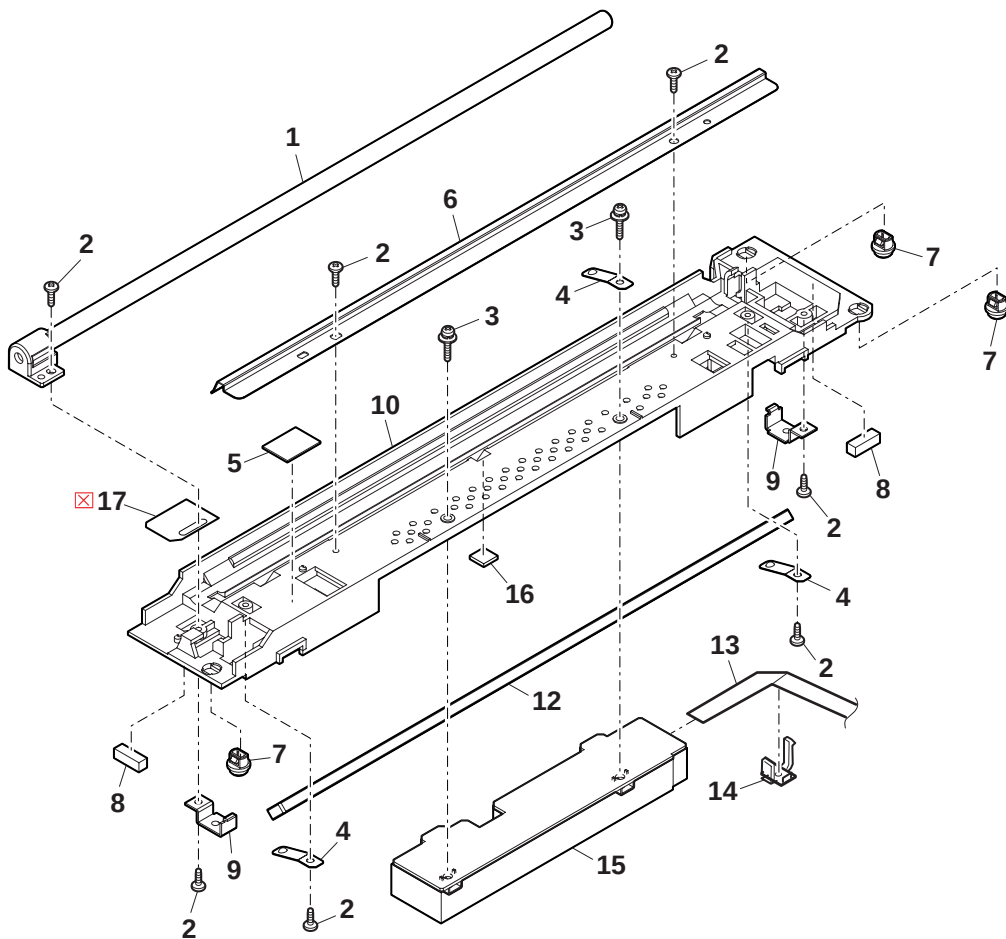


FCP09617

8 500 cassette

[illegible]


8 500 cassette

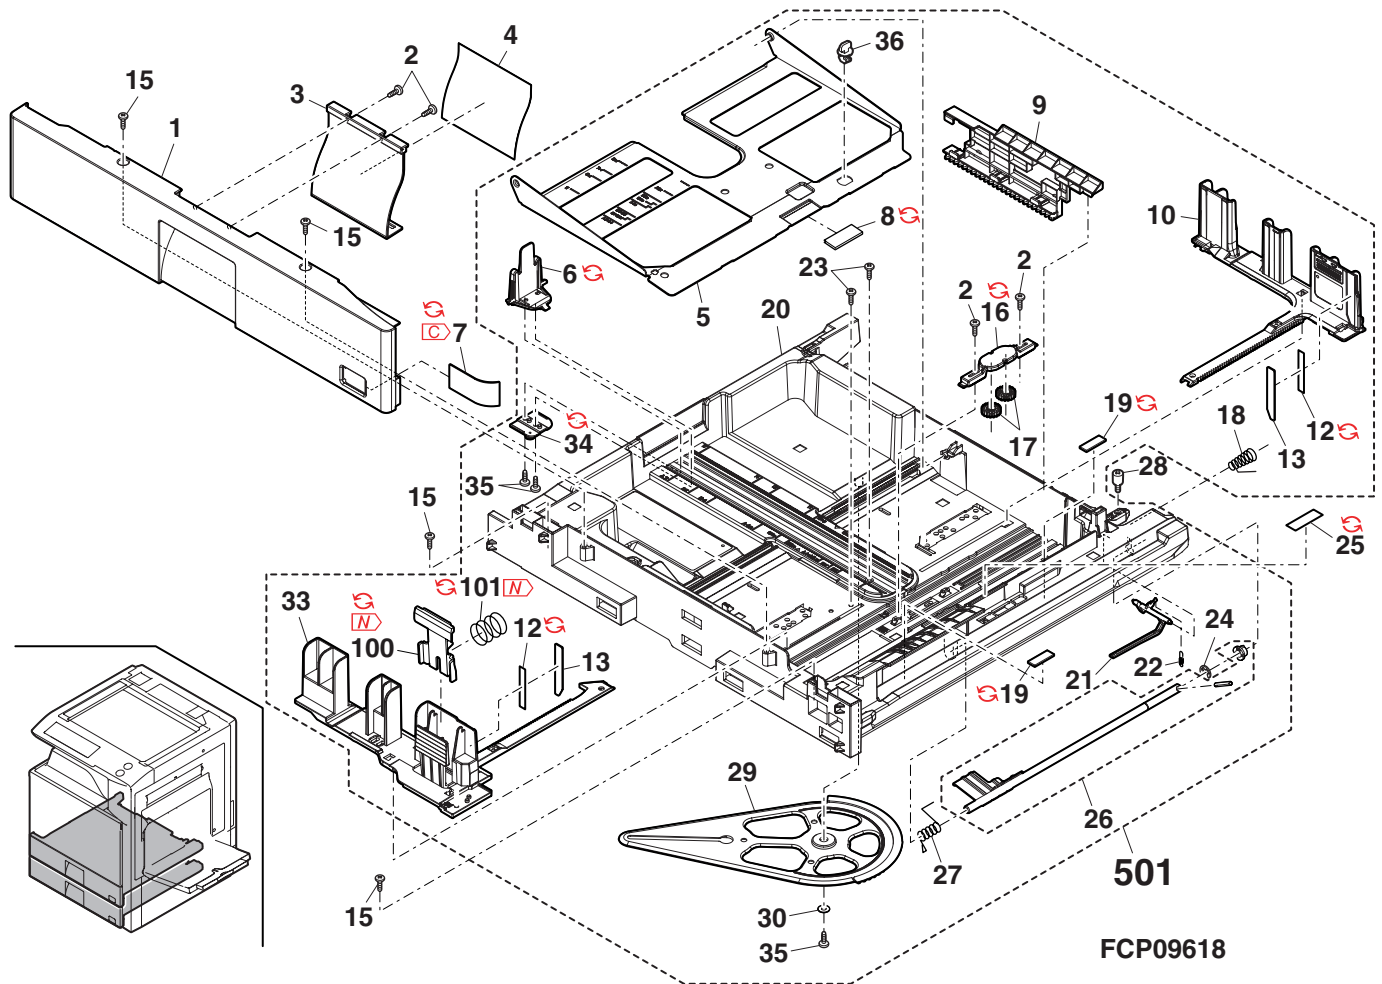

9 Cassette paper feed unit 1

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	XRESP50-06000		AA		C	E ring(E5)		
2	NBRGM0096FCZ1		AC		C	Bearing		
	PGIDM2123FCZZ		AN		C	PF lower PG (1CS)		
3	PGIDM2156FCZZ		AN		C	PF upper PG 2 (2CS)		
	PGIDM2123FCZZ	5	AN		C	PF lower PG (2CS)	CCE772	10/02 mid
4	NROLR1466FCZ1		AN		A	PF separate roller		
5	XEBS740P10000		AA		C	Screw(4x10)		
6	PCLC-0316FCP1		AP		B	Separate torque limiter		
7	CSFTZ2929FC31		AU		E	Separate shaft		
11	MSPRC3398FCZZ		AC		C	Separate pressure spring		
12	NROLP1516FCZZ		AA		C	Transport follower roller (1CS)		
	NROLP1516FCZZ	5	AA		C	Transport follower roller (2CS)	CCE772	10/02 mid
	NSFTZ2949FCZZ		AG		C	Right door follower shaft (1CS)		
13	NSFTZ2949FCZZ	5	AG		C	Right door follower shaft (2CS)	CCE772	10/02 mid
	MSPRC3399FCZZ		AC		C	Transport follower spring (1CS)		
	MSPRC3399FCZZ	5	AC		C	Transport follower spring (2CS)	CCE772	10/02 mid
15	LPLTP6484FCZZ		AC		C	Separate release plate		
16	MSPRT2973FCZZ		AD		C	Multi separate release spring		
17	LPLTM6515FCZZ		AH		C	PF lower PG reinforce plate		
	LPLTM6515FCZ1	3	AH		C	PF lower PG reinforce plate [Improve performance]	CCE627	08/04 mid
18	XHBS740P08000		AA		C	Screw(4x8)		
19	MSPRT3431FCZZ		AC		C	Pick pressure spring		
(Unit)								
901	DUNT-7447FCZZ		BT		E	1st cassette paper feed unit (Include Block[10],[11])		
	DUNT-7447FC11		BU		E	2nd cassette paper feed unit (Include Block[10],[11])		
	DUNT-7447FC14	3	BT		E	1st cassette paper feed unit [Improve performance] (Include Block[10],[11])	CCE627	08/04 mid
	DUNT-7447FC15	3	BU		E	2nd cassette paper feed unit [Improve performance] (Include Block[10],[11])	CCE627	08/04 mid
	DUNT-7447FC19	3	BX		E	2nd cassette paper feed unit (Include Block[10],[11])	CCE772	10/02 mid


9 Cassette paper feed unit 1

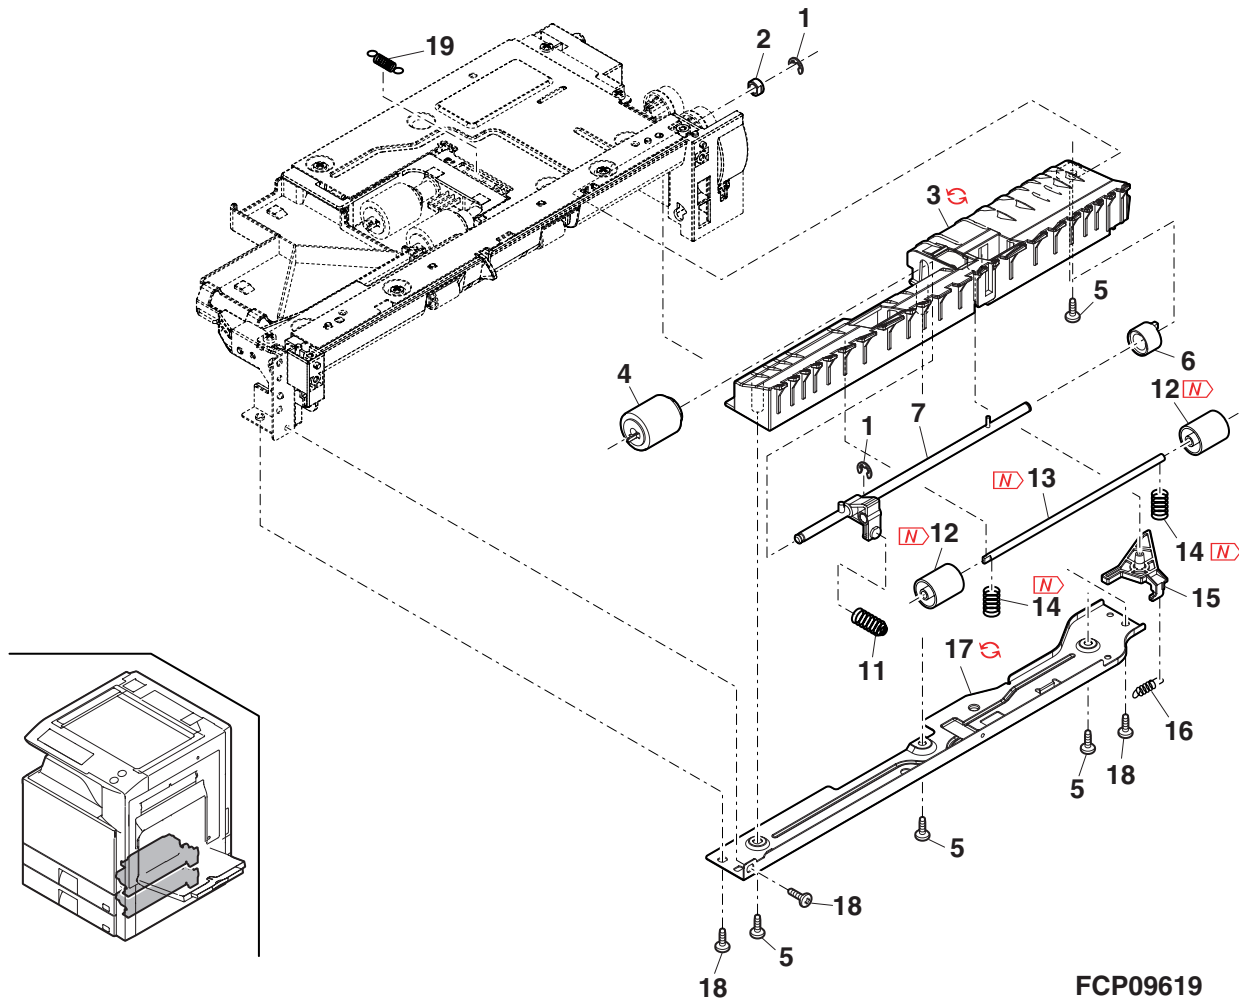

10 Cassette paper feed unit 2

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	LPLTM6514FCZZ		AN		C	PF upper PG reinforce plate		
2	XEBS730P08000		AC		C	Screw(3x8)		
	DHAI-3713FCZZ		AH		C	Paper feed harness (1CS)		
3	DHAI-3713FCZ1	3	AH		C	Paper feed harness [Productivity improvement](1CS)		06/08
	DHAI-3714FCZZ		AH		C	Paper feed harness (2CS)		
	DHAI-3714FCZ1	3	AH		C	Paper feed harness [Productivity improvement](2CS)		06/08
7	XHBS740P08000		AA		C	Screw(4x8)		
8	NROLR1524FCZZ		AT		C	Transport roller 1		
	NROLR1524FCZZ	5	AT		C	Transport roller 1	CCE772	10/02 mid
	LHLDZ1678FCZZ		AB		C	Bearing holder		
9	LHLDZ1678FCZZ	5	AB		C	Bearing holder	CCE772	10/02 mid
10	XEBS740P10000		AA		C	Screw(4x10)		
11	NGERH1638FCZZ		AD		C	Gear(20T-P)		
12	NPLYZ0441FCZZ		AC		C	Pulley(22P) (1CS)		
	NPLYZ0489FCZZ		AR		C	Pulley (2CS)		
13	LPI NS0133FCZZ		AA		C	Pin(2-10)		
	LPI NS0133FCZZ	5	AA		C	Pin(2-10)	CCE772	10/02 mid
14	XRESP50-06000		AA		C	E ring(E5)		
	XRESP50-06000	5	AA		C	E ring(E5)	CCE772	10/02 mid
15	NBRGM0096FCZ1		AC		C	Bearing		
	NBRGM0096FCZ1	5	AC		C	Bearing	CCE772	10/02 mid
16	VHPGP1A71L3-1		AG		B	Sensor(GP1A71L3)		
	VHPGP1A71L3-1	3	AG		B	Sensor(GP1A71L3) [Unleaded solder correspondence]		06/03
	LFRM-1161FCZZ		AE		C	Paper feed R frame (1CS)		
17	CFRM-1191FC01		AE		C	Paper feed R frame 2nd (2CS)		
	LFRM-1161FCZZ	5	AE		C	Paper feed R frame 2nd (2CS)	CCE772	10/02 mid
18	MSPRT3430FCZZ		AC		C	Pick up release lever spring		
	MSPRT3431FCZZ	5	AC		C	Pick up release lever spring	CCE772	10/02 mid
19	MLEVP0947FCZZ		AD		C	Pick up release lever		
	MLEVP1095FCZZ	5	AC		C	Pick up release lever	CCE772	10/02 mid
21	LPLTP5827FCZZ		AF		C	Multi sensor fixing plate		
23	MLEVP0949FCZZ		AC		C	PE actuator		
	MLEVP1169FCZZ	3	AC		C	PE actuator N [Commonization]	CCE618	08/09 mid
24	PGIDM2122FCZZ		AT		C	PF upper PG (1CS)		
	PGIDM2155FCZZ		AT		C	PF upper PG 2 (2CS)		
	PGIDM2415FCZZ	5	AR		C	PF upper PG (2CS)	CCE772	10/02 mid
	PGIDM2126FCZZ		AH		C	Paper feed PG-F		
25	PGIDM2126FCZ1	1	AH		C	Paper feed PG-F		07/11 R/C
	PGIDM2416FCZ1	5	AG		C	Paper feed PG-F	CCE772	10/02 mid
26	LFRM-1154FCZZ		AE		C	Paper feed F frame		
28	LHLDZ1637FCZZ		AS		C	Pick up holder		
	LHLDZ1637FCZ1	3	AS		C	Pick up holder [Productivity improvement]		06/10 R/C
	LHLDZ1965FCZZ	5	AE		C	Pick up holder	CCE772	10/02 mid
29	NROLP1351FCZZ		AG		C	Follower roller		
30	XRESP40-06000		AA		C	E ring(E4)		
31	LHLDZ1679FCZZ		AC		C	Sensor holder		
32	MLEVP0951FCZZ		AC		C	PS front 2 sensor actuator		
33	MSPRD3420FCZZ		AB		C	PS front 2 actuator spring		
34	NSFTZ2927FCZZ		BT		C	Paper feed shaft		
	NSFTZ2927FCZ1	5	BR		C	Paper feed shaft [With No.100]	CCE326	06/04 mid
35	NSFTZ2928FCZZ		AR		C	Pick up shaft		
36	NPLYZ0365FCZZ		AC		C	Pick up roller pulley		
37	NPLYZ0476FCZZ		AH		C	PF roller pulley		
38	NCPL-0081FCBZ		AH		C	Multi separate coupling		
39	NBLTH0412FCZZ		AE		B	Belt(57MXL3.2)		
40	NROLR1467FCZ1		AN		A	Pick up roller		
	NROLR1467FCZ2	1	AN	N	A	Pick up roller		07/10 R/C
41	NROLR1466FCZ1		AN		A	PF separate roller		
47	PRNGP0124FCZZ	5	AA		C	Crescent ring	CCE772	10/02 mid
100	LX-WZ5025BCZZ	-	AA		C	Poly slider		1st lot
	LX-WZ5025BCZZ	-	AA		C	Poly slider [With No.34]	CCE326	06/04 1st lot
101	PSHEP5661FCZZ	-	AC		C	Harness protect sheet		06/06 R/C
	PSHEP5661FCZZ	5	AC		C	Harness protect sheet	CCE772	10/02 mid
	(Unit)							
	DUNT-7447FCZZ		BT		E	1st cassette paper feed unit (Include Block[9],[11])		
	DUNT-7447FC11		BU		E	2nd cassette paper feed unit (Include Block[9],[11])		
901	DUNT-7447FC14	3	BT		E	1st cassette paper feed unit [Improve performance] (Include Block[9],[11])	CCE627	08/04 mid
	DUNT-7447FC15	3	BU		E	2nd cassette paper feed unit [Improve performance] (Include Block[9],[11])	CCE627	08/04 mid
	DUNT-7447FC19	3	BX		E	2nd cassette paper feed unit (Include Block[9],[11])	CCE772	10/02 mid

10 Cassette paper feed unit 2

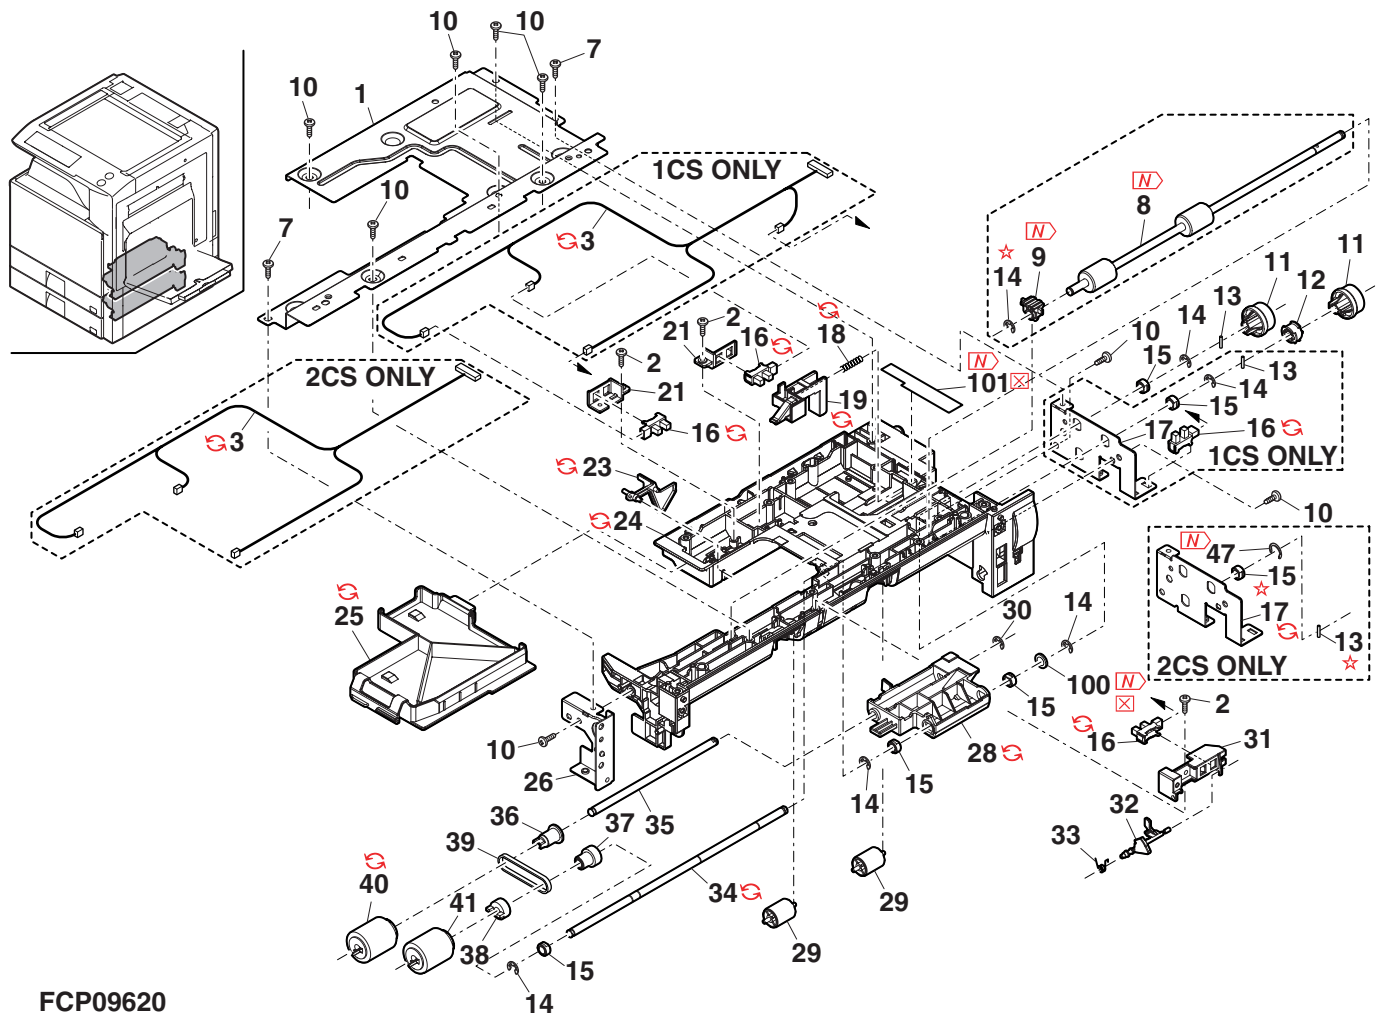


FCP09620

11 Paper feed transport section

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	NBLTH0452FCZZ		AQ		B	PF reverse belt		
2	NPLYZ0441FCZZ		AC		C	Pulley(22P)		
3	LPINS0133FCZZ		AA		C	Pin(2-10)		
4	XRESP50-06000		AA		C	E ring(E5)		
★	XRESP50-06000	5	AA		C	E ring(E5)	CCE565	08/02 mid
5	NBRGM0096FCZ1		AC		C	Bearing		
6	XEBS730P08000		AC		C	Screw(3×8)		
7	PGIDM2127FCZZ		AP		C	PF reverse PG		
↻	PGIDM2127FCZ1	3	AP		C	PF reverse PG [Form change]		06/01 R/C
8	NROLR1525FCZZ		AT		A	Transport roller 2		
9	QEARP0195FCZZ		AC		C	Transport earth plate		
10	NBLTH0479FCZZ		AT		B	Paper feed transport belt		
11	XEBS740P14000		AB		C	Screw(4×14)		
	CFRM-1155FC01		AH		D	Transport lower frame		
↻	CFRM-1155FC02	1	AH	N	D	Transport lower frame		07/10 R/C
↻	CFRM-1155FC03	5	AH		D	Transport lower frame	CCE565	08/02 mid
13	PGIDM2124FCZZ		AL		C	PF lower transport PG		
14	PGIDM2125FCZZ		AL		C	PF movable PG lower		
15	LPLTM6516FCZZ		AC		C	Movable PG fixing plate		
16	NBLTH0450FCZZ		AQ		B	Belt		
17	NPLYZ0457FCZZ		AC		C	Transport lower gear pulley		
↻	NPLYZ0532FCZZ	5	AD		C	Transport lower gear pulley	CCE809	10/07 mid
18	PGIDM2113FCZZ		AL		C	PF transport lower PG		
19	XEBS740P10000		AA		C	Screw(4×10)		
20	XHBS740P08000		AA		C	Screw(4×8)		
21	NPLYZ0489FCZZ		AR		C	Pulley(22P)		
↻	LX-WZ0473FCZZ	5	AA		C	Poly slider	CCE565	08/02 mid
⊗	LX-WZ0473FCZZ	5	AA		C	Poly slider	CCE809	10/07 mid
	DUNT-7447FCZZ		BT		E	1st cassette paper feed unit (Include Block[9],[10])		
↻	DUNT-7447FC14	3	BT		E	1st cassette paper feed unit [Improve performance] (Include Block[9],[10])	CCE627	08/04 mid
	DUNT-7447FC11		BU		E	2nd cassette paper feed unit (Include Block[9],[10])		
↻	DUNT-7447FC15	3	BU		E	2nd cassette paper feed unit [Improve performance] (Include Block[9],[10])	CCE627	08/04 mid
↻	DUNT-7447FC19	3	BX		E	2nd cassette paper feed unit (Include Block[9],[10])	CCE772	10/02 mid
↻	CGIDM2113DS52	-	AV		E	PF transport lower unit	CCE565	-

11 Paper feed transport section

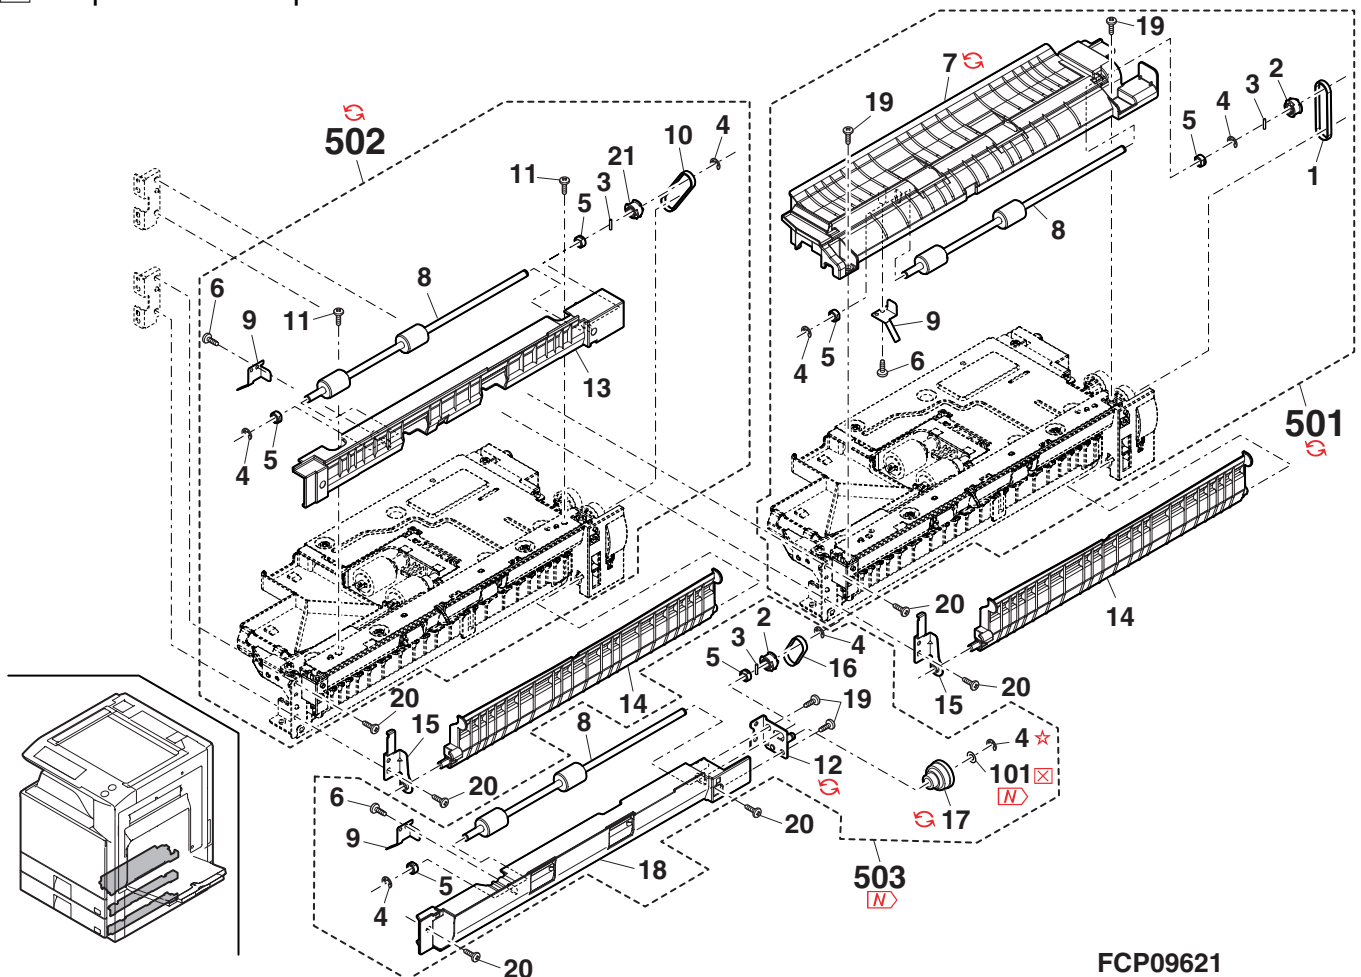


FCP09621

12 Right lower door unit

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	PG i DM2128FCZZ		AW		C	Right lower door PG		
1	PG i DM2128FCZ1	3	AT		C	Right lower door PG	CCE760	09/12
2	XEBS740P12000		AA		C	Screw(4x12)		
3	LSTPP0275FCZZ		AE		C	Stopper		
4	MLEVP0950FCZZ		AE		C	Right door lock release lever		
5	XBPS730P06000		AA		C	Screw(3x6)		
6	PTME-0308FCZZ		AC	N	C	Lock pawl		
7	NSFTZ2930FCZZ		BQ		C	Right lower door lock shaft		
8	LHLDZ1639FCZZ		AC		C	Right door fulcrum holder R		
9	MSPRC3402FCZZ		AC		C	Lock lever pressure spring		
10	GCAB-1136FCZ1		AZ	N	D	Right lower door cabinet		
10	GCAB-1136FCZ2	1	AZ		D	Right lower door cabinet		08/05 R/C
11	GDOR-0042FCZZ		AE		D	Cover right lower door		
12	NROLP1516FCZZ		AA		C	Transport follower roller		
13	MSPRC3401FCZZ		AB		C	Right lower door pressure spring		
14	NSFTZ2949FCZZ		AG		C	Right door follower shaft		
15	LX-BZ3008SCPM		AA		C	Screw(3x8)		
16	PRNGP0077FCZZ		AA		C	Resin ring(E7)		
16	PRNGP0077FCZ1	1	AC		C	Resin ring(E7)		06/10
17	XHBS740P08000		AA		C	Screw(4x8)		
19	LHLDZ1638FCZZ		AC		C	Right door fulcrum holder F		
20	PG i DM2191FCZZ		AL	N	C	Right lower door interface PG		
21	PMLT-1648FCZZ	-	AC		C	Right door cushion P2		06/12 R/C
	(Unit)							
901	CCAB-1136DS51		BF	N	E	Right lower door unit		
901	CCAB-1136DS53	3	BD		E	Right lower door unit	CCE760	09/12


12 Right lower door unit

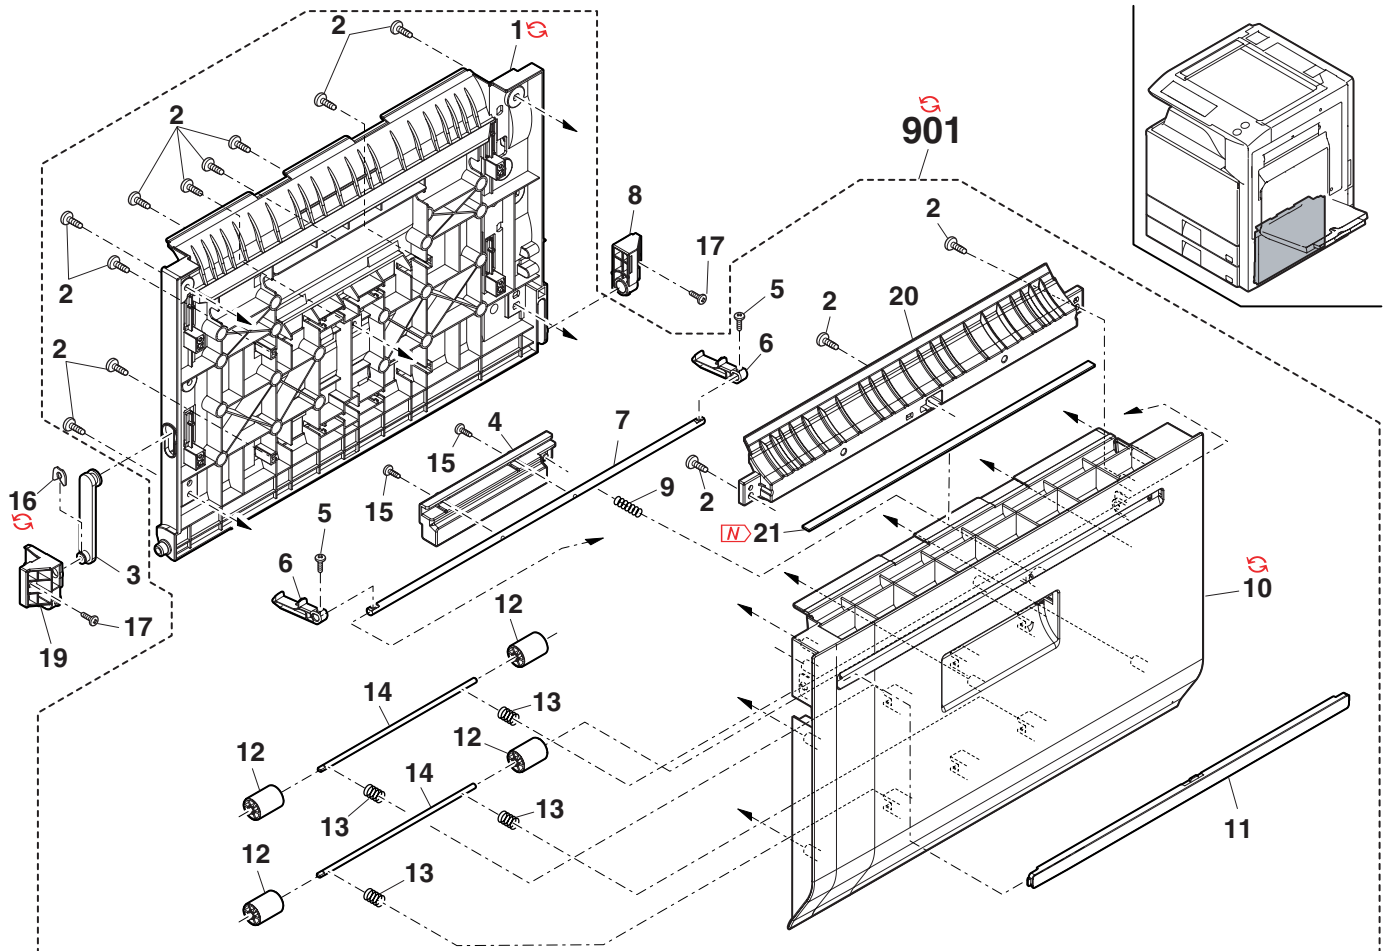

FCP09622


- 17 -

13 Multi tray unit

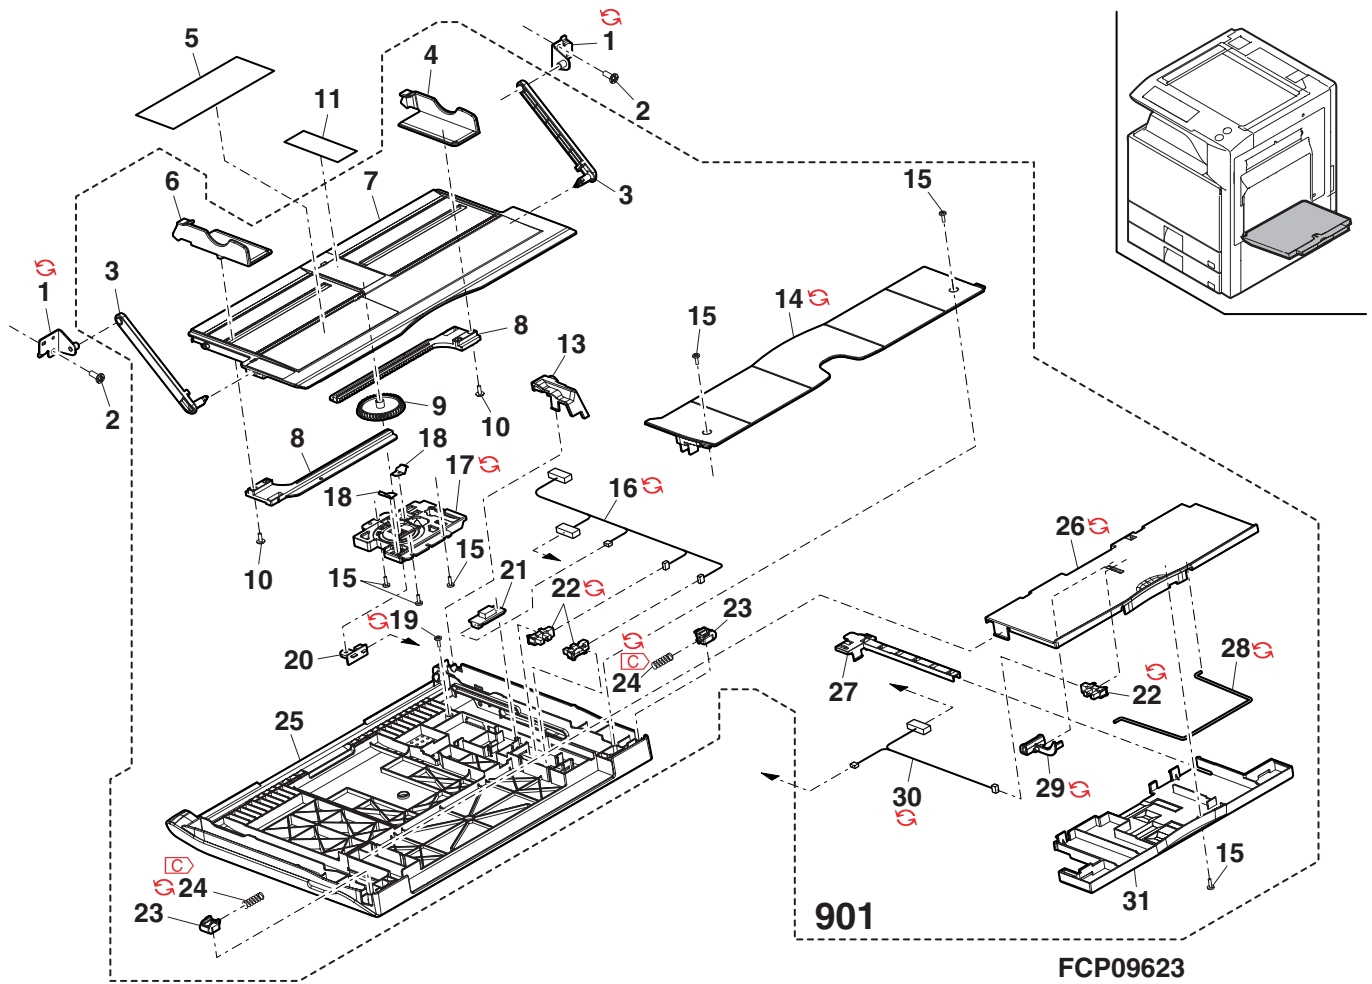

- 19 -


14 Multi paper feed unit 1

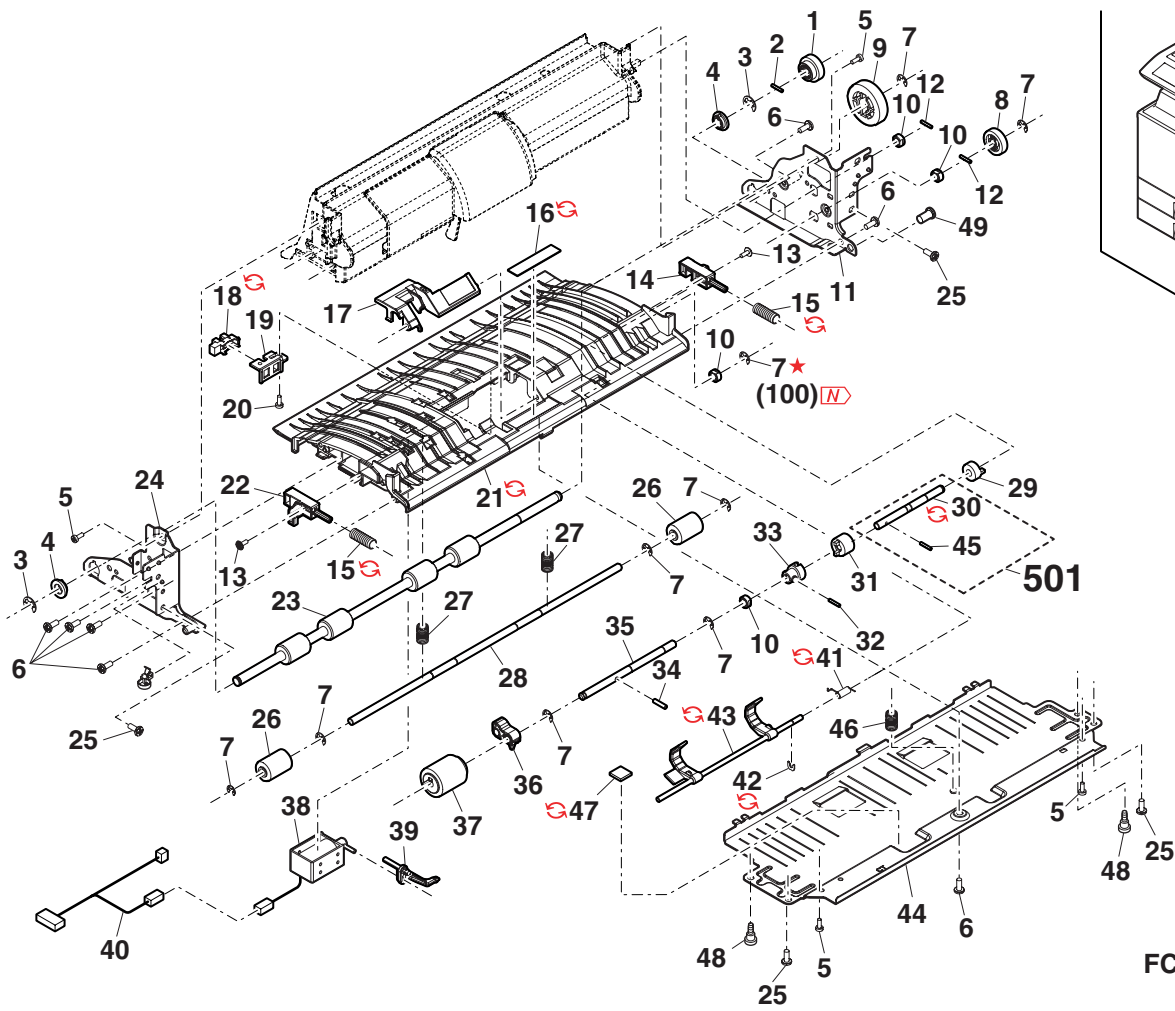

FCP09624

- 21-1 -

15 Multi paper feed unit 2

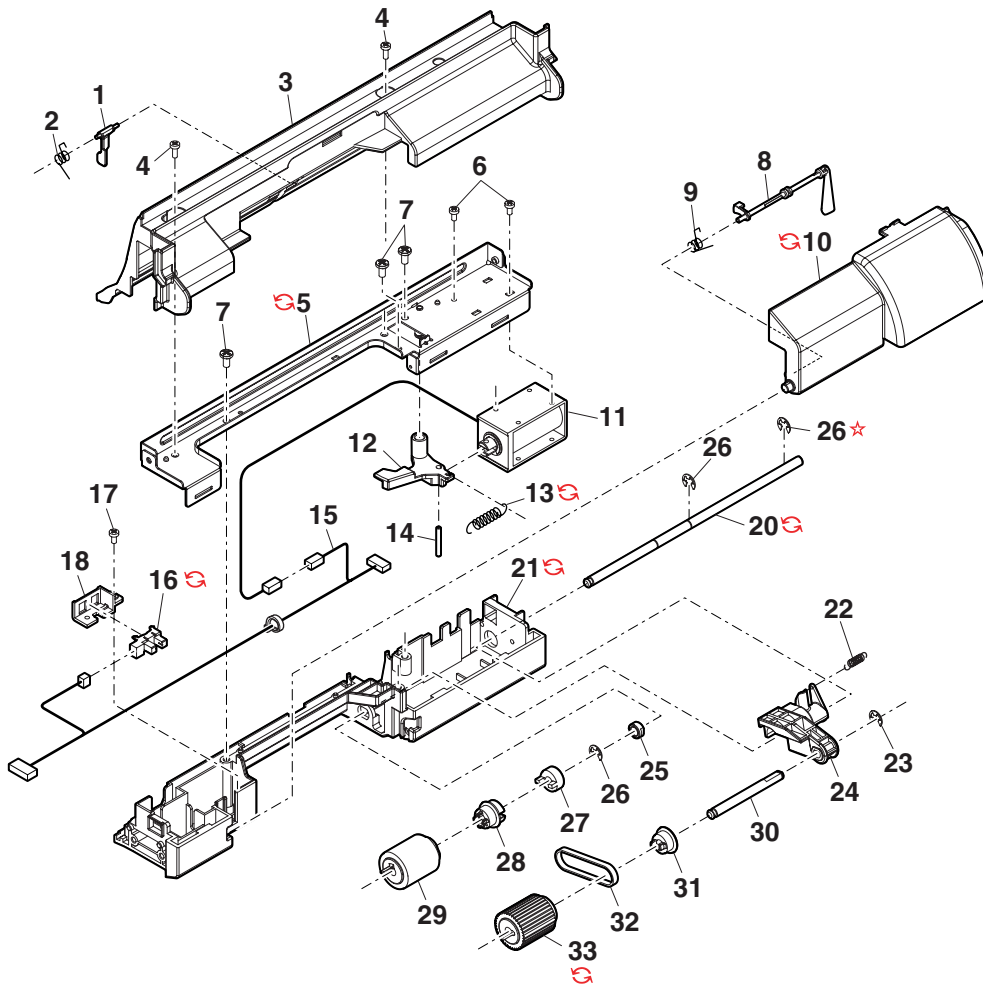


FCP09625

16 PS unit 1

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	LSTYM0349FCZZ		AH		C	PS stay		
2	XEBS730P08000		AC		C	Screw(3x8)		
3	XEBS740P10000		AA		C	Screw(4x10)		
4	XRESP50-06000		AA		C	E ring(E5)		
5	MSPRC3403FCZZ		AB		C	PS pressure spring		
6	NBRGP0741FCZZ		AC		C	PS pressure bearing		
7	NGERH1609FCZZ		AC		C	Gear(18T)		
8	NROLP1527FCZZ		AY		A	PS follower roller		
9	NROLP0896FCZZ		AC		C	Transport follower roller		
10	MSPRC3404FCZZ		AC		C	PS front follower roller spring		
11	NSFTZ2932FCZZ		BQ		C	PS front roller follower shaft		
12	VHPGP2A200L-1		AR		B	PS sensor		
12	VHPGP2A200L-18	3	AQ		B	PS sensor [Unleaded solder correspondence]		06/03
13	QEARP0201FCZZ		AC		C	Roller earth plate		
14	MSPRT3432FCZZ		AC		C	JAM release spring		
15	JHNDP0184FCZZ		AU		C	JAM release handle		
16	LHLDZ1679FCZZ		AC		C	Sensor holder		
17	VHPGP1A71L3-1		AG		B	PS front 2 sensor(GP1A71L3)		
17	VHPGP1A71L3-18	3	AG		B	PS front 2 sensor(GP1A71L3) [Unleaded solder correspondence]		06/03
18	MLEVP0951FCZZ		AC		C	PS front 2 sensor actuator		
19	MSPRD3420FCZZ		AB		C	PS front 2 actuator spring		
20	XHBS730P08000		AB		C	Screw(3x8)		
21	LPINS0337FCZZ		AB		C	Pin(3-12)		
22	XRESP70-08000		AA		C	E ring(E7)		
23	XHBS740P08000		AA		C	Screw(4x8)		
24	DHAi-3716FCZ1		AF		C	PS UN harness		
	(Unit)							
901	CDAiU0694DS51		BL		E	PS unit (Include Block [17])		


16 PS unit 1

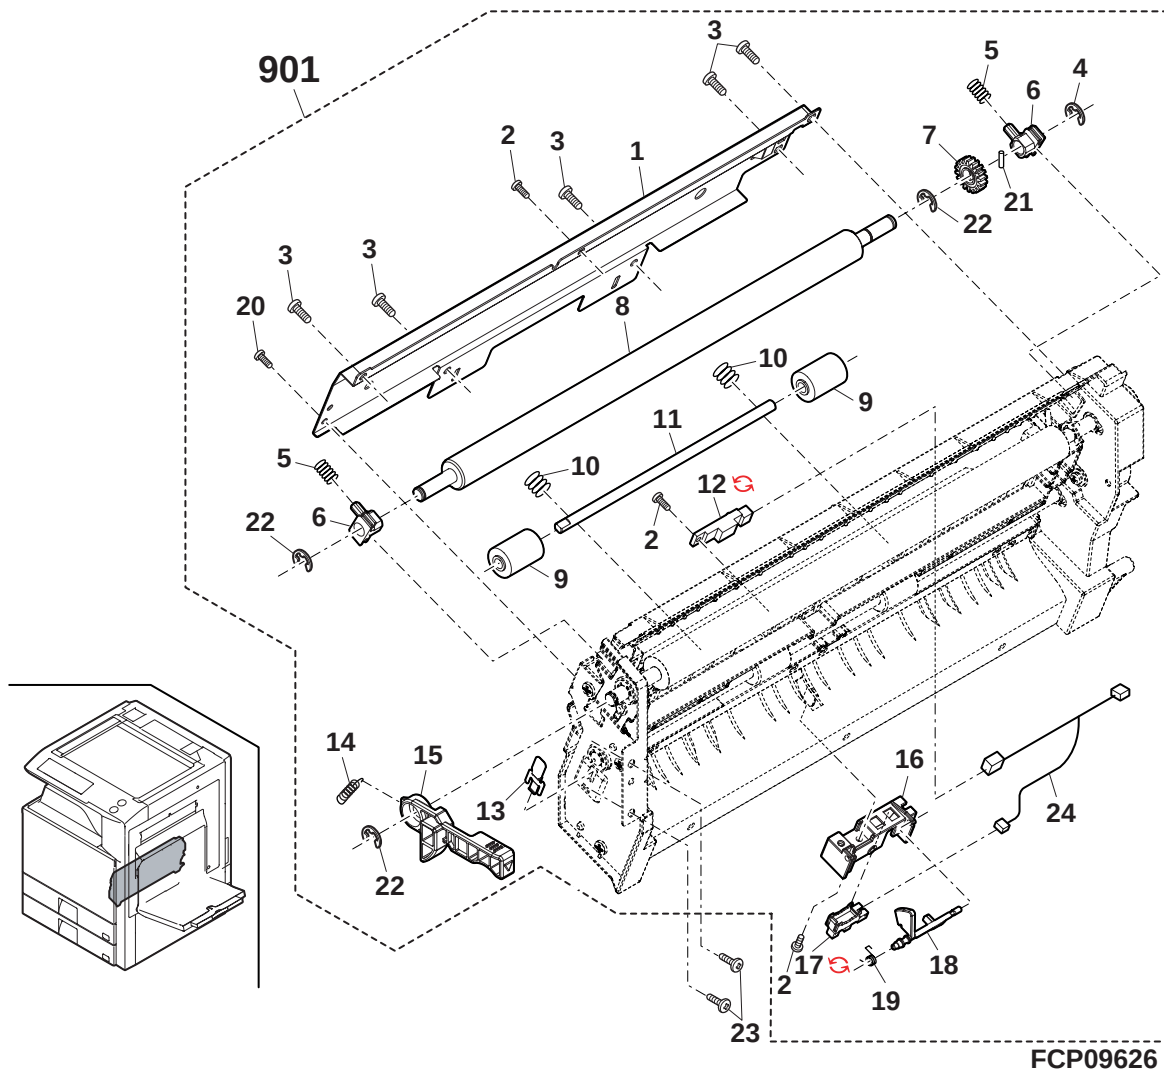

17 PS unit 2

[illegible]


17 PS unit 2

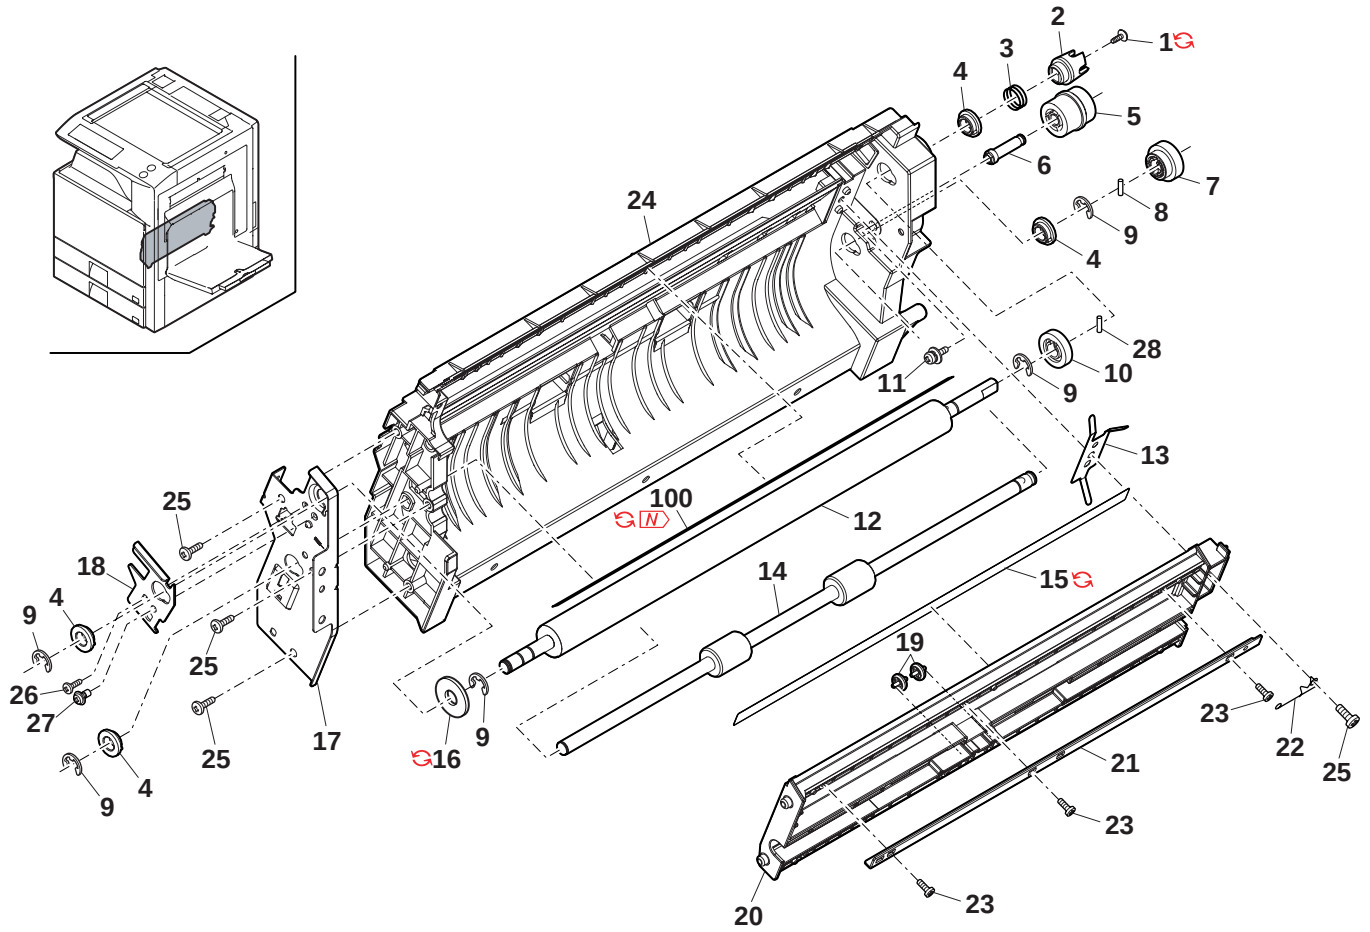

FCP09627

- 24-1 -


18 Toner transport pipe unit

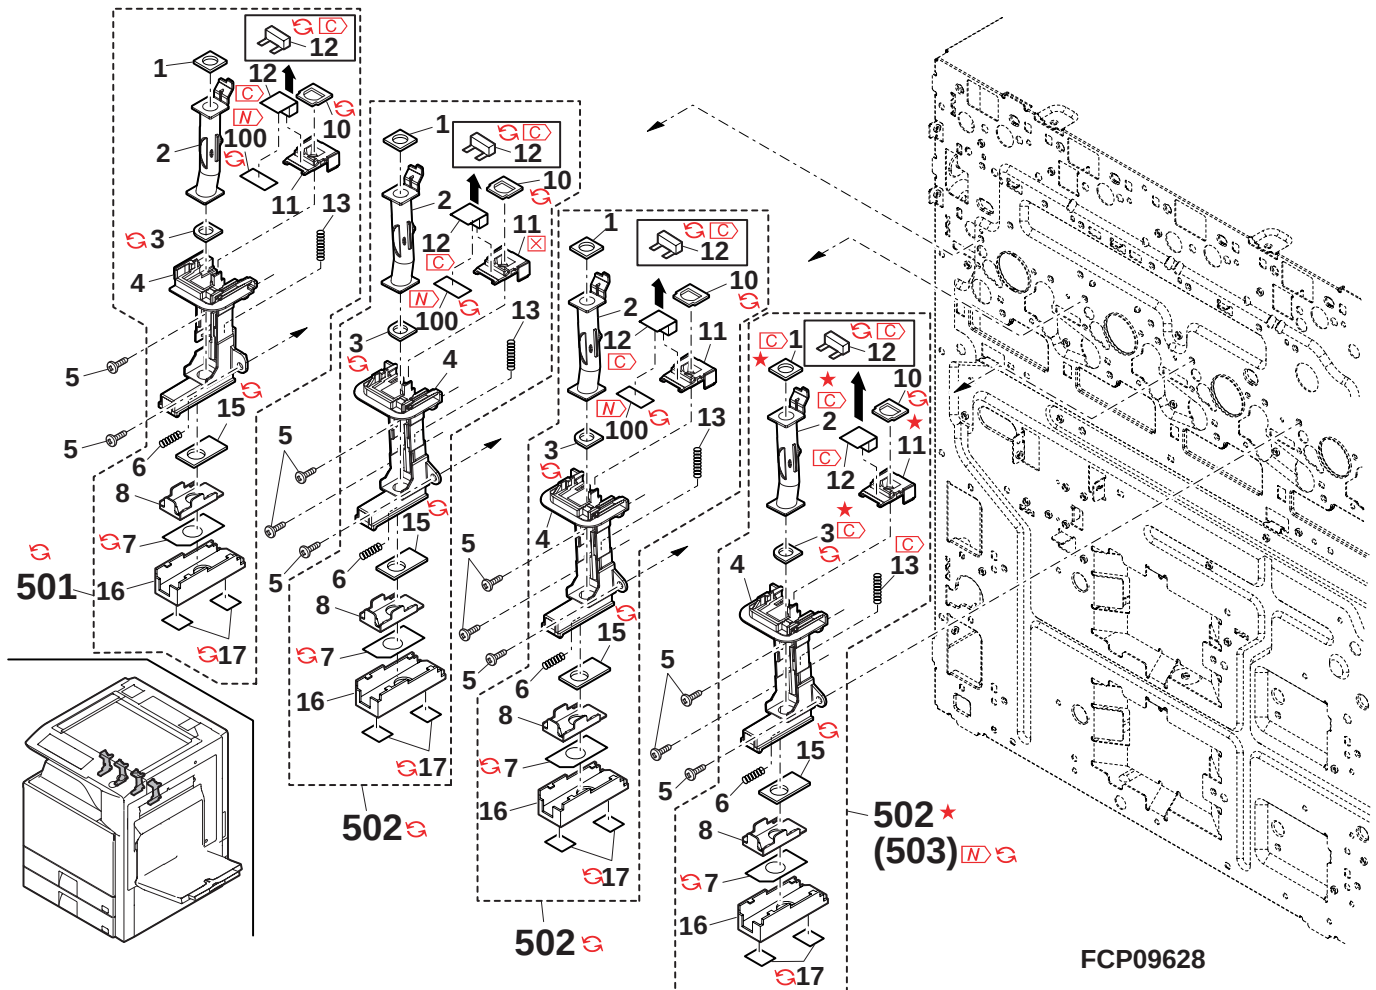

19 Resist sensor unit


NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	LHLDZ1655FCZZ		AM		C	Sensor holder		
1	LHLDZ1655FCZ1	1	AM		C	Sensor holder		07/03 R/C
2	LPLTP6488FCZZ		AB		C	Shutter slide plate		
3	XEBS730P08000		AC		C	Screw(3x8)		
4	VHPKR2051SH-1		AW		B	Resist sensor		
	VHPGP2TC21//1		BE		B	Pro con sensor		
5	VHPGP2TC21//18	3	AZ		B	Pro con sensor [Unleaded solder correspondence]		06/03
6	RPLU-0367FCZZ		AN		B	Shutter solenoid		
7	DHAi-3717FCZ1		AN		C	Pro con unit harness		
8	XHBS730P08000		AB		C	Screw(3x8)		
9	MSPRD3383FCZZ		AB		C	Shutter spring		
10	LPLTP6487FCZZ		AG		C	Shutter movable plate		
11	LSTYM0360FCZZ		AK		C	Sensor fixing stay		
12	XBBS730P05000		AA		C	Screw(3x5)		
13	XHBS740P08000		AA		C	Screw(4x8)		
(Unit)								
901	CHLDZ1655DS51		BG		E	Resist sensor unit (Without No.13)		

19 Resist sensor unit

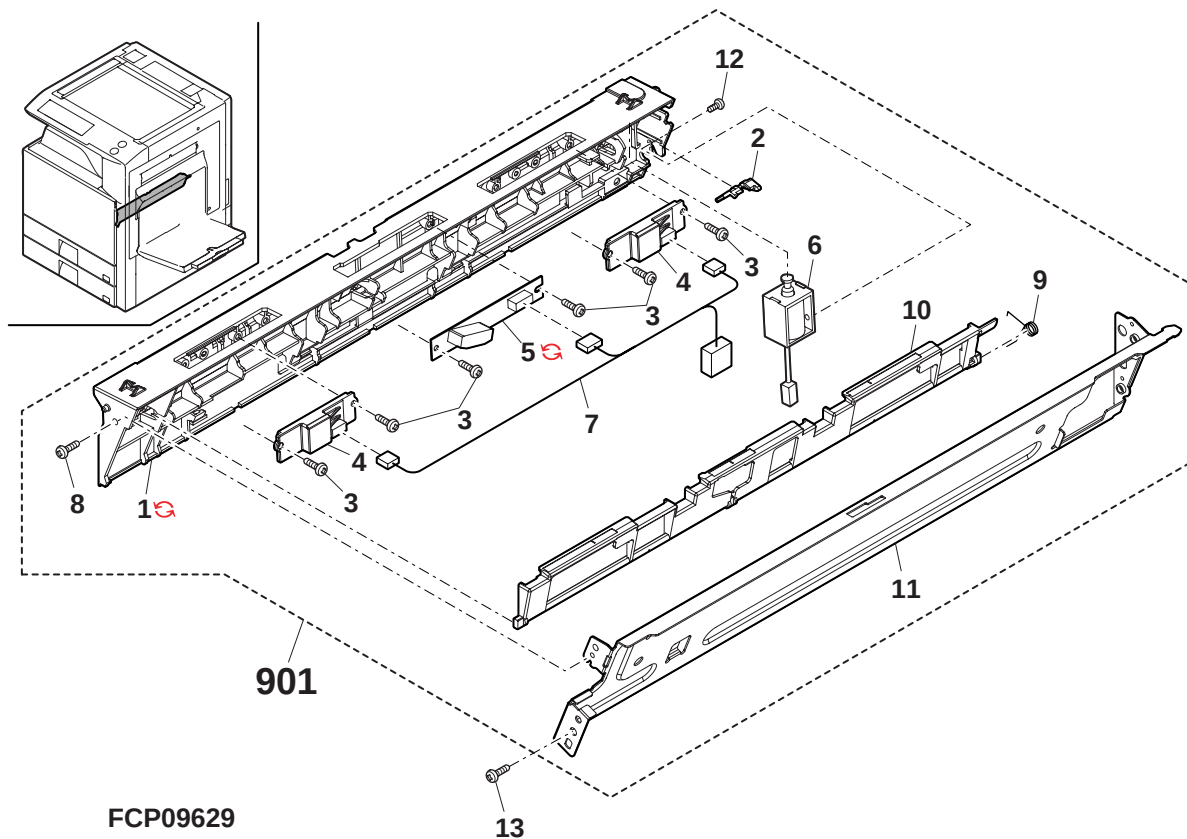

- 26-1 -

20 LSU section

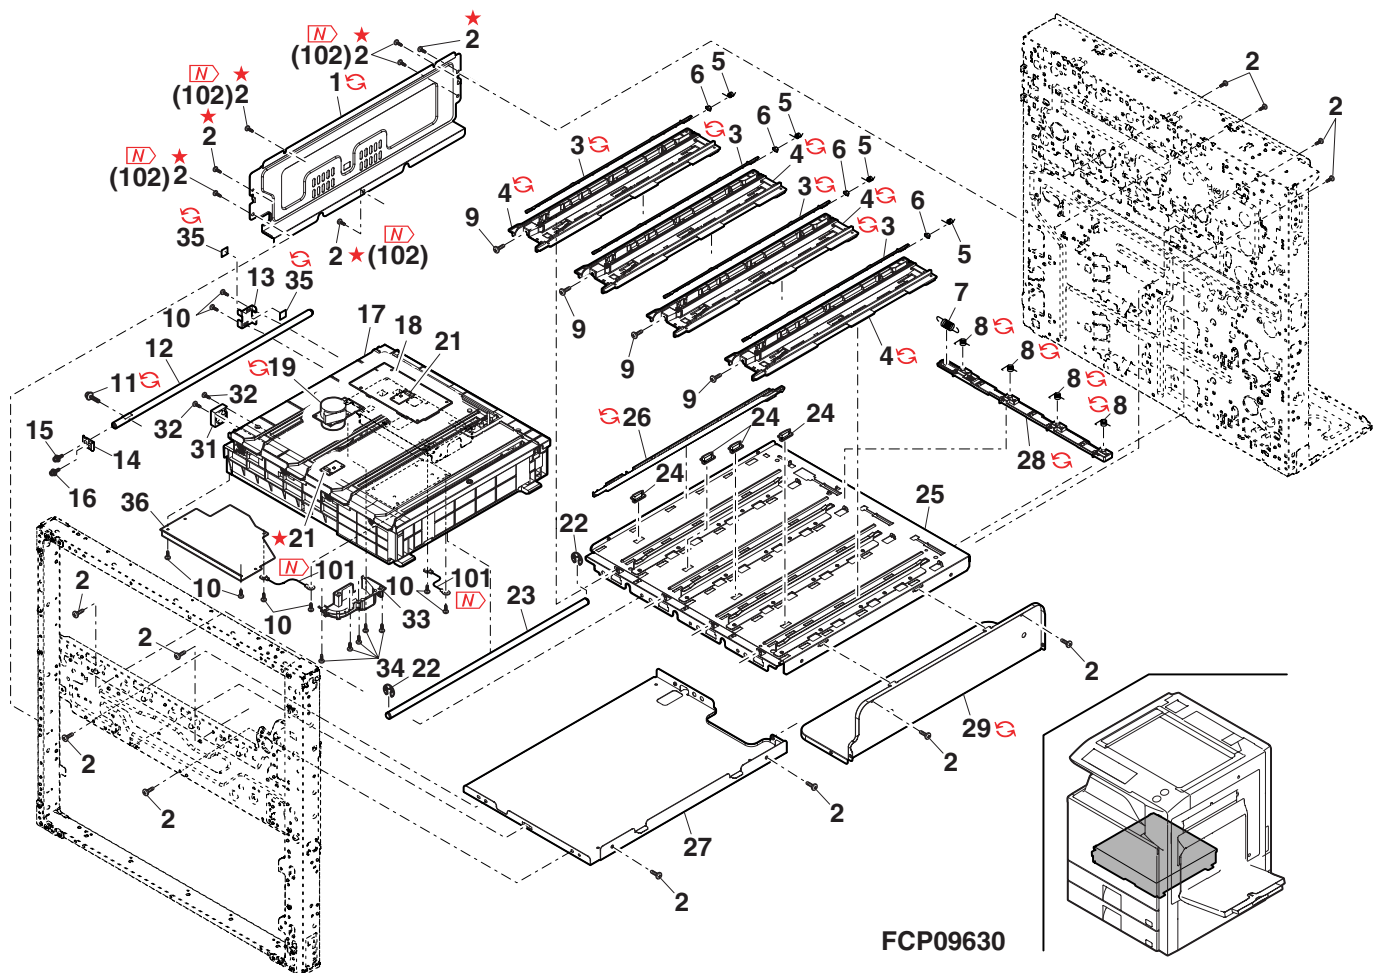


21 DV unit 1

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	PSHEZ5382FCZ1		AE		C	DV shutter suede		
	PSHEZ5382FCZ2	1	AE		C	DV shutter suede		06/12 R/C
	LHLDZ1669FCZZ		AD		C	DV holder TN		
2	LHLDZ1669FCZ3	-	AD		C	DV holder TN [Parts code correction]		1st lot
3	XEBS730P08000		AC		C	Screw(3x8)		
	XEBS730P08000	5	AC		C	Screw(3x8) [With No.17,18,19,20,29,21]	CCE505	07/05 mid
4	MSPRC3530FCZZ		AB		C	DV pressure spring		
	NSFTZ3018FCZZ		AL		C	DV pressure shaft		
5	NSFTZ3018FCZ1	3	AL		C	DV pressure shaft N [Improve performance]		07/05
	PSEL-0919FCZ1		AD		C	DV box seal C		
6	PSEL-0919FCZ2	-	AD		C	DV box seal C [Parts code correction]		1st lot
	PSEL-0919FCZ3	1	AD		C	DV box seal C		07/02 R/C
	PSEL-0919FCZ4	1	AD	N	C	DV box seal C		09/01 R/C
7	PSHT-0105FCZ1		AB		C	DV shutter		
8	MSPRC3364FCZZ		AA		C	DVS spring TN		
9	XRESP25-04000		AA		C	E ring(E2.5)		
	PSEL-0957FCZZ		AB		C	DV cover U seal		
10	PSEL-0957FCZZ	-	AB		C	DV cover U seal [Illustration correction]		1st lot
	PSEL-0957FCZ1	1	AB		C	DV cover U seal		06/12 R/C
	PSEL-0957FCZ2	1	AB	N	C	DV cover U seal		09/01 R/C
11	LPLTM6766FCZZ		AD		C	DSD plate		
	PCOVP1844FCZZ		AK		D	DV cover U		
12	PCOVP1844FCZ3	-	AK		D	DV cover U [Parts code correction]		1st lot
	PCOVP1844FCZ5	1	AK	N	D	DV cover U		09/04 R/C
13	XBBS730P06000		AC		C	Screw(3x6)		
14	CGiDM2151DS51		AM		C	DV guide DSD unit		
15	PSEL-0918FCZ1		AD		C	Supply hole seal		
	PSEL-0918FCZ2	1	AD		C	Supply hole seal		06/12 R/C
16	PCOVP1867FCZ3		AD	N	D	DV cover F		
	PCOVP1867FCZ4	-	AD		D	DV cover F [Parts code correction]		1st lot
	PGiDM2132FCZZ		AC		C	DV guide FD		
17	PGiDM2132FCZZ	5	AC		C	DV guide FD [With No.3,18,19,20,29,21]	CCE505	07/05 mid
	LPLTM5714FCZZ		AB		C	M3 plate		
18	LPLTM5714FCZZ	5	AB		C	M3 plate [With No.3,17,19,20,29,21]	CCE505	07/05 mid
	PCOVP1847FCZZ		AC		D	DV cover FD		
19	PCOVP1847FCZZ	5	AC		D	DV cover FD [With No.3,17,18,20,29,21]	CCE505	07/05 mid
20	LX-BZ1037FCZZ		AD		C	DV step screw		
	LX-BZ1037FCZZ	5	AD		C	DV step screw [With No.3,17,18,19,29,21]	CCE505	07/05 mid
21	PGiDM2131FCZZ		AM		C	DV guide D(BK)		
	PGiDM2282FCZ5	5	AM		C	DV guide D(BK) [With No.3,17,18,19,20,29]	CCE505	07/05 mid
	PGiDM2131FCZ1		AM		C	DV guide D(C)		
	PGiDM2282FCZ6	5	AP		C	DV guide D(C) [With No.3,17,18,19,20,29]	CCE505	07/05 mid
	PGiDM2131FCZ2		AM		C	DV guide D(M)		
	PGiDM2282FCZ7	5	AP		C	DV guide D(M) [With No.3,17,18,19,20,29]	CCE505	07/05 mid
	PGiDM2131FCZ3		AM		C	DV guide D(Y)		
	PGiDM2282FCZ8	5	AP		C	DV guide D(Y) [With No.3,17,18,19,20,29]	CCE505	07/05 mid
22	UCLEZ0180FCZ1		AE		C	DV blade N		
	UCLEZ0180FCZ2	3	AE		C	DV blade N [Form change]		06/04 R/C
	PMLT-1443FCZZ		AE	N	C	DV cover R cushion		
23	PMLT-1443FCZ1	-	AE		C	DV cover R cushion [Parts code correction]		1st lot
	PMLT-1443FCZ2	1	AE		C	DV cover R cushion		06/12 R/C
	PCOVP1846FCZZ		AG		D	DV cover R		
24	PCOVP1846FCZ1	-	AG		D	DV cover R [Parts code correction]		1st lot
	PCOVP1846FCZ2	1	AG	N	D	DV cover R		09/09 R/C
	PSEL-0930FCZZ		AC		C	DV cover R seal		
25	PSEL-0930FCZ1	-	AB	N	C	DV cover R seal [Parts code correction]		1st lot
	PSEL-1009FCZZ	1	AC	N	C	DV cover R seal		07/02 R/C
26	XRESP50-06000		AA		C	E ring(E5)		
28	LX-BZ0656FCP1		AD		C	Process fixing screw N		
	LX-BZ1143FCPZ	1	AD		C	Process fixing screw N		07/01 R/C
29	XRESP30-06000		AA		C	E ring(E3)		
	LX-BZ0045QSZ	5	AA		C	E ring(E3) [With No.3,17,18,19,20,21]	CCE505	07/05 mid
30	PSHEZ5378FCZZ		AD		A	Red screw(3x8)		
31	PSHEZ5378FCZZ	-	AD		A	Duct sheet [Parts code correction]		1st lot
	PSEL-0956FCZZ		AE		A	DV cleaning seal		
32	PSEL-0956FCZ1	1	AE		A	DV cleaning seal		06/12 R/C
	PSEL-0956FCZ2	1	AE		A	DV cleaning seal		09/01 R/C
	TLABH4997FCZZ		AA		D	Color label(BK)		
	TLABH4997FCZ1	1	AA	N	D	Color label(BK) [Pasting position change]		06/10
	TLABH4998FCZZ		AA		D	Color label(C)		
33	TLABH4998FCZ1	1	AA		D	Color label(C) [Pasting position change]		06/10
	TLABH4999FCZZ		AA		D	Color label(M)		
	TLABH4999FCZ1	1	AA		D	Color label(M) [Pasting position change]		06/10
	TLABH5000FCZZ		AA		D	Color label(Y)		
	TLABH5000FCZ1	1	AA		D	Color label(Y) [Pasting position change]		06/10
34	MLEVP1031FCZZ		AD	N	C	DV lock lever		
	MLEVP1031FCZ1	1	AP	N	C	DV lock lever		10/07 R/C
35	MLEVP1030FCZZ		AC	N	C	DV push lever		
36	PCOVP2025FCZZ		AE	N	C	Filter cover		

- 28-1 -

21 DV unit 1

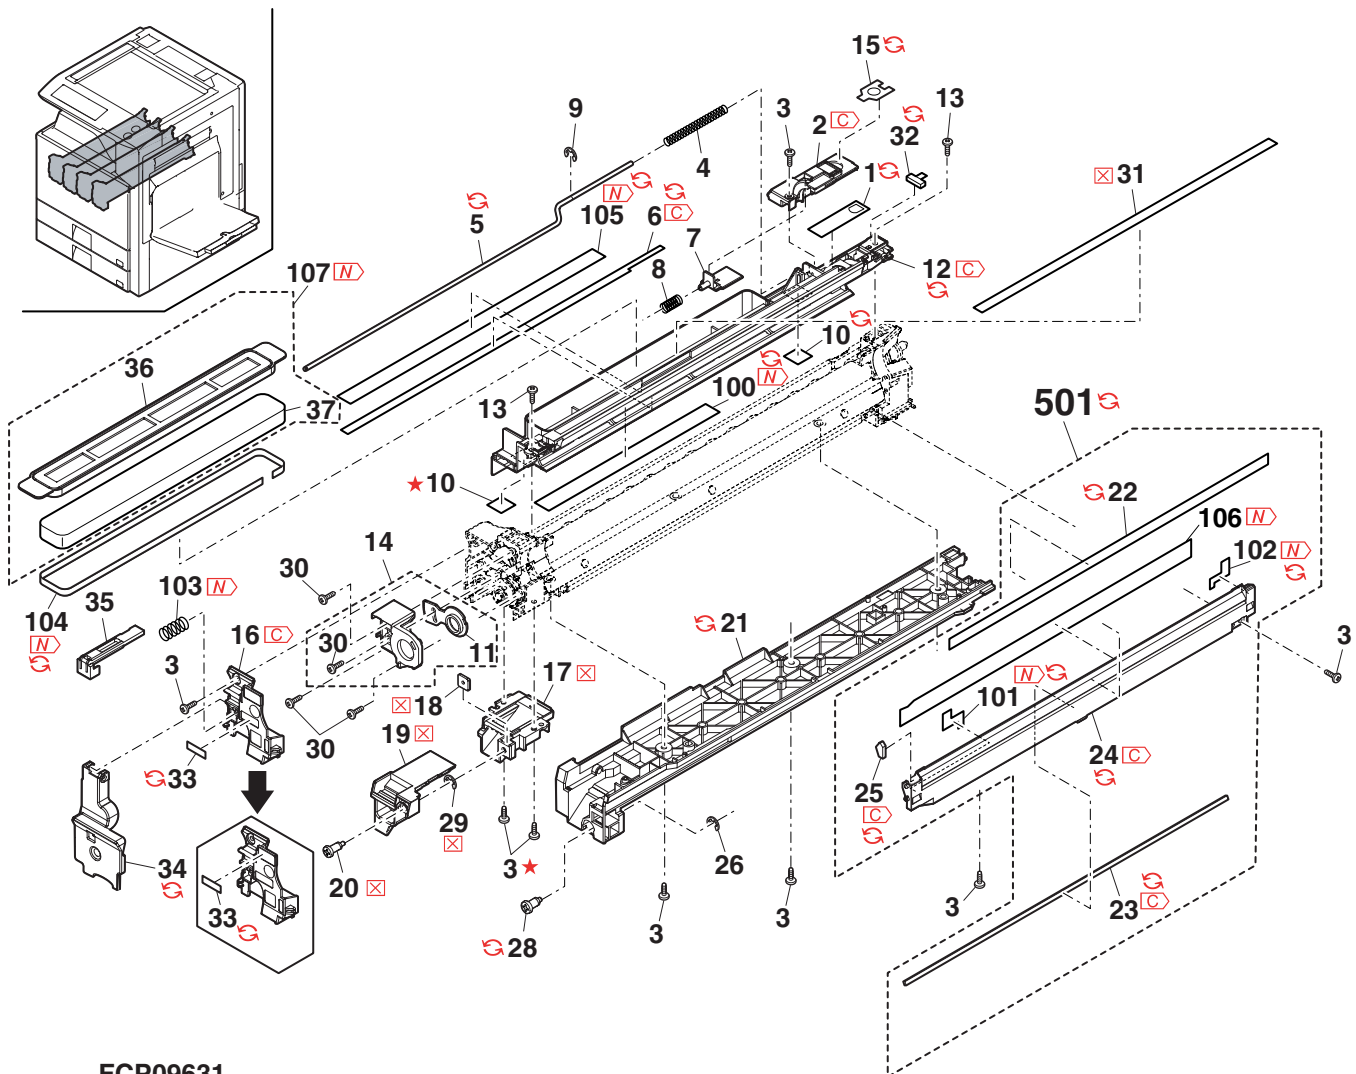


FCP09631

22 DV unit 2

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	NPLYZ0447FCZ2		AC		C	MG pulley		
	Ⓢ NPLYZ0490FCZZ	-	AB		C	MG pulley [Parts code correction]		1st lot
2	XBPS730P06KS0		AB		C	Screw(3x6KS)		
3	CPLYZ0471FC02		AR	N	C	DID pulley		
	Ⓢ CPLYZ0471FC04	-	AR		C	DID pulley [Parts code correction]		1st lot
	NBLTH0459FCZZ		AD		B	DV belt B		
4	Ⓢ NBLTH0494FCZZ	-	AD		B	DV belt B [Parts code correction]		1st lot
5	NBRGC0757FCZZ		AC		C	Bearing		
6	XRESP50-06000		AA		C	E ring(E5)		
7	XESB730P08000		AC		C	Screw(3x8)		
8	CPLTM6528FC02		AG	N	B	DID plate		
	Ⓢ CPLTM6528FC04	1	AF	N	B	DID plate		07/06
	CHLDZ1680FC01		AD		C	MG holder		
9	Ⓢ CHLDZ1680FC02	-	AD		C	MG holder [Parts code correction]		1st lot
10	NBLTH0445FCZ1		AD		B	DV belt		
11	NPLYZ0472FCZ1		AL	N	C	DMX pulley		
12	NPLYZ0473FCZZ		AC	N	C	MG pulley DMX		
13	XRESP40-06000		AA		C	E ring(E4)		
14	NBRGC0770FCZZ		AH	N	C	Bearing		
15	PSEL-0915FCZ1		AD		A	DV side seal R		
	Ⓢ PSEL-0915FCZ2	1	AD		A	DV side seal R		06/12 R/C
	PSEL-0917FCZZ		AB		C	DV box seal F		
16	Ⓢ PSEL-0917FCZ1	1	AB		C	DV box seal F		07/02 R/C
18	LPLTM5714FCZZ		AB		C	M3 plate		
20	PCOVP1866FCZZ		AC		D	DV cover MGB		
	Ⓢ PCOVP1866FCZ1	-	AC		D	DV cover MGB [Parts code correction]		1st lot
21	LPINS0133FCZZ		AA		C	Pin(2-10)		
	NROLM1536FCZ1		BB		C	MG roller		
	Ⓢ NROLM1536FC11	-	BB		C	MG roller(BK) [Parts code correction]		1st lot
	Ⓢ NROLM1536FC15	3	BB		C	MG roller(BK) [Productivity improvement]	CCE352	06/04 mid
	Ⓢ NROLM1536FC11	-	BB		C	MG roller(M) [Parts code correction]		1st lot
	Ⓢ NROLM1536FC15	3	BB		C	MG roller(M) [Productivity improvement]	CCE352	06/04 mid
	Ⓢ NROLM1536FC12	-	BB		C	MG roller(C) [Parts code correction]		1st lot
	Ⓢ NROLM1536FC15	3	BB		C	MG roller(C) [Productivity improvement]	CCE352	06/04 mid
	Ⓢ NROLM1536FC14	-	BB		C	MG roller(Y) [Parts code correction]		1st lot
	Ⓢ NROLM1536FC15	3	BB		C	MG roller(Y) [Productivity improvement]	CCE352	06/04 mid
23	RDTCM0172FCZZ		AX	N	B	ATC sensor(BK)		
	Ⓢ RDTCT0165FCZZ	1	AX		B	ATC sensor(BK)		06/04 R/C
	RDTCM0173FCZZ		AX	N	B	ATC sensor(C)		
	Ⓢ RDTCT0166FCZZ	1	AX		B	ATC sensor(C)		06/04 R/C
	RDTCM0174FCZZ		AX	N	B	ATC sensor(M)		
	Ⓢ RDTCT0166FCZZ	1	AX		B	ATC sensor(C)		06/04 R/C
	RDTCM0175FCZZ		AX	N	B	ATC sensor(Y)		
	Ⓢ RDTCT0166FCZZ	1	AX		B	ATC sensor(C)		06/04 R/C
24	XESB730P05000		AA		C	Screw(3x5)		
	★ XESB730P05000	5	AA		C	Screw(3x5) [With No.25,41,101,104]	CCE505	07/05 mid
	PBOX-0147FCZZ		AN		D	DV box		
25	Ⓢ PBOX-0147FCZ3	-	AN		D	DV box [Parts code correction]		1st lot
	Ⓢ PBOX-0147FCZ4	5	AN		D	DV box [With No.24,41,101,104]	CCE505	07/05 mid
	Ⓢ PBOX-0147FCZ5	1	AN		D	DV box		08/02 mid
	PSEL-0914FCZZ		AD		A	DV side seal F		
26	Ⓢ PSEL-0914FCZ1	3	AD		A	DV side seal F [Form change]		06/04 R/C
	Ⓢ PSEL-0914FCZ2	1	AD		A	DV side seal F		06/12 R/C
	PSEL-0916FCZZ		AD		C	DV box seal B		
27	Ⓢ PSEL-0916FCZ1	-	AD		C	DV box seal B [Parts code correction]		1st lot
	Ⓢ PSEL-0916FCZ2	1	AD		C	DV box seal B		07/02 R/C
28	LHLDZ1642FCZZ		AC		C	MG holder F		
29	LPLTM6527FCZZ		AC		C	PP plate		
30	DHAI-3834FCZZ		AD		C	BIAS harness B		
31	NROLP1515FCZ1		AN		C	DMX roller L		
	Ⓢ NROLP1515FCZ2	-	AN		C	DMX roller L [Parts code correction]		1st lot
32	NROLP1514FCZZ		AN		C	DMX roller R		
	Ⓢ NROLP1514FCZ2	-	AN		C	DMX roller R [Parts code correction]		1st lot
33	QSLP-0209FCZZ		AC		B	DV plug		
34	XESB730P10000		AC		C	Screw(3x10)		
35	DHAI-3833FCZZ		AD		C	BIAS harness A		
36	PCOVP1845FCGZ		AD	N	D	DV cover B		
	Ⓢ PCOVP1845FCG1	1	AD	N	D	DV cover B		09/09 R/C
37	LPLTM6441FCZ1		AN		C	DV doctor		
	Ⓢ LPLTM6441FCZ2	-	AP		C	DV doctor [Parts code correction]		1st lot
38	XBBBZ30P04000		AA		C	Screw(3x4)		
39	DHAI-3711FCZ1		AN		C	DV harness		
40	CPWBF1674FCB34		AN	N	E	DV initial detect PWB		
	LPLTM6442FCZZ		AS		C	Doctor reinforce plate		
41	Ⓢ LPLTM6442FCZ1	-	AS		C	Doctor reinforce plate [Parts code correction]		1st lot
	Ⓢ LPLTM6442FCZ2	5	AV		C	Doctor reinforce plate [With No.24,25,101,104]	CCE505	07/05 mid
	Ⓢ LPLTM6442FCZ3	1	AX	N	C	Doctor reinforce plate		10/01
	PSEL-0925FCZZ		AD		A	Doctor seal		
42	Ⓢ PSEL-0925FCZ1	-	AD		A	Doctor seal [Parts code correction]		1st lot
	Ⓢ PSEL-0925FCZ2	1	AD		A	Doctor seal		06/12 R/C

- 30-1 -

22 DV unit 2

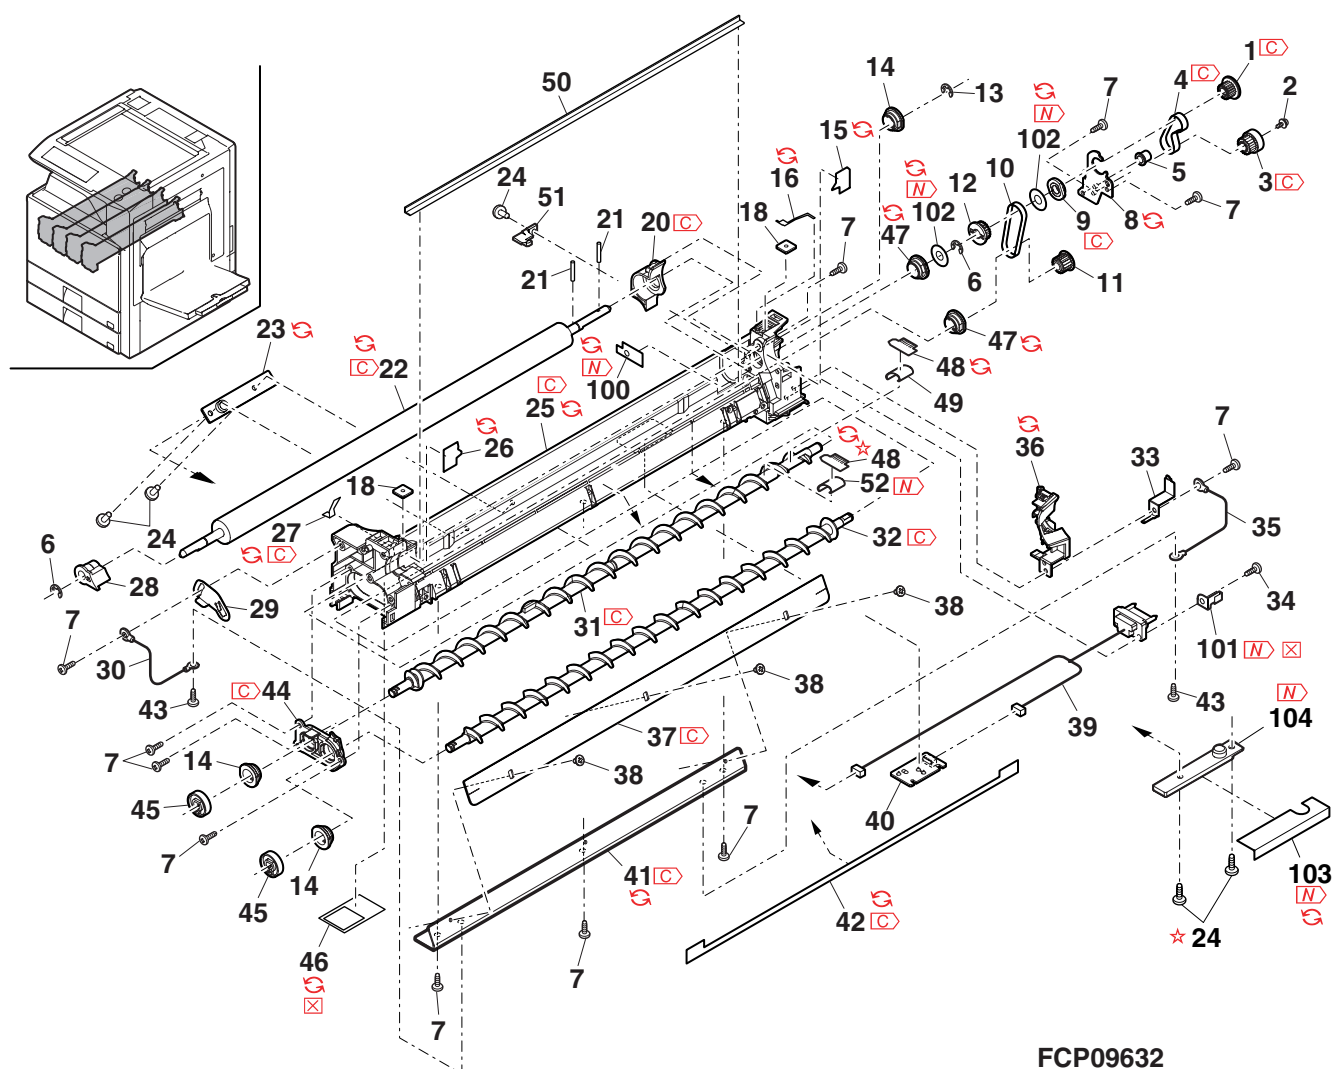

FCP09632


23 Process unit

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	CSFTZ2918DS51		AQ		E	Drum shaft		
	CSFTZ2918FCE1	1	AL		E	Drum shaft		06/02 R/C
	CSFTZ2918DS51	1	AQ		E	Drum shaft		06/07 R/C
2	CHLDZ1647DS51		AY		E	MCU		
	CHLDZ1647FCE1	1	AY		E	MCU		06/02 R/C
	CHLDZ1647DS51	1	AY		E	MCU		06/07 R/C
	CHLDZ1647DS52	3	AY		E	MCU	CCE564	08/04 mid
	CHLDZ1647DS54	3	AY		E	MCU	CCE606	08/10
3	PSHEZ5360FCZZ		AF		C	MCU case sheet		
	PSHEZ5360FCZ1	1	AD		C	MCU case sheet		06/12 R/C
4	XEBS730P10000		AC		C	Screw(3×10)		
5	PCOVP1848FCZ1		AG	N	D	MC cover		
	PCOVP1848FCZ2	1	AG	N	D	MC cover		06/10 R/C
6	PMLT-1433FCZZ		AD		C	Case cushion		
	PMLT-1433FCZ1	1	AC		C	Case cushion		06/12 R/C
9	NSFTZ2890FCZ1		AE		C	MC cleaner shaft		
	NSFTZ2890FCZ2	3	AE		C	MC cleaner shaft [Productivity improvement]		06/11 R/C
10	PSHEZ5359FCZ1		AF		A	Drum toner receive sheet		
	PSHEZ5359FCZ2	1	AF		A	Drum toner receive sheet		06/12 R/C
11	PSL-0913FCZ2		AD		A	Side seal R		
12	LX-BZ1016FCZZ		AB		C	CL fixing screw		
13	PSL-0912FCZ2		AD		A	Side seal F		
14	UCLEZ0179FCZ1		AP		A	Cleaning blade		
	PMLT-1420FCZZ		AA		C	Side cushion		
15	PMLT-1647FCZZ	1	AA	N	C	Side cushion		06/12 R/C
16	PMLT-1481FCZZ		AC	N	C	Toner scattering prevention cushion		
	PMLT-1481FCZ1	1	AC		C	Toner scattering prevention cushion		07/01
17	PMLT-1419FCZZ		AD		C	Blade cushion		
	PMLT-1419FCZ1	1	AC		C	Blade cushion		06/12 R/C
18	TLABH4997FCZZ		AA		D	Color label(BK)		
	TLABH4997FCZ1	1	AA	N	D	Color label(BK)		06/10
	TLABH4998FCZZ		AA		D	Color label(C)		
	TLABH4998FCZ1	1	AA		D	Color label(C)		06/10
	TLABH4999FCZZ		AA		D	Color label(M)		
	TLABH4999FCZ1	1	AA		D	Color label(M)		06/10
19	TLABH5000FCZZ		AA		D	Color label(Y)		
	TLABH5000FCZ1	1	AA		D	Color label(Y)		06/10
19	QEARP0192FCZZ		AC		C	Blade earth plate		
	QEARP0192FCZ1	-	AC		C	Blade earth plate [Parts code correction]		1st lot
20	LFRM-1152FCZ2		AQ		C	Process frame		
	LFRM-1152FCZ3	1	AQ		C	Process frame		06/10 R/C
21	PMLT-1421FCZZ		AB		C	DL cushion		
	PMLT-1645FCZZ	1	AB		C	DL cushion		06/12 R/C
22	PMLT-1422FCZZ		AB		C	Duct cushion		
	PMLT-1646FCZZ	1	AB		C	Duct cushion		06/12 R/C
23	PCOVP1849FCZZ		AC		D	Process R cover		
	PCOVP1849FCZ1	1	AC		D	Process R cover		06/04 R/C
	PCOVP1849FCZ2	3	AC	N	D	Process R cover [Improve performance]	CCE561	07/07 R/C
24	NCPL-0079FCZZ		AC		C	Screw coupling		
25	NBRGP0748FCZZ		AQ		C	Waste toner bearing		
26	NSRW-0040FCZZ		AH		C	Waste toner screw		
	NSRW-0040FCZ1	1	AH		C	Waste toner screw		07/03 R/C
29	MLEVP0962FCZZ		AC		C	Lock lever		
	MLEVP0962FCZ2	5	AC		C	Lock lever	CCE686	09/08 mid
	MLEVP0962FCZ3	5	AC		C	Lock lever	CCE730	09/10 mid
30	MSPRC3360FCZZ		AA		C	Lock lever spring		
	MSPRC3360FCZ2	5	AA		C	Lock lever spring	CCE686	09/08 mid
	MSPRC3360FCZ3	5	AA		C	Lock lever spring	CCE730	09/10 mid
31	CSFTZ2891FC01		AF		C	Drum fixing shaft		
	CSFTZ2891FC03	1	AF	N	C	Drum fixing shaft		10/12 R/C
33	PPiPP0213FCZZ		AC		C	Drum waste toner pipe		
34	NBRGP0746FCZZ		AQ		C	Cleaner bearing		
35	PMLT-1423FCZZ		AC		C	Pipe cushion		
	PMLT-1423FCZ1	1	AC		C	Pipe cushion		06/12 R/C
36	PRNGP0081FCZZ		AA		C	Resin ring(E4)		
	PRNGP0081FCZ1	1	AB		C	Resin ring(E4)		06/10
37	PMLT-1439FCZZ		AC		C	Shutter cushion		
	PMLT-1439FCZ1	1	AC		C	Shutter cushion		06/12 R/C
38	MSPRC3359FCZZ		AA		C	Shutter spring		
39	PSHT-0106FCZZ		AC		C	Waste toner shutter		
40	PCOVP1840FCZZ		AF		D	Process F cover		
	PCOVP1840FCZ1	1	AF	N	D	Process F cover		07/01 R/C
	PCOVP1840FCZ2	5	AF	N	D	Process F cover	CCE686	09/08 mid
	PCOVP1840FCZ3	5	AF		D	Process F cover	CCE730	09/10 mid
41	TLABH4996FCZZ		AA		D	Arrow label(BK)		
	TLABH4995FCZZ		AA		D	Arrow label(C)		
	TLABH4994FCZZ		AA		D	Arrow label(M)		
	TLABH4993FCZ1		AB		D	Arrow label(Y)		
42	PSHEP5522FCZZ		AG	N	C	Toner churning sheet		
	PSHEP5678FCZZ	3	AG		C	Toner churning sheet	CCE380	06/10

23 Process unit

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
42	PSHEP5678FCZ1	1	AG		C	Toner churning sheet		06/12 R/C
43	PSHEP5526FCZZ		AD	N	C	Frame duct sheet bottom		
	PSHEP5526FCZ1	1	AD		C	Frame duct sheet bottom		06/12 R/C
44	PSHEP5527FCZZ		AE	N	C	Frame duct sheet back side		
	PSHEP5527FCZ1	1	AC		C	Frame duct sheet back side		06/12 R/C
45	PMLT-1494FCZZ		AA	N	C	Process side cushion		
	PMLT-1494FCZ1	1	AA		C	Process side cushion		06/12 R/C
46	PMLT-1479FCZZ		AA	N	C	MC cushion F		
	PMLT-1479FCZ1	1	AB		C	MC cushion F		06/12 R/C
	PMLT-1480FCZZ		AA	N	C	MC cushion R		
47	PMLT-1480FCZ1	1	AA		C	MC cushion R		06/12 R/C
48	LHLDZ1846FCZZ	-	AG		C	Process rib	CCE426	06/10 mid
	PMLT-1523FCZZ	-	AC		C	Cleaner pad		1st lot
100	PMLT-1523FCZ1	1	AB		C	Cleaner pad		06/12 R/C
101	PMLT-1524FCZZ	-	AC		C	Cleaner cushion	CCE380	1st lot
	PMLT-1524FCZ1	1	AC		C	Cleaner cushion		06/12 R/C
	PSHEZ5556FCZZ	-	AC		C	Screw sheet		1st lot
102	PSHEZ5556FCZ1	-	AC		C	Screw sheet		06/10 R/C
	PMLT-1522FCZZ	-	AC		C	MC guide cushion		1st lot
103	PMLT-1522FCZ1	-	AC		C	MC guide cushion		06/10 R/C
105	LPLTM7421FCZZ	-	AH		C	Toner churning plate	CCE380	06/10
(Unit)								
901	CFRM-1152DS52		BD		E	Process unit		
	CFRM-1152FCE2	1	BC		E	Process unit		06/02 R/C
	CFRM-1152DS52	1	BD		E	Process unit		06/07 R/C
	CFRM-1152DS53	3	BH		E	Process unit	CCE380	06/07
	CFRM-1152DS54	3	BH		E	Process unit	CCE564	08/04 mid

23 Process unit

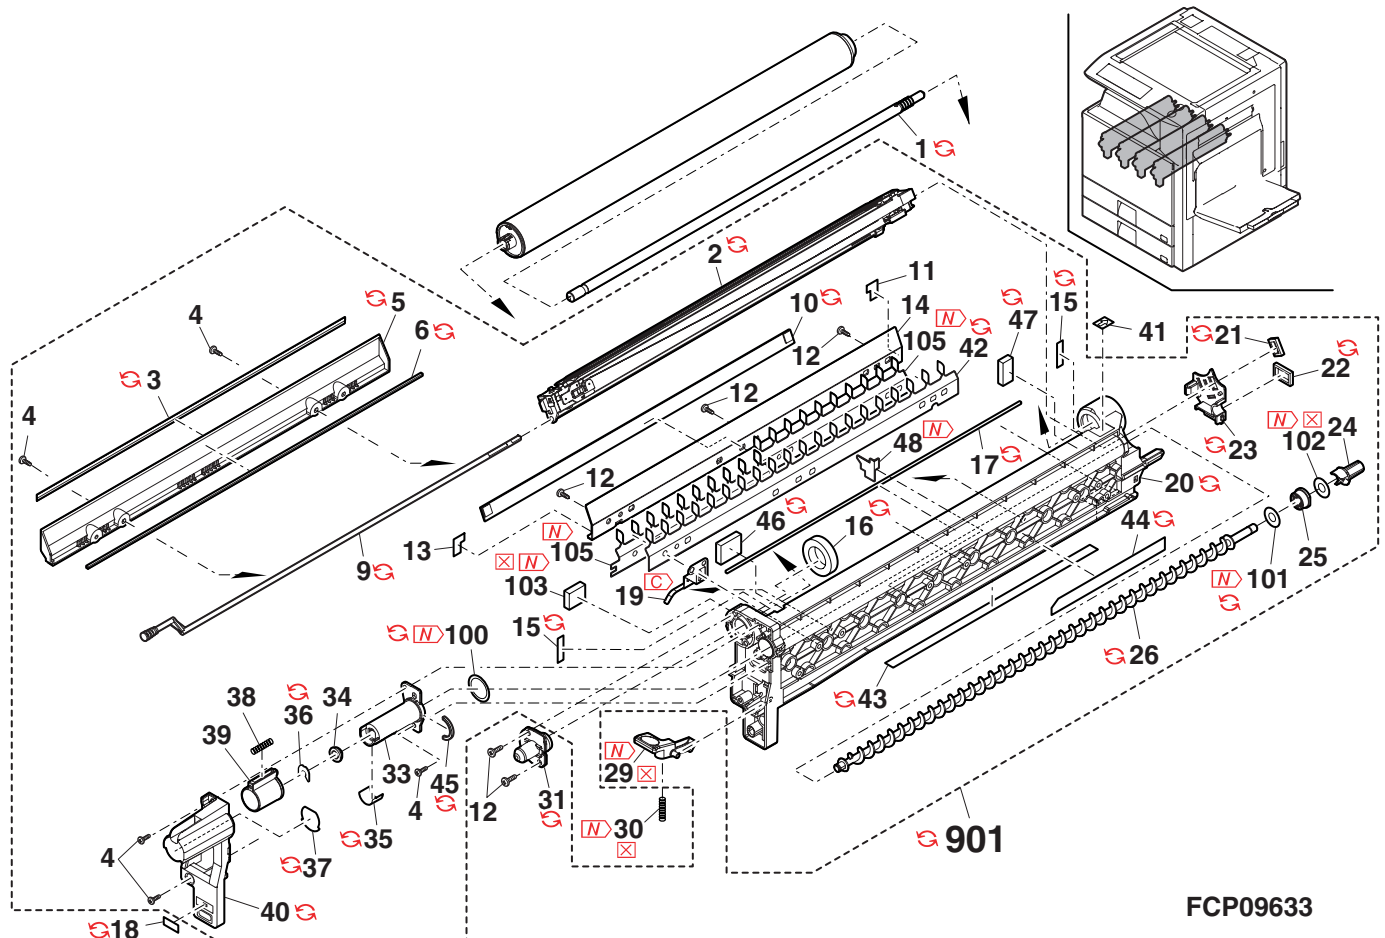


FCP09633

24 1st transfer cleaner unit

[illegible]

24 1st transfer cleaner unit

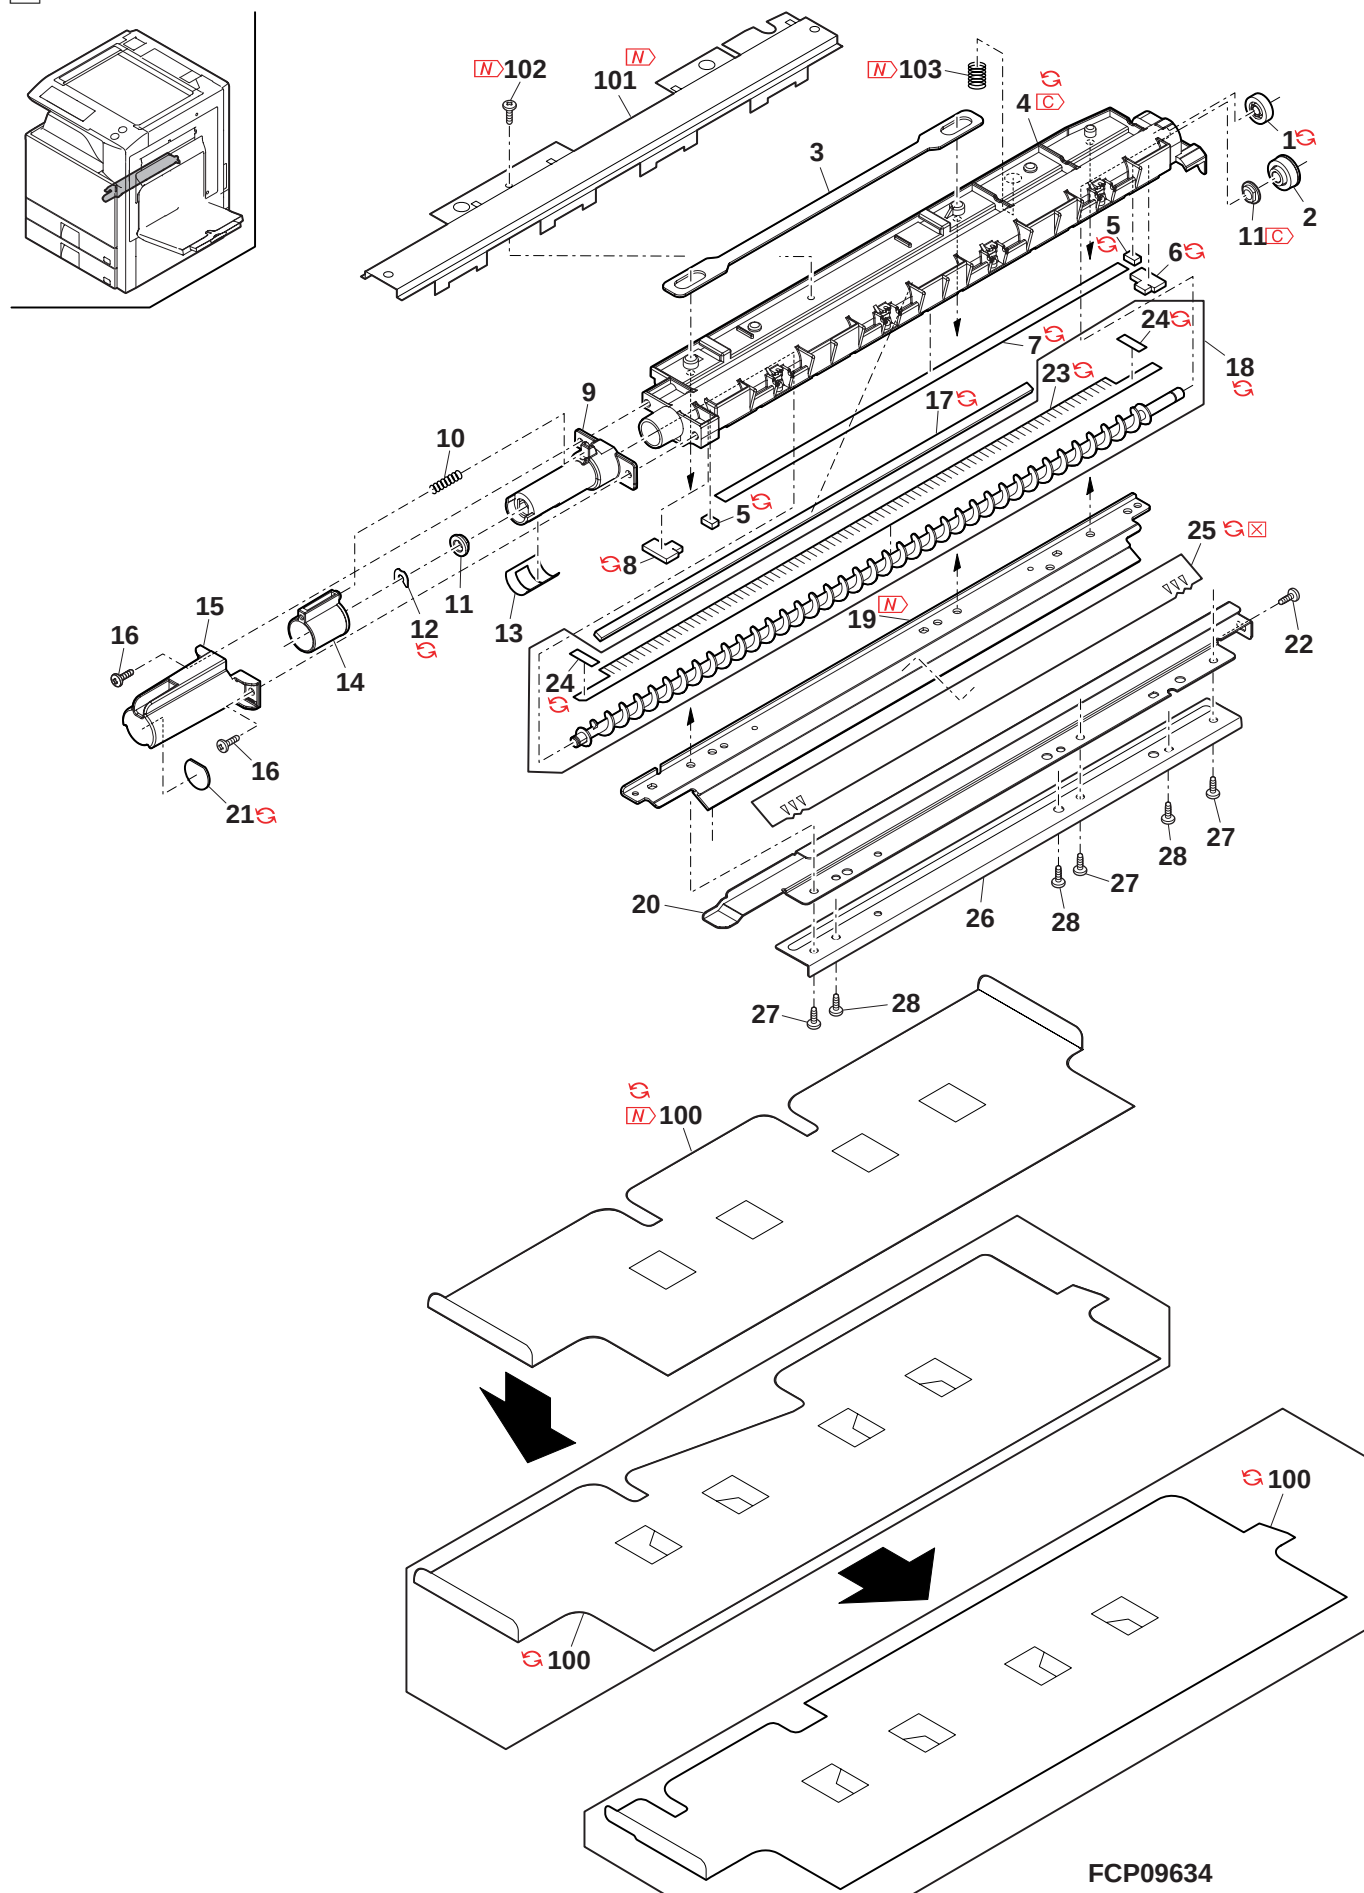


25 1st transfer unit 1

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	CG i DH2142FC02		AN		C	Transfer guide left		
	CG i DH2142FC03	3	AN		C	Transfer guide left	CCE322	06/05 mid
	PG i DH2142FCZ1	3	AN		C	Transfer guide left	CCE376	06/07 mid
2	LX-BZ0858FCZZ		AA		C	MCR fixing screw		
3	NBLTH0434FCZZ		BF		A	Middle transfer belt		
4	LP i NS0155FCZZ		AA		C	Pin(3-10)		
5	XRESP50-06000		AA		C	E ring(E5)		
6	MCAMP0115FCZ1		AC	N	C	Transfer cam R		
7	PG i DM2157FCZ1		AC	N	C	BK link guide		
8	PG i DM2269FCZZ		AC	N	C	BK link guide R		
9	XEBS730P06000		AA		C	Screw(3x6)		
10	NSFTZ2905FCZZ		BQ		C	Transfer cam shaft		
11	MCAMP0111FCZ1		AC	N	C	Transfer cam F		
12	NGERH1632FCZZ		AC		C	Separate coupling gear		
13	CSPRD3367FC01		AG		C	1st transfer print spring K		
14	NBRGP0750FCZZ		AC		C	Transfer cam bearing		
15	NBRGP0674FCZZ		AE		C	Belt idle bearing		
16	LX-BZ1005FCZZ		AC		C	Transfer unit fixing step screw		
17	CFRM-1170FC01		AQ		C	Transfer front frame		
	CFRM-1170FC02	3	AQ		C	Transfer front frame [Form change]		06/02
	CFRM-1170FC03	1	AQ	N	C	Transfer front frame		07/04 R/C
18	XEBS740P08000		AA		C	Screw(4x8)		
19	MCAMP0116FCZZ		AC		C	CRU incorrect insertion prevention cam		
20	MSPRC3363FCZZ		AC		C	Bottle lock lever spring		
21	MLEVP0937FCZZ		AD		C	Lock link lever		
22	MLEVP0966FCZZ		AE		C	Waste toner bottle lock lever		
23	PCOVP1852FCZZ		AT		D	Transfer front cover		
	PCOVP1852FCZ1	1	AT		D	Transfer front cover		07/01
24	TLABH5030FCZZ		AB		D	Color label(Y)		
25	TLABH5029FCZZ		AA		D	Color label(M)		
26	TLABH5028FCZZ		AA		D	Color label(C)		
27	TLABH5027FCZZ		AA		D	Color label(BK)		
28	PMAGT0015FCPZ		AF		C	Magnet catch(10P)		
	PMAGT0146FCZZ	1	AF	N	C	Magnet catch		10/03
29	XRESP40-06000		AA		C	E ring(E4)		
30	LX-BZ1007FCZZ		AD		C	Transfer front cover screw		
31	NBRGP0745FCZZ		AC		C	Follower roller position fixing bearing		
32	XHBS740P08000		AA		C	Screw(4x8)		
33	NBRGP0744FCZZ		AB		C	Insulate bearing		
34	TLABH4993FCZ1		AB		D	Arrow label(Y)		
35	TLABH4994FCZZ		AA		D	Arrow label(M)		
36	TLABH4995FCZZ		AA		D	Arrow label(C)		
37	TLABH4996FCZZ		AA		D	Arrow label(BK)		
38	LX-BZ1033FCZZ		AA		C	Transfer separate screw left		
41	XEBS730P08000		AC		C	Screw(3x8)		
42	MLEVP0964FCZZ		AC		C	Protect lever		
43	LPLTM6568FCZZ		AP		C	Drum positioning plate		
44	NBRGP0755FCZZ		AC		C	Drum positioning bearing		
	NBRGP0755FCZ1	1	AC		C	Drum positioning bearing		08/06 R/C
45	PCOVP1853FCZZ		AQ		C	Drum positioning cover		
	PCOVP1853FCZ1	1	AQ	N	C	Drum positioning cover		07/01 R/C
46	MSPRD3574FCZZ		AB		C	1st transfer print spring KA		
47	LX-BZ0465FCZZ		AA		C	Screw(4x8)		
	LX-BZ0465FCZ1	-	AA		C	Screw(4x8)	CCE399	06/06
48	CPLTM7006FC01		AG		C	CL roller fixing plate R		
	CPLTM7006FC01	-	AG		C	CL roller fixing plate R	CCE399	06/06
49	LANGT1446FCZZ		AN	N	C	CL roller separate angle		
	LANGT1446FCZ1	-	AN		C	CL roller separate angle	CCE399	06/06
50	PSHEZ5515FCZZ		AE	N	C	Toner omission cover sheet		
	PSHEZ5515FCZ1	1	AE		C	Toner omission cover sheet		06/12
51	CPLTM7005FC01		AG		C	CL roller fixing plate F		
	CPLTM7005FC01	-	AG		C	CL roller fixing plate F	CCE399	06/06
52	JKNBZ0152FCZZ		AC	N	C	CL roller separate knob		
	JKNBZ0152FCZ1	-	AC		C	CL roller separate knob	CCE399	06/06
53	MSPRC3601FCZZ		AB	N	C	Transfer CL pressure spring		
	MSPRC3601FCZ2	-	AC		C	Transfer CL pressure spring [Parts code correction]		1st lot
	MSPRC3601FCZ2	-	AC		C	Transfer CL pressure spring	CCE399	06/06
54	MARMP0372FCZZ		AR	N	C	CL roller arm		
	MARMP0372FCZ1	-	AR		C	CL roller arm	CCE399	06/06
55	NBRGC0819FCZZ		AC	N	C	CL roller bearing		
	NBRGC0819FCZ1	-	AC		C	CL roller bearing	CCE399	06/06
56	NROLS1634FCZZ		AX		A	Transfer CL roller		
	NROLS1634FCZ1	-	AX		A	Transfer CL roller	CCE399	06/06
57	LSTPP0279FCZZ		AB		C	Stopper		
	LSTPP0279FCZ1	-	AB		C	Stopper	CCE399	06/06
58	CCOVP1837DS51		AN		E	Paper dust remove unit		
100	PSHEP5633FCZZ		AD		C	Paper dust guide sheet		06/05 R/C
	PSHEP5633FCZ1	1	AD		C	Paper dust guide sheet		06/12 R/C

25 1st transfer unit 1


NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
	(Unit)							
901	DUNT-7445DS11		BZ	N	E	1st transfer unit (Include Block[24]-901,[26],[27])		
	DUNT-7445DS14	3	CE		E	1st transfer unit (Include Block[24]-901,[26],[27])	CCE330	06/05
	DUNT-7445DS16	3	CE		E	1st transfer unit (Include Block[24]-901,[26],[27])	CCE376	06/06 mid
	DUNT-7445DS20	3	CE		E	1st transfer unit (Include Block[24]-901,[26],[27])		07/03 mid
902	CPLTM6568DS1		AZ		E	Drum positioning unit		

25 1st transfer unit 1

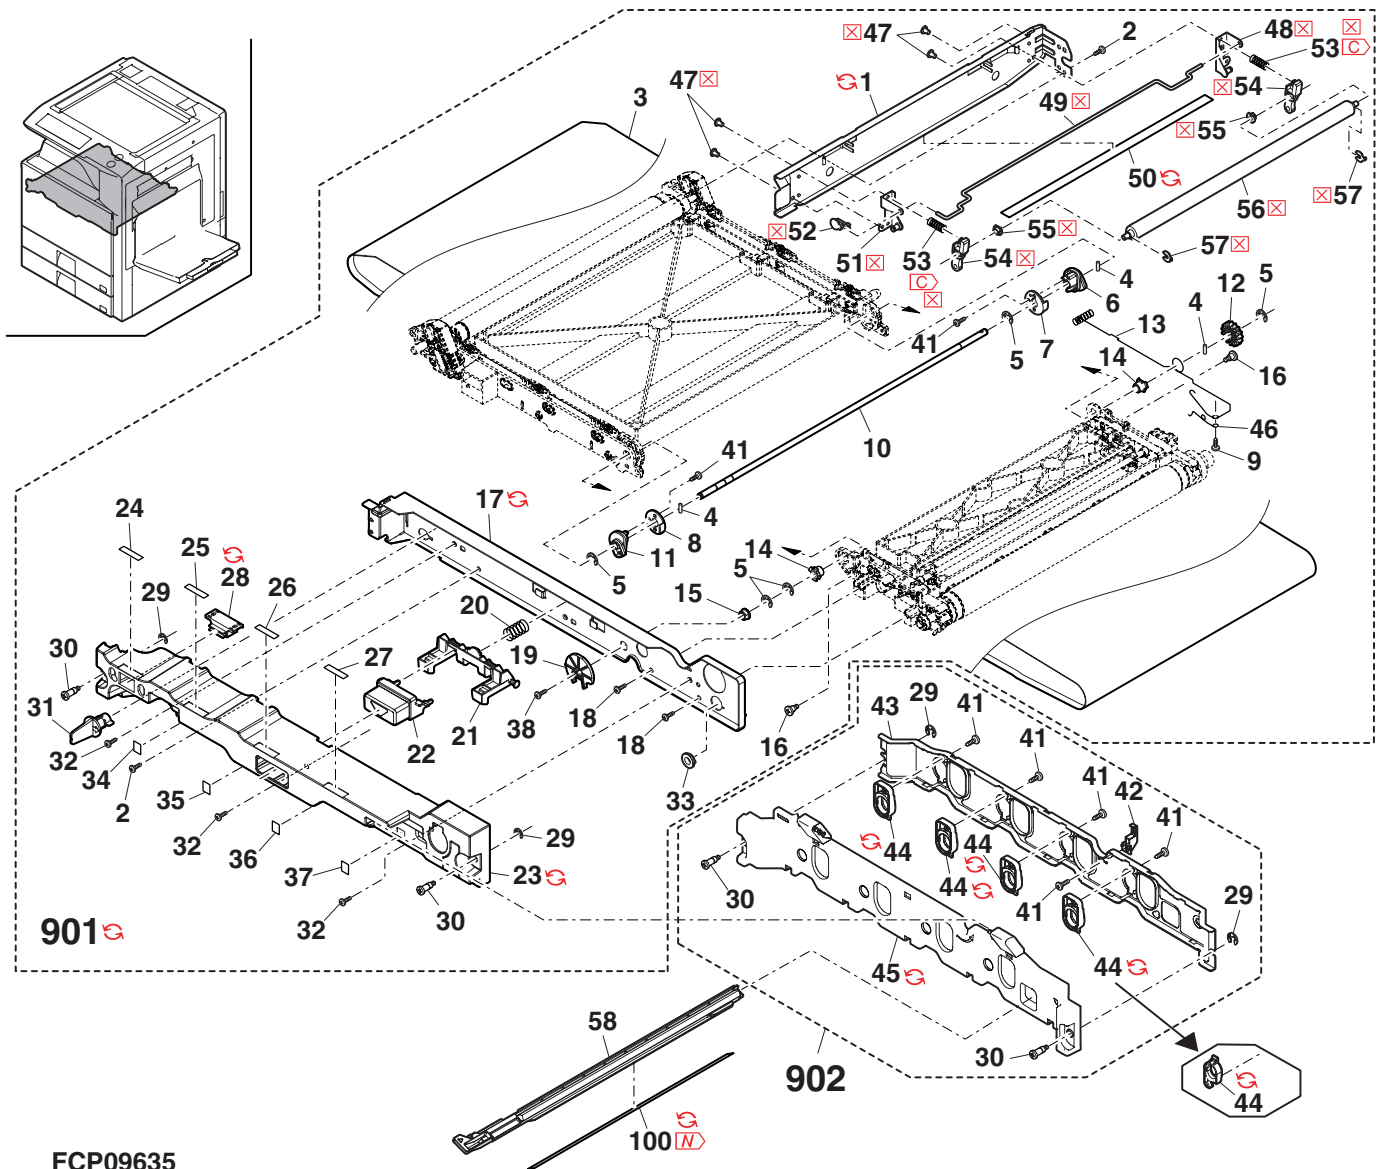

- 37 -


26 1st transfer unit 2

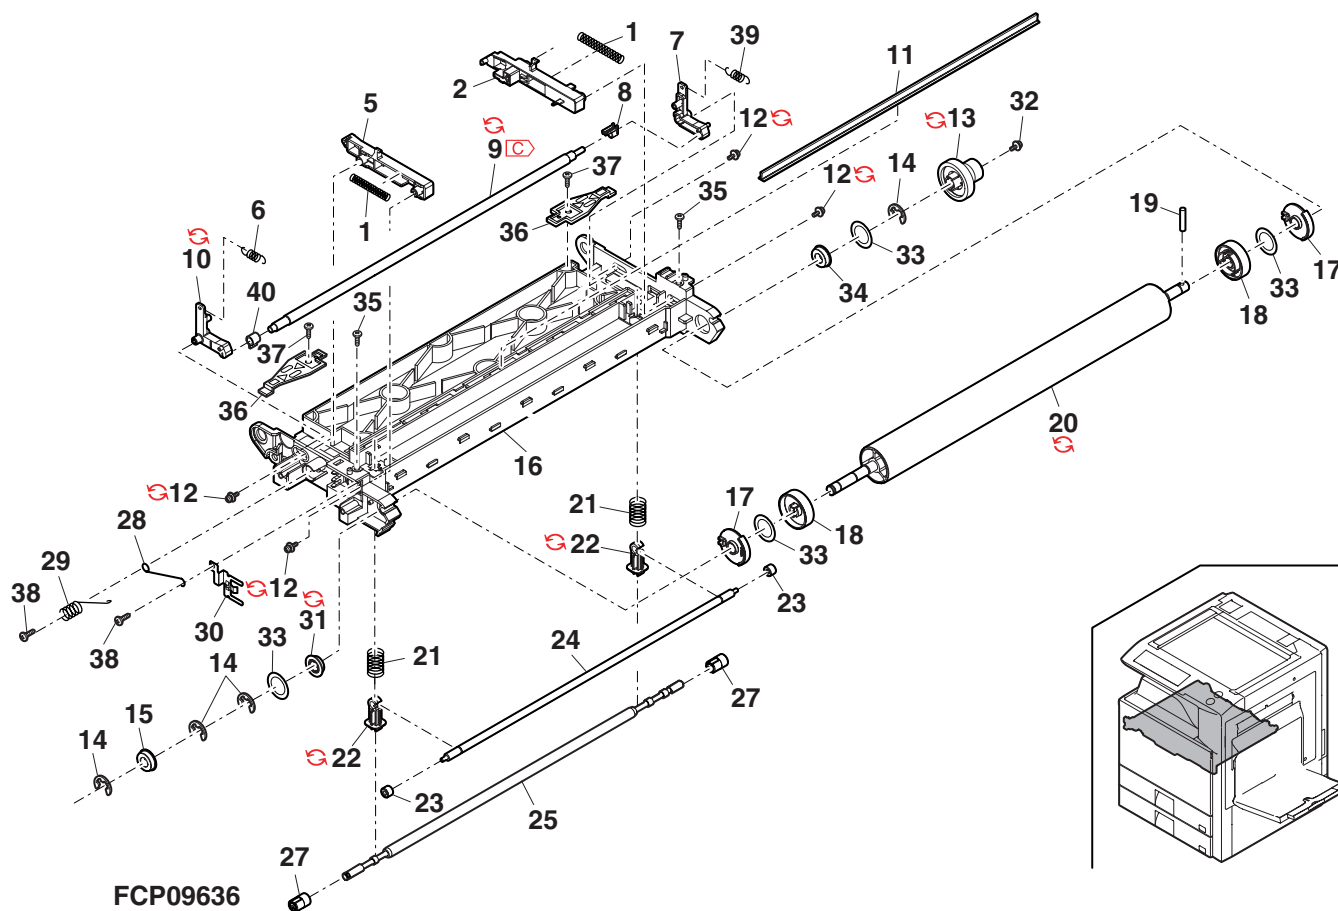

27 1st transfer unit 3

[illegible]

27 1st transfer unit 3

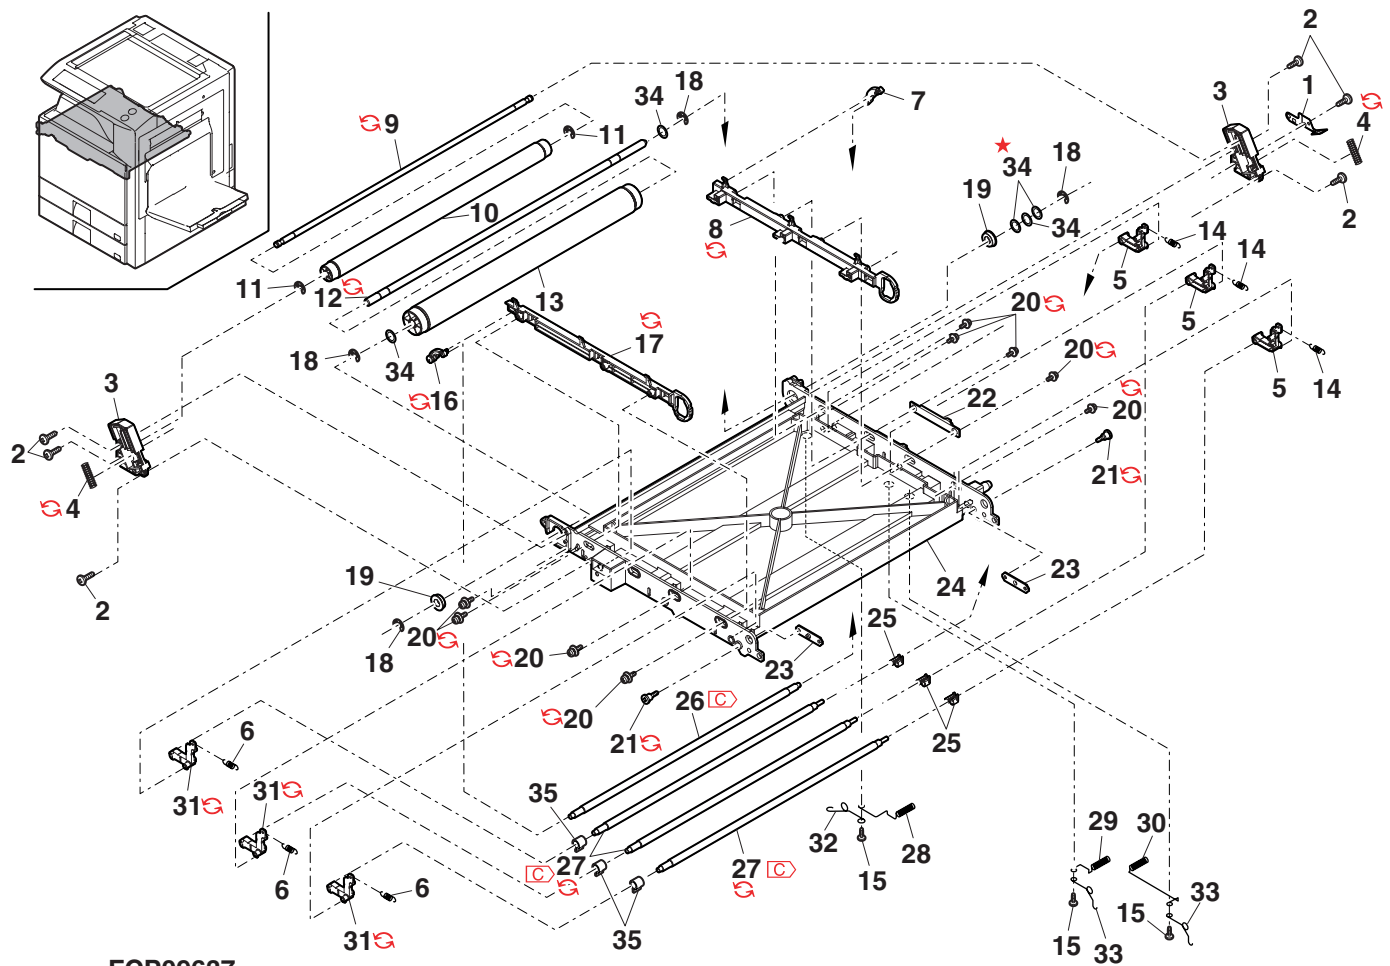


FCP09637

28 2nd transfer unit 1

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
3	XEBS740P08000		AA		C	Screw(4x8)		
4	CPLTM6624FC03		AG		C	2nd drive plate		
5	PCLR-0522FCZZ		AC		C	2nd belt drive roller coupling		
6	NGERH1686FCZZ		AR		A	2nd drive idle gear		
7	XRESP30-06000		AA		C	E ring(E3)		
8	NBLTH0463FCZZ		AD		B	2nd drive pulley belt		
9	NPLYZ0459FCZZ		AR		C	2nd drive pulley		
10	LPINS0155FCZZ		AA		C	Pin(3-10)		
14	LX-BZ0980FCPZ		AA		C	Blue screw(3x12)		
15	LFRM-1196FCZ1		AP		C	2nd belt reinforce frame		
16	QEARP0208FCZZ		AD		C	2nd earth terminal		
17	XEBS730P08000		AC		C	Screw(3x8)		
18	DUNTK7693FCPZ		AH	N	E	Resistor unit transfer		
20	PGIDH2272FCZZ		AP	N	C	Transfer front PG GiD		
	PGIDH2272FCZ1	1	AN	N	C	Transfer front PG GiD		07/04 R/C
21	LX-WZ2011SCZZ		AA		C	Poly slider		
	LX-WZ0473FCZZ	1	AA		C	Poly slider		08/03
	LX-WZ0328FCZZ	3	AA		C	Poly slider	CCE804	10/07
22	NBRGP0674FCZZ		AE		C	Belt idle bearing		
	NBRGP0674FCZZ	-	AE		C	Belt idle bearing	CCE563	1st lot
23	XRESP50-06000		AA		C	E ring(E5)		
(Unit)								
901	DUNT-7467DSZZ		BR	N	E	2nd transfer unit (Include Block [29])		
	DUNT-7467DS12	-	BR		E	2nd transfer unit [Parts code correction](Include Block [29])		1st lot
	DUNT-7467DS15	3	BR		E	2nd transfer unit (Include Block [29])	CCE583R	08/05 mid
	DUNT-7467DS19	3	BR		E	2nd transfer unit [Productivity improvement](Include Block [29])	CCE794	10/06 mid


28 2nd transfer unit 1

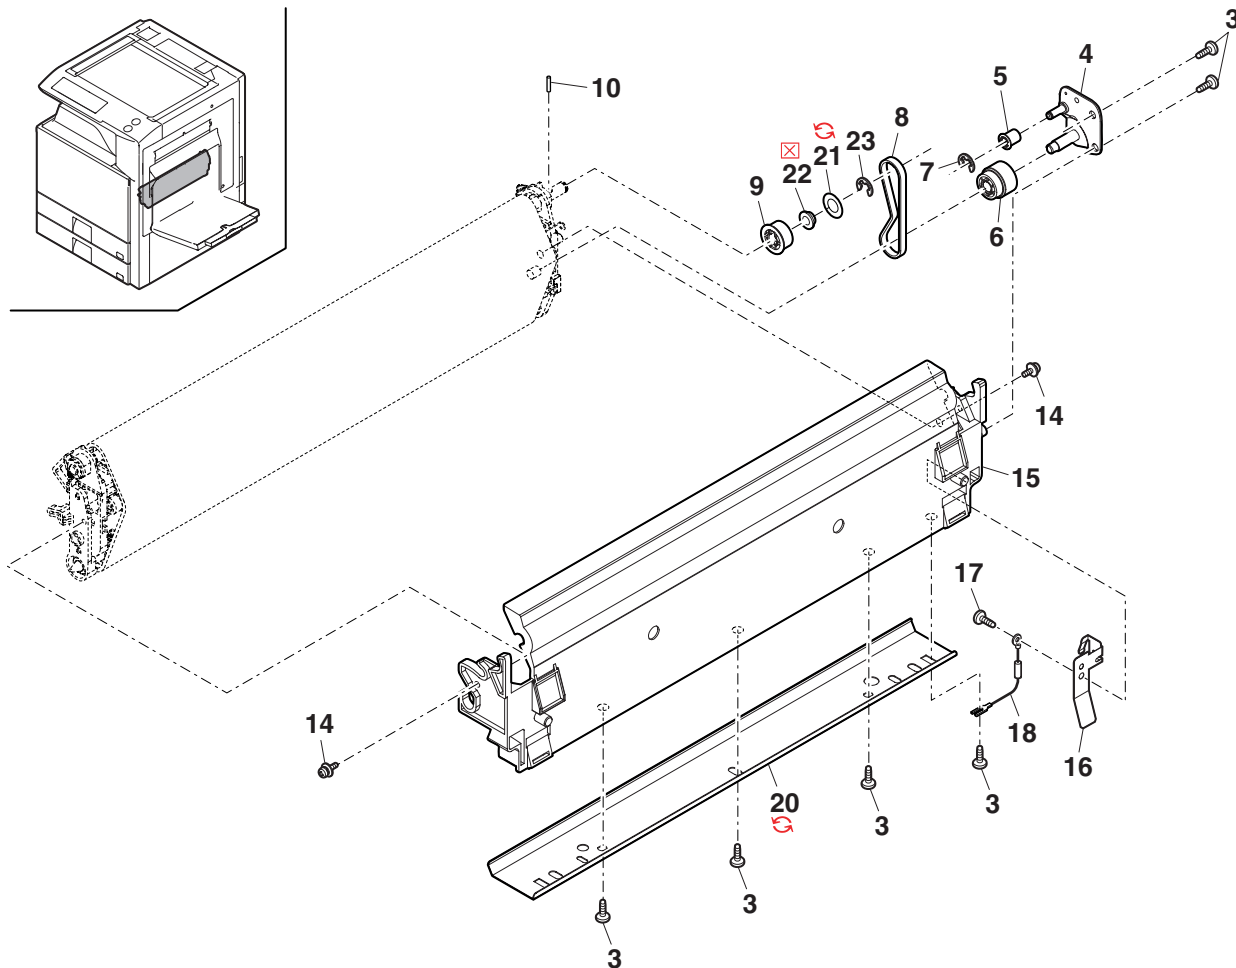

FCP09638

- 41-1 -


29 2nd transfer unit 2

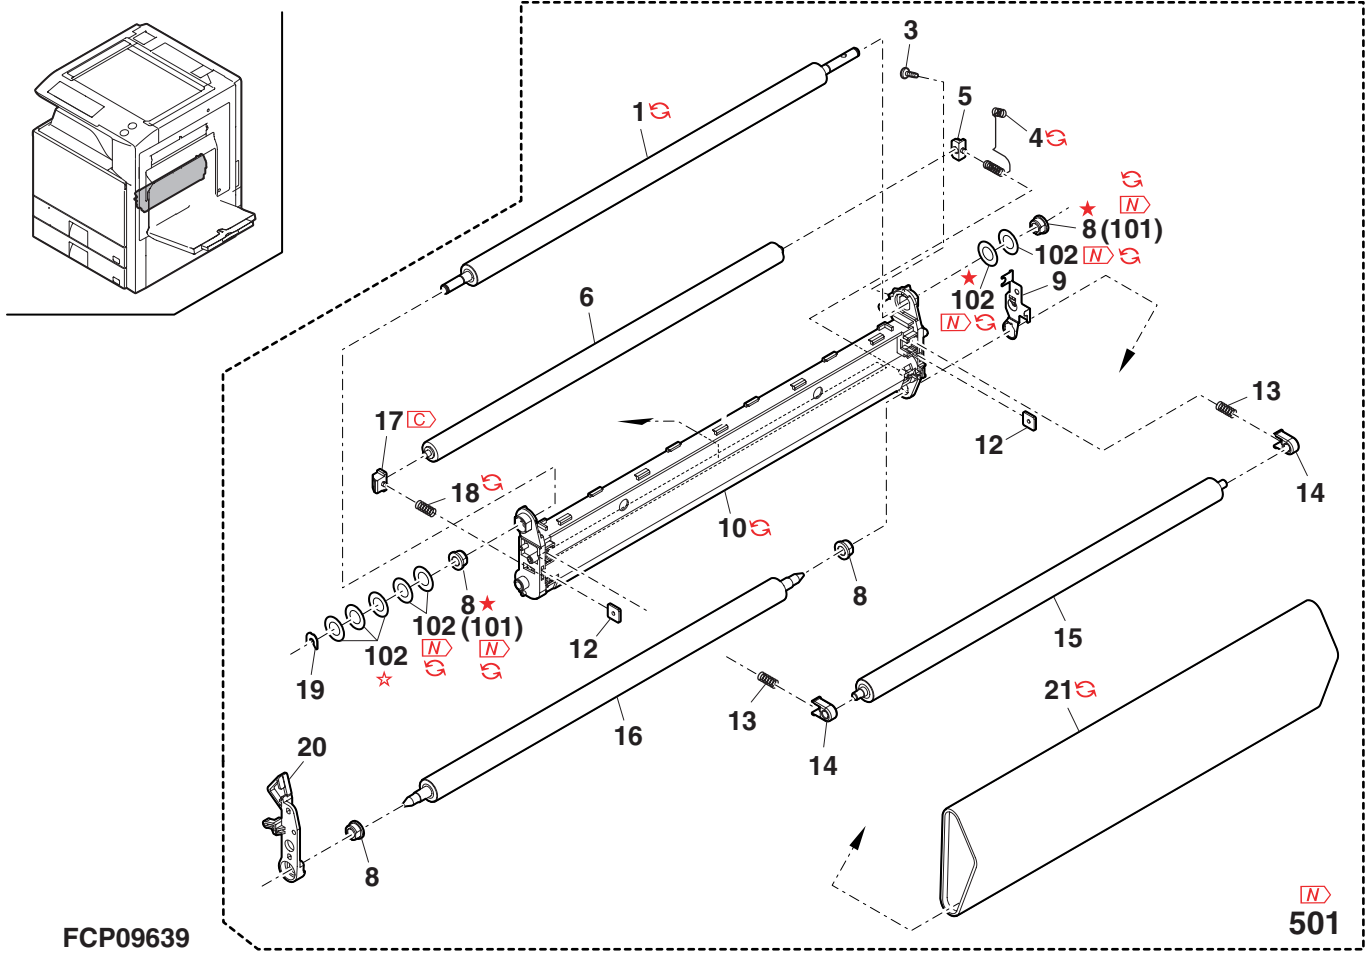

30 Fusing unit 1

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	LX-BZ0064QSZZ		AA		C	Screw(3x8)		
★	LX-BZ0064QSZZ	-	AA		C	Screw(3x8) [To No.100]		1st lot
2	LX-BZ0067QSPZ		AB		C	Screw(4x8)		
3	LX-BZ0736FCPZ		AC		C	Step screw		
4	PFLT-0069FCZZ		AC	N	D	Fusing protect felt R1		
5	XEPS840P08X00		AC		C	Screw(4x8)		
6	MLEVP1005FCZZ		AD	N	C	Fusing lock lever		
↻	MLEVP1005FCZ1	3	AD		C	Fusing lock lever [Productivity improvement]		07/11 R/C
7	NGERH1683FCZZ		AC		C	Idle gear(29T)		
8	JKNBZ0151FCZZ		AN	N	C	Fusing knob		
9	CPLTM6679FC01		AF	N	B	Gear drive plate		
10	LX-BZ0882FCPZ		AD		C	Step screw		
↻	LX-BZ1130FCPZ	1	AD	N	C	Step screw		07/03 R/C
12	PCOVP1924FCZ1		AL	N	D	Fusing top cover F		
↻	PCOVP1924FCZ2	3	AL		D	Fusing top cover F [Productivity improvement]		07/11 R/C
↻	PCOVP1924FCZ3	1	AL		D	Fusing top cover F		08/05 mid
14	PFLT-0068FCZZ		AD	N	D	Fusing protect felt F		
15	PFLT-0072FCZZ		AC	N	D	Fusing lock lever felt		
	PCOVP1925FCZZ		AH	N	D	Fusing top cover R		
17	PCOVP1925FCZ1	3	AH		D	Fusing top cover R [Productivity improvement]		07/03
↻	PCOVP1925FCZ2	3	AH		D	Fusing top cover R [Productivity improvement]		07/11 R/C
18	XHBS730P06000		AC		C	Screw(3x6)		
↻	XHBS730P06000	1	AC		C	Screw(3x6)		07/01 R/C
100	LX-BZ1082FCZZ	-	AB		C	Screw(3x8) [From No.1]		1st lot
	(Unit)							
901	DUNTW7511DS13		CH	N	E	Fusing unit (Japan)(Include Block [31],[32],[33])		
	DUNTW7511DS14		CH	N	E	Fusing unit (120V)(Include Block [31],[32],[33])		
↻	DUNTW7511DS16	3	CL		E	Fusing unit (120V)(Include Block [31],[32],[33])	CCE406	-
↻	DUNTW7511DS17	1	CH		E	Fusing unit (Soudi Arabia)(Include Block [31],[32],[33])	CCE450	07/02
	DUNTW7511DS15		CH	N	E	Fusing unit (230V)(Include Block [31],[32],[33])		

30 Fusing unit 1

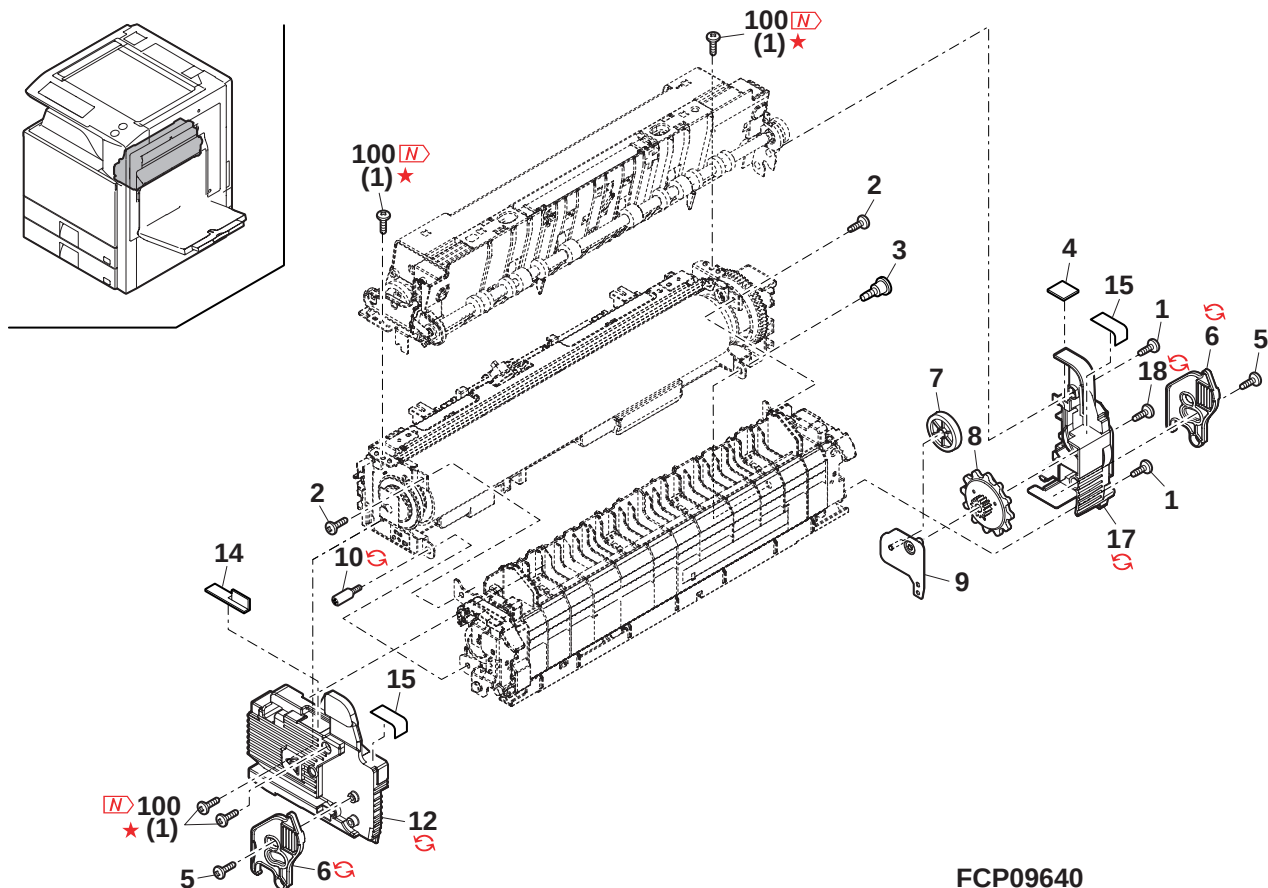


31 Fusing unit 2

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	DHA i-3792FCZ2		AX		C	Fusing top harness (Japan)		
	DHA i-3798FCZ1		AX		C	Fusing top harness (120V)		
	DHA i-3798FCZ2	1	AX		C	Fusing top harness (120V)		07/04
	DHA i-4234FCPZ	3	AX		C	Fusing top harness [Deleted unused connector](120V)		07/12
	DHA i-3799FCZ1		AX		C	Fusing top harness (230V)		
	DHA i-3799FCZ2	1	AX		C	Fusing top harness (230V)		07/04
2	DHA i-4235FCPZ	3	AX		C	Fusing top harness [Deleted unused connector](230V)		07/12
	LX-BZ0905FCPZ		AB		C	Screw(3x12)		
3	LX-BZ1151FCPZ	1	AB		C	Screw(3x12)		07/01 R/C
	PCOVP2023FCZZ		AD	N	D	Thermistor cover		
5	LX-BZ3006SCPS		AA		C	Screw(3x6)		
	PSHEZ5493FCZZ		AG	N	C	Fusing top cover		
6	PSHEZ5493FCZ1	1	AG		C	Fusing top cover		08/09 R/C
	PSHEZ5493FCZ2	1	AG	N	C	Fusing top cover		10/02 R/C
8	XEBS730P10000		AC		C	Screw(3x10)		
	XEBS730P10000	-	AC		C	Screw(3x10)	CCE350	06/08
	XEBS730P10000	-	AC		C	Screw(3x10)		07/12
10	DHA i-3793FCZ1		AF		C	Web end harness		
	LPLTM6684FCZZ		AC	N	C	End detect plate B		
11	LPLTM6684FCZZ	-	AC		C	End detect plate B	CCE350	06/08
	LPLTM6684FCZZ	-	AC		C	End detect plate B		07/12
13	DHA i-3816FCZ2		AE		C	Web init harness		
	DHA i-3816FCZ2	-	AE		C	Web init harness		07/12
15	RDTCT0171FCZZ		AZ	N	B	Un-contacting thermistor		
	DHA i-3702FCZ2		AC		C	TS-HL harness main		
17	DHA i-3702FCZ3	1	AC	N	C	TS-HL harness main	CCE728	09/10 R/C
	XHBS730P04000		AA		C	Screw(3x4)		
18	XBBS730P04000	-	AA		C	Screw(3x4) [Parts code correction]		1st lot
	XBPS730P04000	1	AA		C	Screw(3x4)		07/12 mid
19	XWHS730-05080		AA		C	Washer(M3)		
	XWHS730-05080	-	AA		C	Washer(M3) [Fixing position change]	CCE407	06/11
20	RTHM-0022FCZZ		AN		B	Thermostat (Japan)		
	CTHM-0011FC01		AK		B	Thermostat (Except Japan)		
21	CTHM-0011FC01	-	AK		B	Thermostat [to No.104](Except Japan)	CCE567	08/03
	LPLTM6755FCZZ		AB	N	C	Sub lamp fixing plate		
23	LX-BZ1030FCZZ		AB		C	Thermistor screw		
	XBPS730P10KS0	-	AB		C	Screw(3x10KS) [Parts code correction]		1st lot
24	RDTCT0176FCZZ		AP	N	B	Thermistor lower		
	RDTCT0198FCZZ	3	AP		B	Thermistor lower [Improve performance]	CCE472	07/05
25	RDTCT0176FCZZ	-	AP		B	Thermistor lower [to No.101]	CCE472	07/05
	LX-BZ0064QSZZ		AA		C	Screw(3x8)		
26	LX-BZ1082FCZZ	-	AB		C	Screw(3x8) [Parts code correction]		1st lot
	NBRGP0774FCZ1		AE	N	C	Sub heat roller bearing		
27	LPLTM6754FCZ1		AL	N	C	Sub heat roller fixing plate		
	LPLTM6754FCZ2	-	AL		C	Sub heat roller fixing plate [Parts code correction]		1st lot
28	LPLTM6754FCZ3	3	AL		C	Sub heat roller fixing plate [Productivity improvement]		07/02
	LX-BZ1058FCZZ		AE		C	Screw(3x8)		
29	LX-BZ1081FCZZ	-	AB		C	Screw(3x4) [Parts code correction]		1st lot
	DHA i-3815FCZ1		AC		C	TS-HL harness sub		
30	PFLT-0070FCZZ		AC	N	D	Fusing protect felt R2		
	NROL i1584FCZ1		BB	N	C	Sub heat roller		
31	RLMPU0715FCZZ		AZ	N	B	Heater lamp sub (Japan)		
	RLMPU0720FCZZ		AY	N	B	Heater lamp sub (120V)		
32	RLMPU0720FCP1	3	AY		B	Heater lamp sub [Unleaded correspondence](120V)		06/07
	RLMPU0717FCZZ		AZ	N	B	Heater lamp sub (230V)		
33	RLMPU0717FCP1	3	AZ		B	Heater lamp sub [Unleaded correspondence](230V)		06/07
	CFRM-1204FC01		AR	N	D	Fusing top stay frame		
34	CFRM-1204FC02	-	AR		D	Fusing top stay frame [Parts code correction]		1st lot
	CFRM-1204FC03	3	AR		D	Fusing top stay frame [Productivity improvement]		07/02
35	CFRM-1204FC04	1	AS		D	Fusing top stay frame		-
	CFRM-1204FC05	3	AS		D	Fusing top stay frame	CCE550	08/01
36	MSPRC3506FCZZ		AB	N	C	Sub heat roller spring		
	MSPRC3059FCZZ		AC		C	Heat roller fixing spring		
37	MSPRC3059FCZ1	1	AC	N	C	Heat roller fixing spring		10/09 R/C
	XHBS730P06000		AC		C	Screw(3x6)		
38	XHBS730P06000	-	AC		C	Screw(3x6) [To No.52]		1st lot
	MSPRC3456FCZZ		AB		C	Earth spring		
39	LSTPF0172FCZZ		AA		C	Roller stopper		
	NGERH1708FCZZ		AN	N	C	Fusing gear(60T)		
40	NGERH1708FCZ1	3	AN		C	Fusing gear(60T)	CCE446	07/01 mid
	NBRGY0761FCZZ		AQ		C	Top heat roller bearing		
41	NROL i1572FCZZ		BQ	N	C	Top heat roller		
	NROL i1572FCZ1	-	BQ		C	Top heat roller [Parts code correction]		1st lot
42	NROL i1572FCZ2	3	BQ		C	Top heat roller	CCE402	06/10 mid
	RLMPU0714FCPZ		AY	N	B	Heater lamp main (Japan)		
43	RLMPU0719FCPZ		AZ	N	B	Heater lamp main (120V)		
	RLMPU0716FCPZ		AY	N	B	Heater lamp main (230V)		
44	LHLDZ1706FCZ1		AC	N	C	Top lamp holder F		
	LX-BZ0046QSPZ		AA		C	Screw(3x6)		
45	LX-BZ1066FCZZ	-	AC		C	Screw(3x6) [Parts code correction]		1st lot

31 Fusing unit 2

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
47	PCOVP1926FCZ1		AS	N	D	Fusing paper feed cover		
48	PCOVP1926FCZ2	1	AU		D	Fusing paper feed cover		-
49	QSLP-0207FCZZ		AC		C	Lamp electrode B		
49	QSLP-0206FCZZ		AD		C	Lamp electrode A		
50	QEARP0215FCZZ		AC	N	C	Earth plate		
51	LX-WZ0044FCZZ		AA		C	Push nut		
52	XBBS730P06000		AC		C	Screw(3×6)		
	★ XBBS730P06000	-	AC		C	Screw(3×6) [From No.36]		1st lot
	★ XBBS730P06000	-	AC		C	Screw(3×6)	CCE350	06/08
	★ XBBS730P06000	-	AC		C	Screw(3×6)		07/12
53	XHBS730P12000		AA		C	Screw(3×12)		
	Ⓢ XBBS730P12000	-	AA		C	Screw(3×12) [Parts code correction]		1st lot
54	LRTNP0015FCPZ		AD		C	Retainer(RWZS-09-P-R)		
55	LRTNP0016FCPZ		AD		C	Retainer(RWZS-10-P-E)		
100	Ⓢ PBRSS0242FCZZ	-	AC		B	Fusing discharge brush upper		1st lot
101	Ⓢ RDTCT0199FCZZ	1	AP		B	Thermistor lower [from No.24]	CCE472	07/05
	Ⓢ LX-WZ0475FCZZ	3	AC		C	HR spacer	CCE531	07/10 mid
102	★ LX-WZ0475FCZZ	3	AC		C	HR spacer	CCE628	08/12 mid
103	Ⓢ LX-WZ0477FCZZ	3	AA		C	Spacer	CCE550	08/01
104	Ⓢ RTHM-0040FCZZ	-	AM		B	Thermostat [from No.20](Except Japan)	CCE567	08/03
105	Ⓢ LX-WZ0479FCZZ	3	AD		C	Undulate washer	CCE628	08/12 mid
501	Ⓢ CROL11572DS55	3	BT		E	Top heat roller unit	CCE628	08/12 mid
901	(Unit)							
	DUNTW7511DS13		CH	N	E	Fusing unit (Japan)(Include Block [30],[32],[33])		
	DUNTW7511DS14		CH	N	E	Fusing unit (120V)(Include Block [30],[32],[33])		
	Ⓢ DUNTW7511DS16	3	CL		E	Fusing unit (120V)(Include Block [30],[32],[33])	CCE406	-
	Ⓢ DUNTW7511DS17	1	CH		E	Fusing unit (Soudi Arabia)(Include Block [30],[32],[33])	CCE450	07/02
	DUNTW7511DS15		CH	N	E	Fusing unit (230V)(Include Block [30],[32],[33])		

31 Fusing unit 2

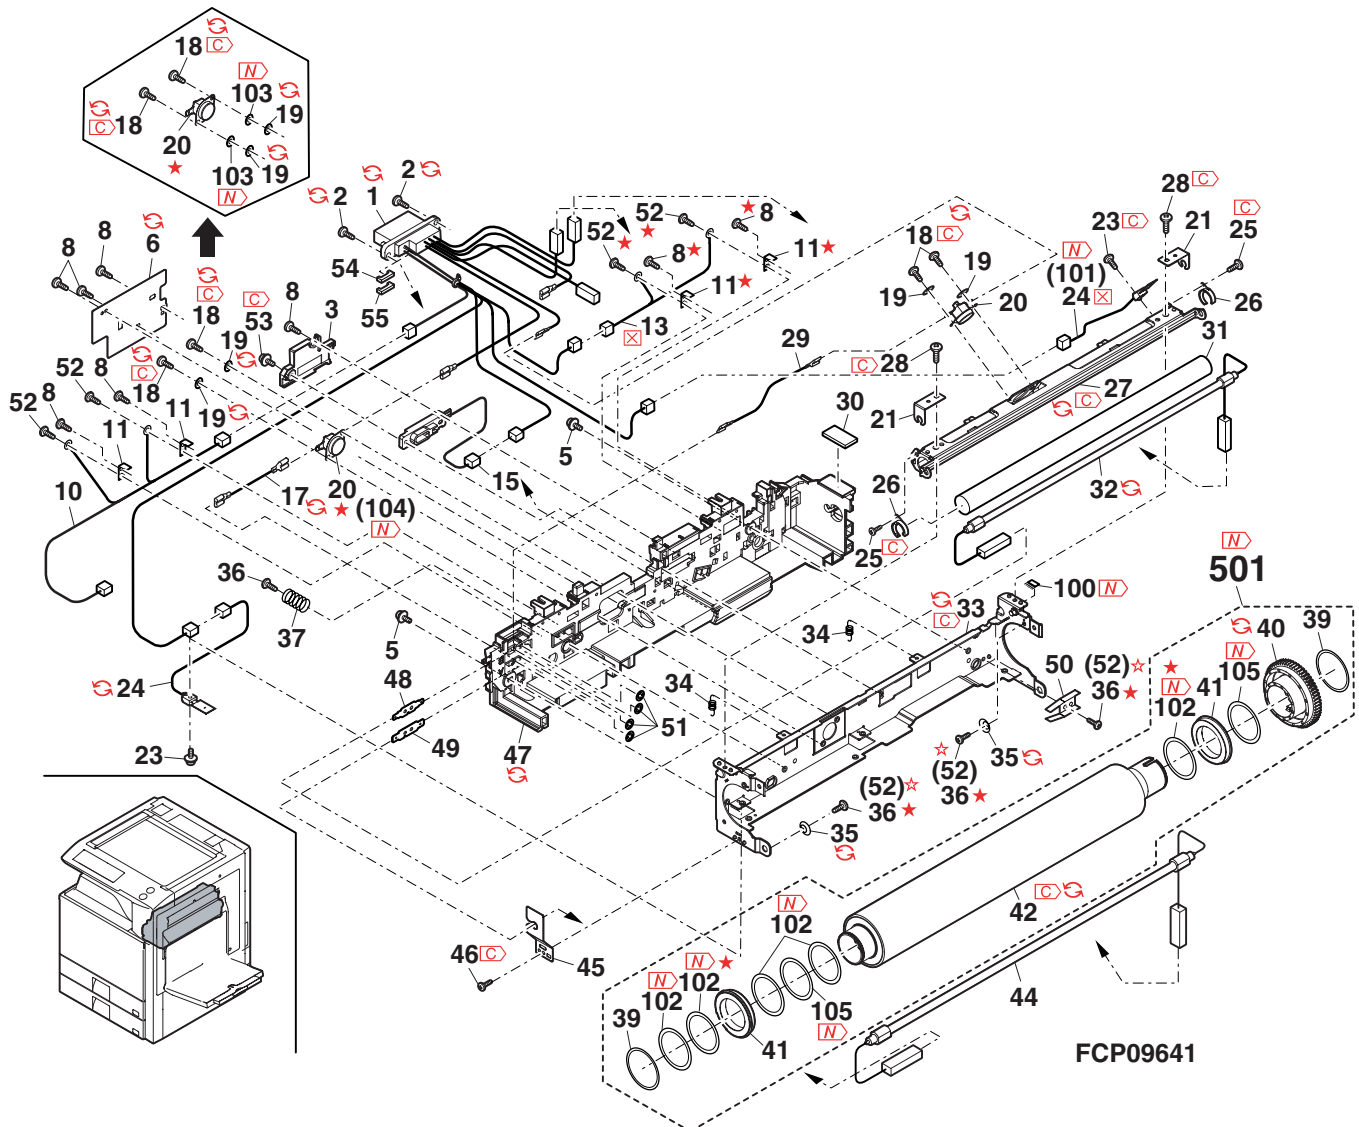


32 Fusing unit 3

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	LX-BZ0046QSPZ		AA		C	Screw(3x6)		
2	LHLDZ1662FCZZ		AB		C	Lower lamp holder		
2	LHLDZ1662FCZ1	1	AB	N	C	Lower lamp holder		09/04 mid
3	XRESP70-08000		AA		C	E ring(7E)		
4	MSPRC3496FCZZ		AD		C	Pressure spring		
4	MSPRC3496FCZ1	-	AD		C	Pressure spring [Parts code correction]		1st lot
5	CLEVF0998FC01		AG	N	C	Pressure lever R		
5	CLEVF0998FC02	3	AG		C	Pressure lever R	CCE365	06/09
5	CLEVF0998FC03	3	AG		C	Pressure lever R [Productivity improvement]		07/02
6	MLEVP1004FCZ1		AD	N	C	Release lever R		
6	MLEVP1004FCZ2	3	AD		C	Release lever R	CCE327	06/04 mid
6	MLEVP1004FCZ3	3	AD	N	C	Release lever R [Level up]		07/03
7	XBBS730P06000		AC		C	Screw(3x6)		
8	CFRM-1205FC01		AK	N	D	Lower frame R		
8	CFRM-1205FC02	3	AK		D	Lower frame R [Productivity improvement]		07/02
10	MSPRD3058FCZZ		AC		C	Roller stopper 20		
10	PRNGP0138FCZZ	3	AF		C	Lower heat roller C ring [Productivity improvement]	CCE528	07/12
11	NBRGY0762FCZZ		AN		C	Lower heat roller bearing		
11	NBRGY0838FCZZ	3	AS		C	Lower heat roller bearing [Level up]	CCE388	06/10
12	RLMPU0713FCZZ		AZ	N	B	Lower heater lamp (Japan)		
12	RLMPU0721FCZZ		AY	N	B	Lower heater lamp (120V)		
12	RLMPU0721FCPZ	3	AY		B	Lower heater lamp [Unleaded correspondence](120V)		06/07
12	RLMPU0718FCZZ		AY	N	B	Lower heater lamp (230V)		
12	RLMPU0718FCPZ	3	AY		B	Lower heater lamp [Unleaded correspondence](230V)		06/07
13	NROL11571FCZ1		BP	N	C	Lower heat roller		
13	NROL11571FCZ3	1	BQ		C	Lower heat roller	CCE388	06/10
13	NROL11718FCZZ	3	BQ		C	Lower heat roller	CCE402	06/10 mid
14	LX-BZ0026GCZ1		AC		C	Screw		
14	XHBS730P04000	-	AA		C	Screw(3x6) [Parts code correction]		1st lot
15	PCOVP2004FCZ1		AP		D	Paper feed PG cover		
15	PGiDH2181FCZ2	-	AN		D	Paper feed PG cover [Parts code correction]		1st lot
16	PGiDH2181FCZ1		AL	N	C	Paper feed paper guide		
17	LX-BZ1031FCZZ		AB		C	Paper feed paper guide screw		
17	LX-BZ1066FCZZ	-	AC		C	Screw(3x6) [Parts code correction]		1st lot
18	LSTYM0368FCZZ		AL	N	C	Fusing lower stay		
18	LSTYM0368FCZ1	-	AL		C	Fusing lower stay [Parts code correction]		1st lot
18	LSTYM0368FCT2	3	AL		C	Fusing lower stay [Productivity improvement]		07/02
19	RTHM-0021FCZZ		AN		B	Thermostat(L150)		
19	RTHM-0021FCPZ	3	AN		B	Thermostat(L150) [Unleaded solder correspondence]		06/02
19	RTHM-0028FCZZ	3	AL		B	Thermostat	CCE579	08/05 mid
20	XBBS730P04000		AA		C	Screw(3x4)		
20	XBPS730P04000	1	AA		C	Screw(3x4)		07/12 mid
21	XWHS730-05080		AA		C	Washer(M3)		
21	XWHS730-05080	-	AA		C	Washer(M3) [Fixing position change]	CCE407	06/11
23	DHAI-3839FCZZ		AD		C	TL-HL low harness (Japan)		
23	DHAI-3840FCZZ		AD		C	TL-HL low harness (120V)		
23	DHAI-3841FCZZ		AD		C	TL-HL low harness (230V)		
24	LHLDZ1697FCZ1		AL	N	D	Fusing lower harness holder		
25	PCOVP1927FCZ1		AM	N	D	Fusing lower cover		
26	LX-BZ0064QSZZ		AA		C	Screw(3x8)		
26	LX-BZ1082FCZZ	-	AB		C	Screw(3x8) [Parts code correction]		1st lot
27	PGiDM2192FCZ1		BF	N	C	Fusing rear lower paper guide		
27	PGiDM2192FCZ2	-	BF		C	Fusing rear lower paper guide [Parts code correction]		1st lot
27	PGiDM2192FCZ3	1	BF		C	Fusing rear lower paper guide		08/01 mid
28	CFRM-1206FC01		AL	N	D	Lower frame F		
28	CFRM-1206FC02	3	AL		D	Lower frame F [Productivity improvement]		07/02
29	MLEVP1003FCZ1		AD	N	C	Release lever F		
29	MLEVP1003FCZ2	3	AD		C	Release lever F	CCE327	06/04 mid
29	MLEVP1003FCZ3	3	AD	N	C	Release lever F [Level up]		07/03
30	CLEVF0997FC01		AG	N	C	Pressure lever F		
30	CLEVF0997FC02	3	AG		C	Pressure lever F	CCE365	06/09
30	CLEVF0997FC03	3	AG		C	Pressure lever F [Productivity improvement]		07/02
31	MSPRC3059FCZZ		AC		C	Heat roller fixing spring		
31	MSPRC3059FCZ1	1	AC	N	C	Heat roller fixing spring		10/09 R/C
32	XHBS730P06000		AC		C	Screw(3x6)		
33	XRESP50-06000		AA		C	E ring(5E)		
34	TLABH0289QSZZ		AA		D	Fusing green label		
35	TLABH0308QSZZ		AF		D	High temperature label		
36	LX-BZ3006SCPS		AA		C	Screw(3x6)		
36	XBBS730P06000	-	AC		C	Screw(3x6) [Parts code correction]		1st lot
37	RDTCT0176FCZZ		AP	N	B	Thermistor lower		
37	RDTCT0198FCZZ	3	AP		B	Thermistor lower [Improve performance]	CCE472	07/05
38	LX-BZ1030FCZZ		AB		C	Thermistor screw		
38	XBPS730P10KS0	-	AB		C	Thermistor screw [Parts code correction]		1st lot
39	LPLTM6990FCZZ		AH	N	C	Lower frame reinforce plate		
39	LPLTM6990FCT1	3	AH		C	Lower frame reinforce plate [Productivity improvement]		07/02
40	PBRSS0240FCZZ		AG		B	Discharger brush		
41	XHBS730P08000		AB		C	Screw(3x8)		
43	PTME-0313FCZZ		AK	N	C	Separate pawl lower		
44	MSPRD3458FCZ1		AC	N	C	Separate pawl lower spring		

32 Fusing unit 3

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
100	PBRSS0241FCZZ	-	AC		B	Fusing discharge brush N		1st lot
101	LHLDZ1887FCZZ	-	AD		C	Fusing lower harness holder R	CCE365	06/09
102	LHLDZ1886FCZZ	-	AD		C	Fusing lower harness holder F	CCE365	06/09
103	XHBS730P06000	-	AC		C	Screw(3x6)	CCE365	06/09
501	CGIDM2192DS52		AX	N	E	Fusing lower PG unit		
502	CROLi1571DS52		BQ	N	E	Lower heat roller unit		
	CROLi1571DS53	1	BR	N	E	Lower heat roller unit	CCE388	06/10
	CROLi1718DS51	3	BR		E	Lower heat roller unit	CCE402	06/10 mid
	CROLi1718DS52	3	BT		E	Lower heat roller unit [Productivity improvement]	CCE528	07/12
	(Unit)							
901	DUNTW7511DS13		CH	N	E	Fusing unit (Japan)(Include Block [30],[31],[33])		
	DUNTW7511DS14		CH	N	E	Fusing unit (120V)(Include Block [30],[31],[33])		
	DUNTW7511DS16	3	CL		E	Fusing unit (120V)(Include Block [30],[31],[33])	CCE406	-
	DUNTW7511DS17	1	CH		E	Fusing unit (Saudi Arabia)(Include Block [30],[31],[33])	CCE450	07/02
	DUNTW7511DS15		CH	N	E	Fusing unit (230V)(Include Block [30],[31],[33])		

32 Fusing unit 3

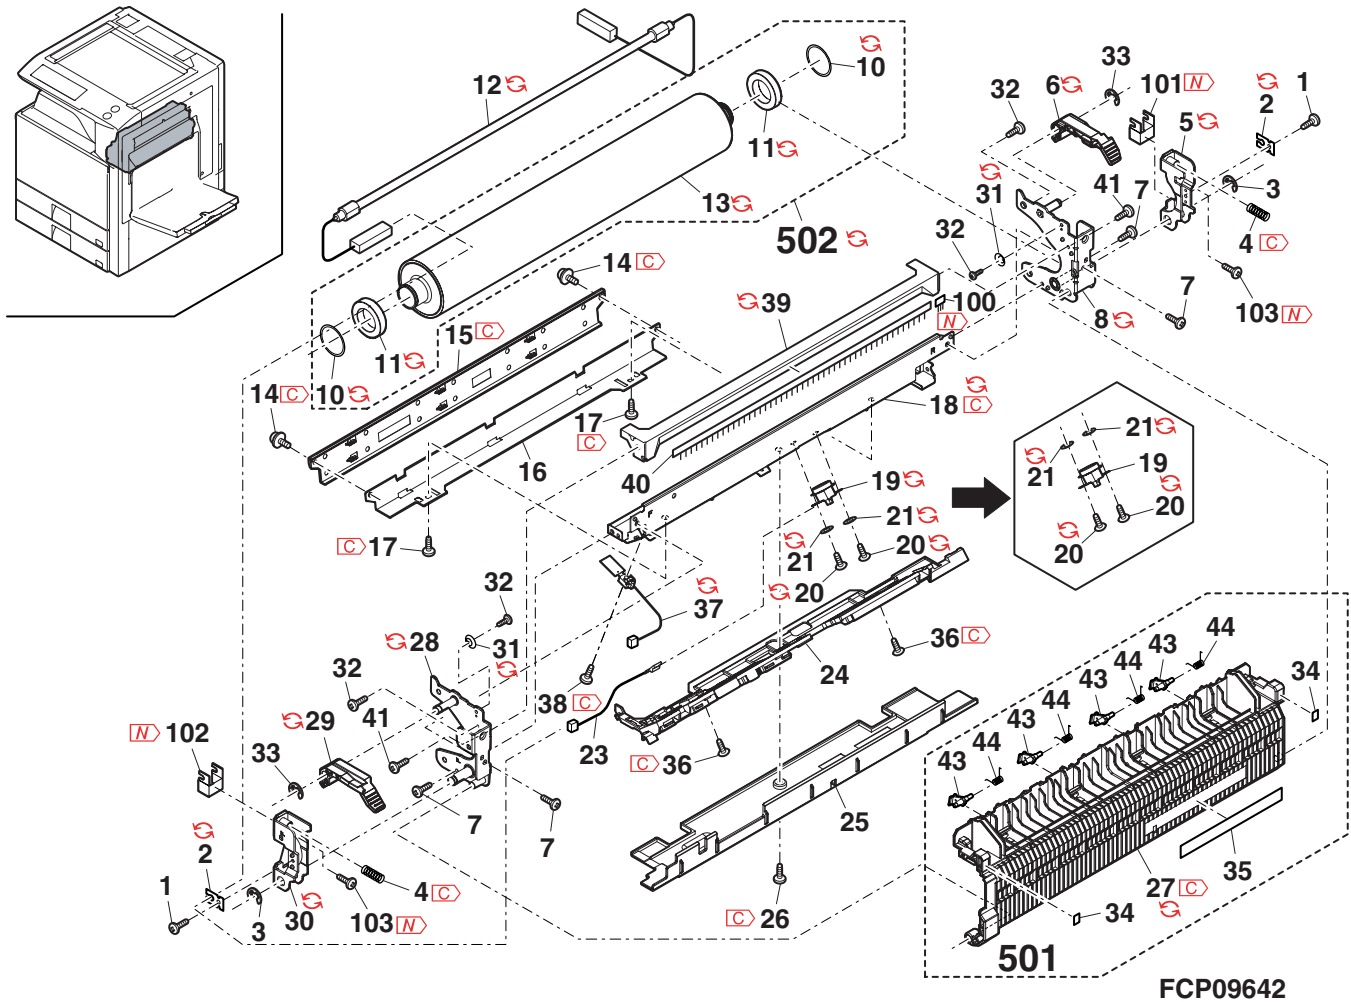


33 Fusing unit 4

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	LFRM-1203FCZ2		AS	N	D	Web frame		
	LFRM-1203FCZ3	3	AS		D	Web frame	CCE350	06/08
	LX-BZ0067QSPZ		AB		C	Screw(4x8)		
2	LX-BZ1083FCZZ	-	AB		C	Screw(4x8) [Parts code correction]		1st lot
	LX-BZ1101FCZZ	3	AB		C	Screw(4x6) [Productivity improvement]		06/07
	MSPRC3504FCZZ		AA	N	C	Web spring		
3	MSPRC3504FCZ1	-	AA		C	Web spring [Parts code correction]		1st lot
	NBRGP0767FCZZ		AF	N	C	Web drive bearing		
4	NBRGP0767FCZ1	3	AF		C	Web drive bearing [Commonization]		07/03 R/C
5	XESB730P10000		AC		C	Screw(3x10)		
6	NBRGP0766FCZZ		AE	N	C	Web bearing		
	LPLTM6685FCZ1		AC	N	C	Initial detect plate A		
7	LPLTM6685FCZ1	-	AC		C	Initial detect plate A	CCE350	06/08
	LPLTM6686FCZ1		AC	N	C	Initial detect plate B		
8	LPLTM6686FCZ1	-	AC		C	Initial detect plate B	CCE350	06/08
9	LPLTM6683FCZ1		AC	N	C	End detect plate A		
10	NGERH1694FCZ1		AP	N	C	Gear(39T)		
11	LPLTP6687FCZ1		AU	N	C	Drive gear support plate		
12	NSFTZ2986FCZZ		AV	N	C	Web tension shaft		
13	NROLR1581FCZZ		AX	N	C	Pressure roller		
14	PCLR-0526FCZ1		AH	N	C	Web brake collar B		
	NROLR1576FCZZ		BA	N	C	Web roller		
15	NROLR1576FCZ1	-	BA		C	Web roller [Parts code correction]		1st lot
	NROLR1576FCZ2	3	BA		C	Web roller	CCE453	07/03 mid
16	PCLR-0525FCZZ		AK	N	C	Web brake collar A		
17	PGUMS0323FCZZ		AC	N	C	Web brake gum		
18	NSFTZ2985FCZZ		AW	N	C	Web drive shaft		
19	LINS0327FCZZ		AC		C	Spring pin(2-10)		
20	LPLTM6752FCZZ		AG	N	C	Separate pawl fixing plate		
	LX-BZ0046QSZZ		AA		C	Screw(3x6)		
21	LX-BZ1066FCZZ	-	AC		C	Screw(3x6) [Parts code correction]		1st lot
	LX-BZ1121FCZZ	4	AA		C	Screw(3x6) [Productivity improvement]		06/10
	MSPRT3457FCZZ		AA		C	Separate pawl spring		
22	MSPRT3457FCZ1	5	AC		C	Separate pawl spring [With No.23][Except North America]	CCE328	06/08 mid
	PTME-0309FCZZ		AM	N	C	Top separate pawl		
23	PTME-0315FCZ1	5	AL		C	Top separate pawl [With No.22][Except North America]	CCE328	06/08 mid
	PTME-0309FCZ1	1	AL		C	Top separate pawl [North America]	CCE553	07/11 mid
24	MLEVP1006FCZ1		AS	N	C	Actuator		
25	MSPRD3461FCZZ		AB		C	Delivery actuator return spring		
26	PCOV1943FCZ1		AE	N	D	Gear protect cover		
27	LPLTM6680FCZZ		AE	N	C	PG fixing plate R		
	LPLTM6680FCT1	3	AE		C	PG fixing plate R [Productivity improvement]		07/02
28	XRESP50-06000		AA		C	E ring(5E)		
29	XESB730P12000		AC		C	Screw(3x12)		
30	NGERH1693FCZZ		AH		C	One way gear(18T)		
31	NBRGP0674FCZZ		AE		C	Belt idle bearing		
32	NGERH0866FCZZ		AC		C	Gear(22T)		
	CFRM-1219FC01		AS	N	D	Fusing rear frame		
33	CFRM-1219FC02	-	AS		D	Fusing rear frame [Parts code correction]		1st lot
	CFRM-1219FC03	3	AX		D	Fusing rear frame [Productivity improvement]		06/10
	CFRM-1219FC04	3	AX		D	Fusing rear frame [Productivity improvement]		07/02
34	XRESP30-06000		AA		C	E ring(3E)		
35	PCLR-0498FCZ1		AE		C	Fusing follower collar		
36	NSFTZ2987FCZZ		AY	N	C	Shaft		
37	MSPRC3505FCZZ		AC	N	C	Fusing follower collar spring		
38	LX-BZ0852FCZZ		AC		C	Step screw		
	PGIDM2193FCZZ		BD	N	C	Fusing rear top paper guide		
39	PGIDM2193FCZ1	1	AY		C	Fusing rear top paper guide		07/08 mid
40	PCLR-0501FCZZ		AB		C	Delivery guide collar		
41	NROLR1575FCZ2		AX	N	C	Fusing rear roller		
42	LPLTM6681FCZZ		AF	N	C	PG fixing plate F		
43	QEARP0213FCZZ		AC	N	C	Fusing roller earth plate		
	XHBS730P06000		AC		C	Screw(3x6)		
44	XBBS730P06000	-	AC		C	Screw(3x6) [Parts code correction]		1st lot
45	PFLT-0071FCZZ		AC	N	D	Fusing protect felt R3		
	XHBS730P08000		AB		C	Screw(3x8)		
46	XBBS730P08000	-	AA		C	Screw(3x8) [Parts code correction]		1st lot
47	NGERH1510FCZZ		AD		C	Gear(20T)		
	MSPRC3600FCZZ		AC	N	C	Web ratchet spring		
48	MSPRC3600FCZ1	1	AC	N	C	Web ratchet spring		10/12 R/C
49	LDAIU0735FCZZ		AM	N	C	Web ratchet block		
50	PSHEP5511FCZ1	-	AA	N	C	Pa sheet L		06/12
51	LX-BZ1082FCZZ	-	AB		C	Screw(3x8)	CCE350	06/08
52	XWHS740-08120	-	AA		C	Washer	CCE350	06/08
53	LPLTM7458FCZZ	-	AB		C	M3 plate	CCE350	06/08
54	PSHEP5780FCZZ	-	AF		C	End detect insulate sheet	CCE350	06/08
100	PSHEZ5738FCZZ	-	AH		C	Web fixing sheet		06/07
	(Unit)							
901	DUNTW7511DS13		CH	N	E	Fusing unit (Japan)(Include Block [30],[31],[32])		
	DUNTW7511DS14		CH	N	E	Fusing unit (120V)(Include Block [30],[31],[32])		

33 Fusing unit 4

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
901	DUNTW7511DS16	3	CL		E	Fusing unit (120V)(Include Block [30],[31],[32])	CCE406	-
	DUNTW7511DS17	1	CH		E	Fusing unit (Soudi Arabia)(Include Block [30],[31],[32])	CCE450	07/02
	DUNTW7511DS15		CH	N	E	Fusing unit (230V)(Include Block [30],[31],[32])		

33 Fusing unit 4

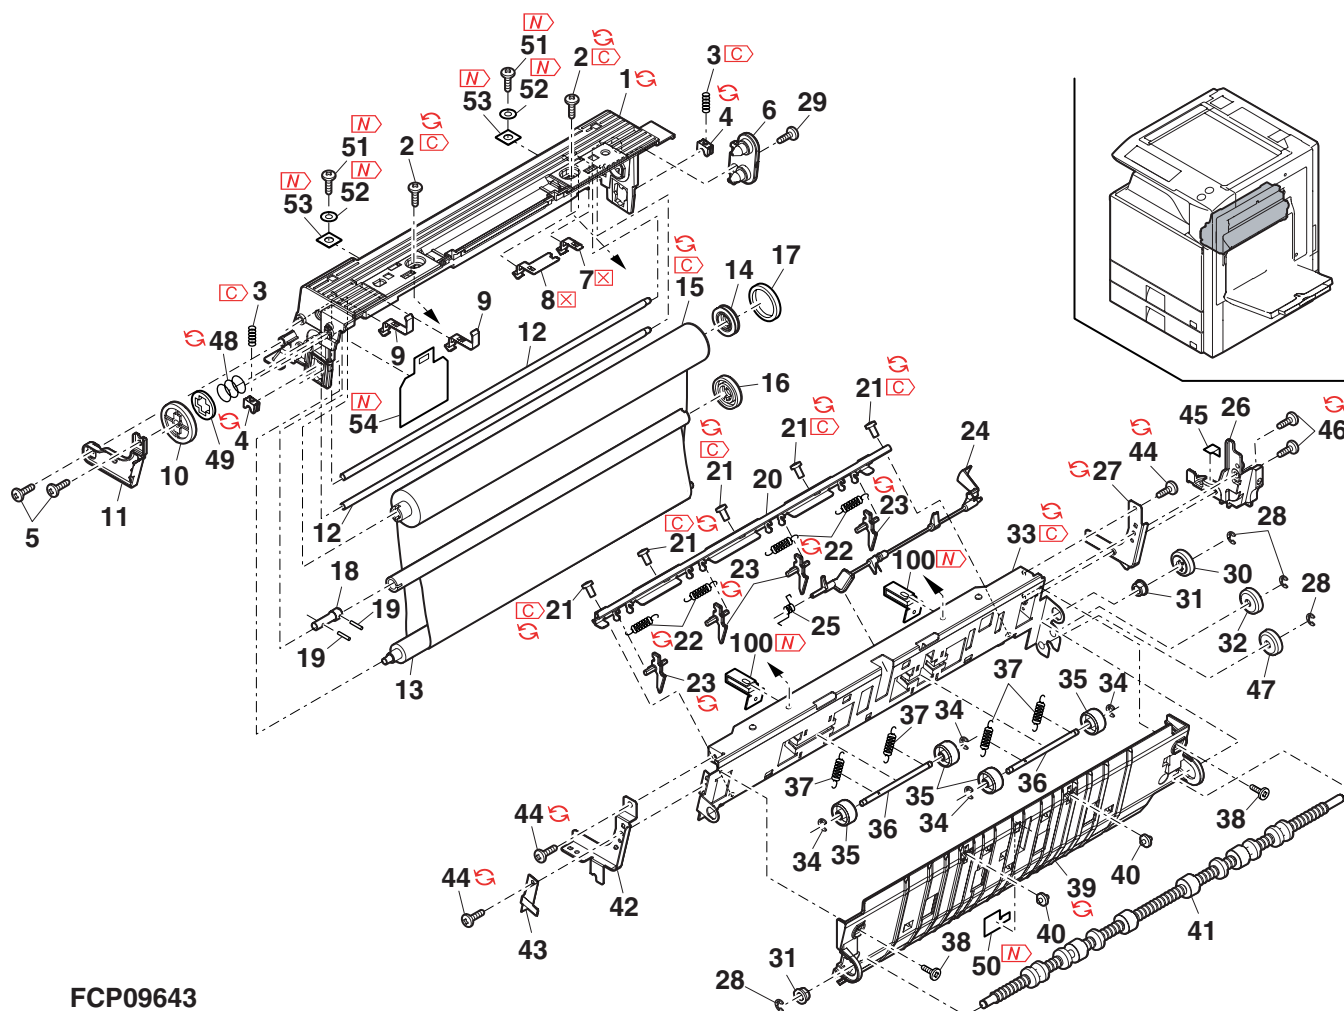


FCP09643

34 Right door unit 1


NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	PCOVP1916FCZZ		AR	N	D	ADU inner cover R		
2	PCOVP1916FCZ1	1	AM	N	D	ADU inner cover R		10/02 R/C
3	XEBS740P10000		AA		C	Screw(4x10)		
4	XHBS740P08000		AA		C	Screw(4x8)		
5	XHBS740P10000		AA		C	Screw(4x10)		
6	CPWBN1671FC31		AY		E	RD-I/F PWB		
7	XHBS730P06000		AC		C	Screw(3x6)		
8	DHAI-3789FCZ4		BB		C	Right door harness P [MX-3500FN,MX-3501FN,MX-4500FN,MX-4501FN]		
9	DHAI-3789FCZ5	1	BB	N	C	Right door harness P [MX-3500FN,MX-3501FN,MX-4500FN,MX-4501FN]		07/07
10	LDAIU0696FCZZ		AF		D	Drawer fixing base		
11	LANGT1434FCZZ		AL		C	Rail fixing angle R lower		
12	LX-BZ0862FCPZ		AC		C	Step screw		
13	CPLTM6708FC01		AK	N	C	MF drive joint plate		
14	NBRGM0096FCZ1		AC		C	Bearing		
15	XRESP40-06000		AA		C	E ring(E4)		
16	NSFTZ2950FCZZ		AN		C	MF clutch shaft		
17	PCLC-0342FCZZ		BA		B	Paper feed clutch(2.5K)		
18	PCLC-0342FCZ1	1	AQ		B	Paper feed clutch(2.5K)		06/04 R/C
19	NGERH1679FCZZ		AD		C	Joint gear(21T)		
20	MSPRT3434FCZZ		AB		C	MF drive arm spring		
21	MARMP0344FCZZ		AC		C	MF drive arm		
22	NGERH1629FCZZ		AC		C	Paper feed gear(24T)		
23	NSFTZ2948FCZZ		AF		C	Movable joint shaft		
24	NGERH1617FCZZ		AC		C	ADU joint gear(28T)		
25	LFRM-1192FCZZ		AD		C	Drive joint frame		
26	LFRM-1192FCZ1	3	AD		C	Drive joint frame [Commonization]		08/09 R/C
27	XHBS730P08000		AB		C	Screw(3x8)		
28	MSPRT3433FCZ1		AB		C	MF joint gear spring		
29	XRESP50-06000		AA		C	E ring(E5)		
30	GCAB-1087FCZZ		AT		D	ADU cabinet R		
31	XEPS730P08X00		AA		C	Screw(3x8X)		
32	MLOKZ0012FCZZ		AC		C	ADU open/close door lock		
33	MSPRC3413FCZZ		AB		C	Open/close lock spring		
34	MSPRC3622FCZZ	3	AB		C	Open/close lock spring [Specification change]		06/03
35	GDOR-0045FCZZ		AY	N	D	ADU open/close door		
36	GDOR-0045FCZ1	3	AY		D	ADU open/close door [Form change]		06/01 R/C
37	GDOR-0045FCZ2	1	AY		D	ADU open/close door		06/05 R/C
38	GCAB-1086FCZZ		AP		D	ADU cabinet F		
39	LPLTP6480FCZZ		AB		C	2nd transfer holder pressure plate		
40	LPLTP6480FCZ1	1	AB		C	2nd transfer holder pressure plate		- R/C
41	MSPRC3469FCZZ		AB		C	2nd belt holder spring		
42	MSPRC3469FCZ1	1	AB	N	C	2nd belt holder spring		07/01
43	LHLDZ1684FCZZ		AC		C	2nd belt holder R		
44	LPINS0133FCZZ		AA		C	Pin(2-10)		
45	XBPS730P08KS0		AB		C	Screw(3x8KS)		
46	PTME-0307FCZZ		AD	N	C	Right door lock pawl		
47	PTME-0307FCZ1	3	AD		C	Right door lock pawl [Form change]		06/01 R/C
48	MSPRD3426FCZZ		AD		C	Right door lock spring		
49	LHLDZ1469FCZZ		AE		C	Upper transport fulcrum holder		
50	NSFTZ2953FCZZ		AS		C	Right door lock shaft		
51	XEBS740P08000		AA		C	Screw(4x8)		
52	MSPRC3452FCZZ		AC		C	2nd belt pressure spring		
53	MSPRC3468FCZZ		AC		C	2nd belt earth spring		
54	LDAIU0704FCZZ		AC		D	2nd belt support block		
55	LDAIU0734FCZZ		AD	N	D	Lock block		
56	LHLDZ1683FCZZ		AC		C	2nd belt holder F		
57	MLEVP0944FCZ1		AE		C	Right door release lever		
58	PCOVP1941FCZZ		AD		C	ADU connector cover		
59	DHAI-3791FCZ2		AL		C	Right PG harness		
100	TLABH5260FCZZ	-	AK		D	Fixing pressure adjustment lever label	CCE353	06/08
	(Unit)							
901	CDAIU0707DS53		BZ	N	E	Right door unit (Except No.100 Include Block [35],[36]) [MX-3500N,MX-3501N,MX-4500N,MX-4501N]		
	CDAIU0707DS63	3	BZ		E	Right door unit (Except No.100 Include Block [35],[36]) [MX-3500N,MX-3501N,MX-4500N,MX-4501N]	CCE691	09/07 mid

34 Right door unit 1

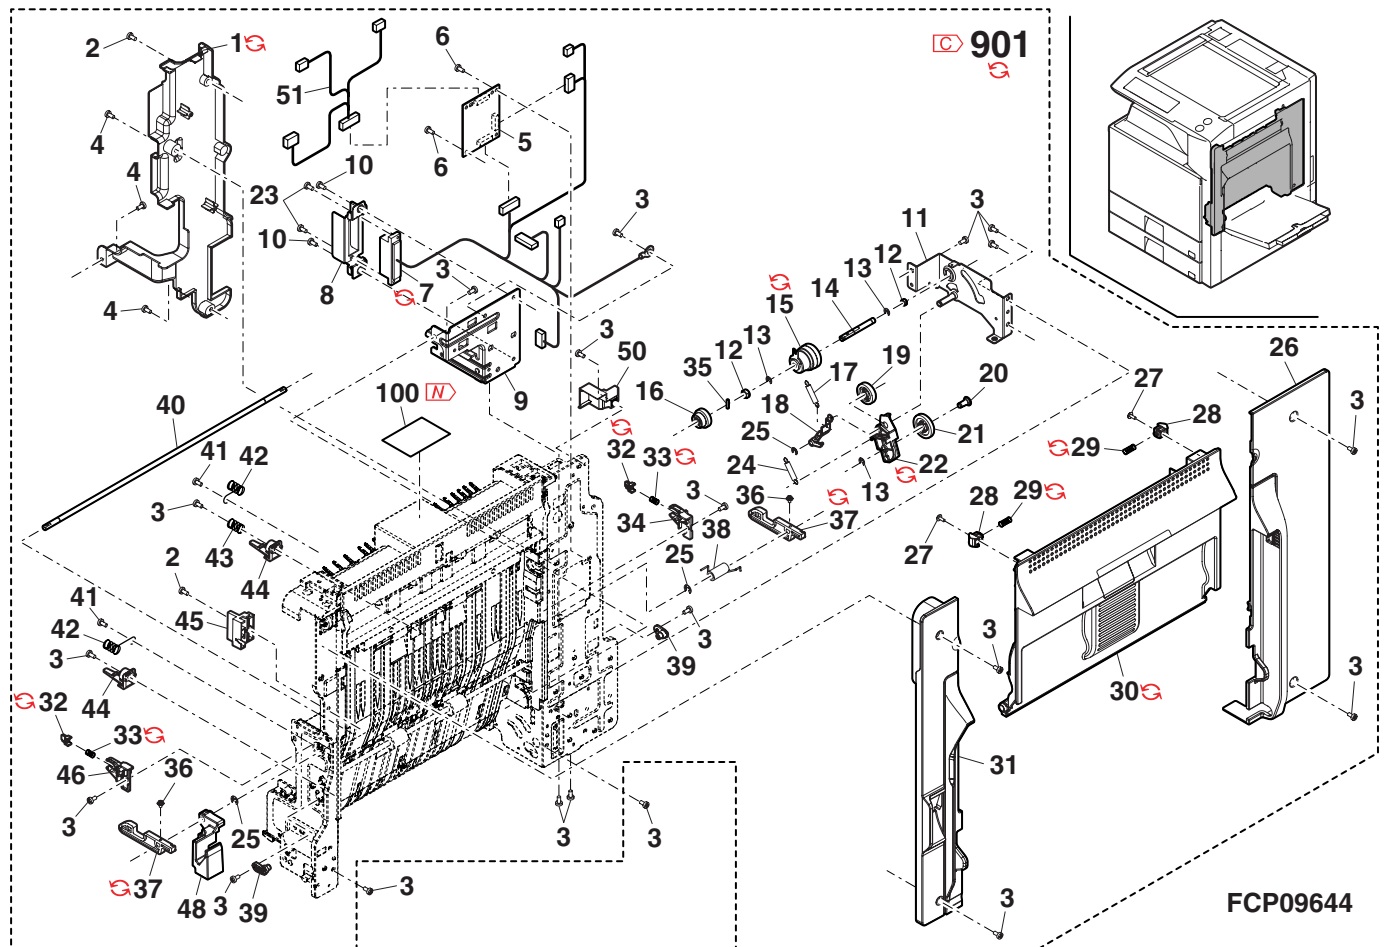

- 51 -


35 Right door unit 2

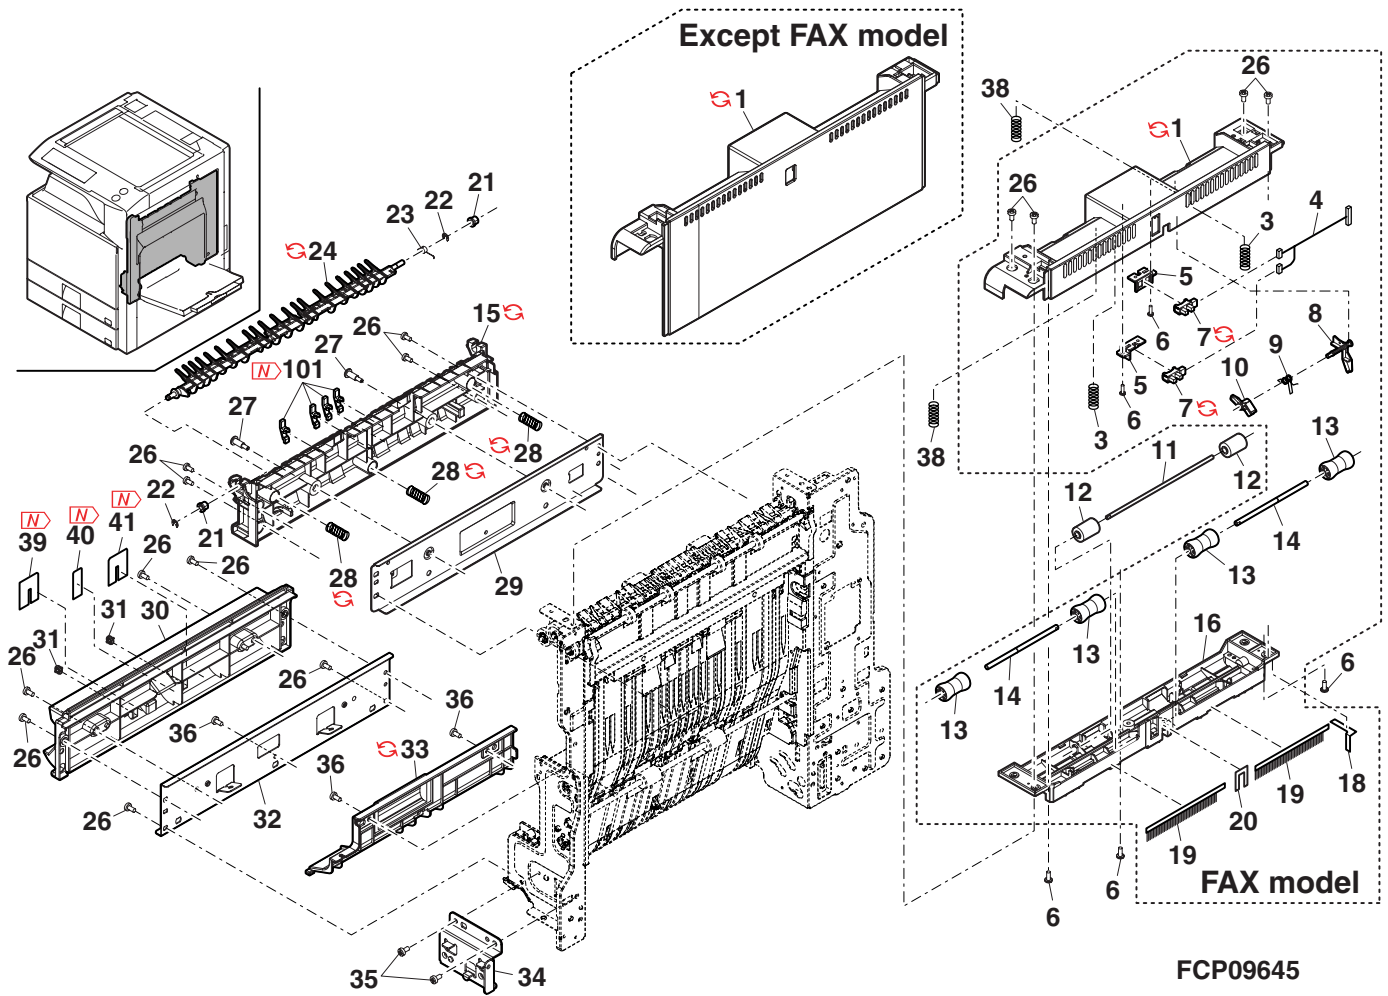

36 Right door unit 3


NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	MARMP0348FCZZ		AC	N	C	Right delivery solenoid arm		
2	MARMP0348FCZ1	3	AC	N	C	Right delivery solenoid arm [Margin up]	CCE417	06/07 R/C
3	XHBS730P06000		AC		C	Screw(3x6)		
4	XBBS730P04000		AA		C	Screw		
5	MSPRT3500FCZZ		AC	N	C	Right delivery gate return spring		
6	CPLTM6707FC01		AF	N	C	Gate solenoid fixing plate		
7	CPLTM6707FC02	3	AF		C	Gate solenoid fixing plate [Form change]		06/01
8	RPLU-0350FCZZ		AQ		B	ADU gate solenoid		
9	XRESP50-06000		AA		C	E ring(E5)		
10	PCLR-0524FCZZ		AC	N	C	27 collar		
11	NGERH1629FCZZ		AC		C	Paper feed gear(24T)		
12	NBRGC0691FCZZ		AG		C	Bearing		
13	XEBS740P10000		AA		C	Screw(4x10)		
14	XEBS740P10000	5	AA		C	Screw(4x10)	CCE691	09/07 mid
15	LPLTM6709FCZZ		AC	N	C	ADU open/close door sensor fixing plate		
16	XHBS740P08000		AA		C	Screw(4x8)		
17	NGERH1690FCZZ		AP	N	C	Gear(30T/27T)		
18	NGERH1617FCZZ		AC		C	ADU joint gear(28T)		
19	CFRM-1209FC01		AU	N	D	ADU frame R		
20	CFRM-1209FC02	1	AW	N	D	ADU frame R		10/09 R/C
21	NR0LR1577FCZZ		AL	N	C	ADU PF roller		
22	LPiNS0133FCZZ		AA		C	Pin(2-10)		
23	LPiN-0026MCZZ	-	AA		C	SP pin(2-10) [Parts code correction]		1st lot
24	NBRGC0249FCZ1		AD		C	Bearing		
25	XRESP40-06000		AA		C	E ring(E4)		
26	PGiDM2188FCZZ		AP	N	C	Right delivery gate		
27	NR0LR1580FCZZ		AM	N	C	Right delivery roller		
28	GCAB-1134FCZZ		AP	N	D	Right delivery cabinet		
29	QCNCM1005FCZZ		AD	N	C	Interface cap(BU08P-TR-PH)		
30	LDAiU0707FCZZ		BA	N	D	ADU main body		
31	LDAiU0707FCZ1	3	BA		D	ADU main body [Specification change]		06/04 R/C
32	LHLDZ1679FCZZ		AC		C	Sensor holder		
33	XEBS730P10000		AC		C	Screw(3x10)		
34	VHPGP1S73P+-1		AF		B	Photo sensor(GP1S73P)		
35	VHPGP1S73P+-18	3	AF		B	Photo sensor(GP1S73P) [Unleaded solder correspondence]		06/03
36	VHPGP1SQ73P-18	3	AF		B	Photo sensor(GP1SQ73P) [Level up]		06/03
37	MSPRD3420FCZZ		AB		C	PS front 2 actuator spring		
38	MLEVP0951FCZZ		AC		C	PS front 2 sensor actuator		
39	DHAi-3734FCZ2		AE		C	ADU transport 1 harness		
40	DHAi-3734FCZ3	1	AE	N	C	ADU transport 1 harness		07/09
41	NR0LP1516FCZZ		AA		C	Transport follower roller		
42	MSPRC3513FCZZ		AC	N	C	ADU main body follower spring		
43	MSPRC3513FCZ1	1	AC		C	ADU main body follower spring		10/08 R/C
44	NSFTZ2949FCZZ		AG		C	Right door follower shaft		
45	JBTN-0280FCZZ		AC		C	Fusing PG lock button		
46	MSPRC3455FCZZ		AB		C	Fusing rear lower PG fixing spring		
47	MSPRC3417FCZZ		AC		C	Right door follower pressure spring		
48	MSPRC3788FCZZ	3	AC	N	C	Right door follower pressure spring [Margin up]	CCE530	06/11
49	MSPRC3788FCZ1	1	AC	N	C	Right door follower pressure spring		10/08 R/C
50	NSFTZ2954FCZZ		AG		C	Follower roller shaft		
51	NSFTZ3277FCZZ	1	AD	N	C	Follower roller shaft		07/03
52	NGERH1634FCZZ		AR		C	Separate gear(18T)		
53	NGERH1526FCZZ		AE		C	Reverse drive gear		
54	NPLYZ0441FCZZ		AC		C	Pulley(22P)		
55	NBLTH0473FCZZ		AR	N	B	Right delivery belt		
56	CFRM-1208FC01		AT	N	D	ADU frame F		
57	PCLR-0501FCZZ		AB		C	Delivery guide collar		
58	NR0LR1578FCZZ		AL	N	C	ADU transport roller		
59	NR0LR1579FCZZ		AL	N	C	ADU delivery roller		
60	PSHEZ5484FCZZ		AA	N	C	Silence suede		
61	LHLDW1009ACZZ		AA		C	Mini clamp		
100	VHPGP1SQ73P-18	-	AF		B	Photo sensor(GP1SQ73P) [From No.31]		06/10
101	CFiX-0678FC01	5	AN		D	Right door fixing plate	CCE691	09/07 mid
	(Unit)							
901	CDAiU0707DS53		BZ	N	E	Right door unit (Include Block [34],[35]) [MX-3500N,MX-3501N,MX-4500N,MX-4501N]		
	CDAiU0707DS63	3	BZ		E	Right door unit (Include Block [34],[35]) [MX-3500N,MX-3501N,MX-4500N,MX-4501N]	CCE691	09/07 mid

36 Right door unit 3

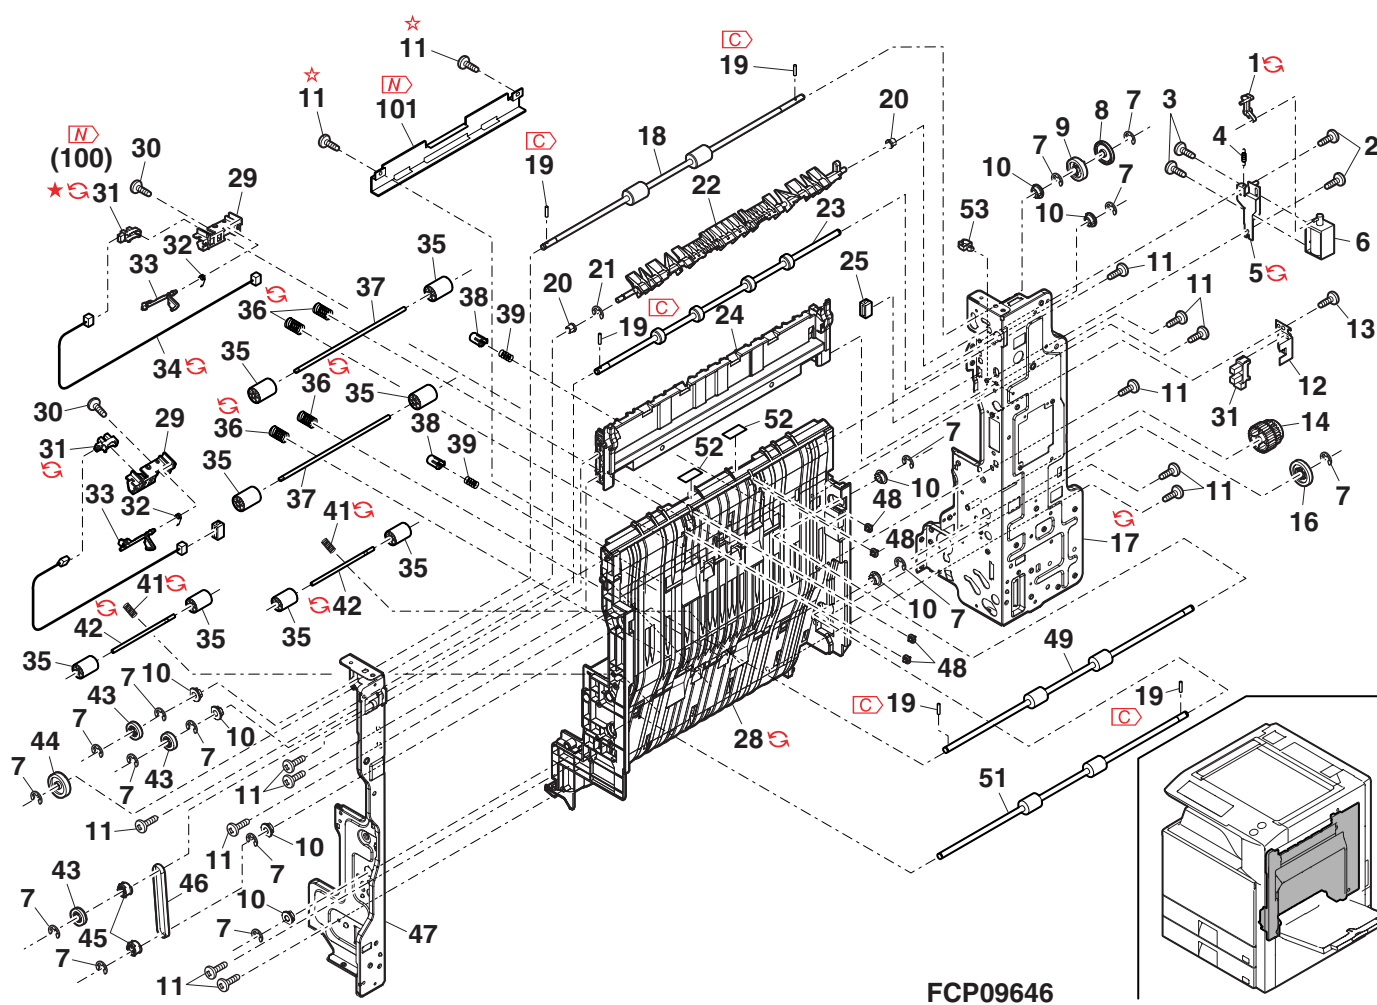

- 55 -


37 Delivery unit 1

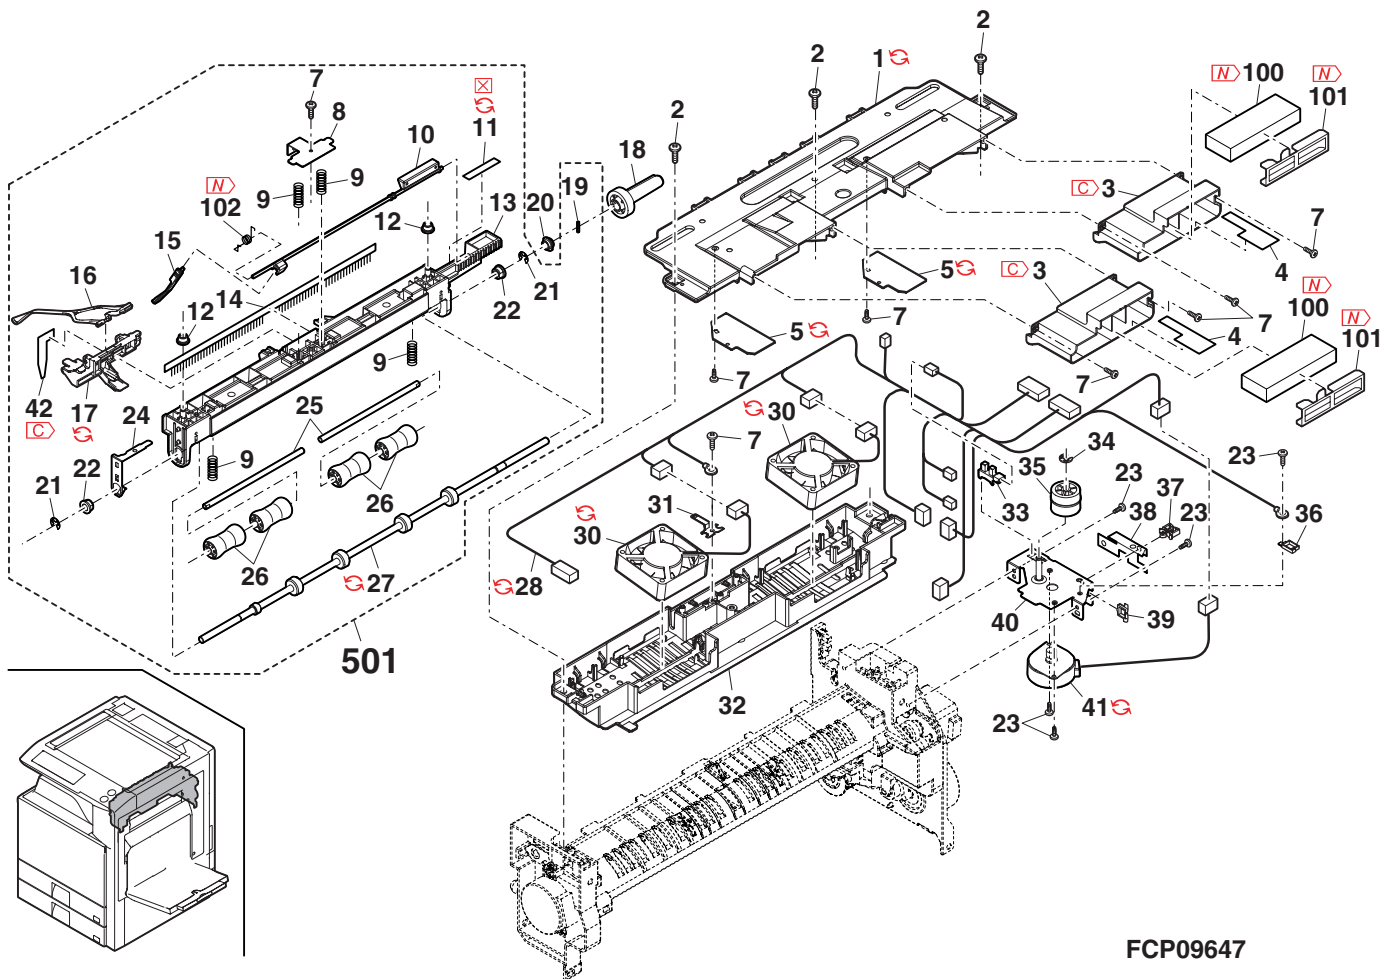

FCP09647


- 57 -

38 Delivery unit 2

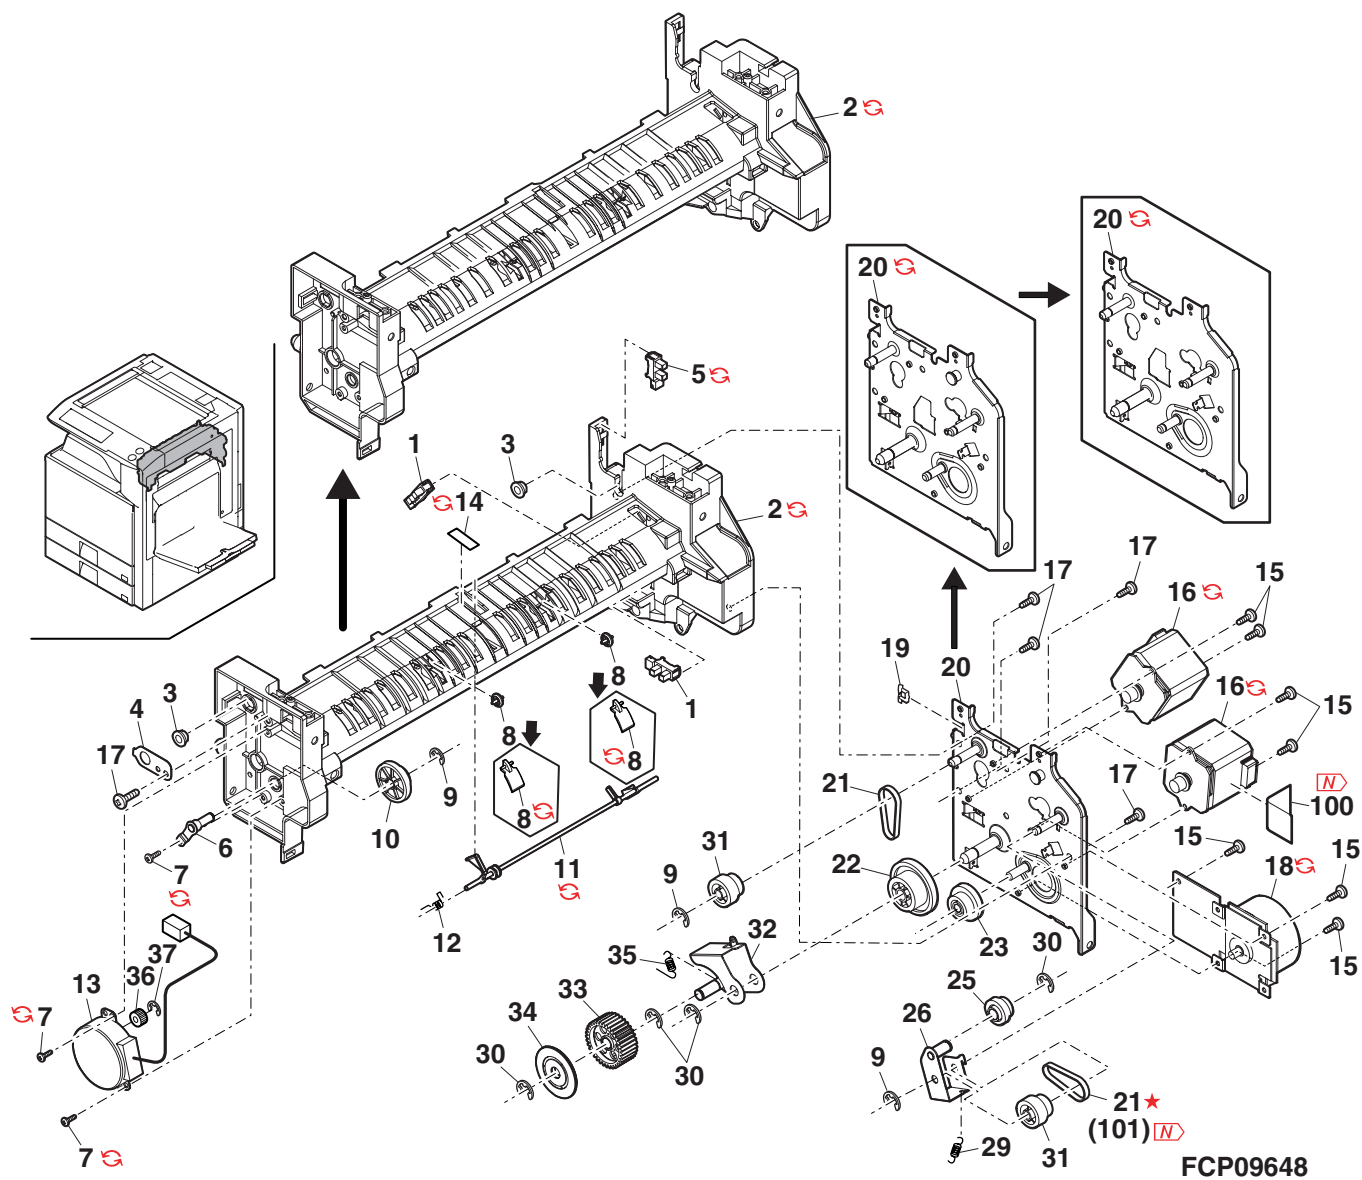

– 59 –


39 Paper feed drive section

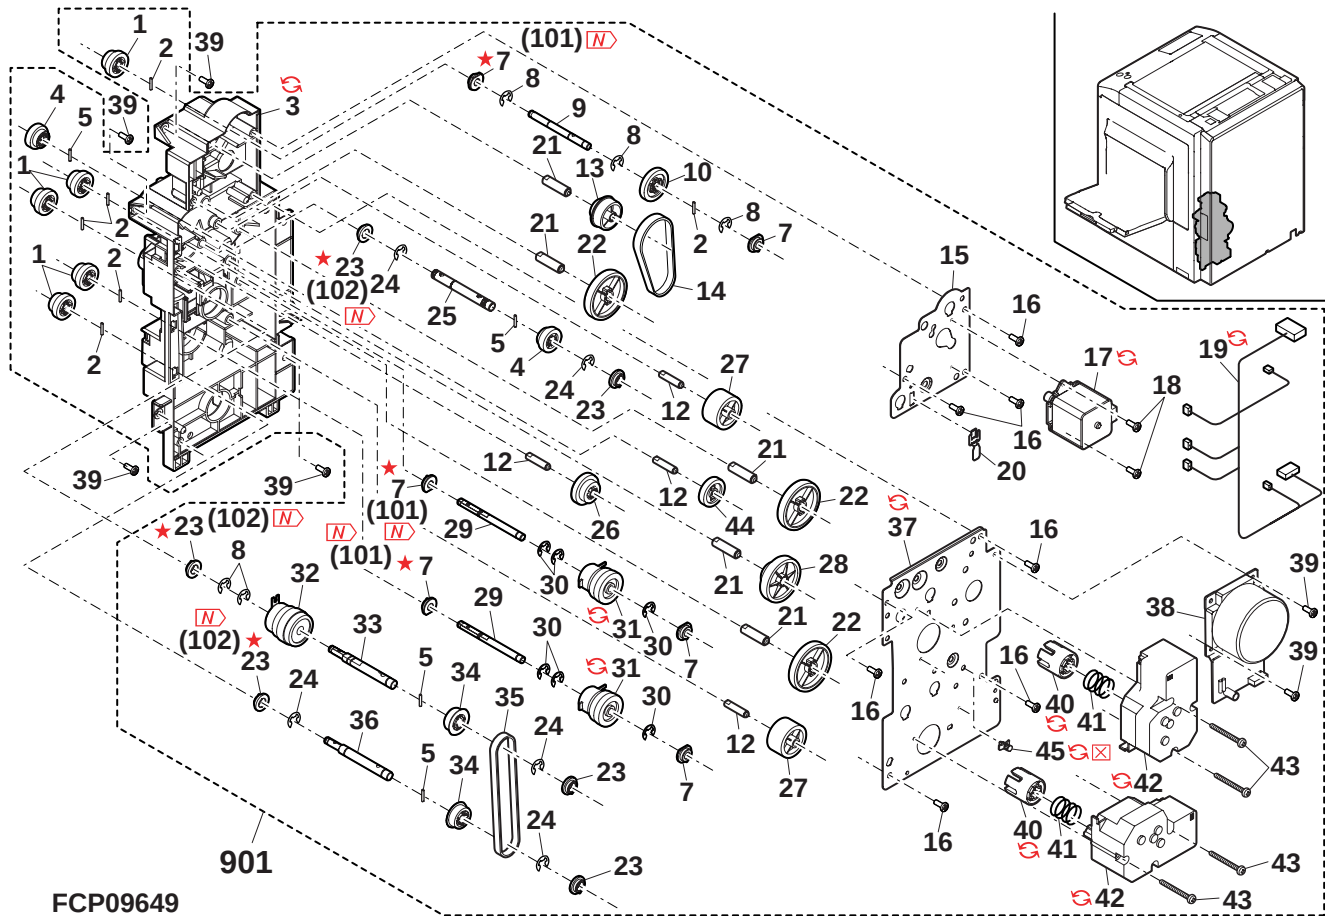

40 Main drive section 1

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	LHLDZ1627FCZZ		AD		C	Frame joint holder		
	LHLDZ1627FCZ1	1	AD	N	C	Frame joint holder		06/12 R/C
	CFRM-1187DS51		BH		C	Drive sub frame		
2	CFRM-1187DS53	1	BH	N	C	Drive sub frame		07/11
	CFRM-1187DS54	1	BF	N	C	Drive sub frame		10/03 R/C
3	XRESP50-06000		AA		C	E ring(E5)		
4	NBRGM0501FCZZ		AB		C	Metal bearing		
5	NSFTZ2924FCZZ		AT		C	Separate coupling shaft		
6	XRESP70-08000		AA		C	E ring(E7)		
7	NBRGC0319FCZ1		AC		C	Bearing		
8	XBPS730P06KS0		AB		C	Screw(3x6KS)		
9	NCPL-0080FCZZ		AC		C	TN coupling		
10	MSPRC3396FCZZ		AB		C	TN coupling spring		
11	NSFTZ2926FCZZ		AS		C	TN coupling shaft		
12	NBRGP0742FCZZ		AC		C	Coupling bearing		
14	MJNTP0030FCZZ		AB		C	TN motor joint		
15	PRNGP0109FCZZ		AA		C	Crescent ring		
16	PSHEZ5381FCZZ		AC		C	Pulley sheet R		
	NBRGY0772FCZZ		AP		C	Bearing(φ8-16)		
17	NBRGY0466FCZZ	1	AK		C	Bearing(φ8-16) [With No.18]	CCE416	07/01
	NBRGY0466FCZ1	1	AK		C	Bearing(φ8-16)		11/01 R/C
	NGERH1651FCZZ		AC		C	DV reduction gear		
18	NGERH1651FCZ1	1	AC	N	C	DV reduction gear [With No.17]	CCE416	06/11 mid
19	NBRGY0773FCZZ		AP		C	Bearing(φ8-22)		
22	XHBS730P08000		AB		C	Screw(3x8)		
	XHBS730P08000	-	AB		C	Screw(3x8) [Quantity correction]		1st lot
24	NGERH1665FCZZ		AC		C	Waste toner drive gear		
25	NSFTZ2922FCZZ		AZ		C	Drum drive shaft		
	NSFTZ2922FCZ1	1	AZ		C	Drum drive shaft		06/11 R/C
26	XRESP90-08000		AA		C	E ring(E9)		
27	LPINS0278FCZZ		AB		C	Spring pin(3-11)		
28	NGERH1630FCZZ		AS		C	Drum drive gear		
29	CFRM-1186FC01		AT		C	Drive frame		
30	NGERH1631FCZZ		AR		C	Drum idle gear		
31	LPINS0133FCZZ		AA		C	Pin(2-10)		
32	NPLYZ0436FCZZ		AC		C	Separate pulley(24/35P)		
33	NSFTZ2923FCZZ		AQ		C	Clutch shaft		
	NSFTZ2923FCZ1	3	AQ		C	Clutch shaft	CCE589	08/06 mid
36	NBLTH0446FCZZ		AU		B	BK DV belt		
37	NCPL-0074FCZ1		AD		C	DV coupling		
38	CSFTZ2921DS51		AL		C	DV drive shaft		
	CSFTZ3471DS51	1	AK	N	C	DV drive shaft		10/01
39	MSPRC3366FCZZ		AB		C	DV coupling spring		
40	NBRGY0466FCZZ		AK		C	Bearing(φ8-16)		
	NBRGY0466FCZ1	1	AK		C	Bearing(φ8-16)		11/01 R/C
41	XBBS740P08000		AA		C	Screw(4x8)		
42	NPLYZ0455FCZZ		AR		C	DV pulley(35P)		
43	NPLYZ0445FCZZ		AC		C	DV pulley(24P)		
	LPINS0337FCZZ		AB		C	Pin(3-12)		
44	LPINS0353FCZZ	1	AB	N	C	Pin(3-12)		09/09 R/C
	LPINS0337FCZ1	1	AB		C	Pin(3-12)		10/05 R/C
45	NBLTH0447FCZZ		AU		B	DV joint belt		
46	NBLTH0448FCZZ		AX		B	DV drive belt CL		
47	NBRGC0632FCZ1		AE		C	Bearing		
48	NBLTH0449FCZZ		AU		B	DV joint belt BK		
50	CSFTZ2920DS51		AM		E	Belt drive shaft		
51	NGERH1642FCZZ		AE		C	Gear(20/57T)		
52	LHLDZ1554FCZZ		AE		C	PS holder		
53	LX-BZ0670FCP1		AC		C	Screw		
54	NGERH0851FCZZ		AD		C	ADU gear(33T)		
55	LPINS0155FCZZ		AA		C	Pin(3-10)		
56	NSFTZ2939FCZZ		AR		C	PS drive shaft		
57	CBRGP0739DS51		AP		E	DSD bearing		
58	LX-BZ1053FCZZ		AC		C	Red screw(3x8)		
59	LX-WZ0454FCZZ		AD		C	Poly slider(φ8-17)		
	LX-WZ2011SCZZ		AA		C	Poly slider		
60	LX-WZ0473FCZZ	1	AA		C	Poly slider		08/03
	LX-WZ0473FCZ1	3	AA		C	Poly slider	CCE589	08/06 mid
61	PSHEP5486FCZZ		AC		C	Pulley sheet		
	PSHEP5765FCZZ	1	AC	N	C	Pulley sheet		07/01
62	XHBS730P08KS0		AC		C	Screw(3x8KS)		
	(Unit)							
901	CFRM-1186DS72		BW	N	E	Main drive mechanic unit		
	CFRM-1186DS75	3	BW		E	Main drive mechanic unit	CCE589	08/06 mid

40 Main drive section 1

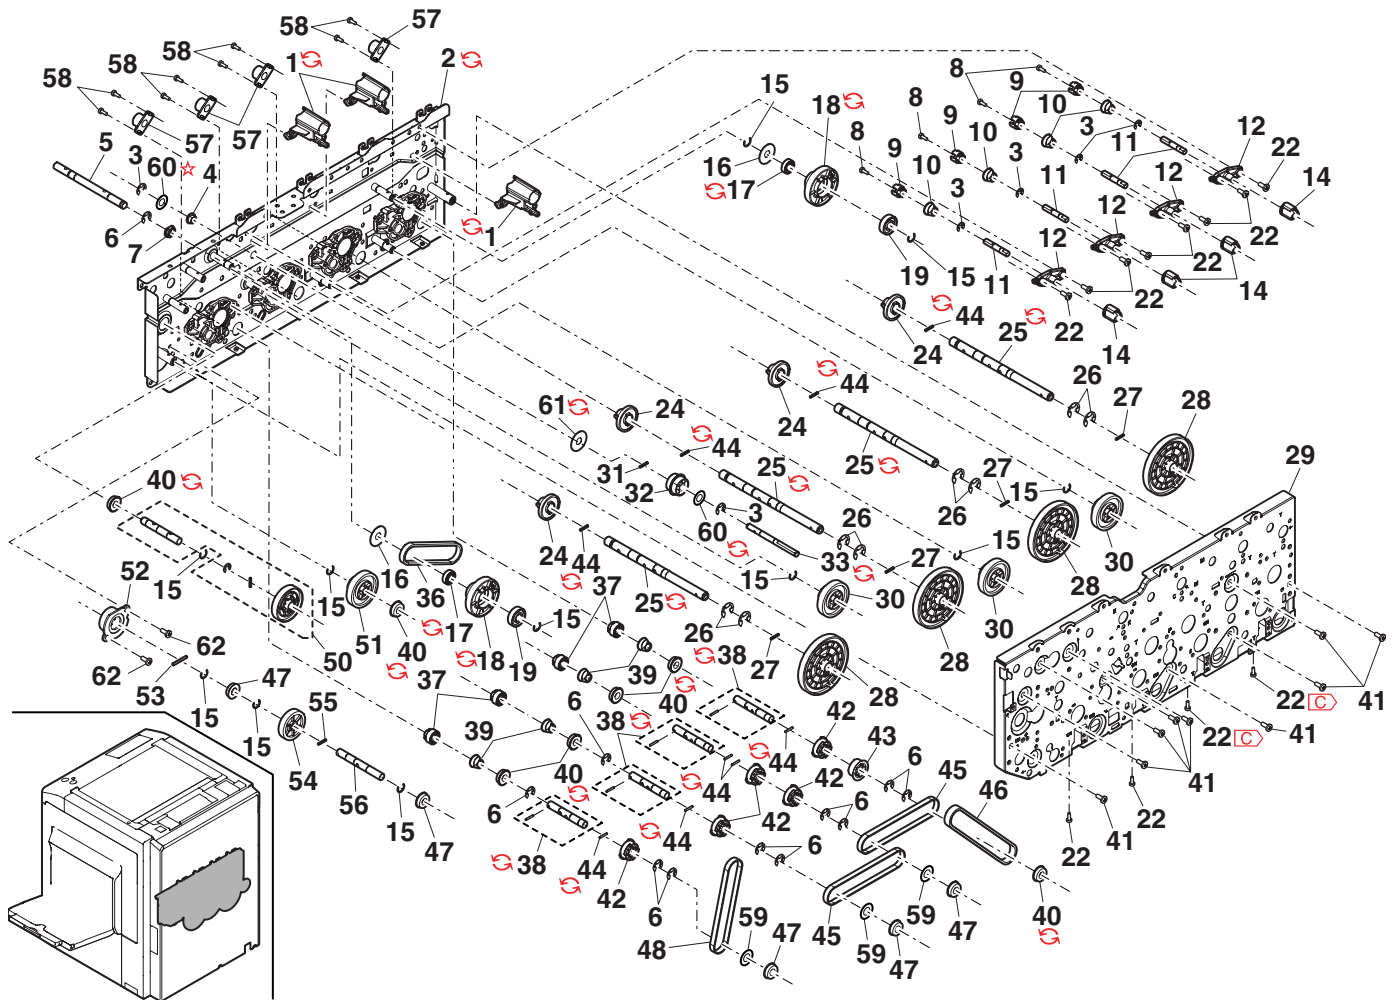


FCP09650

Matrix

- 63-1 -


41 Main drive section 2

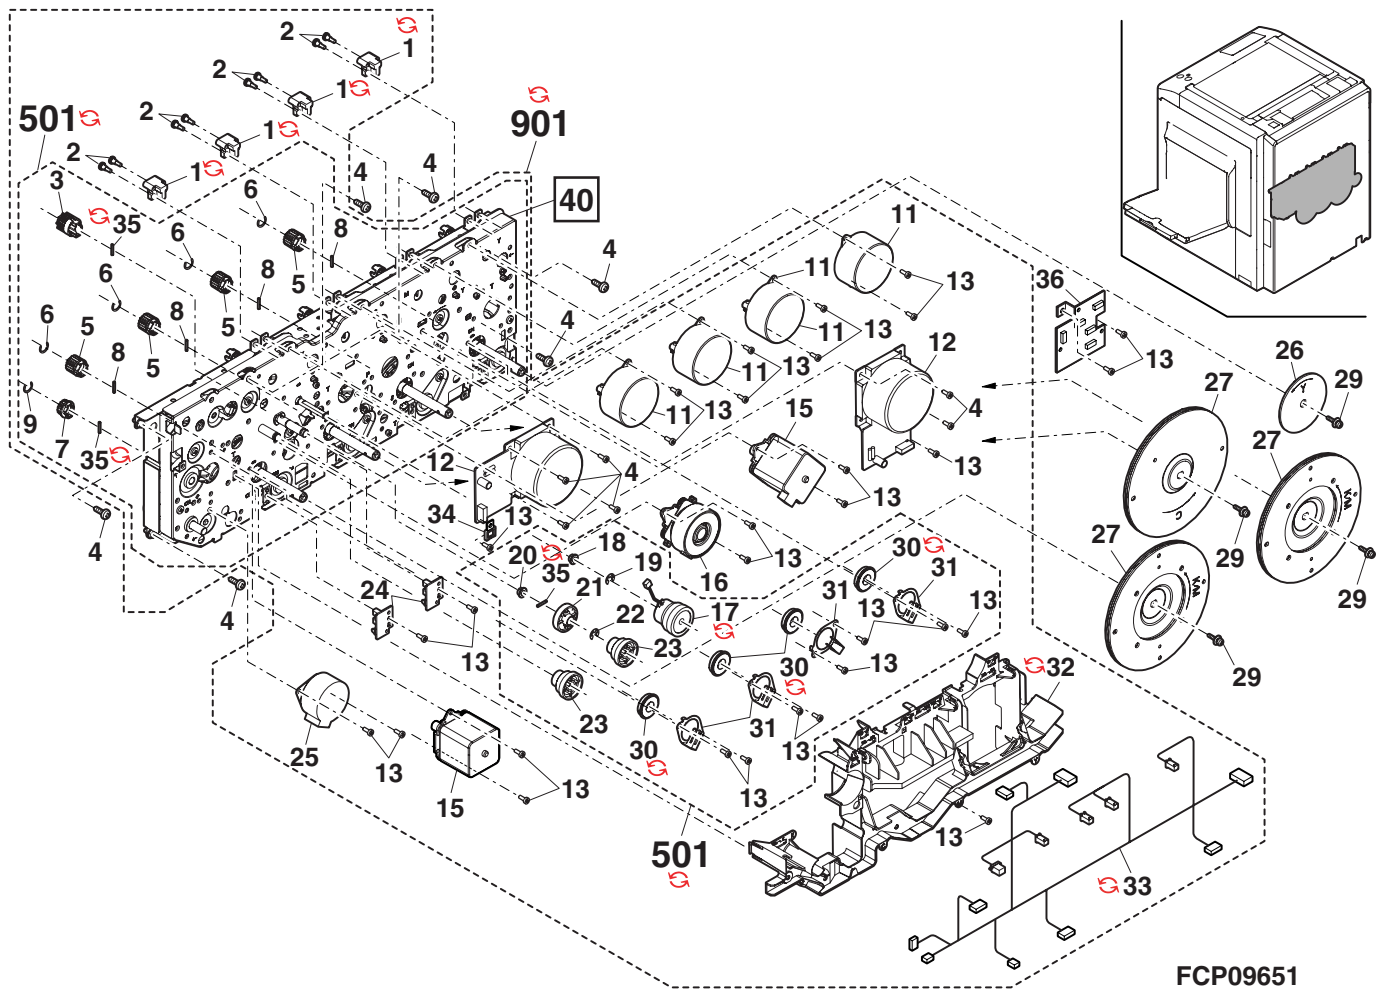

42 Control BOX 1

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	CRALM0236FC01		AP		C	MFP PWB rail lower		
	CRALM0236FC02	1	AP		C	MFP PWB rail lower		08/06
2	XHBS730P08000		AB		C	Screw(3x8)		
	XHBS730P06000	1	AC		C	Screw(3x6)		07/09
3	LPLTM6595FCZZ		AR		C	PCU PWB fixing plate		
	CPWBX1714FCE3		BZ	N	E	PCU PWB [MX-3500FN/N,MX-3501FN/N]		
	CPWBX1737FCE3	3	CA		E	PCU PWB [MX-3500FN/N,MX-3501FN/N(For North America)] [MX-3500N(Taiwan)]	CCE507R	07/09
4	CPWBX1737FCE3	3	CA		E	PCU PWB [MX-3500N,MX-3501N(Except for North America)]	CCE542R	08/01
	CPWBX1714FCE2		BZ	N	E	PCU PWB [MX-4500FN/N,MX-4501FN/N]		
	CPWBX1737FCE2	3	CA		E	PCU PWB [MX-4500FN/N,MX-4501FN/N(For North America)] [MX-4500N(Taiwan)]	CCE507R	07/09
	CPWBX1737FCE2	3	CA		E	PCU PWB [MX-4500N,MX-4501N(Except for North America)]	CCE542R	08/01
5	VHi28F161L17C		AV	N	B	PCU flash PWB(28F161L17C)		
6	CPWBX1672FCE2		BL		E	Mother PWB		
7	PSLDM0186FCZZ		AQ		C	MFP PWB shield plate lower		
	XHBS730P30000		AB		C	Screw(3x30)		
8	XHBS730P28000	3	AB	N	C	Screw(3x28) [Productivity improvement]		06/11
	LX-BZ1180FCPZ	1	AC	N	C	Screw(3x28)		07/02
	NFANP0082FCPZ		BF		B	Fan motor		
9	NFANP0082FCP1	3	BF		B	Fan motor	ARE957	10/01
	CRALM0235FC01		AP		C	MFP PWB rail upper		
10	CRALM0235FC02	1	AP	N	C	MFP PWB rail upper		- R/C
11	PSLDM0187FCZ1		AM		C	MFP PWB shield plate upper		
12	LHLDW1264FCZZ		AD		C	Wire saddle(LWS-8S-2.5W)		
13	QCNW-0226FCZ1		AD		C	PCU mother FFC		
14	LSUPP0131FCZZ		AC	N	C	Card spacer(25M)		
15	LHLDW1057FCZZ		AB		C	Wire saddle(LWS35)		
16	LHLDW1757FCPZ		AC		C	Harness lifter		
	CPWBX1712FCE1		BG		E	Scan in PWB		
17	CPWBX1712FCE28	3	BG		E	Scan in PWB [Level up](Except Taiwan)		06/11
18	LX-BZ0922FCPZ		AC		C	HR drawer step screw		
19	MSPRP3164FCZZ		AD		C	Earth spring		
	MSPRP3164FCZZ	-	AD		C	Earth spring (Except South Africa,Taiwan)		06/10
20	XHBS730P04000		AA		C	Screw(3x4)		
	XHBS730P04000	-	AA		C	Screw(3x4) (Except South Africa,Taiwan)		06/10
101	PGSK-0061FCPZ		AE		C	Gasket(L-30) [Taiwan,South Africa]		1st lot
	PGSK-0061FCP1	1	AE		C	Gasket(L-30) [Taiwan,South Africa]		07/06


42 Control BOX 1

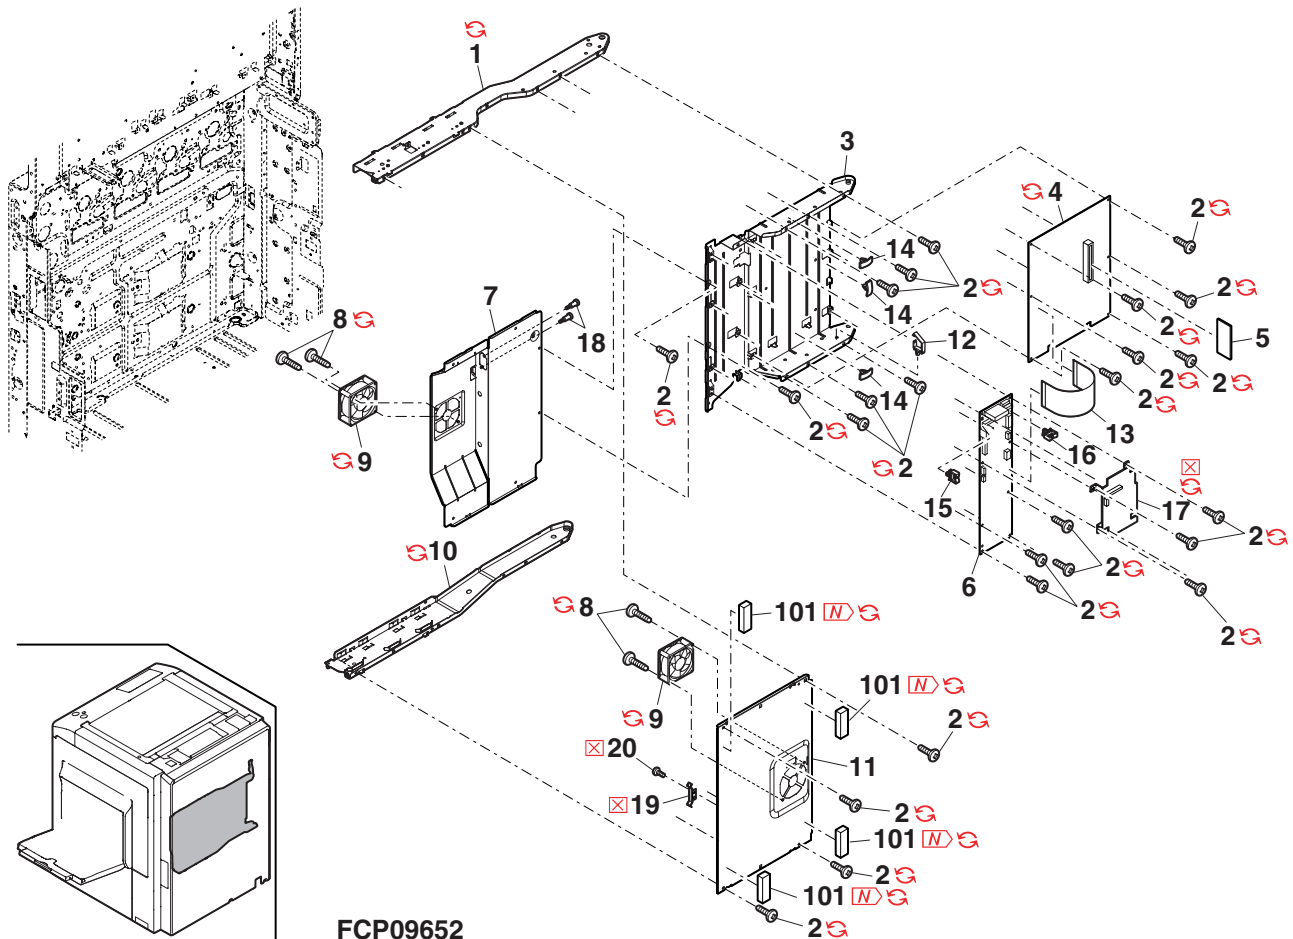

43 Control BOX 2

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	XHBS730P08000		AB		C	Screw(3x8)		
2	LPLTM6592FCZZ		AF		C	HDD harness plate		
3	LPLTM6600FCZZ		AF		C	HDD fixing plate		
4	DUNT-7388FCPZ		CD		E	HDD(40GB) [MX-3500FN/N,MX-4500FN/N]		
	DUNT-7388FCP1	3	BZ		E	HDD(40GB) [MX-3500FN/N,MX-4500FN/N]	CCE302	06/03 mid
	DUNT-7681FCPZ	1	CD		E	HDD(40GB) [MX-3500FN/N,MX-4500FN/N]		08/01
	DUNT-8037FCPZ	1	BZ		E	HDD(80GB) [MX-3500FN/N,MX-4500FN/N]		09/12
	DUNT-7510FCPZ		CA	N	E	HDD(80GB) [MX-3501FN/N,MX-4501FN/N]		
	DUNT-7510FCP1	3	CA		E	HDD(80GB) [MX-3501N,MX-4501N]	CCE302	06/03 mid
	DUNT-7680FCPZ	1	BY		E	HDD(80GB) [MX-3501N,MX-4501N]		08/01
5	DUNT-8037FCPZ	1	BZ		E	HDD(80GB) [MX-3501N,MX-4501N]		10/01 R/C
	DHAI-3749FCZ1		AT		C	HDD IDE harness		
6	DHAI-3749FCZ2	1	AU		C	HDD IDE harness (Except South Africa,Taiwan)		06/10
	DHAI-3750FCZZ		AR		C	HDD power harness		
7	PCUSG0378FCZZ		AF		C	Cushion		
8	PDMP-0005FCZZ	4	AD	N	C	HDD damper [Productivity improvement]		07/12
	LX-BZ1022LCZZ		AB		C	Screw		
9	LX-BZ1022LCPZ	3	AB		C	Screw [Unleaded correspondence]		06/06
10	LX-BZ1057FCZZ		AC		C	HDD fixing step screw		
11	LHLDW1600FCZZ		AC		C	Cable saddle		
	LHLDW1600FCZZ	-	AC		C	Cable saddle (Except South Africa,Taiwan)		06/10
12	PCOVP1946FCZZ		AE		B	HDD cover		
13	XHBS730P06000		AC		C	Screw(3x6)		
14	XBBS730P06000		AC		C	Screw(3x6)		
15	LX-BZ0986FCZ1		AF		C	RIC fixing screw		
	LX-BZ1155FCPZ	1	AD		C	RIC fixing screw (Except South Africa,Taiwan)		07/03
16	JHNDM0170FCZ1		AD		C	Controller handle		
	JHNDM0170FCZ2	1	AC	N	C	Controller handle		10/07 R/C
17	LX-WZ0096FCZZ		AA		C	Washer		
18	TLABZ5149FCZZ		AC		D	Interface label		
19	RH-iX0018FCPZ		CA		B	Memory(512M)		
20	RH-iX0017FCPZ		BS		B	Memory(256M)		
21	RH-iX0018FCPZ		CA		B	Memory(512M)		
22	VHi28F642L06F		BF	N	B	BOOT flash ROM [MX-3500FN/N,MX-3501FN/N]		
	VHi28F642L08F		BF	N	B	BOOT flash ROM [MX-4500FN/N,MX-4501FN/N]		
23	VHi28F642L07F		BF	N	B	Program flash ROM [MX-3500FN/N,MX-3501FN/N]		
	VHi28F642L09F		BF	N	B	Program flash ROM [MX-4500FN/N,MX-4501FN/N]		
24	XBBS740P08000		AA		C	Screw(4x8)		
25	PGSK-0065FCPZ		AF		C	HDD cushion		
	PGSK-0065FCPZ	-	AF		C	HDD cushion (Except South Africa,Taiwan)		06/10
26	PCAPH1005ACZZ		AC		C	Protect cap (200V series)		
	PCAPH0017QSZZ	-	AC		C	Protect cap [Parts code correction](200V series)		1st lot
	PCAPH0017QSZZ	-	AC		C	Protect cap (200V series)		10/10
27	PRDAF0094FCPZ		AT	N	B	CPU radiate fin		
28	PRDAF0092FCPZ		AU	N	B	ICU radiate fin		
29	PRDAF0093FCPZ		AU	N	B	SYS radiate fin		
501	DUNT-7648FC24		CY	N	E	MFP PWB [MX-3500FN/MX-3501FN](Japan)		
	DUNT-7648FC25		CY	N	E	MFP PWB [MX-3500N/MX-3501N](Japan)		
	DUNT-7648FC26		DD	N	E	MFP PWB [MX-3500N/MX-3501N](Except Japan)		
	DUNT-7648DS26	1	DE		E	MFP PWB [MX-3500N/MX-3501N](Except Japan)		06/03
	DUNT-7648DS57	-	DA	N	E	MFP PWB [MX-3500N](Taiwan)		1st lot
	DUNT-7648FC38		CY	N	E	MFP PWB [MX-4500FN/MX-4501FN](Japan)		
	DUNT-7648FC39		CY	N	E	MFP PWB [MX-4500N/MX-4501N](Japan)		
	DUNT-7648FC40		DD	N	E	MFP PWB [MX-4500N/MX-4501N](Except Japan)		
	DUNT-7648DS40	1	DE		E	MFP PWB [MX-4500N/MX-4501N](Except Japan)		06/03
	DUNT-7648DS61	-	DA	N	E	MFP PWB [MX-4500N](Taiwan)		1st lot


43 Control BOX 2

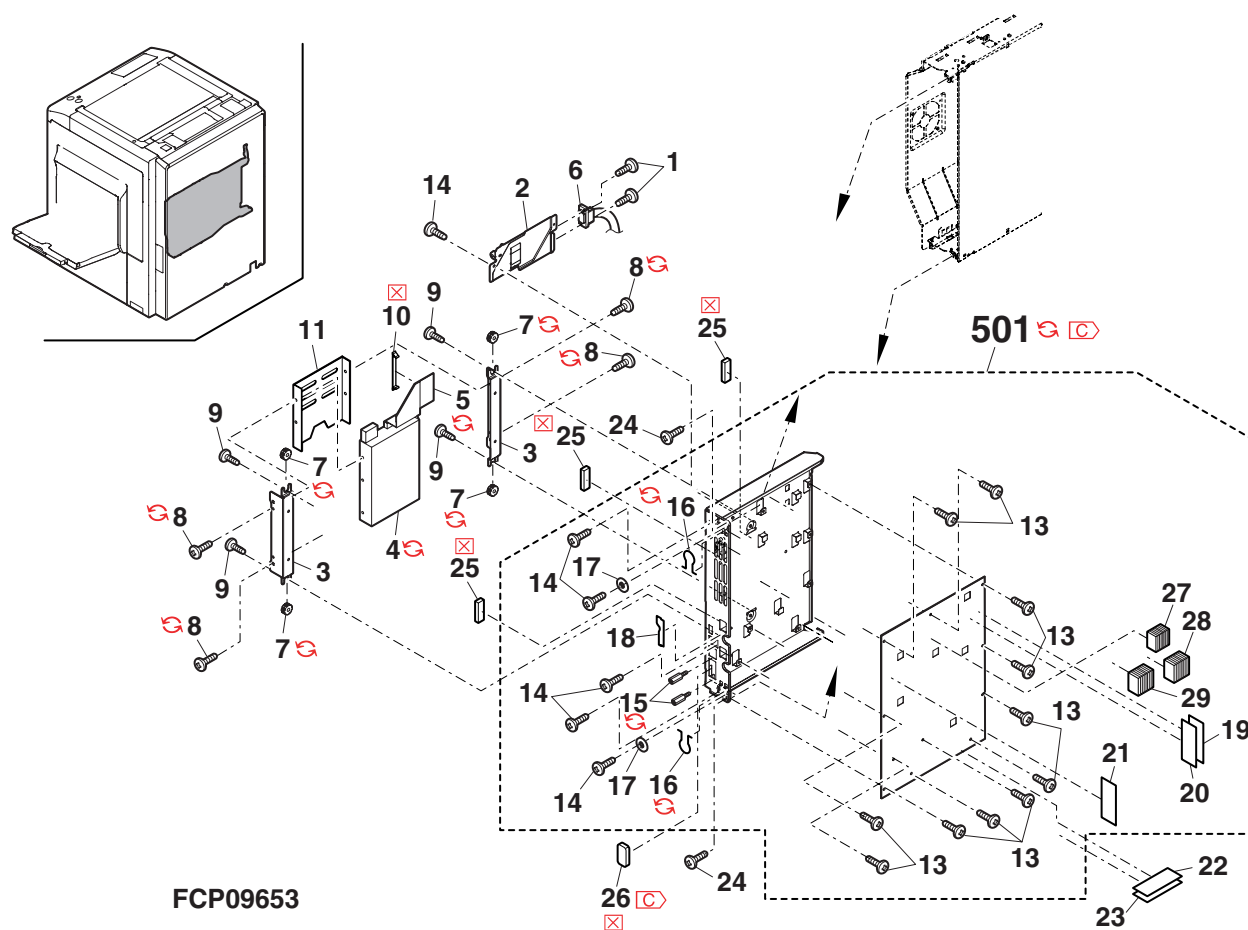

44 Power supply unit

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	LPLTM6594FCZZ		AL		C	AC PWB fixing plate		
	LPLTM6594FCZ1	1	AL		C	AC PWB fixing plate		08/04 R/C
	LPLTM6594FCZ2	1	AL		C	AC PWB fixing plate		-
2	LX-WZ0443FCPZ		AB		C	Washer		
	LX-WZ0443FCPZ	-	AB		C	Washer		06/07
3	XBPS740P06K00		AA		C	Screw(4x6K)		
4	XHBS730P08000		AB		C	Screw(3x8)		
	XHBS730P08000	-	AB		C	Screw(3x8) [to No.102]		09/02
5	LHLDW7005SCZZ		AB		C	Wire holder(LWS-2Y)		
6	LFIX-0016FCZZ		AD		C	AC cord fixer (Japan)		
	LFIX-0084FCZZ		AC		C	AC cord fixer (U.S.A,Canada)		
	LFIX-0084FCZZ	-	AC		C	AC cord fixer (Saudi Arabia(127V))		07/05
7	XHBS740P08000		AA		C	Screw(4x8)		
	XHBS740P08000	-	AA		C	Screw(4x8) (Saudi Arabia(127V))		07/05
8	XBPS740P25XS0		AB		C	Screw(4x25XS)		
	XBPS740P25XS0	-	AB		C	Screw(4x25XS) (Saudi Arabia(127V))		07/05
9	DHAI-3756FCZZ		AE		C	AC/WH harness 2 (Japan)		
10	XBPS740P08K00		AA		C	Screw(4x8K)		
11	CPWBF1663FC328		BH	N	E	AC PWB (Japan)		
	CPWBF1664FC328		BG	N	E	AC PWB (100V Series except Japan)		
	CPWBF1721FC328	-	BN		E	AC PWB (Taiwan)		1st lot
	CPWBF1665FC328		BG	N	E	AC PWB (200V Series)		
	CPWBF1665FC338	1	BG		E	AC PWB (200V Series)		06/08
12	CPWBF1665FC35	3	BK		E	AC PWB [Commonization](200V Series)		08/10 R/C
	XHBS730P30000		AB		C	Screw(3x30)		
	XHBS730P28000	3	AB	N	C	Screw(3x28) [Productivity improvement]		06/11
13	LX-BZ1180FCPZ	1	AC	N	C	Screw(3x28)		07/02
	NFANP0078FCZZ		BF		B	Fan		
14	LSUPP0118FCZZ		AB		C	PWB supporter (Japan)		
15	CPWBF1675FC31		AT		E	WH PWB (Japan)		
16	DHAI-3755FCZZ		AH		C	AC/WH harness 1 (Japan)		
17	LPLTM6590FCZZ		AQ		C	PS PWB fixing plate		
	LPLTM6590FCZ1	1	AQ		C	PS PWB fixing plate		08/04 R/C
	LPLTM6590FCZ3	1	AQ	N	C	PS PWB fixing plate		11/01
18	LHLDW1264FCZZ		AD		C	Wire saddle(LWS-8S-2.5W)		
	RDENC0048FCZZ		CE	N	E	DC power supply PWB (100V Series)		
	RDENC0078FCPZ	1	BZ		E	DC power supply PWB (100V Series) (Except Japan,Taiwan,BrazilSaudi Arabia(127V))		08/03
	RDENC0078FCPZ	-	BZ		E	DC power supply PWB (100V Series)(South Africa(127V))		08/07 R/C
	RDENC0078FCPZ	1	BZ		E	DC power supply PWB (100V Series)(Japan,Brazil)		08/07 R/C
20	RDENC0050FCZZ		CE	N	E	DC power supply PWB (200V Series)		
	RDENC0079FCPZ	1	BZ		E	DC power supply PWB (Except South Africa(200V Series))		08/12
	RDENC0079FCPZ	1	BZ		E	DC power supply PWB (Except South Africa(200V Series))		
21	XBPS730P08K00		AA		C	Screw(3x8K)		
22	LHLDW7027SCZZ		AB		C	Wire saddle(LSW-2H)		
23	QACCJ6413QCPA		AY		B	AC cord (Japan)		
	QACCD7713QCPZ		AT		B	AC cord (U.S.A,Canada,Saudi Arabia)		
	DHAI-4181DSZZ	-	BB	N	B	AC cord (Saudi Arabia(127V))		07/05
24	LHLDW1154FCZZ		AC		C	Wire saddle(LWS5S2W)		
25	LHLDW1334FCZZ		AA		C	Wire holder (Japan)		
26	DHAI-3699FCZ1		AG		C	AC-DCWH harness		
27	DHAI-3771FCZZ		AL		C	Reactor harness (200V Series)		
	DHAI-3771FCZ1	1	AL		C	Reactor harness (200V Series)		06/03
28	RCORF0049FCZZ		AF		C	Core		
	RCORF0049FCZZ	-	AF		C	Core		06/10
29	LBNDJ0013FCZ1		AE		C	Band (100V Series)		
	LBNDJ0013FCZ1	-	AE		C	Band (100V Series)		06/10
30	LPLTM6771FCZZ		AG		C	AC cord fixing plate (100V Series)		
	LPLTM6771FCZ1	-	AG		C	AC cord fixing plate (Saudi Arabia(127V))		07/05
	LPLTM6770FCZZ		AG		C	Inlet fixing plate (200V Series)		
31	LPLTM6770FCZ1	1	AG	N	C	Inlet fixing plate (200V Series)		10/03
	LHLDW1152FCZZ		AC		C	Bush		
32	LHLDW1152FCZ1	-	AC		C	Bush (Saudi Arabia(127V))		07/05
	LSUPP0011FCZZ		AB		C	Card spacer(PS-3N)		
33	PSHEP5513FCPZ	-	AG		C	PS insulate sheet		1st lot
34	QSOCA0096FCZZ		AK		C	Inlet (200V Series)		
	QSOCA0096FCPZ	3	AL		C	Inlet [Unleaded correspondence](200V Series)		06/02
	QSOCA0096FCZZ	-	AK		C	Inlet (Saudi Arabia(127V))		07/05
35	PTUBU0141FCPZ		AA		C	Tube (200V Series)		
	PTUBU0141FCPZ	-	AA		C	Tube (Saudi Arabia(127V))		07/05
36	DHAI-3838FCZ1		AG		C	Inlet harness (200V Series)		
	DHAI-3838FCZ1	-	AG		C	Inlet harness (Saudi Arabia(127V))		07/05
	DHAI-4479FCPZ	4	AL	N	C	Inlet harness [Productivity improvement](200V Series,Except Taiwan)		09/04
101	LBNDJ0013FCZ1	-	AE		C	Band (Except South Africa)		06/10
	LBNDJ0013FCZ1	-	AE		C	Band (200V Series,Except Taiwan)		09/04
102	XBPS730P08000	-	AA		C	Screw(3x8) [from No.4]		09/02
501	DUNT-7548DSZZ		AQ		E	Inlet unit (200V Series)		
	DUNT-7548DS11	-	AS		E	Inlet unit (200V Series)		1st lot
	DUNT-7548DS14	6	AT		E	Inlet unit [EMI Countermeasure](200V Series)		06/01
	DUNT-7548DS11	1	AS		E	Inlet unit (200V Series)(Except South Africa)		06/10
	DUNT-7548DS11	-	AS		E	Inlet unit (Saudi Arabia(127V))		07/05


44 Power supply unit

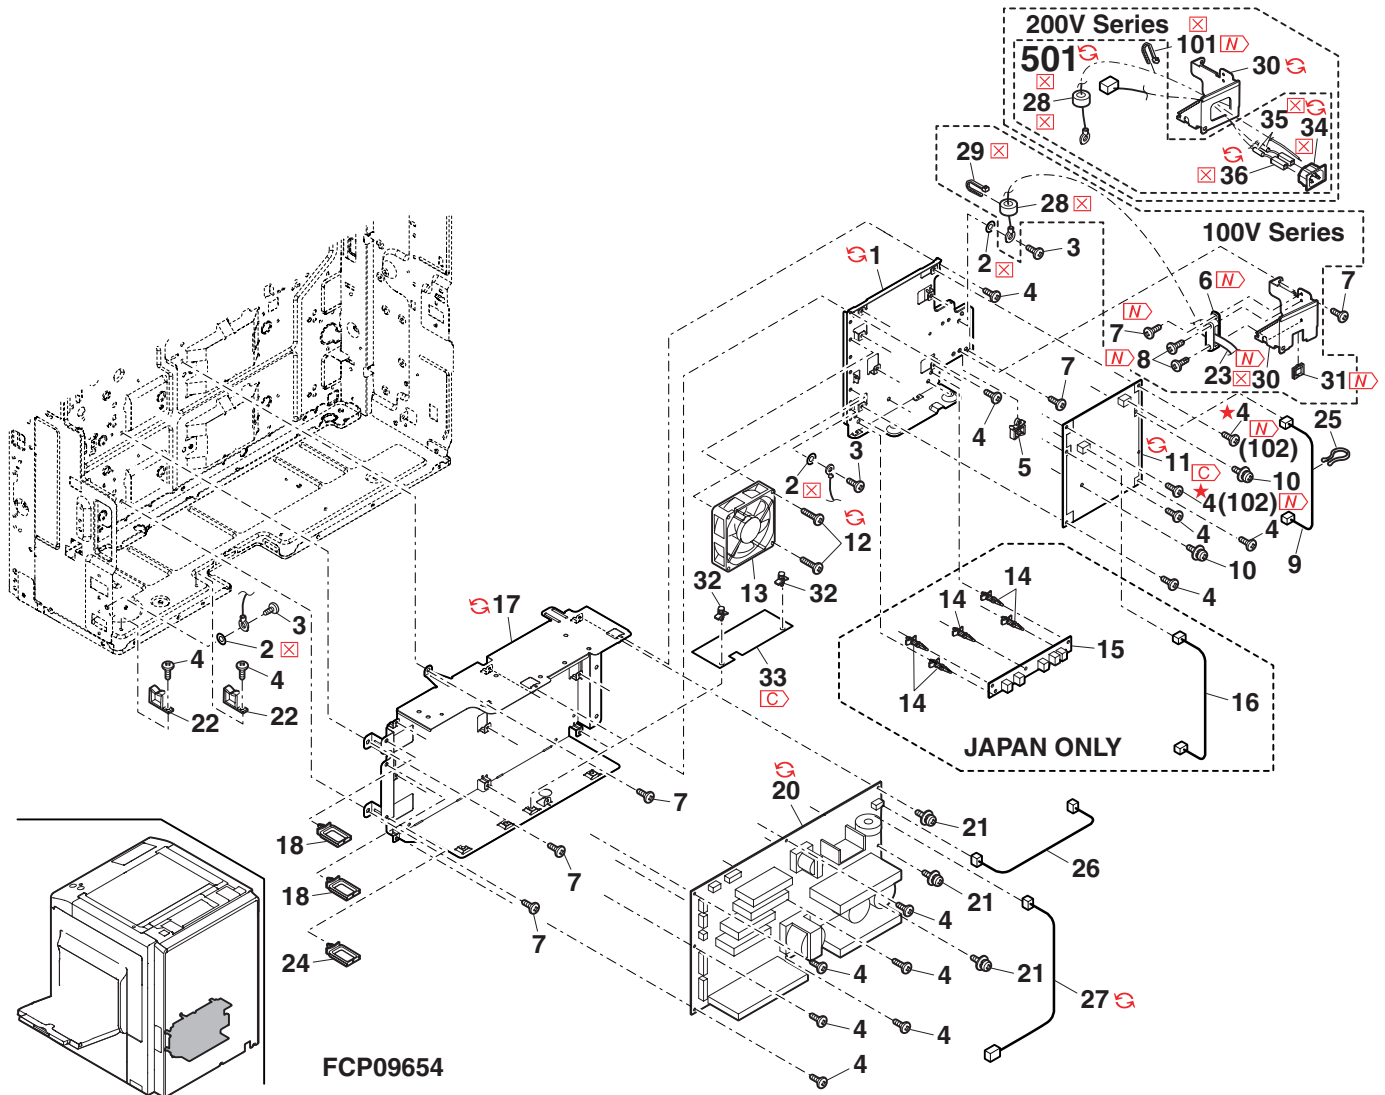

45 Front frame section

[illegible]


45 Front frame section

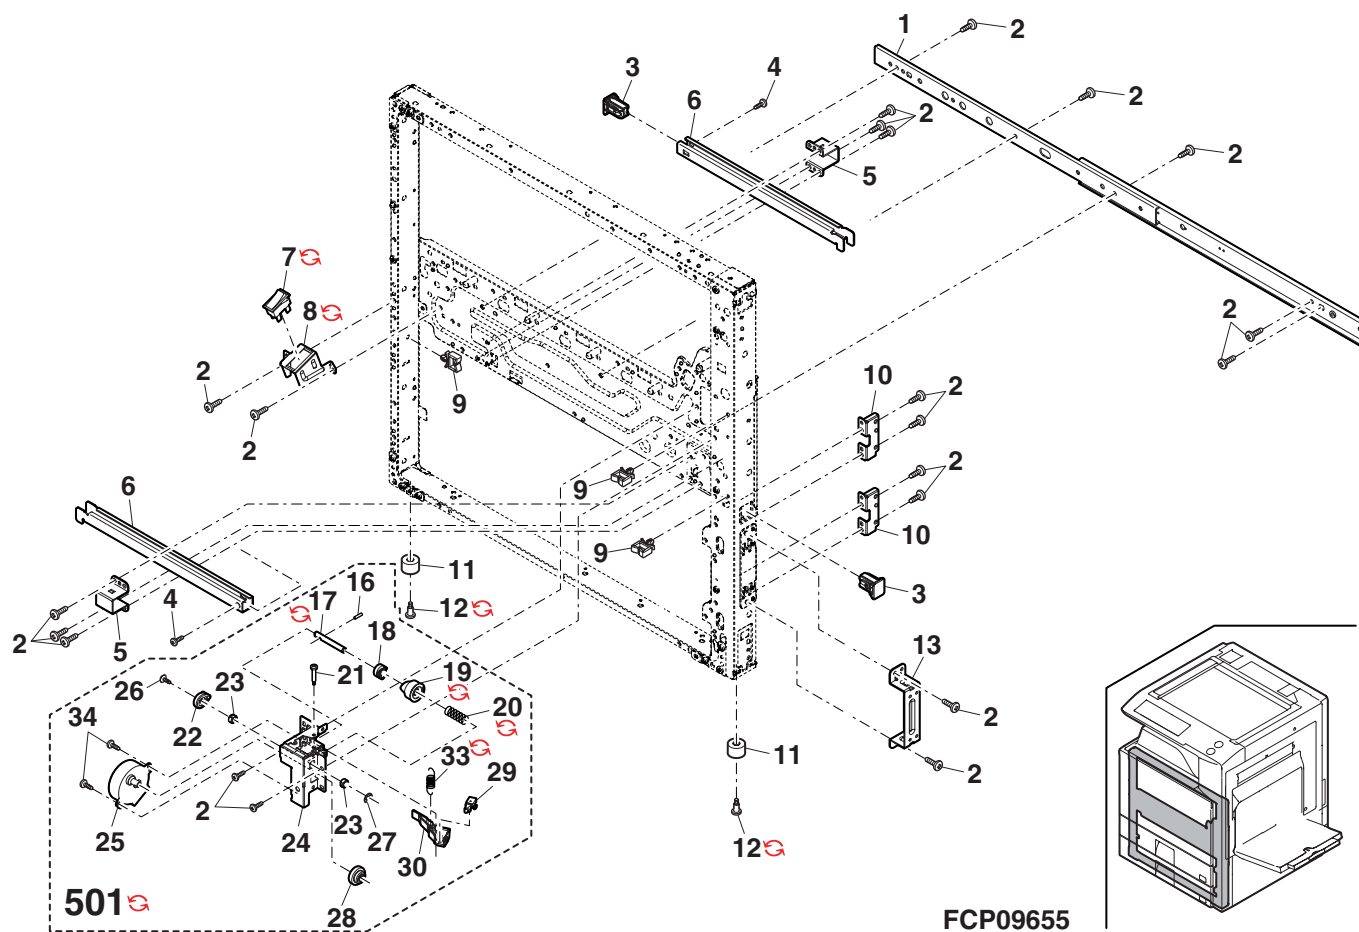

46 Rear frame section 1

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	LHLDZ1652FCZZ		AF		C	1st TC electrode holder		
2	XHBS740P08000		AA		C	Screw(4x8)		
4	QSLP-0216FCZZ		AC		B	1st TC electrode		
5	XEBS730P08000		AC		C	Screw(3x8)		
6	RPLU-0368FCZZ		AT		B	Solenoid CL		
7	MLNKP0035FCZZ		AC		C	Shutter link		
8	XBBS730P06000		AC		C	Screw(3x6)		
9	CHLDZ1660FC01		AG		C	Shutter drive holder		
10	CHLDZ1660FC02	1	AG	N	C	Shutter drive holder		07/05 R/C
	CPWBF1676FC31		AQ		E	Discharger lamp PWB		
	PFTAP0149FCZZ		AG		C	Process electrode cover		
11	PFTAP0149FCZ1	5	AG	N	C	Process electrode cover [With No.15]	CCE645	08/11 mid
	PFTAP0149FCZ2	3	AF	N	C	Process electrode cover	CCE808	10/08 mid
12	MSPRD3385FCZZ		AD		C	GB contact spring		
13	MSPRD3386FCZZ		AD		C	DV contact spring		
14	MSPRD3384FCZZ		AC		C	MC contact spring		
	PCASZ0312FCZZ		AG		C	Process electrode case		
15	PCASZ0312FCZ1	5	AG	N	C	Process electrode case [With No.11]	CCE645	08/11 mid
17	DHAI-3710FCZZ		AQ		C	DV interface harness		
18	QSLP-0208FCZZ		AD		B	MC connect plug		
19	LPLTM6609FCZZ		AF		C	LCC fixing plate		
21	GLEGG0079FCZZ		AE		D	Rubber foot		
22	LX-BZ1013FCZZ		AC		C	Rubber foot fixing screw		
	LX-BZ1124FCPZ	1	AC	N	C	Rubber foot fixing screw		07/02
23	MLOKZ0011FCZZ		AC		C	Cassette lock		
24	VHPGP1S73P+-1		AF		B	Photo sensor(GP1S73P)		
	VHPGP1S73P+-18	3	AF		B	Photo sensor(GP1S73P) [Unleaded solder correspondence]		06/03
25	XBPS740P10KS0		AC		C	Screw(4x10KS)		
26	NBLTH0455FCZZ		AQ		B	Motor reduction belt		
27	NSFTZ2952FCZZ		AL		C	ADU drive joint shaft		
28	PCLR-0509FCZZ		AC		C	Joint collar(22)		
29	NGERH1471FCZZ		AF		C	M transport gear(22T)		
30	MARMP0343FCZZ		AC		C	ADU drive joint arm		
31	XRESP40-06000		AA		C	E ring(E4)		
32	MSPRT3438FCZZ		AA		C	Joint arm spring		
	LFRM-1193FCZZ		AF		C	Right drive frame		
33	LFRM-1193FCZ1	1	AF	N	C	Right drive frame		07/02 R/C
34	XBPS730P08KS0		AB		C	Screw(3x8KS)		
35	NPLYZ0440FCZZ		AC		C	Pulley(36P)		
36	NGERH1617FCZZ		AC		C	ADU joint gear(28T)		
37	NSFTZ2960FCZZ		AL		C	Right drive shaft		
	LX-BZ0020QSPZ		AB		C	Drawer connector step screw		
38	LX-BZ1046FCZZ	-	AC		C	Drawer connector step screw [Parts code correction]		1st lot
39	LPLTM5714FCZZ		AB		C	M3 plate		
	LPLTM7458FCZZ	3	AB		C	M3 plate [Productivity improvement]		06/08
40	LHLDZ1653FCZZ		AL		C	2nd TC separate electrode holder		
	QSLP-0212FCZZ		AC		B	2nd TC separate electrode		
41	QSLP-0212FCZZ	-	AC		B	2nd TC separate electrode		06/12
42	QSW-M0502FCPZ		AH		B	Inter lock switch(AM51632C531)		
43	XEBS730P16000		AA		C	Screw(3x16)		
44	XEBS730P08000		AC		C	Screw(3x8)		
45	PCOVP1893FCZZ		AE		C	Inter lock switch cover		
46	MSPRD3424FCZ1		AC		C	Joint spring		
47	NSFTZ2942FCZZ		BQ		C	Joint shaft		
	LFRM-1192FCZZ		AD		C	Drive joint frame		
48	LFRM-1192FCZ1	3	AD		C	Drive joint frame [Commonization]		08/09 R/C
49	NSFTZ2948FCZZ		AF		C	Movable joint shaft		
50	NGERH1629FCZZ		AC		C	Paper feed gear(24T)		
51	XRESP40-06000		AA		C	E ring(E4)		
52	NGERH1617FCZZ		AC		C	ADU joint gear(28T)		
53	VHPGP1A71L3-1		AG		B	Remain detect sensor(GP1A71L3)		
	VHPGP1A71L3-18	3	AG		B	Remain detect sensor(GP1A71L3) [Unleaded solder correspondence]		06/03
	PCOVP1863FCZZ		AD		C	Remain detect cover		
54	PCOVP1863FCZ1	1	AD		C	Remain detect cover		10/03 R/C
55	CPWBF1592FCE1		AN		E	Cassette existence detect PWB		
56	MSPRC2894FCZZ		AC		C	Vertical detect switch spring		
	LHLDZ1464FCZZ		AG		C	Vertical detect spring holder		
57	LHLDZ1464FCZ1	1	AC		C	Vertical detect spring holder		- R/C
	LHLDZ1463FCZZ		AX		C	Vertical detect cover		
58	LHLDZ1463FCZ1	1	AM	N	C	Vertical detect cover		- R/C
59	XEBS740P08000		AA		C	Screw(4x8)		
60	DHAI-3725FCZZ		AG		C	MC harness		
61	DHAI-3726FCZZ		AE		C	MC interface harness		
	DHAI-3832FCZ1		AG		C	MC BK harness		
62	DHAI-4256FCPZ	1	AE		C	MC harness P2		09/01 R/C
63	DHAI-3721FCZZ		AD		C	Transfer belt separate harness		
64	DHAI-3924FCPZ		AP		C	1st transfer output harness		
65	LX-BZ0987FCZZ		AC		C	Heater fixing screw		
501	CFRM-1193DS51		AQ		E	ADU joint drive		

46 Rear frame section 1

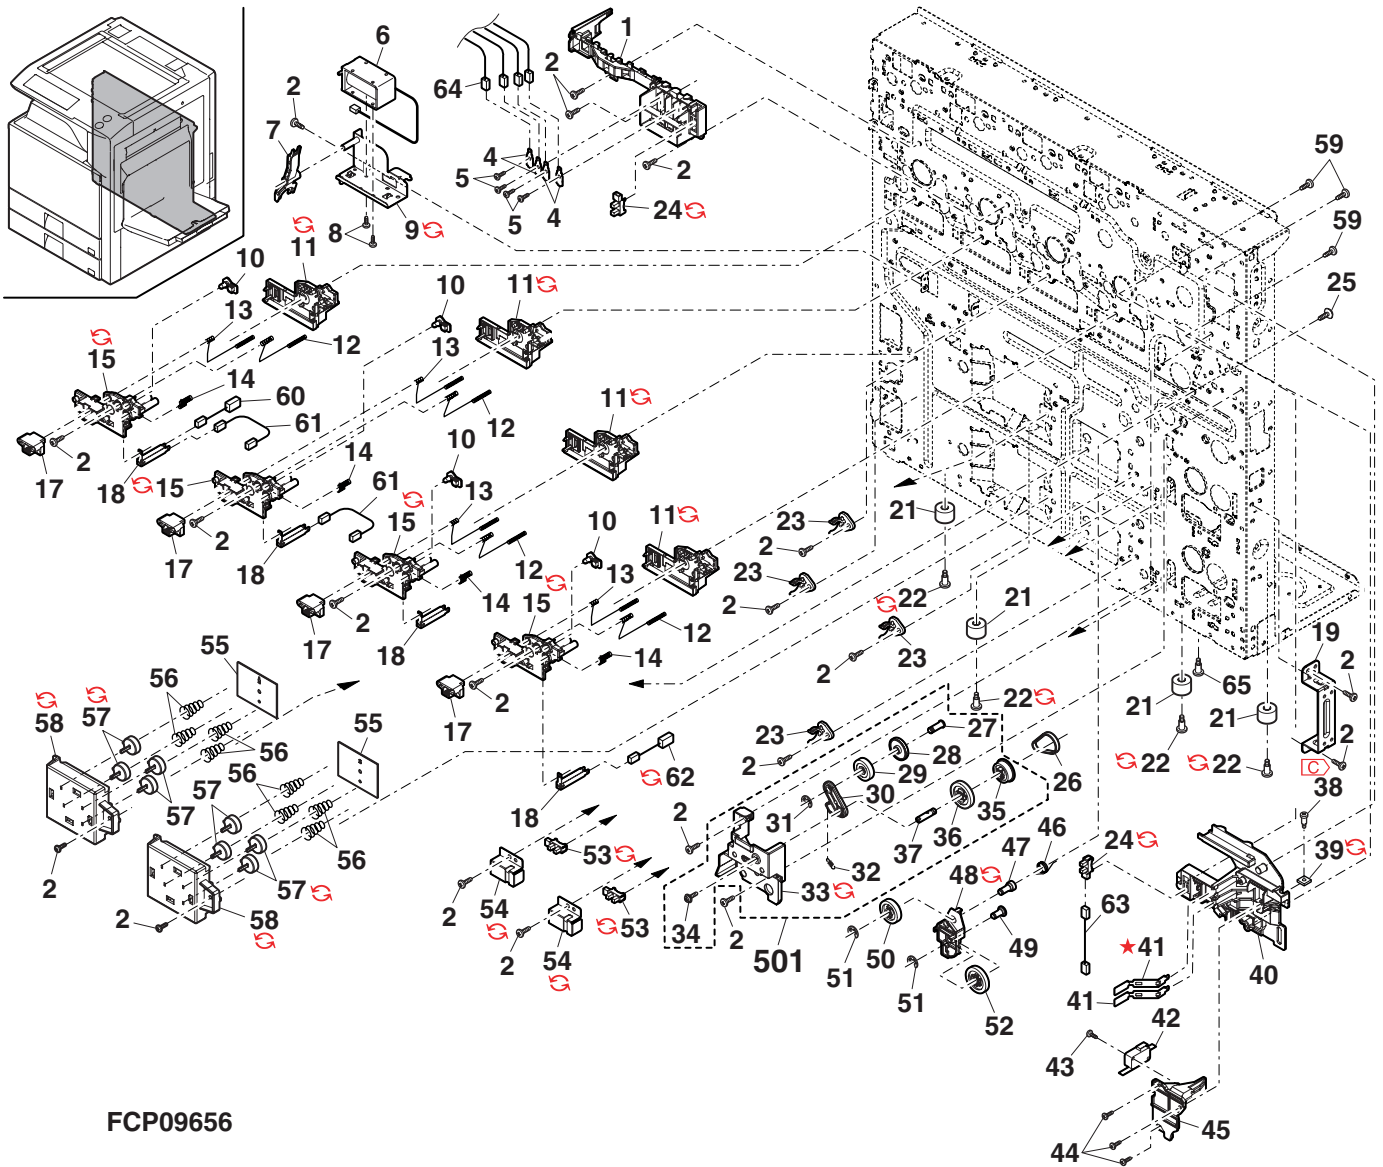


47 Rear frame section 2

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	LPLTM6583FCZZ		AG		C	Exterior fixing plate L		
2	LPLTM6583FCZ1	1	AG		C	Exterior fixing plate L		08/06
	XHBS740P08000		AA		C	Screw(4x8)		
3	LHLDZ1681FCZZ		AG		C	Harness holder		
	LHLDZ1681FCZ1	1	AG	N	C	Harness holder		07/01
	LHLDZ1681FCZ2	1	AG		C	Harness holder		08/02 mid
4	LPLTM6606FCZZ		AP		C	HL 2nd TC PWB fixing plate		
	LPLTM6606FCZ1	-	AP		C	HL 2nd TC PWB fixing plate [Parts code correction]		1st lot
5	CPWBF1723FC318		BP	N	E	HL PWB (100V Series)		
	CPWBF1667FC31		BH		E	HL PWB (200V Series)		
6	XHBS730P08000		AB		C	Screw(3x8)		
7	CPWBF1691FCE2		BC	N	E	Driver sub PWB		
	CPWBF1691FCE4	3	BD		E	Driver sub PWB [Improve performance]	CCE586	08/03 R/C
8	LHLDW1264FCZZ		AD		C	Wire saddle(LWS-8S-2.5W)		
9	RDENU0046FCZZ		CE		E	2nd transfer PWB		
	RDENU0066FCPZ	1	CE	N	E	2nd transfer PWB		07/01 R/C
10	LPLTM6584FCZZ		AD		C	Box fixing plate		
11	LPLTM6593FCZZ		AF		C	Transfer high voltage fixing plate		
12	RDENU0045FCZ1		CE		E	TC1 PWB		
13	QSW-C9294QCZZ		AF		B	Dehumidification heater switch (Japan)		
14	PMLT-1426FCZZ		AC		C	Ozone duct cushion B		
	PMLT-1649FCZZ	1	AC	N	C	Ozone duct cushion B		07/01
15	JHNDM0185FCZZ		AG		C	Handle		
16	PCOVP1883FCZZ		AC		C	Handle cover		
17	XEBS730P08000		AC		C	Screw(3x8)		
18	LPLTM6543FCZZ		AD		C	Handle fixing plate		
19	LRALM0234FCZZ		BA		C	Slide rail		
21	LPLTM6603FCZZ		AG		C	Shield fixing plate		
22	RSPA00001QSZZ		AH		B	Speaker [MX-3500FN,MX-3501FN,MX-4500FN,MX-4501FN]		
23	LX-HZ0002QSPZ		AC		C	Step screw [MX-3500FN,MX-3501FN,MX-4500FN,MX-4501FN]		
24	RMOTS0925FCPZ		BF		B	ADU lower motor		
	RMOTS0925FCP1	1	BF		B	ADU lower motor		06/05
25	XHBS730P06000		AC		C	Screw(3x6)		
26	LBNDJ0020FCZZ		AA		C	Snap band [MX-3500FN,MX-3501FN,MX-4500FN,MX-4501FN]		
27	LX-BZ0932FCPZ		AC		C	Drawer step screw		
28	MSPRC3267FCZ1		AC		C	Right drawer spring		
29	LPLTM6695FCZZ		AE	N	C	Right drawer fixing plate		
30	DHAI-3797FCZ4		BK	N	C	Paper feed main harness		
	DHAI-4230FCPZ	1	BK		C	Paper feed main harness		07/12
31	PDUC-0187FCZZ		AQ		C	Ozone inhalation duct B		
	PDUC-0187FCZ1	5	AQ		C	Ozone inhalation duct B [With No.101]		08/02 mid
	PDUC-0187FCZ2	1	AQ	N	C	Ozone inhalation duct B		11/03 R/C
32	PDUC-0186FCZZ		AS		C	Ozone inhalation duct A		
	PDUC-0186FCZ1	1	AS		C	Ozone inhalation duct A		08/02 mid
	PDUC-0186FCZ2	1	AS	N	C	Ozone inhalation duct A		11/03 R/C
33	RDENU0047FCZZ		CR	N	E	MC PWB		
34	PDUC-0188FCZZ		AM		C	Ozone inhalation duct C		
	PDUC-0188FCZ1	1	AM	N	C	Ozone inhalation duct C		07/01
35	LPLTM6585FCZZ		AL		C	Exterior fixing plate L lower		
36	RCILZ0123FCPZ		BF	N	B	Reactor (200V series)		
37	XEBS740P40000		AC		C	Screw(4x40)		
38	NFANS0079FCPZ		BC		B	Ozone fan		
39	PBOX-0152FCZZ		AK		D	Filter box		
	PBOX-0152FCZ1	1	AK	N	D	Filter box		07/01
40	PFILZ0308FCZZ		AZ		A	Ozone filter		
	PFILZ0330FCZZ	4	AY		A	Ozone filter [Improve performance] [For Europe,effective time Dec/07]		08/01
41	LPLTM6591FCZZ		AG		C	Driver PWB fixing plate		
42	CPWBN1668FCE2		BC	N	E	Driver PWB		
	CPWBN1668FCE5	3	BE		E	Driver PWB [Improve performance]	CCE586	08/03 R/C
45	LPLTM6601FCZZ		AM		C	FAX PWB fixing plate [MX-3500FN,MX-3501FN,MX-4500FN,MX-4501FN]		
46	VHi28F082L47S		AY		B	FAX flash ROM [MX-3500FN,MX-3501FN,MX-4500FN,MX-4501FN]		
47	CPWBX1647FCE5		CA	N	E	FAX main PWB [MX-3500FN,MX-3501FN,MX-4500FN,MX-4501FN]		
48	XBPS730P08KS0		AB		C	Screw(3x8KS) [MX-3500FN,MX-3501FN,MX-4500FN,MX-4501FN]		
49	PCOVP1885FCZZ		AK		C	FAX cover [MX-3500FN,MX-3501FN,MX-4500FN,MX-4501FN]		
50	CPWBN1648FCE3		BT		E	LIU PWB [MX-3500FN,MX-3501FN,MX-4500FN,MX-4501FN]		
52	XBPS726P08000		AA		C	Screw(2.6x8) [MX-3500FN,MX-3501FN,MX-4500FN,MX-4501FN]		
53	PSHEP5458FCZZ		AD		C	Duct harness sheet		
	PSHEP5766FCZZ	1	AD	N	C	Duct harness sheet		07/01
	PSHEP5766FCZ1	1	AD	N	C	Duct harness sheet		07/01
54	PSEL-0936FCZZ		AC		C	Ozone duct seal		
	PSEL-1011FCZZ	1	AC	N	C	Ozone duct seal		07/01
55	PGSK-0059FCZZ		AC	N	C	Gasket [MX-3500FN,MX-3501FN,MX-4500FN,MX-4501FN]		

47 Rear frame section 2

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
56	PGSK-0060FCZZ		AF	N	C	Gasket [MX-3500FN,MX-3501FN,MX-4500FN,MX-4501FN]		
57	MSPRP3572FCZZ		AH	N	C	Finger [MX-3500FN,MX-3501FN,MX-4500FN,MX-4501FN]		
58	LX-BZ0705FCPZ		AC		C	Screw		
59	LHLDW1285FCZZ		AC		C	Edge saddle		
60	LX-BZ1027FCZZ		AC		C	Rail step screw		
61	CPLTM6981FC01		AG		C	Earth spring fixing plate [Except MX-3500FN,MX-3501FN,MX-4500FN,MX-4501FN]		
62	PCÖVP1933FCZZ		AE		C	Duct harness cover		
63	PSHEP5497FCPZ		AC		C	Speaker harness protect sheet [MX-3500FN,MX-3501FN,MX-4500FN,MX-4501FN]		
64	DHAi-3728FCZ1		AF		C	2nd transfer separate harness		
65	DHAi-3706FCZZ		AE		C	HV interface harness		
66	DHAi-3921FCZZ		AK		C	HVR harness		
101	PSHEP5954FCZZ	5	AB		C	Duct B sheet [With No.31]		08/02 mid
501	DUNT-7480FCA2		CE		E	1st FAX box [MX-3500FN,MX-3501FN,MX-4500FN,MX-4501FN]		

47 Rear frame section 2

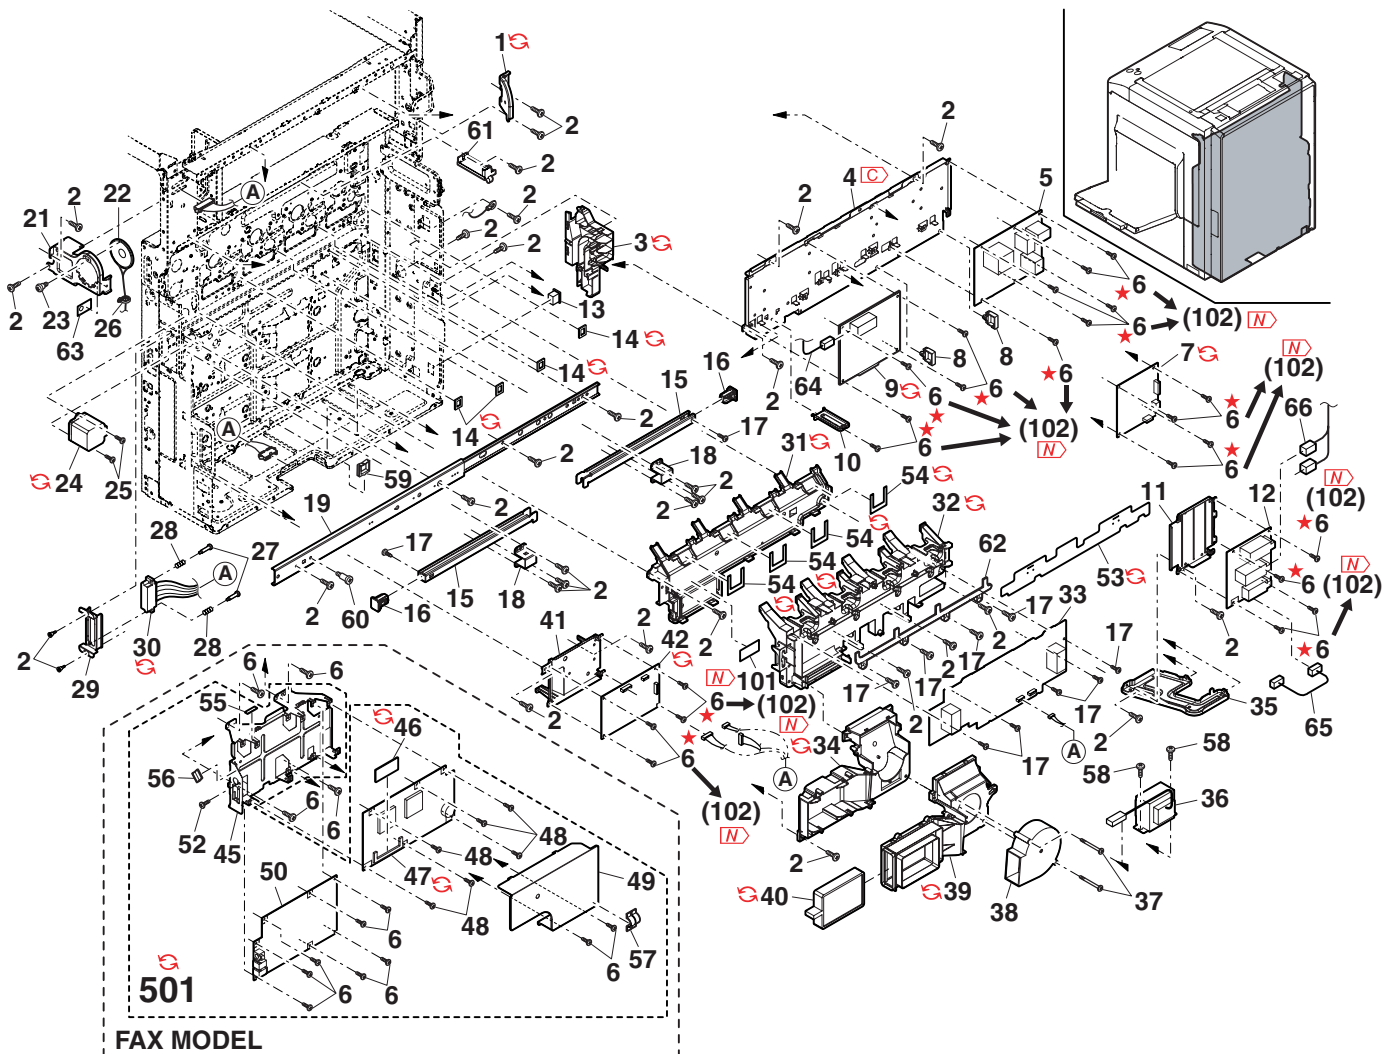


FCP09657

48 Frame section

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	LFRM-1178FCZZ		AR		C	Frame left rear		
	LFRM-1178FCZ1	1	AR		C	Frame left rear		08/06
	LFRM-1178FCZ2	3	AR	N	C	Frame left rear [Improve reliability]		- R/C
2	PG1DH2161FCZZ		AG		C	Harness guide		
3	XHBS740P08000		AA		C	Screw(4x8)		
	XHBS740P08000	-	AA		C	Screw(4x8) [To No.105]		06/09
4	LFRM-1189FCZZ		AR		C	Frame right rear		
	LFRM-1189FCZ2	1	AR	N	C	Frame right rear		09/02 R/C
5	CSTYM0351FC01		AN		C	Scanner stay RR		
6	LPLTM6577FCZZ		AG		C	Delivery positioning plate		
7	LSTYM0355FCZZ		AQ		C	Delivery stay		
	LSTYM0355FCZ1	5	AR		C	Delivery stay [With No.5-901,6-901]		- R/C
	LSTYM0355FCZ2	1	AR		C	Delivery stay		08/02 R/C
	LSTYM0355FCZ3	1	AR		C	Delivery stay		08/07 R/C
8	LPLTM6604FCZZ		AH		C	Exterior reinforce plate		
9	CPLTM6541FC01		AY		C	Scanner joint plate L		
10	LX-BZ0335FCPZ		AB		C	Red screw(4x6S/SW)		
11	LRALM0229FCZZ		AL		C	Cassette rail L		
12	PCLR-0519FCZZ		AE		C	Collar(φ16)		
13	LX-BZ0926FCP1		AC		C	Collar step screw		
14	PCASZ0314FCZZ		AY		C	Toner case upper		
	PCASZ0314FCZ5	-	AY		C	Toner case upper [Parts code correction]		1st lot
	PCASZ0314FCZ6	1	AY		C	Toner case upper		- R/C
	PCASZ0314FCZ8	3	AY	N	C	Toner case upper [Productivity improvement]		- R/C
15	QSW-M0502FCPZ		AH		B	Inter lock switch(AM51632C531)		
16	LPLTM6542FCZZ		AD		C	Scanner adjust plate		
17	LPLTM6597FCZ1		AH		C	Door switch fixing plate		
18	LPLTM5714FCZZ		AB		C	M3 plate		
	LPLTM7458FCZZ	3	AB		C	M3 plate [Productivity improvement]		06/08
19	LRALP0231FCZZ		AM		C	Fusing rail F		
20	LPLTM6575FCZZ		AE		C	Fusing drawer fixing plate		
21	XEBS740P08000		AA		C	Screw(4x8)		
22	CSTYM0353FC05		AR	N	C	Fusing stay		
	CSTYM0353FC06	1	AR	N	C	Fusing stay		07/05 R/C
23	LX-BZ0881FCZZ		AC		C	Holder red screw		
24	LRALM0230FCZZ		AN		C	Cassette rail R		
	LRALM0230FCZ1	1	AL		C	Cassette rail R		10/03 R/C
25	LPLTM6580FCZZ		AL		C	Transport UN fixing plate		
26	LX-BZ0959FCPZ		AC		C	Step screw(M3)		
	LX-BZ1134FCPZ	1	AC	N	C	Step screw(M3)		07/02
27	PCOVP1654FCZ2		AN	N	C	T heater cover (Japan)		
28	LPLTM6089FCZZ		AK		C	Heater fixing plate (Japan)		
29	RHETP0133FCP1		AV		B	Dehumidification heater (Japan)		
30	XHBS730P06000		AC		C	Screw(3x6) (Japan)		
32	PCASZ0313FCZZ		AV		C	Toner case lower		
	CCASZ0313FC05	-	AX		C	Toner case lower [Parts code correction]		1st lot
	CCASZ0313FC06	5	AY		C	Toner case lower [MX-3500N,MX-3501N,MX-4500N,MX-4501N(For North America)]	CCE507	07/09
	CCASZ0313FC06	5	AY		C	Toner case lower [MX-3500N,MX-3501N,MX-4500N,MX-4501N(Except for North America)]	CCE542	08/01
34	LX-BZ0020QSPZ		AB		C	Drawer connector step screw		
	LX-BZ1046FCZZ	-	AC		C	Drawer connector step screw [Parts code correction]		1st lot
35	CSTYM0350FC01		AQ		C	Scanner stay FR		
	CSTYM0350FC02	1	AQ		C	Scanner stay FR		08/02 R/C
37	LHLDW7008XCZZ		AB		C	Wire saddle(LWS-1S)		
38	PCOVP1872FCZZ		AK		C	Fusing drawer harness cover		
	PCOVP1872FCZ1	1	AL	N	C	Fusing drawer harness cover		11/03 R/C
39	XHBS730P14000		AA		C	Screw(3x14)		
40	LPLTM6532FCZZ		AL		C	Scanner joint rear plate		
	LPLTM6532FCZ1	1	AL	N	C	Scanner joint rear plate		- R/C
41	LRALP0232FCZZ		AF		C	Toner cartridge rail A		
42	TCAUH1035FCZZ		AC		D	High temperature caution label (Japan)		
43	PSHEP5491FCPZ		AD		C	PF main harness fixer		
44	LANGT1444FCZZ		AE	N	C	Panel angle		
45	LRALM0237FCZZ		AG		C	Transfer rail		
	LRALM0237FCZ1	3	AG		C	Transfer rail	CCE307	06/04 mid
	LRALM0237FCZ2	1	AG		C	Transfer rail		- R/C
100	PSHEP5560FCZZ	-	AF		C	Scanner right sheet		1st lot
	PSHEP5560FCZ1	1	AF	N	C	Scanner right sheet		06/11
101	NFANP0081FCZZ	-	BA		B	LSU radiate fan		1st lot
	NFANP0081FCZZ	-	BA		B	LSU radiate fan	CCE507	07/09
102	NFANS0085FCPZ	5	BA		B	LSU radiate fan [MX-3500N,MX-3501N,MX-4500N,MX-4501N(For North America)]	CCE507	07/09
	NFANS0085FCPZ	5	BA		B	LSU radiate fan [MX-3500N,MX-3501N,MX-4500N,MX-4501N(Except for North America)]	CCE542	08/01
103	LBNDJ0043FCZZ	-	AA	N	C	Band		1st lot
	LBNDJ0013FCZ1	5	AE		C	Band [MX-3500N,MX-3501N,MX-4500N,MX-4501N(For North America)]	CCE507	07/09
	LBNDJ0013FCZ1	5	AE		C	Band [MX-3500N,MX-3501N,MX-4500N,MX-4501N(Except for North America)]	CCE542	08/01

- 73-2 -


48 Frame section

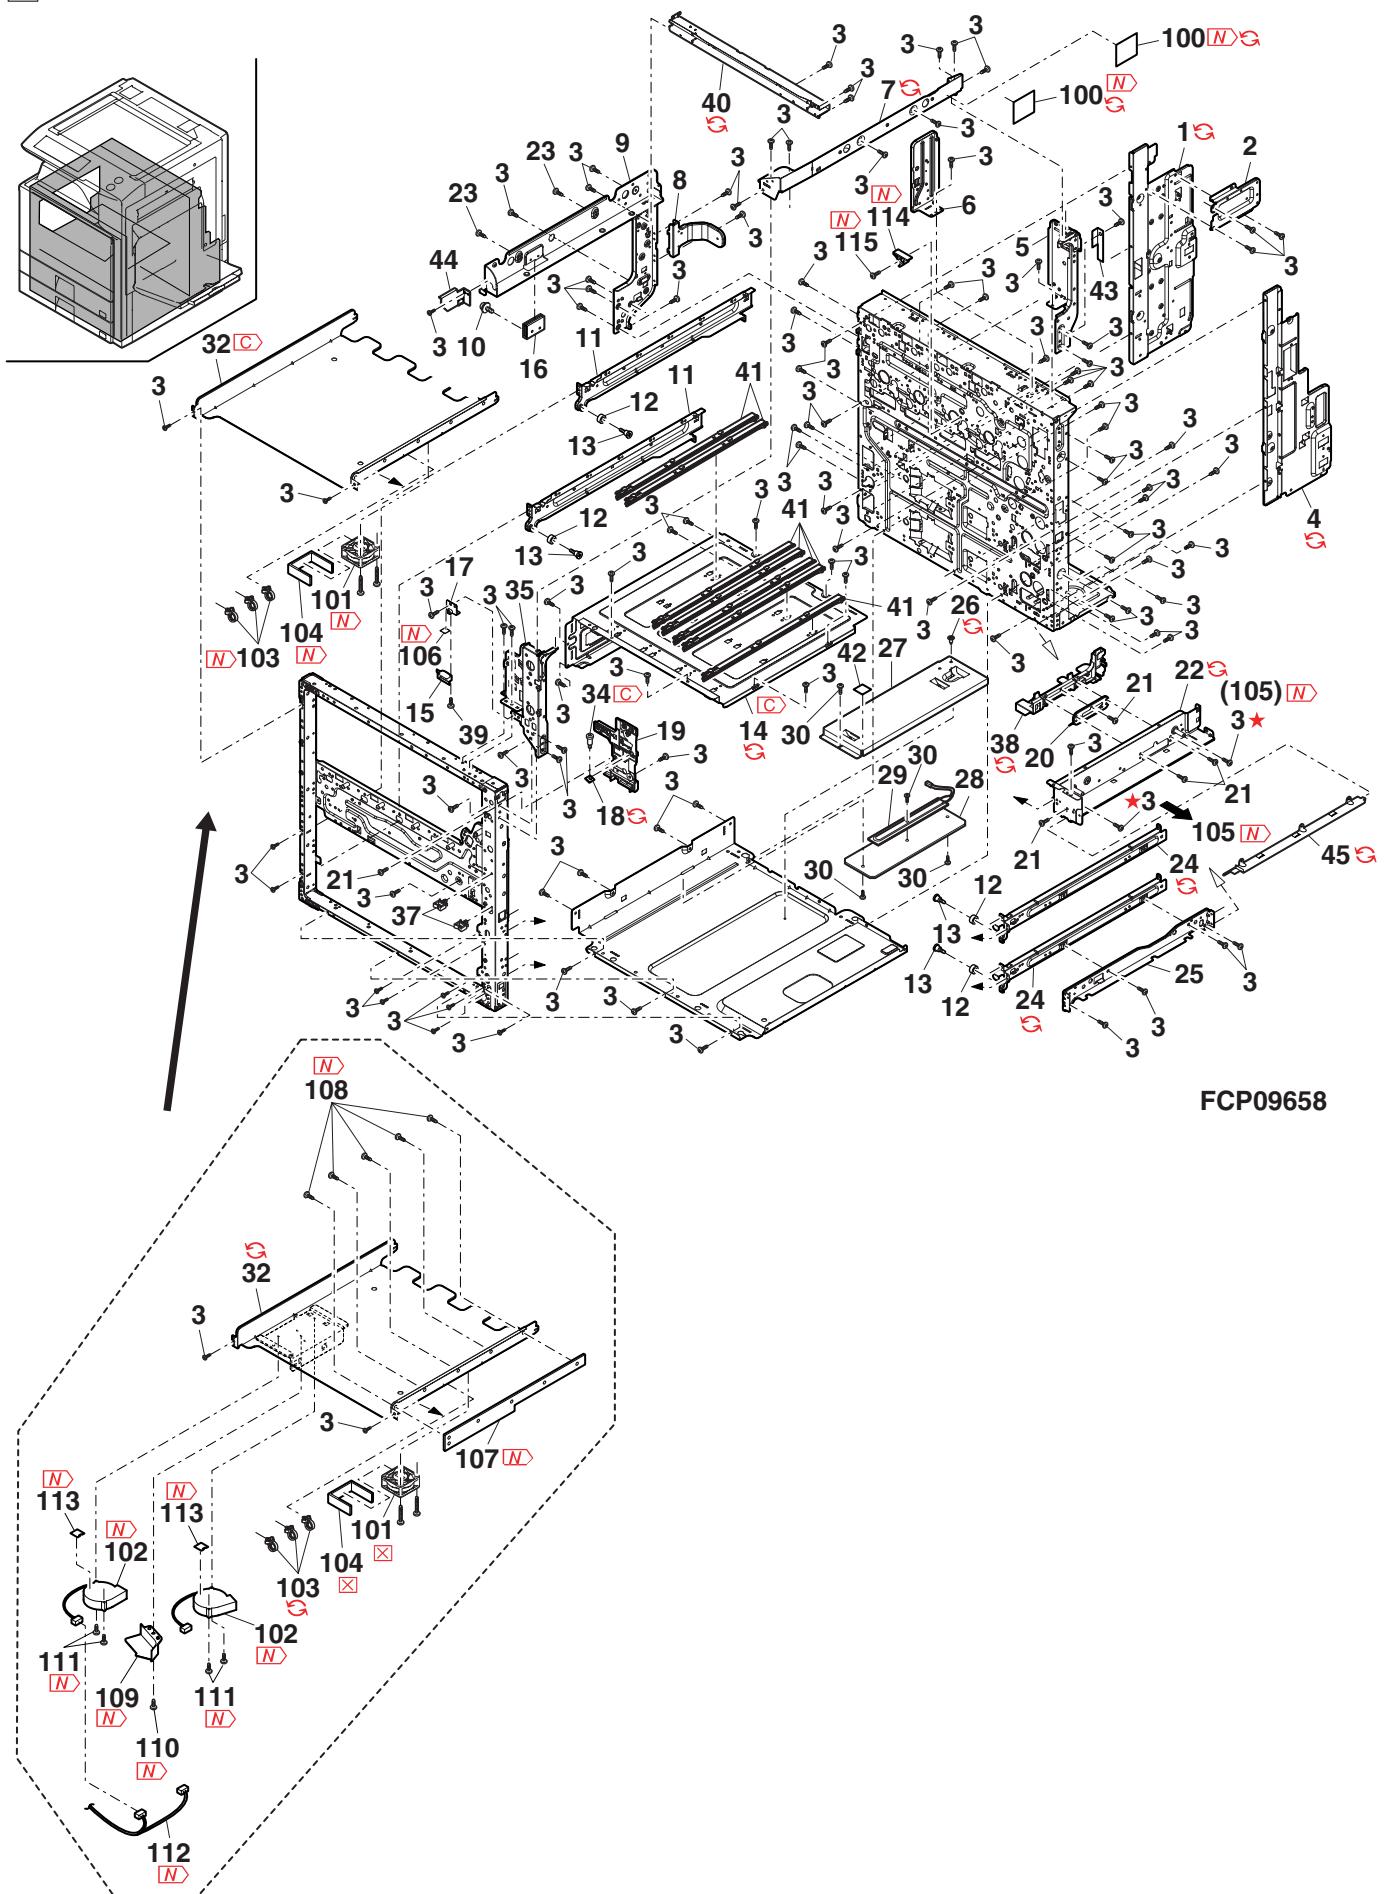

FCP09658

- 74-1 -


49 Wiring section

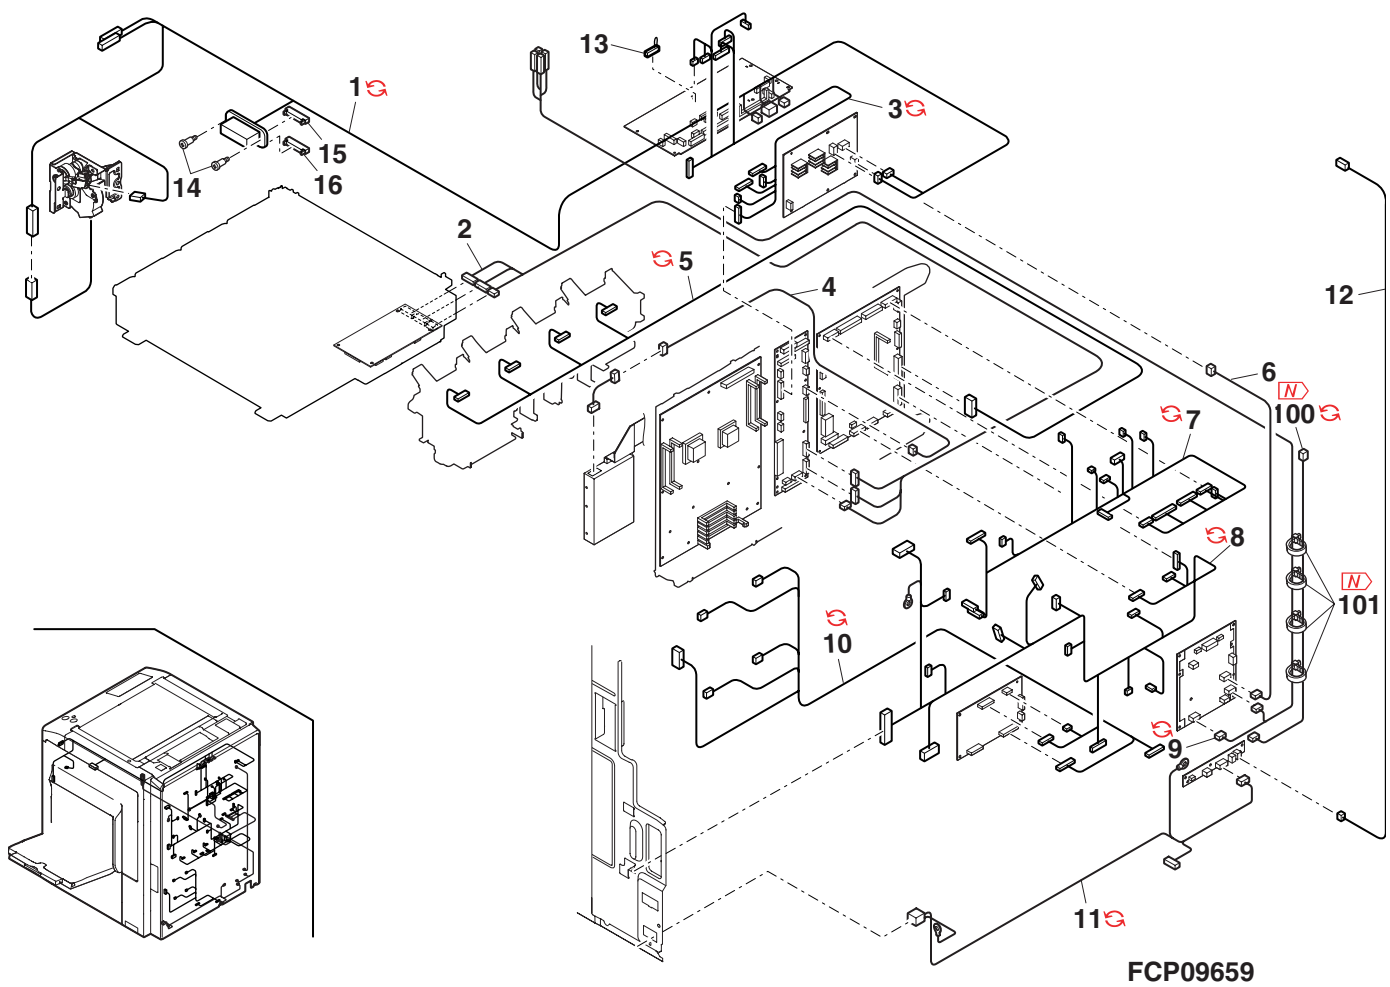

50 RSPF Exteriors[MX-3500FN/N,MX-4500FN/N]

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	CG i DM2137DS51		BN		E	Paper feeding roller unit		
2	CSOU-0205DS51		BH		E	Original tray unit		
3	GCAB-1107FCZZ		AS		D	RSPF rear cabinet		
4	DHAI-3760FCZZ		AN		C	Transport interface main harness		
5	XEBS740P10000		AA		C	Screw(4x10)		
6	PSHEZ5374FCZZ		AD		C	OC positioning sheet		
6	PSHEZ5374FCZ1	1	AC		C	OC positioning sheet		06/12 mid
7	XHBS730P06000		AC		C	Screw(3x6)		
8	XBBS730P16000		AA		C	Screw(3x16)		
9	PCOVP1929FCZ1		AE	N	C	Harness cover upper		
9	PCOVP1929FCZ2	-	AE		C	Harness cover upper [Parts code correction]		1st lot
10	DHAI-3759FCZZ		AU		C	RSPF connection harness		
11	LX-BZ1028FCZZ		AC		C	Screw		
12	PCOVP1930FCZZ		AE		C	Harness cover lower		
12	PCOVP1930FCZ1	-	AE		C	Harness cover lower [Parts code correction]		1st lot
13	XNES730-24000		AA		C	Nut(M3)		
14	CPWBN1680FCE1		BB	N	E	RSPF driver PWB unit		
14	CPWBN1680FCE2	3	BB		E	RSPF driver PWB unit [Productivity improvement]		08/02 R/C
15	LSOU-0203FCZ1		BG		D	RSPF base tray		
15	LSOU-0203FCZ2	3	BF		D	RSPF base tray	CCE497	07/08 mid
15	LSOU-0203FCZ3	1	BF		D	RSPF base tray		08/02 R/C
16	LPLTM6553FCZZ		AM		C	Hinge fixing plate		
17	XEBS740P10000		AA		C	Screw(4x10)		
17	XEBS740P10000	3	AA		C	Screw(4x10) [to No.101]	CCE497	07/08 mid
18	MHNG-0217FCZ2		BS	N	C	Hinge R		
18	MHNG-0217FCZ3	1	BS		C	Hinge R		06/02
19	MHNG-0216FCZ2		BT	N	C	Hinge L		
20	PCOVP1824FCZZ		AE		C	Stamp cover		
20	PCOVP1824FCZ1	-	AE		C	Stamp cover [Parts code correction]		1st lot
21	LX-BZ0531FCPZ		AB		C	Screw(4x8)		
22	DHAI-3761FCZZ		AH		C	Base tray harness		
23	XEBS730P08000		AC		C	Screw(3x8)		
24	LHLDZ1540FCZZ		AG		C	Fulcrum holder		
25	XEBS730P10000		AC		C	Screw(3x10)		
26	PCOVP1855FCZZ		AF		C	Sensor cover		
27	CCEZ0020QS01		AK		D	Glass cleaner		
27	CCEZ0020RS51	1	AK	N	D	Glass cleaner		11/02 R/C
28	PHAG-0005FCZZ		AC		C	OC mat fixing hook		
29	MLEVP0930FCZZ		AC		C	Paper exit actuator		
30	MSPRD3375FCZZ		AB		C	Paper exit return spring		
31	PCOVP1856FCZ1		AE		C	Follower roller cover		
32	LPLTM6554FCZZ		AC		C	Follower roller fixing plate		
32	LPLTM6554FCZ1	-	AC		C	Follower roller fixing plate [Parts code correction]		1st lot
33	NSFTZ0009QSPZ		AL		C	Transport follower shaft		
34	NROLP1517FCZZ		AA		C	Delivery follower roller RSPF		
35	PSHEZ5372FCZZ		AE		C	Reading front sheet		
35	PSHEZ5372FCZ1	1	AD		C	Reading front sheet		06/12 mid
36	VHPGP1A71L3-1		AG		B	Photo sensor(GP1A71L3)		
36	VHPGP1A71L3-18	3	AG		B	Photo sensor(GP1A71L3) [Unleaded solder correspondence]		06/03
37	PSHEZ5373FCZ1		AE		C	Reading rear sheet		
37	PSHEZ5373FCZ2	-	AE		C	Reading rear sheet [Parts code correction]		1st lot
37	PSHEZ5373FCZ3	1	AD		C	Reading rear sheet		06/12 mid
38	MSPRC3352FCZZ		AB		C	Follower pressure spring		
39	PMLT-1418FCZZ		AA		C	Gate stopper cushion		
39	PMLT-1653FCZZ	1	AA	N	C	Gate stopper cushion		06/12 mid
40	XEBS730P08000		AC		C	Screw(3x8)		
41	NSFTZ2914FCZZ		AP		C	Follower roller shaft		
42	XRESP30-06000		AA		C	E ring(E3)		
43	LHLDZ1640FCZZ		AC		C	Paper feeding PG holder		
44	LX-BZ0930FCPZ		AC		C	Screw(4x6)		
45	GCAB-1106FCZZ		AN		D	RSPF front cabinet		
46	GCOV-0249FCZZ		AF		D	F cabinet cover		
47	MSPRT3390FCZZ		AC		C	Link arm return spring		
48	PSHEZ5400FCZ3		AQ		D	OC mat		
48	PSHEZ5400FCZ4	-	AY		D	OC mat [Parts code correction]		1st lot
48	PSHEZ5400FCZ5	1	AX		D	OC mat		06/12 mid
48	PSHEZ5400FCZ6	3	AX		D	OC mat	CCE474	07/05 mid
48	PSHEZ5400FCZ7	1	AW	N	D	OC mat		09/11 R/C
49	XHBS740P08000		AA		C	Screw(4x8)		
50	MARMP0325FCZZ		AC		C	Upper PG link arm		
51	PCOVP2017FCZZ		AL		C	Base lower right cover		
51	PCOVP2017FCZ1	1	AL		C	Base lower right cover		07/08 mid
51	PCOVP2017FCA1	1	AL	N	C	Base lower right cover		10/12 R/C
101	XEBS740P14000	3	AB		C	Screw(4x14) [from No.17]	CCE497	07/08 mid
501	CSOU-0203DS51		BW		E	Base tray unit (Except No.5,7,27,40,48)		
	(Unit)							
901	DUNT-7473FCZZ		CG		E	RSPF unit (Include Block [51]-[58])		

50 RSPF Exteriors[MX-3500FN/N,MX-4500FN/N]

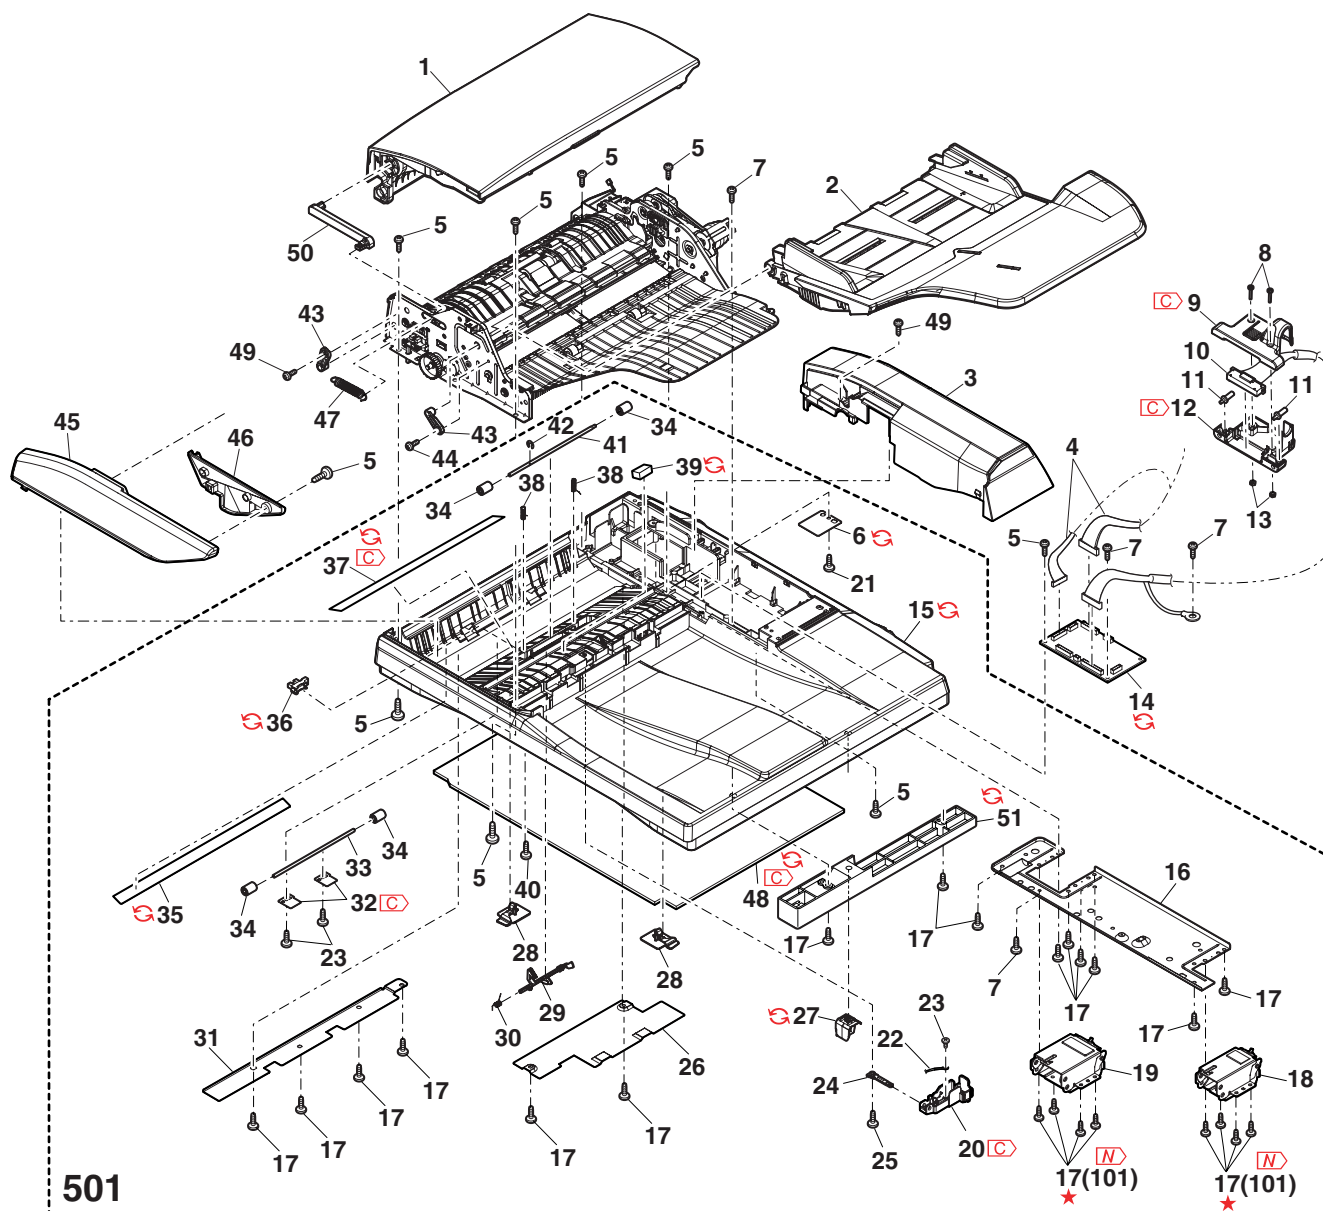


FCP09660

51 RSPF Original tray[MX-3500FN/N,MX-4500FN/N]

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	LPLTP6485FCZZ		AG		C	RSPF regulation plate F		
2	LPLTP6486FCZZ		AG		C	RSPF regulation plate R		
3	DHAI-3764FCZZ		AK		C	Original tray harness		
4	TLABZ5062FCZZ		AP	N	D	Original size label (Japan)		
	TLABZ5134FCZZ		AH	N	D	Original size label (Except Japan)		
5	LSOU-0204FCZZ		AV		D	RSPF original tray upper		
6	LSOU-0205FCZZ		AU		D	RSPF original tray lower		
7	XEBS740P10000		AA		C	Screw(4x10)		
8	NROLP1517FCZZ		AA		C	Delivery follower roller RSPF		
9	NSFTZ2914FCZZ		AP		C	Follower roller shaft		
10	XRESP30-06000		AA		C	E ring(E3)		
11	MSPRC3352FCZZ		AB		C	Follower pressure spring		
12	CPWBF1594FCE2		AS		E	SPF VR PWB		
13	XEBS730P08000		AC		C	Screw(3x8)		
14	LPLTP0321QSZZ		AE		C	Width detection fixing plate		
15	NGERP0168QSZZ		AD		C	Width detection gear(36T)		
	VHPGP1S73P+-1		AF		B	Photo sensor(GP1S73P)		
16	VHPGP1S73P+-18	3	AF		B	Photo sensor(GP1S73P) [Unleaded solder correspondence]		06/03
17	XEPS730P08X00		AA		C	Screw(3x8X)		
18	NGERR0169QSZZ		AE		C	Width detection rack gear		
19	MSPRP0315QSZZ		AD		C	Regulation plate spring		
20	MLEVP0098QSZZ		AC		C	Original detect actuator		


51 RSPF Original tray[MX-3500FN/N,MX-4500FN/N]

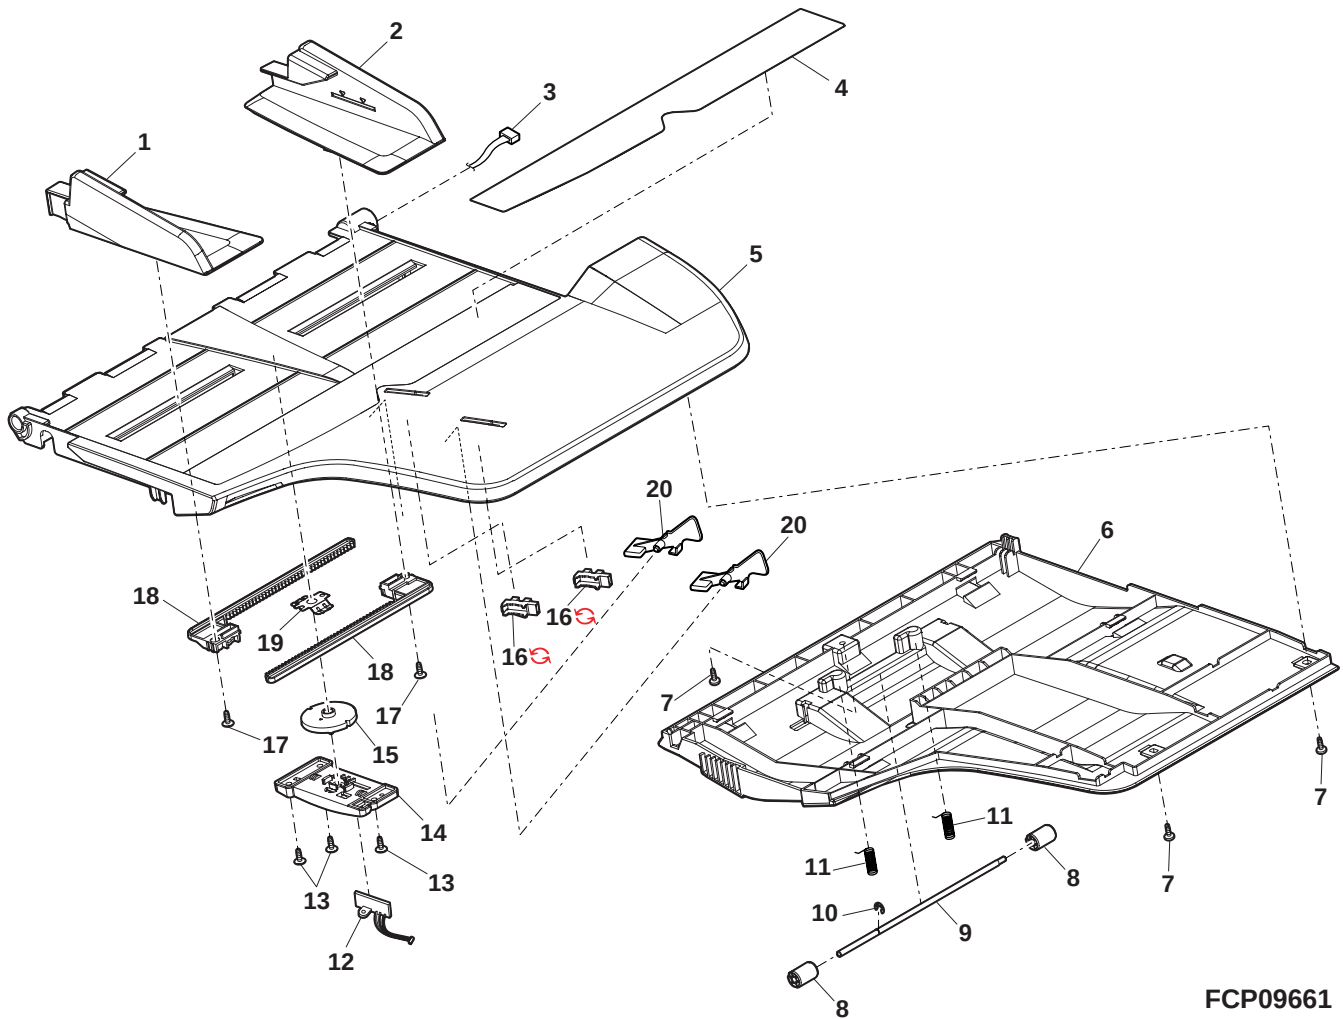

52 RSPF Paper feeding section[MX-3500FN/N,MX-4500FN/N]

[illegible]


52 RSPF Paper feeding section[MX-3500FN/N,MX-4500FN/N]

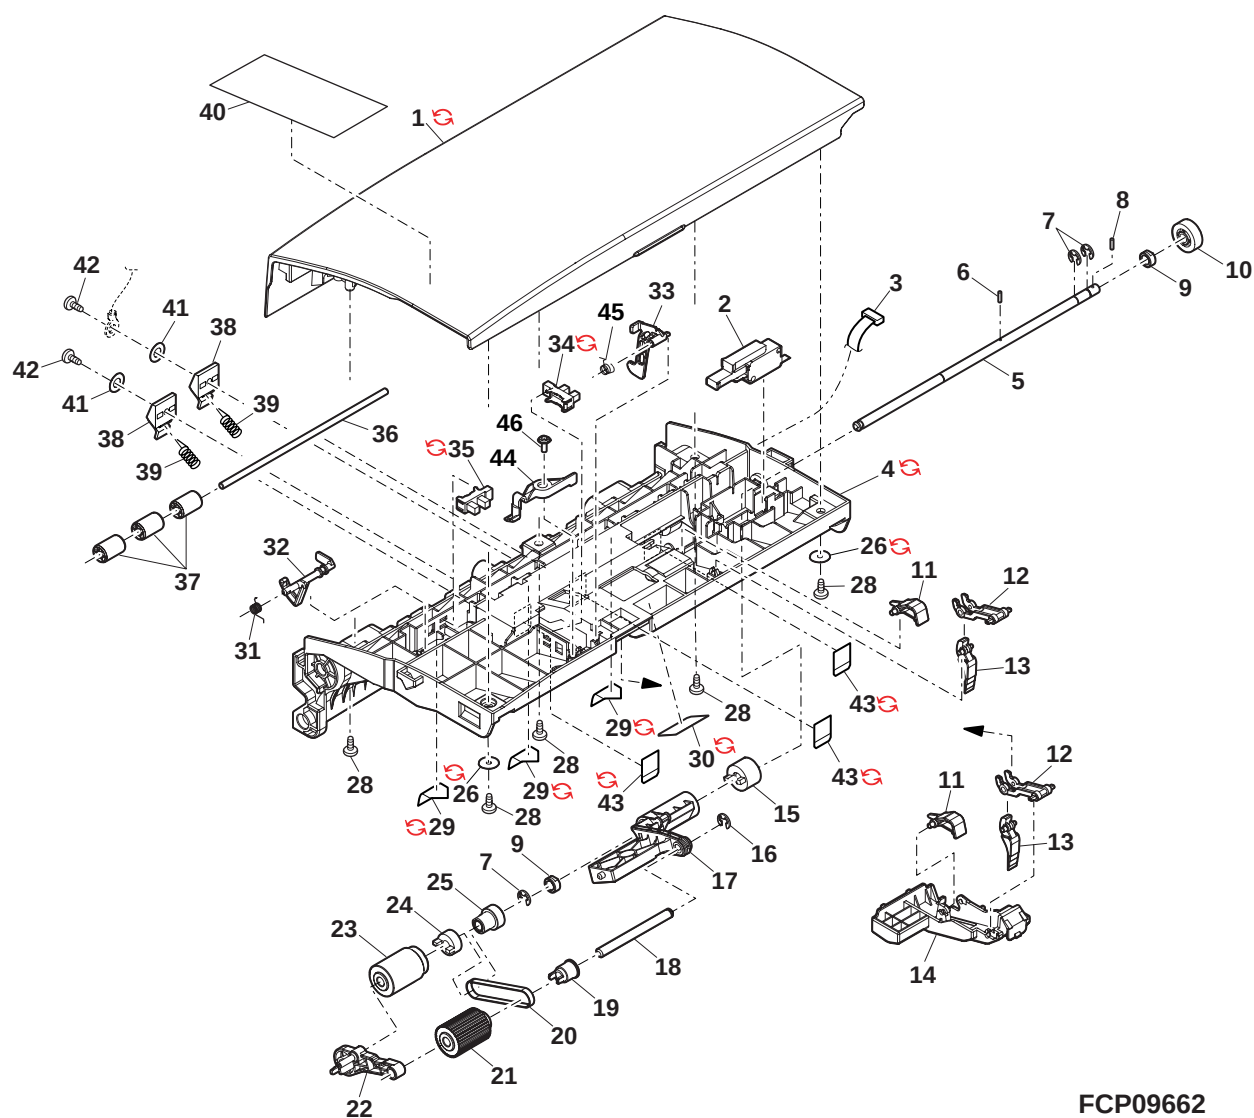

FCP09662

53 RSPF Separation section[MX-3500FN/N,MX-4500FN/N]


NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	PCÖVP1850FCZZ		AD		C	Separation roller cover		
2	PSHEZ5462FCZZ		AE	N	C	RSPF front separate sheet		
2	PSHEZ5462FCZ1	1	AD		C	RSPF front separate sheet		06/12 mid
3	XHBS740P08000		AA		C	Screw(4×8)		
4	PCLR-0461FCZZ		AC		C	U-turn collar		
5	PGiDM2136FCZZ		AL		C	Separation transport guide		
6	NSFTZ0009QSPZ		AL		C	Transport follower shaft		
7	NRÖLP1517FCZZ		AA		C	Delivery follower roller RSPF		
8	PSHEZ3130FCZZ		AB		C	Rotation plate sheet		
8	PSHEZ5782FCZZ	1	AC		C	Rotation plate sheet N		06/12 mid
9	MSPRC3355FCZZ		AB		C	Roller spring		
10	NRÖLR1555FCZZ		AG		B	Separation roller		
11	PCLC-0338FCZZ		BE	N	B	Torque limiter SPF		
11	PCLC-0368FCZZ	-	BB		B	Torque limiter 300	CCE447	-
12	LPiNS0089FCZZ		AA		C	Spring pin		
13	XRESP50-06000		AA		C	E ring(E5)		
14	NSFTZ2912FCZZ		AX		C	Separation shaft		
15	LHLDZ1670FCZZ		AC		C	Separation roller fulcrum holder		
16	MSPRT3391FCZZ		AB		C	SPF pressure spring		
17	XEBS740P10000		AA		C	Screw(4×10)		
18	LPLTM6557FCZZ		AH		C	Separation PG reinforce plate		
21	PGiDM2135FCZZ		AN		C	Middle guide		
23	NBRGP0668FCZZ		AE		C	Stopper bearing		
24	XRESP40-06000		AA		C	E ring(E4)		
26	XEBS730P08000		AC		C	Screw(3×8)		
100	MSPRD3613FCZZ	-	AC		C	Separation roller cover		1st lot
	(Unit)							
901	CGiDM2136DS51		BF		E	Separation roller guide unit		

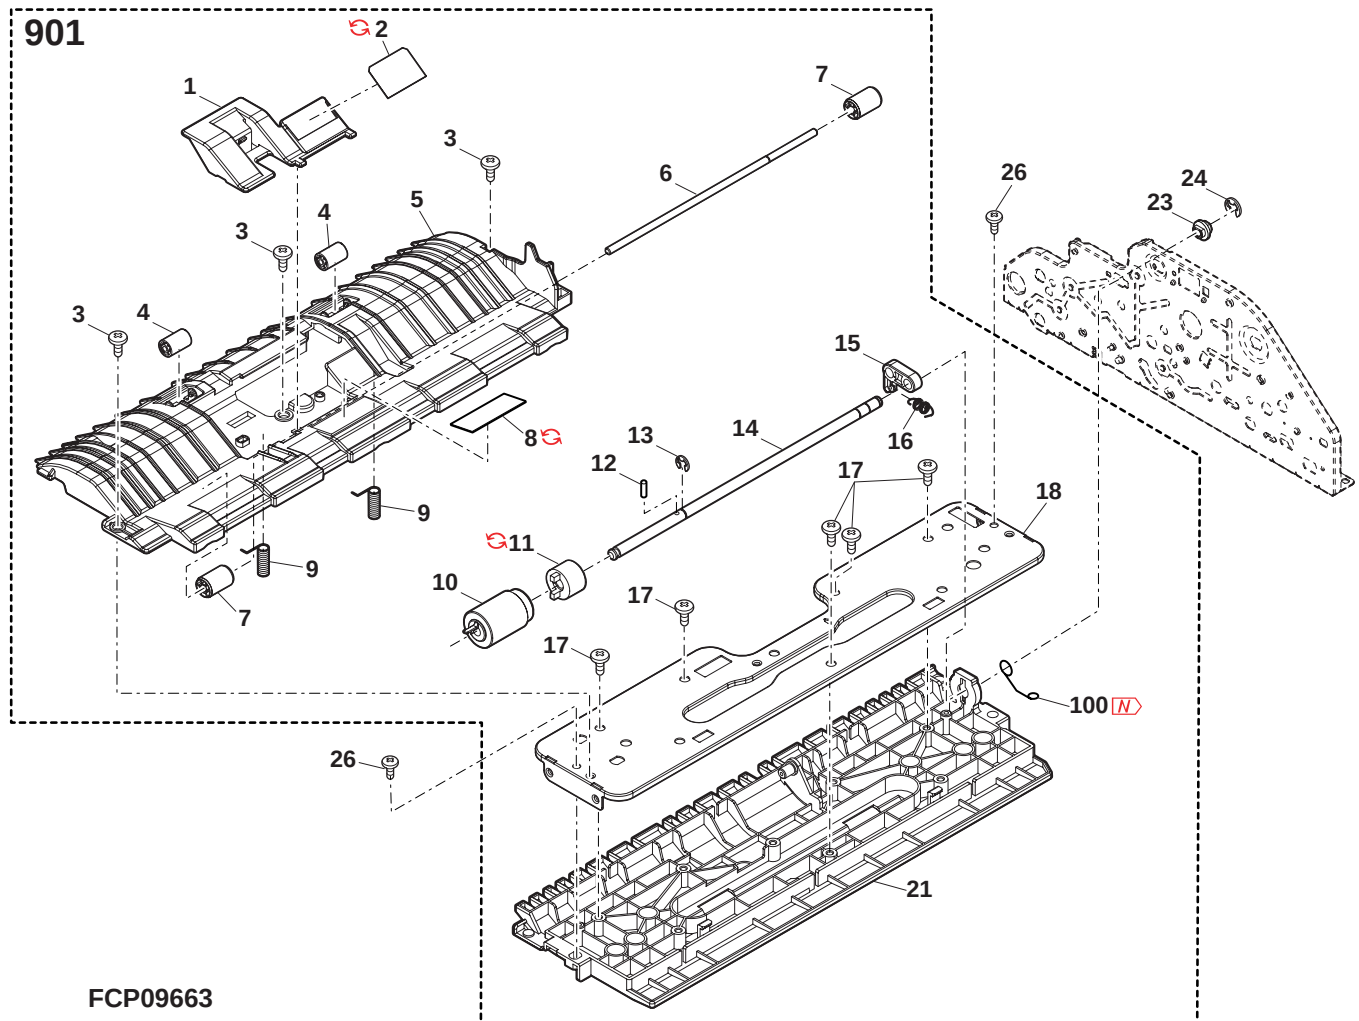53 RSPF Separation section[MX-3500FN/N,MX-4500FN/N]


54 RSPF Transport section 1[MX-3500FN/N,MX-4500FN/N]

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	NBRGM0501FCZZ		AB		C	Metal bearing		
2	MSPRC3357FCZZ		AA		C	Brake spring		
3	XWHS760-08115		AA		C	Washer		
4	PRNGP0090FCZZ		AA		C	Resin ring(E5)		
	PRNGP0090FCZ1	1	AB		C	Resin ring(E5)		06/10
	PCLC-0337FCZZ		BA		B	SP clutch SPF		
5	PCLC-0337FCZ1	1	AQ		B	SP clutch SPF		06/04 R/C
6	XRESP40-06000		AA		C	E ring(E4)		
7	NGERH1681FCZZ		AC		C	Gear(36T)		
	XRESP30-04000		AA		C	E ring(E3)		
8	XRESP30-06000	-	AA		C	E ring(E3)		-
9	NGERH1682FCZZ		AT		C	One way gear(32T)		
10	XRESP50-06000		AA		C	E ring(E5)		
11	NPLYZ0454FCZZ		AC		C	Gear pulley(25/24)		
12	NBLTH0444FCZZ		AS		B	Belt(200)		
13	PSHEZ5377FCZZ		AA		C	Pulley sheet(25)		
	PSHEZ5377FCZ1	1	AA		C	Pulley sheet(25)		06/12 mid
15	XPSSP20-10000		AA		C	Spring pin(ϕ 2-10)		
17	NPLYZ0453FCZZ		AC		C	Drive pulley(24P)		
19	NROLR1545FCZ1		BD		B	Delivery roller		
20	NROLR1552FCZZ		AX		B	Reading front roller		
21	NROLR1543FCZZ		AU		B	PS roller		
22	CFRM-1167FC01		AL		C	Frame F		
	CFRM-1183FC01		AR		C	Frame R		
23	CFRM-1183FC02	1	AR		C	Frame R		08/01 R/C
24	LX-WZ5002BCZZ		AA		C	Washer		

54 RSPF Transport section 1[MX-3500FN/N,MX-4500FN/N]

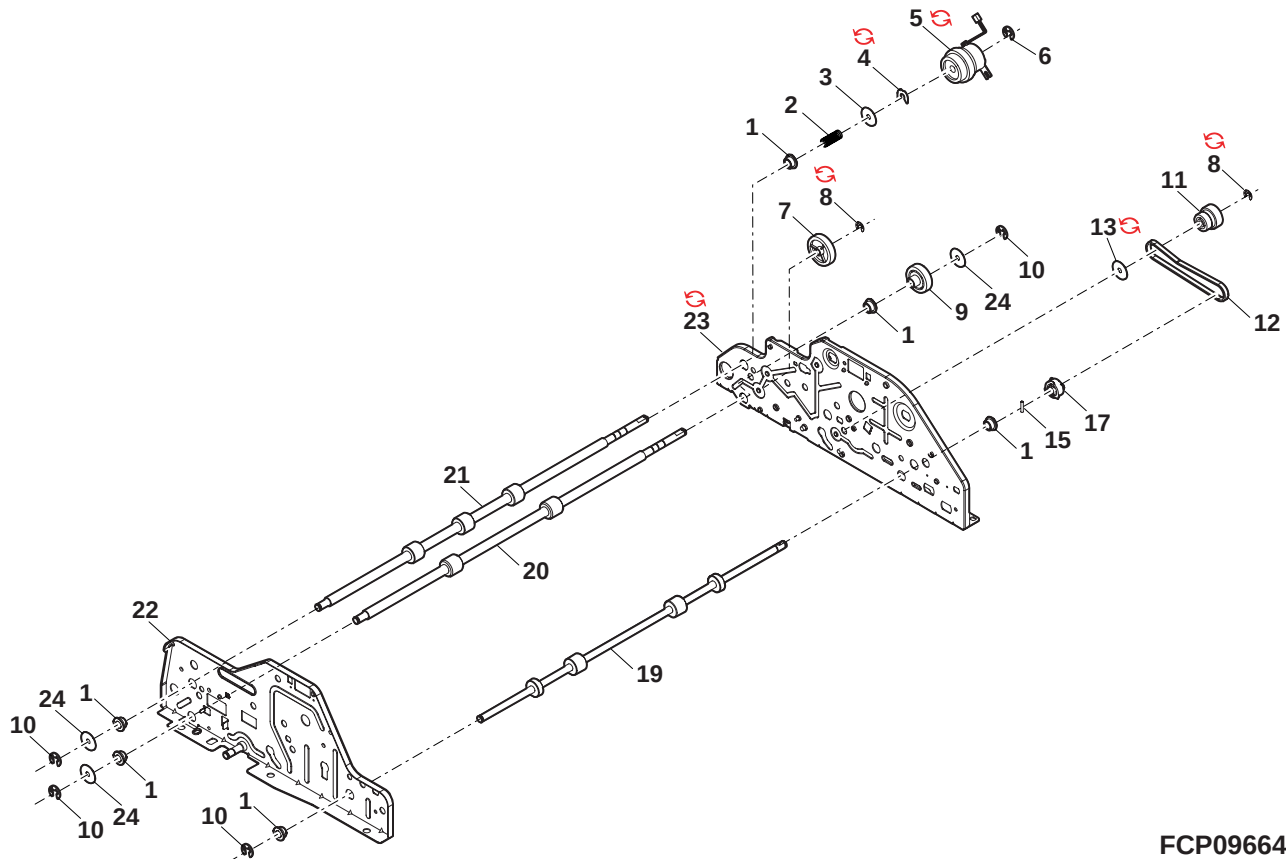


FCP09664

55 RSPF Transport section 2[MX-3500FN/N,MX-4500FN/N]

[illegible]


55 RSPF Transport section 2[MX-3500FN/N,MX-4500FN/N]

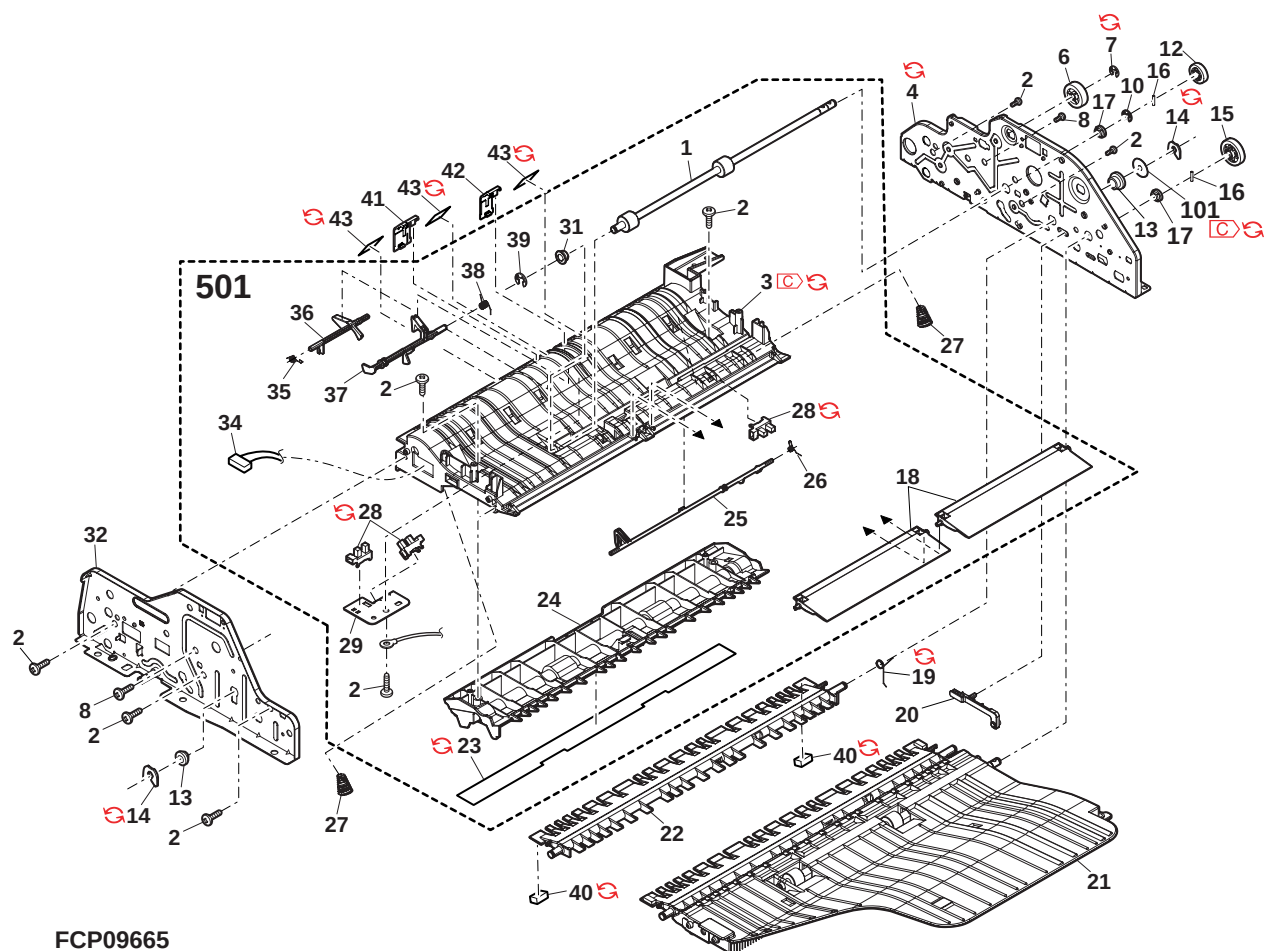

56 RSPF Transport section 3[MX-3500FN/N,MX-4500FN/N]

[illegible]

56 RSPF Transport section 3[MX-3500FN/N,MX-4500FN/N]

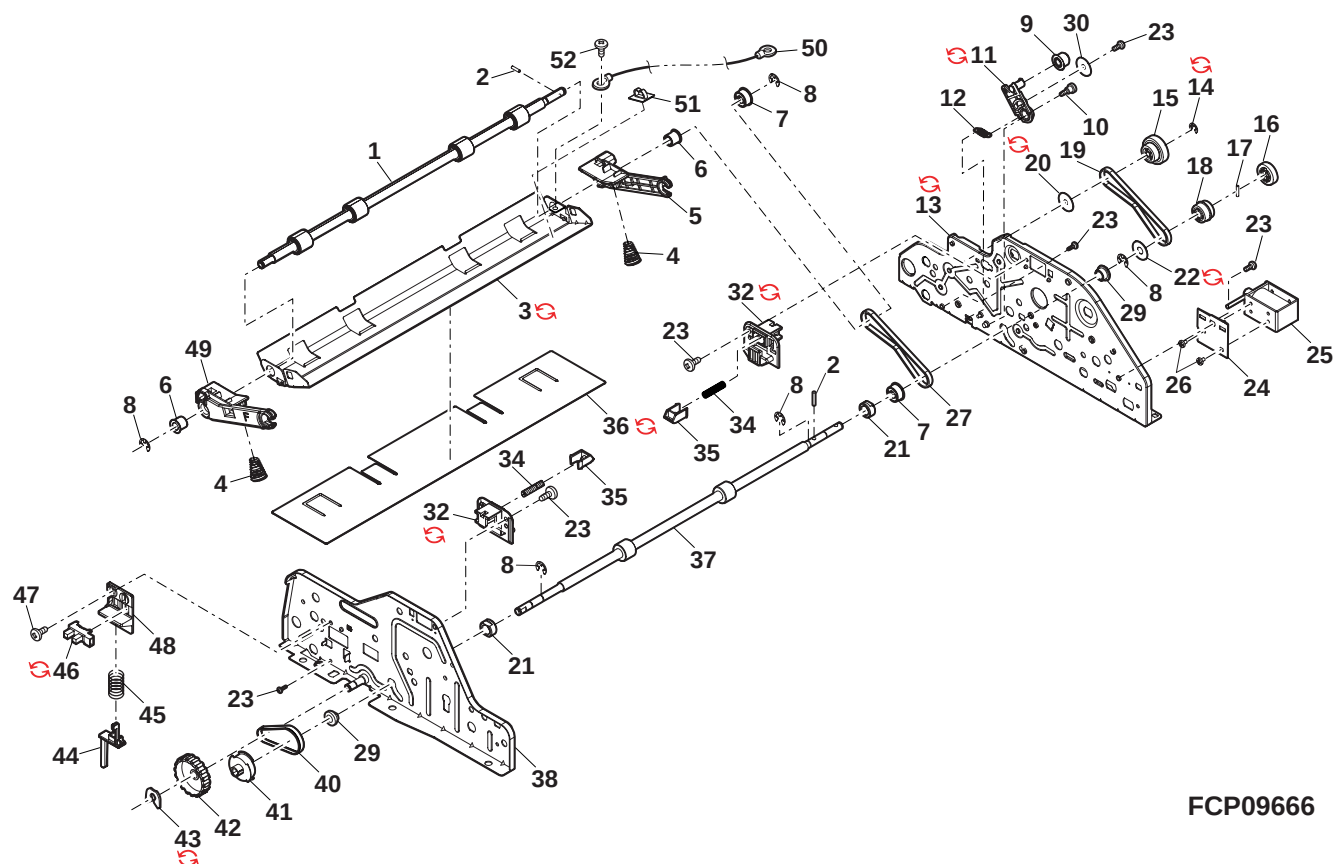


FCP09666

57 RSPF Middle tray[MX-3500FN/N,MX-4500FN/N]

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	LSOU-0206FCZZ		AR		D	RSPF middle tray		
2	MSPRC3358FCZZ		AA		C	RSPF delivery follower spring		
3	NROLP1517FCZZ		AA		C	Delivery follower roller RSPF		
4	NSFTZ0009QSPZ		AL		C	Transport follower shaft		
5	NROLR1590FCZZ		AT		B	SWB roller		
6	NBRGM0501FCZZ		AB		C	Metal bearing		
7	XRESP50-06000		AA		C	E ring(E5)		
8	PBRSS0230FCZZ		AE		B	Discharge brush RSP		
9	PGiDH2153FCZZ		AG		C	Middle tray guide		
10	XEBS740P10000		AA		C	Screw(4x10)		
11	PSHEZ5449FCZ1		AB		C	Delivery sheet RSPF(38)		
	PSHEZ5449FCZ2	1	AC		C	Delivery sheet RSPF(38)		06/12 mid

57 RSPF Middle tray[MX-3500FN/N,MX-4500FN/N]

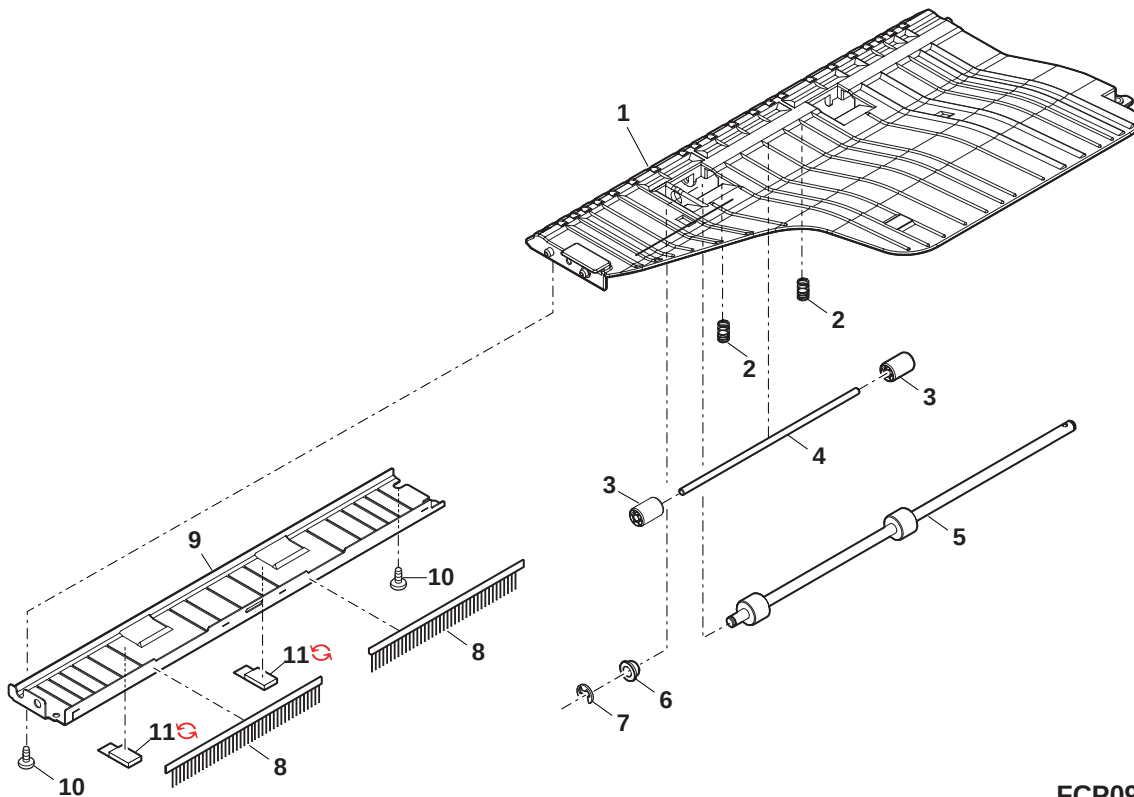


FCP09667

58 RSPF Drive unit[MX-3500FN/N,MX-4500FN/N]

[illegible]


58 RSPF Drive unit[MX-3500FN/N,MX-4500FN/N]

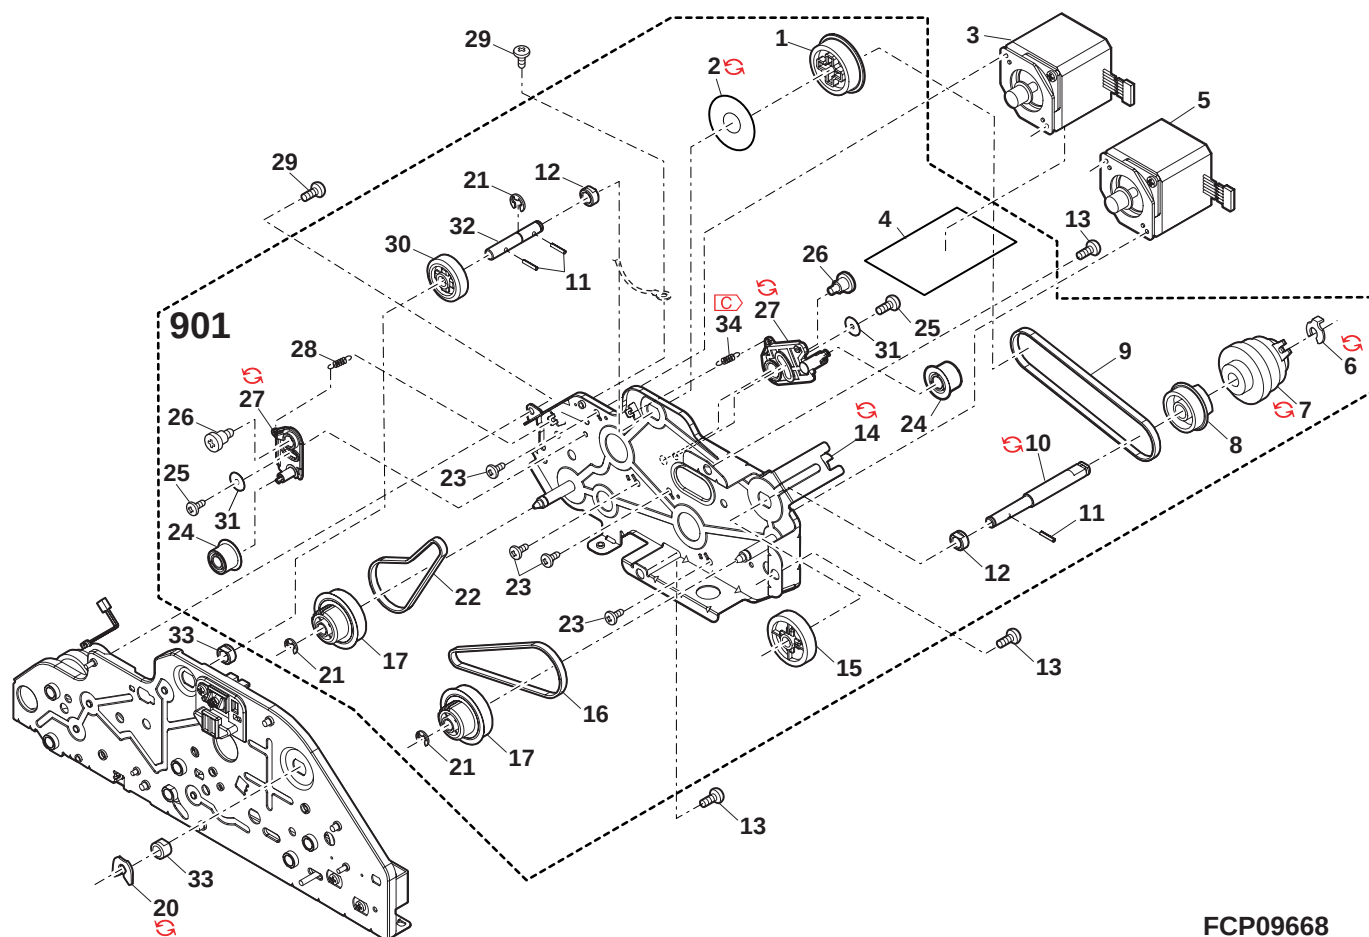

59 DSPF Exteriors[MX-3501FN/N,MX-4501FN/N]

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	TLABH5075FCZZ		AF	N	D	Original read label (Japan)		
	(C)TLABH5076FCZZ	-	AL		D	Original read label [Missing parts code](Except Japan)		1st lot
2	XHBS740P08000		AA		C	Screw(3×8)		
3	PCOVP1897FCZZ		AQ		D	Paper feed cover		
4	XHBS730P06000		AC		C	Screw(3×6)		
5	GCAB-1126FCZZ		AZ		D	Rear cabinet top		
6	XJBS740P12000		AB		C	Screw(3×12)		
7	PCOVP1894FCZZ		AF		D	Rom cover		
8	LX-NZ0088FCZZ		AC		C	Speed nut		
9	GCAB-1129FCZZ		AF		D	Left rear lower cabinet		
10	LSOU-0207FCZZ		AY		D	Delivery tray		
	(C)LSOU-0207FCZ1	3	AY		D	Delivery tray [Form change]		06/04 R/C
11	LSOU-0208FCZZ		AK		D	Delivery extension tray		
12	GCAB-1128FCZZ		AT		D	Right bottom cabinet		
13	XEBS740P10000		AA		C	Screw(4×10)		
14	MSPRC3472FCZZ		AC		C	OC pressure spring		
15	LPLTP6631FCZZ		AC		C	OC pressure plate		
16	PSHEZ5165FCZZ		AK		C	OC mat sheet		
	PSHEZ5432FCZ3		AX	N	C	OC mat		
17	(C)PSHEZ5432FCZ4	-	AX		C	OC mat [Parts code correction]		1st lot
	(C)PSHEZ5432FCZ5	3	AX	N	C	OC mat [Productivity improvement]		07/12
	(C)PSHEZ5432FCZ6	1	AX	N	C	OC mat		10/01
18	LSTPP0011QSZZ		AC		C	Resin ring(E3)		
19	MLEVP0992FCZZ		AD		C	Release link lever		
20	LX-BZ0901FCPZ		AC		C	Drawer screw		
21	MSPRT3488FCZZ		AC		C	Release lever spring		
22	LHLDZ1691FCZZ		AC		C	Release shaft holder		
23	GCAB-1124FCZZ		AX		D	Front cabinet		
24	TLABH5078FCZZ		AC	N	D	Lower door open/close label L		
25	TLABH5079FCZZ		AC	N	D	Lower door open/close label R		
26	CCLEZ0020QS01		AK		D	Glass cleaner		
	(C)CCLEZ0020RS51	1	AK	N	D	Glass cleaner		11/02 R/C
100	(M)PSHEZ5740FCPZ	-	AV		C	Cabinet shield [South Africa]		06/09
101	(M)PGSK-0027QSZZ	-	AE		C	Gasket [South Africa]		06/09
	(C)DUNT-7523FC32	-	DF		E	DSPF unit (Except No.17,26)		1st lot
901	(C)DUNT-7523DS72	1	DF		E	DSPF unit (Except No.17,26)(Except MX-3501N,MX-4501 South Africa)		07/02
	(C)DUNT-7523DS74	4	DB	N	E	DSPF unit (Except No.17,26)(MX-3501N,MX-4501 South Africa)		07/02


59 DSPF Exteriors[MX-3501FN/N,MX-4501FN/N]

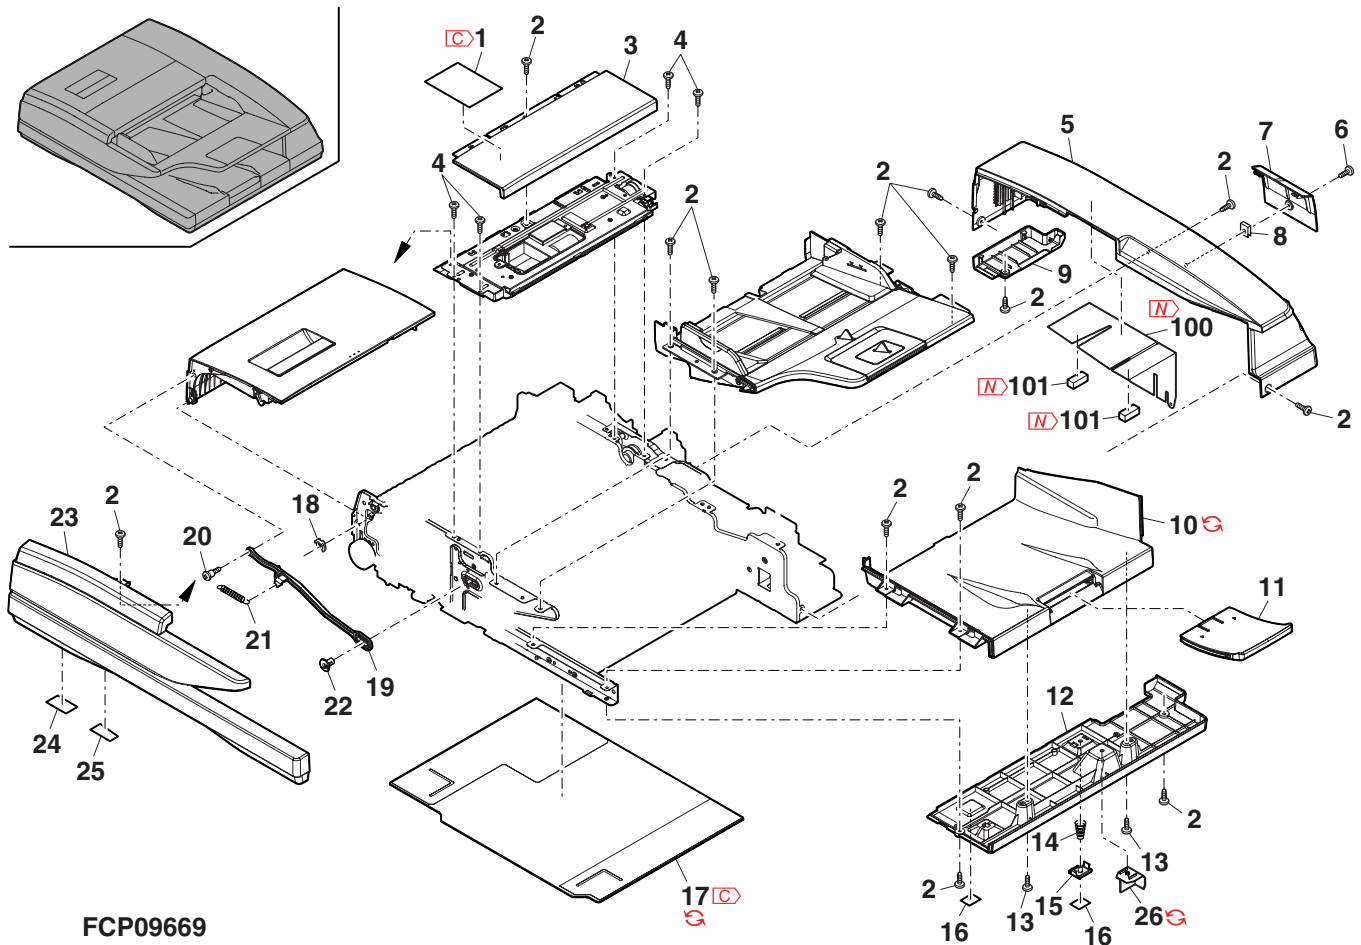

60 DSPF Original tray[MX-3501FN/N,MX-4501FN/N]


NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	PGIDM2173FCZZ		AH	N	D	Guide R		
1	PGIDM2173FCZ1	3	AH		D	Guide R	CCE578	08/05 mid
2	LSOU-0211FCZZ		AT	N	D	PF rotation tray		
3	PSHEZ3138FCZZ		AC		C	Paper feed base sheet		
4	PGIDM2172FCZZ		AH	N	C	Guide F		
4	PGIDM2172FCZ1	3	AH		C	Guide F	CCE578	08/05 mid
5	NGERR1386FCZZ		AE		C	Width detect rack		
6	XEPS730P06X00		AA		C	Screw(3x6X)		
7	LPLTM6756FCZZ		AD	N	C	Rack fixing plate		
8	NGERP1385FCZZ		AF		C	Width detect pinion gear		
9	LX-WZ0094FCZZ		AA		C	Poly slider		
10	LPLTP5743FCZZ		AF		C	Width detect fixing plate		
11	PSHEP5210FCZZ		AB		C	Lift up sheet		
12	CPWBF1594FCE2		AS		E	SPF VR PWB		
13	XEBS730P08000		AC		C	Screw(3x8)		
14	XEBS740P10000		AA		C	Screw(4x10)		
15	TLABZ5133FCZZ		AH	N	D	Original size label (Japan)		
16	LSOU-0212FCZZ		AF	N	D	Paper feed tray S		
17	NSFTZ2988FCZZ		AD	N	C	Rotation tray shaft		
18	LSOU-0209FCZZ		AX	N	D	Paper feed tray upper		
19	DHA1-3805FCZ1		AH	N	C	DSPF tray harness		
20	XEBS740P25000		AC		C	Screw(4x25)		
21	MLEVP0794FCZZ		AC		C	Length detect actuator		
22	LSOU-0210FCZZ		AQ	N	C	Paper feed tray lower		
23	VHPGP1S73P+-1		AF		B	Sensor(GP1S73P)		
23	VHPGP1S73P+-18	3	AF		B	Sensor(GP1S73P) [Unleaded solder correspondence]		06/03
	(Unit)							
901	CSOU-0209DS52		BH	N	E	DSPF Original tray unit		

60 DSPF Original tray[MX-3501FN/N,MX-4501FN/N]

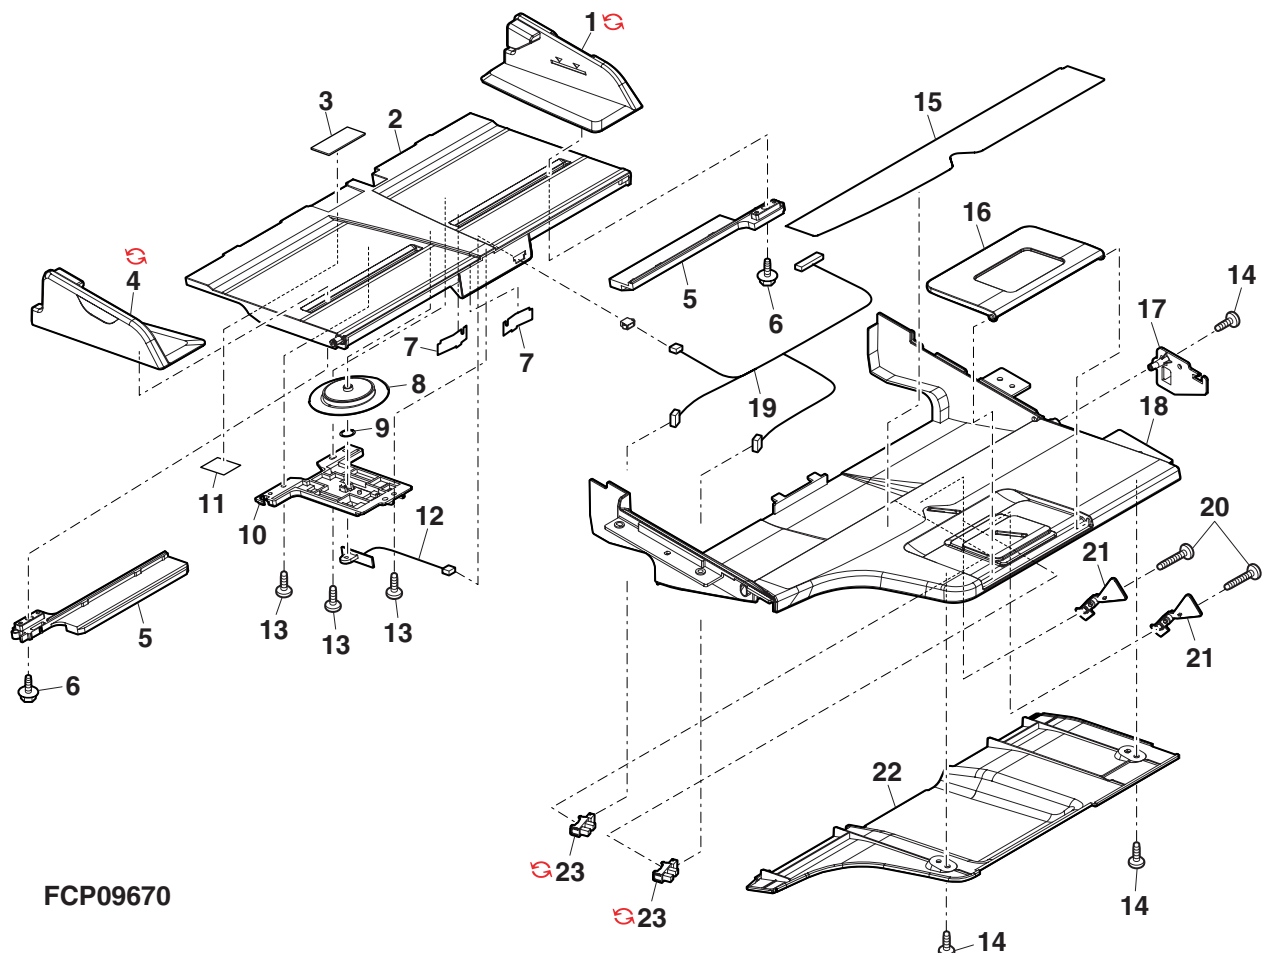


61 DSPF Paper feed unit[MX-3501FN/N,MX-4501FN/N]

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	PCOVP1896FCZZ		AH		D	Paper feed PG top cover		
1	PCOVP1896FCZ1	3	AH		D	Paper feed PG top cover	CCE687	09/06 mid
2	XEBS730P08000		AC		C	Screw(3x8)		
3	XRESP40-06000		AA		C	E ring(E4)		
4	NBRGY0720FCZZ		AR		C	Bearing(φ6-13)		
4	NBRGY0720FCZ1	1	AQ	N	C	Bearing(φ6-13)		10/03
5	LPLTM6644FCZZ		AN		C	Paper feed PG top reinforce plate		
6	PCLC-0349FCZ1		AT	N	B	Paper feed clutch		
6	PCLC-0349FCZ2	1	AT		B	Paper feed clutch		06/02 R/C
7	NSFTZ2975FCZZ		AP		C	Paper feed roller shaft		
8	NBRGC0136FCZ1		AC		C	Bearing		
9	MSPRT3238FCZZ		AC		C	Pick up pressure spring		
10	PGIDM2170FCZZ		AF		C	Pick up roller guide		
11	XRESP50-06000		AA		C	E ring(E5)		
12	NSFTZ2976FCZZ		AG		C	Pick up roller shaft		
13	NBRGP0764FCZZ		AK	N	C	Paper feed bearing		
15	NPLYZ0424FCZZ		AD		C	Pick up roller pulley(26P)		
16	NBLTH0415FCZZ		AF		B	Belt(40S2M124)		
17	NPLYZ0461FCZZ		AK	N	C	Paper feed roller pulley		
18	NROLR1462FCZZ		AR		A	Paper feed roller		
19	NROLR1475FCZZ		AU		A	Pick up roller		
19	NROLR1693FCZ2	3	BA		A	Pick up roller [Improve performance]	CCE651	09/02
20	LHLDR1690FCZZ		AC		C	Pick up roller holder		
21	PSHEP5184FCZZ		AB		C	Pick up roller sheet		
23	DHAI-3804FCZ1		AM	N	C	Paper feed harness		
24	LFI-X-0620FCZZ		AD		C	Paper feed harness fixer		
25	VHPGP1A71L3-1		AG		B	Sensor A		
25	VHPGP1A71L3-18	3	AG		B	Sensor A(GP1A71L3) [Unleaded solder correspondence]		06/03
26	MLEVP0904FCZZ		AD		C	Open/close detect actuator		
27	MSPRD3477FCZZ		AA		C	Paper feed actuator spring		
28	MLEVP0989FCZZ		AC		C	PIN actuator		
29	PGIDM2169FCZZ		AQ		C	Paper feed PG upper		
31	MLEVP0988FCZZ		AC		C	PE upper actuator		
32	VHPGP1S73P+-1		AF		B	Sensor B(GP1S73P)		
32	VHPGP1S73P+-18	3	AF		B	Sensor B(GP1S73P) [Unleaded solder correspondence]		06/03
32	VHPSG2481+-1	1	AE		B	Sensor B		10/03
	(Unit)							
901	CGIDM2169DS51		BH	N	E	Paper feed PG upper unit		

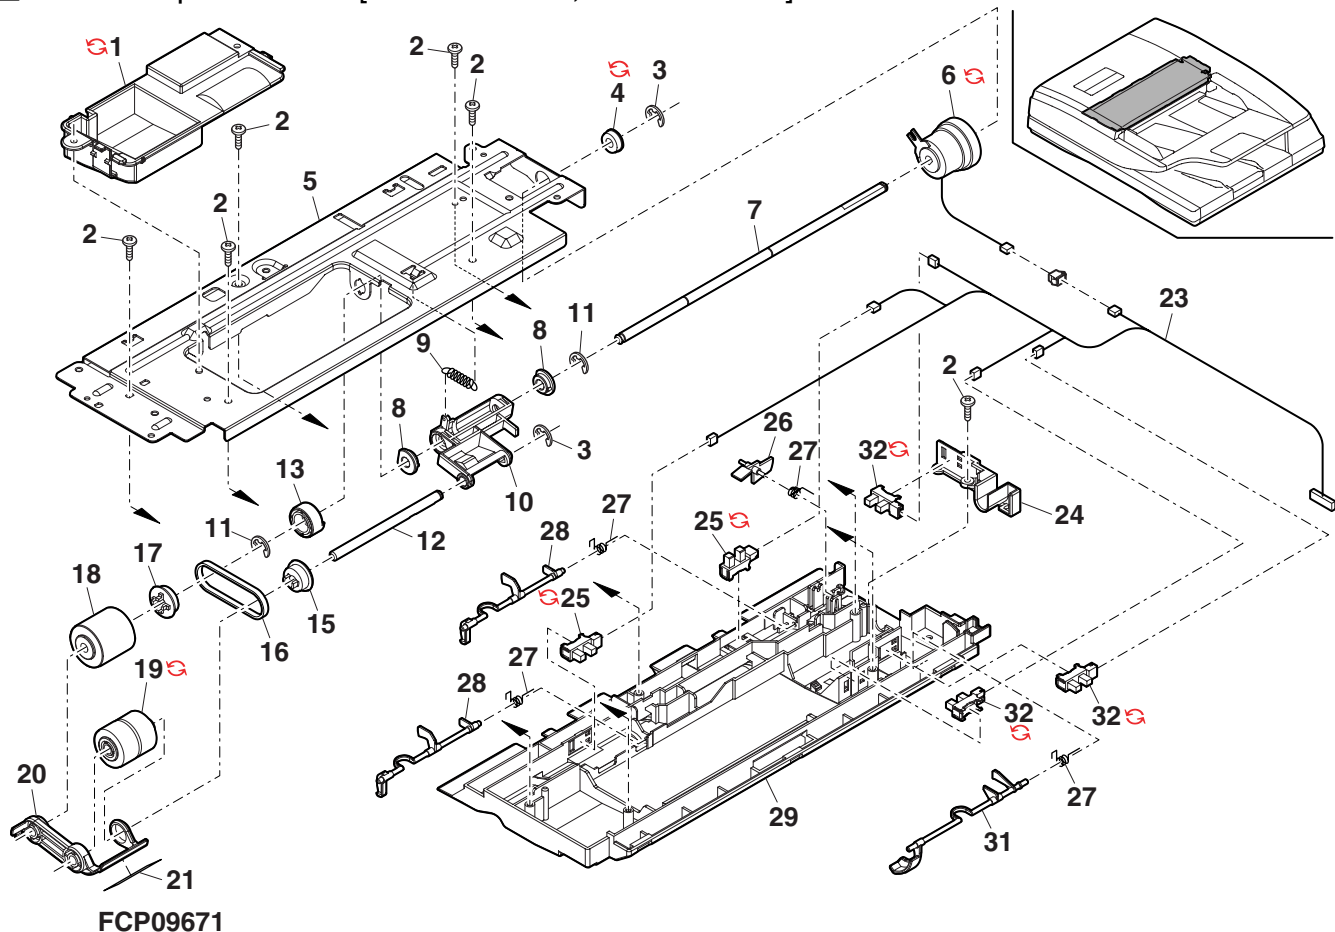61 DSPF Paper feed unit[MX-3501FN/N,MX-4501FN/N]


- 89 -

62 DSPF Separation unit[MX-3501FN/N,MX-4501FN/N]

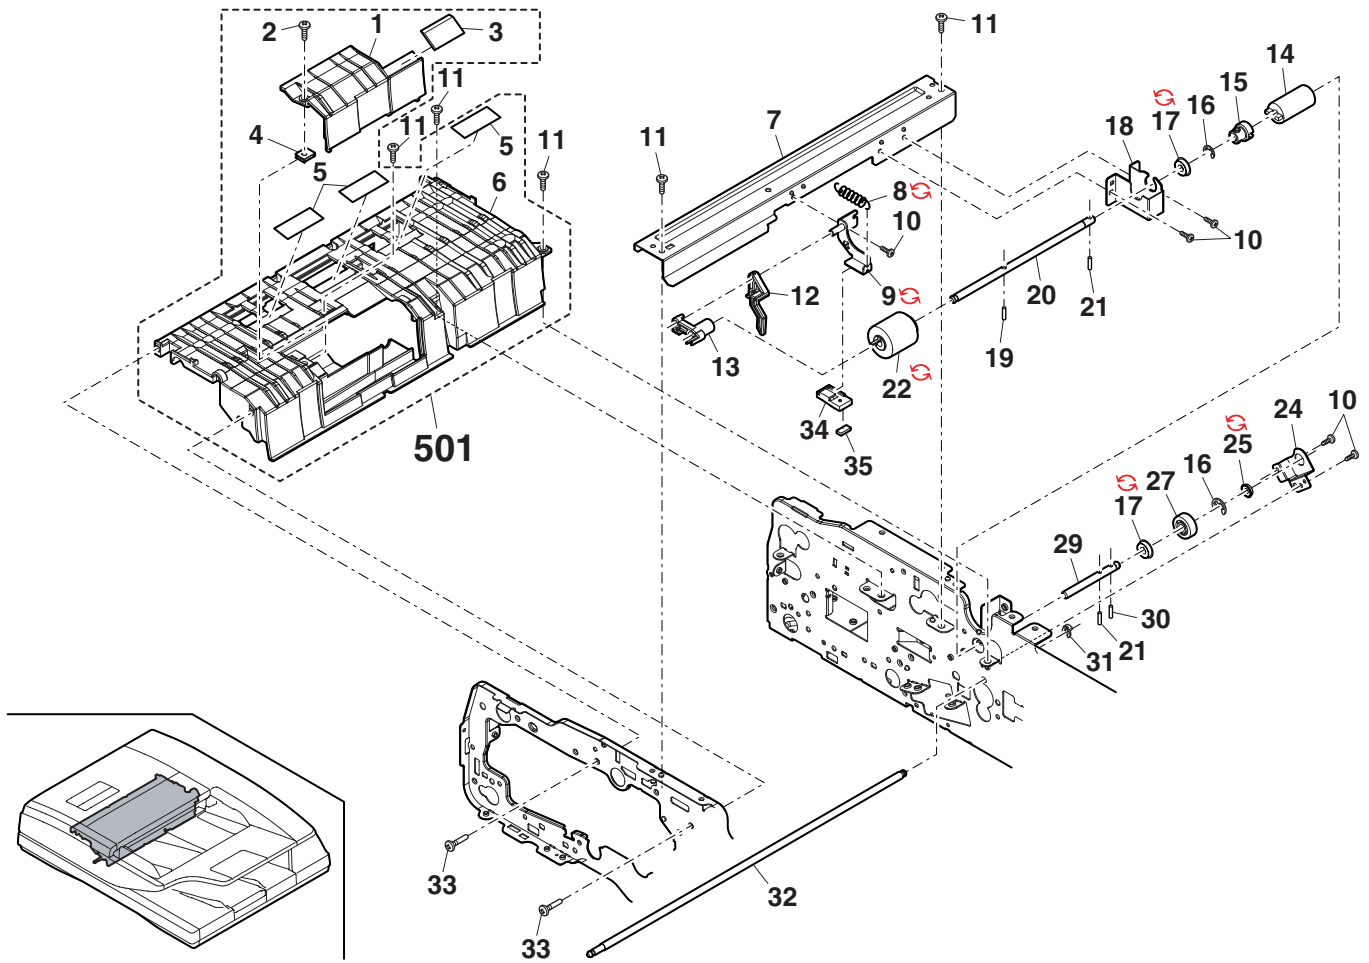


FCP09672

63 DSPF Upper door unit[MX-3501FN/N,MX-4501FN/N]

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	PRNGP0090FCZZ		AA		C	Resin ring(E5)		
1	PRNGP0090FCZ1	1	AB		C	Resin ring(E5)		06/10
2	PHAG-0007FCZZ		AB		B	Open/close lever hook R		
3	MSPRT3312FCZZ		AD		C	PS pressure spring		
4	NSFTP2966FCZZ		AH		C	Open/close lever shaft		
5	MLEVP0981FCZZ		AE		C	Open/close lever		
6	GCAB-1130FCZZ		AV		D	Top door cabinet		
7	PHAG-0006FCZZ		AB		C	Open/close lever hook F		
8	MSPRC2643FCZZ		AB		C	Follower pressure spring		
9	NSFTP2967FCZZ		AC		C	Follower collar shaft		
10	NROLP0896FCZZ		AC		C	Transport follower roller		
11	MSPRC3471FCZZ		AB		C	Follower pressure spring		
12	LHLDZ1592FCZZ		AD		C	Pressure spring holder		
13	XEBS730P08000		AC		C	Screw(3x8)		
14	CFRM-1199FC02		AF		D	Top door frame R		
14	CFRM-1199FC04	1	AF		D	Top door frame R		07/08 R/C
15	PGIDM2163FCZZ		AU		D	Top door PG		
16	LX-WZ0443FCPZ		AB		C	Washer		
16	LX-WZ0469FCPZ	1	AA		C	Washer		07/02
17	XEBS740P10000		AA		C	Screw(4x10)		
18	CFRM-1199FC01		AF		C	Top door frame F		
18	CFRM-1199FC03	1	AF		C	Top door frame F		07/08 R/C
100	PCUSS0389FCZZ	-	AC		C	Upper door sponge	[Missing illustration]	1st lot
	(Unit)							
901	CGIDM2163DS51		BD	N	E	Top door unit		


63 DSPF Upper door unit[MX-3501FN/N,MX-4501FN/N]

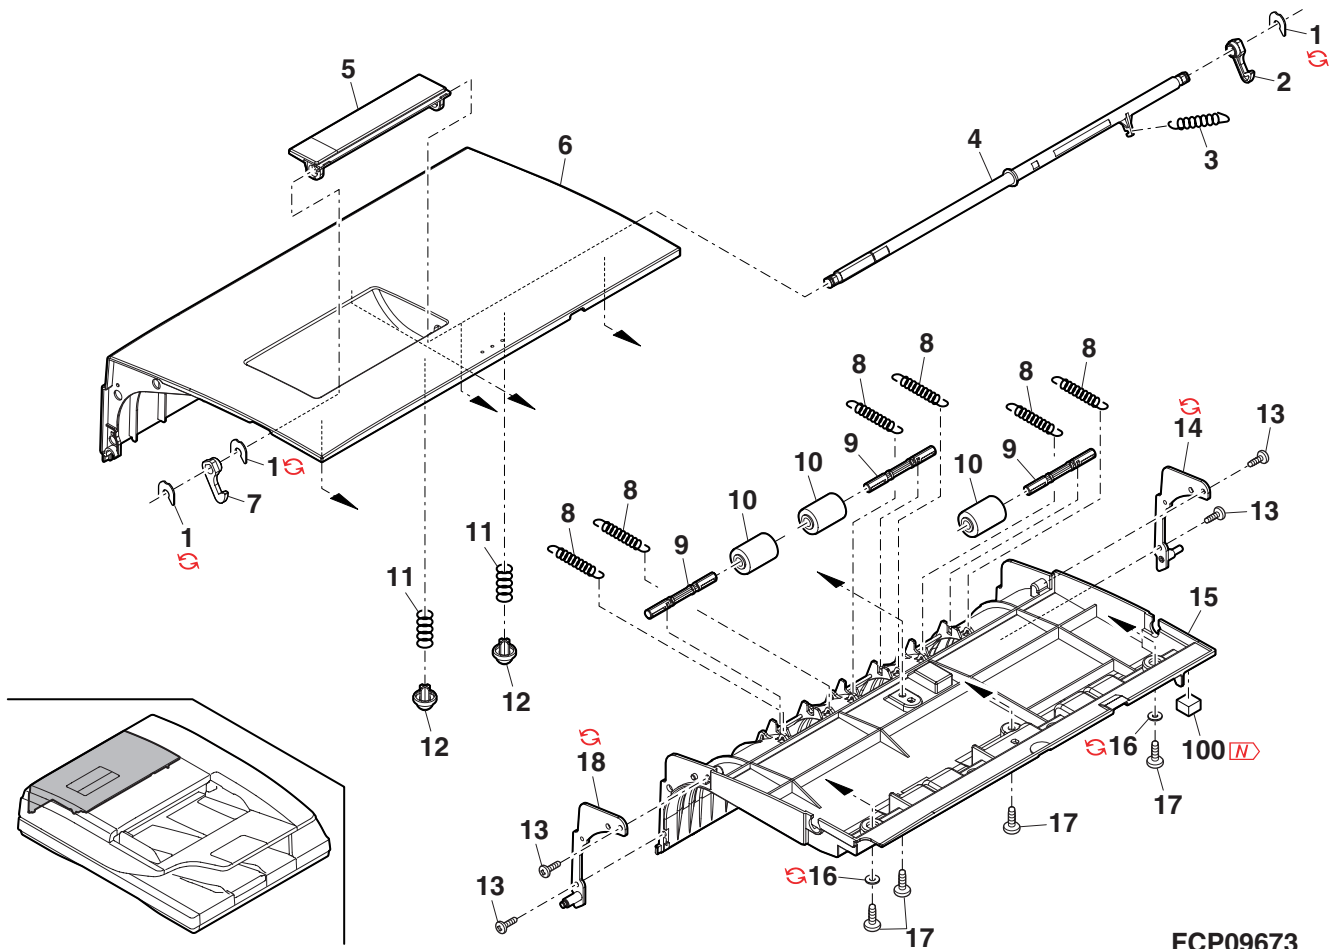

64 DSPF Upper transport unit[MX-3501FN/N,MX-4501FN/N]

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	XRESP70-08000		AA		C	E ring(E7)		
2	NBLTH0470FCZZ		AR		B	Paper feed transport belt		
3	NPLYZ0491FCZZ		AN		C	Coupling pulley		
4	NBRGY0809FCZZ		AK	N	C	Bearing(φ8-16)		
4	NBRGY0809FCZ1	1	AK	N	C	Bearing(φ8-16)		10/03
5	LSTPP0011QSZZ		AC		C	Resin ring(E3)		
6	PCLC-0350FCZZ		AU	N	B	Separate clutch		
6	PCLC-0350FCZ1	-	AU		B	Separate clutch [Illustration No. written mistake][to No.7]		1st lot
6	PCLC-0350FCZ1	1	AU		B	Separate clutch		06/02 R/C
6	PCLC-0351FCZZ		AU	N	B	Brake clutch		
7	PCLC-0351FCZZ	-	AU		B	Brake clutch [Illustration No. written mistake][to No.6]		1st lot
7	PCLC-0351FCZ1	1	AU		B	Brake clutch		06/02 R/C
8	XHBS740P08000		AA		C	Screw(3x8)		
9	NBRGY0719FCZZ		AR	N	C	Bearing(φ6-10)		
9	NBRGY0934FCZZ	1	AH	N	C	Bearing(φ6-10)		10/03
10	PCOVP1895FCZZ		AB		D	Adjustment cover		
11	PGIDM2166FCZZ		AU		D	Transport PG top		
12	MLEVP0982FCZZ		AD		C	Transport top actuator		
13	MSPRD3477FCZZ		AA		C	Paper feed actuator spring		
14	NROLR1565FCZ1		AV	N	A	DSPF transport roller 2		
14	NROLR1565FCZ2	1	AV		A	DSPF transport roller 2		06/01 R/C
16	VHPGP1A71L3-1		AG		B	Photo sensor		
16	VHPGP1A71L3-18	3	AG		B	Photo sensor(GP1A71L3) [Unleaded solder correspondence]		06/03
17	LDAIU0713FCZZ		AC		D	Lower door fixing base R		
18	XHBS730P06000		AC		C	Screw(3x6)		
19	NROLR1564FCZ1		AX	N	A	DSPF transport roller 1		
20	LDAIU0712FCZZ		AC		D	Lower door fixing base F		
21	NROLP1479FCZZ		AH		C	DSPF follower roller B		
22	NROLP1478FCZZ		AK		C	DSPF follower roller A		
23	NSFTZ2982FCZZ		AN		C	Transport drive roller shaft 1		
24	LX-BZ1025FCZZ		AC		C	Step screw(φ3-4)		
25	LSTPP0358FCZZ		AF		C	Wire fixing stopper		
26	LX-WZ0070FCZZ		AA		C	Poly slider(φ8-17)		
27	PCLR-0259FCZZ		AB		C	Brake collar		
28	MSPRC3313FCZZ		AD		C	DSPF brake spring		
29	LX-WZ0042FCZ1		AA		C	Washer		
30	PCLC-0353FCZZ		AT	N	B	Transport clutch		
30	PCLC-0353FCZ1	1	AT		B	Transport clutch		06/02 R/C
501	CSFTZ2982DS51		AX	N	E	Transport drive roller shaft 1 unit		

64 DSPF Upper transport unit[MX-3501FN/N,MX-4501FN/N]

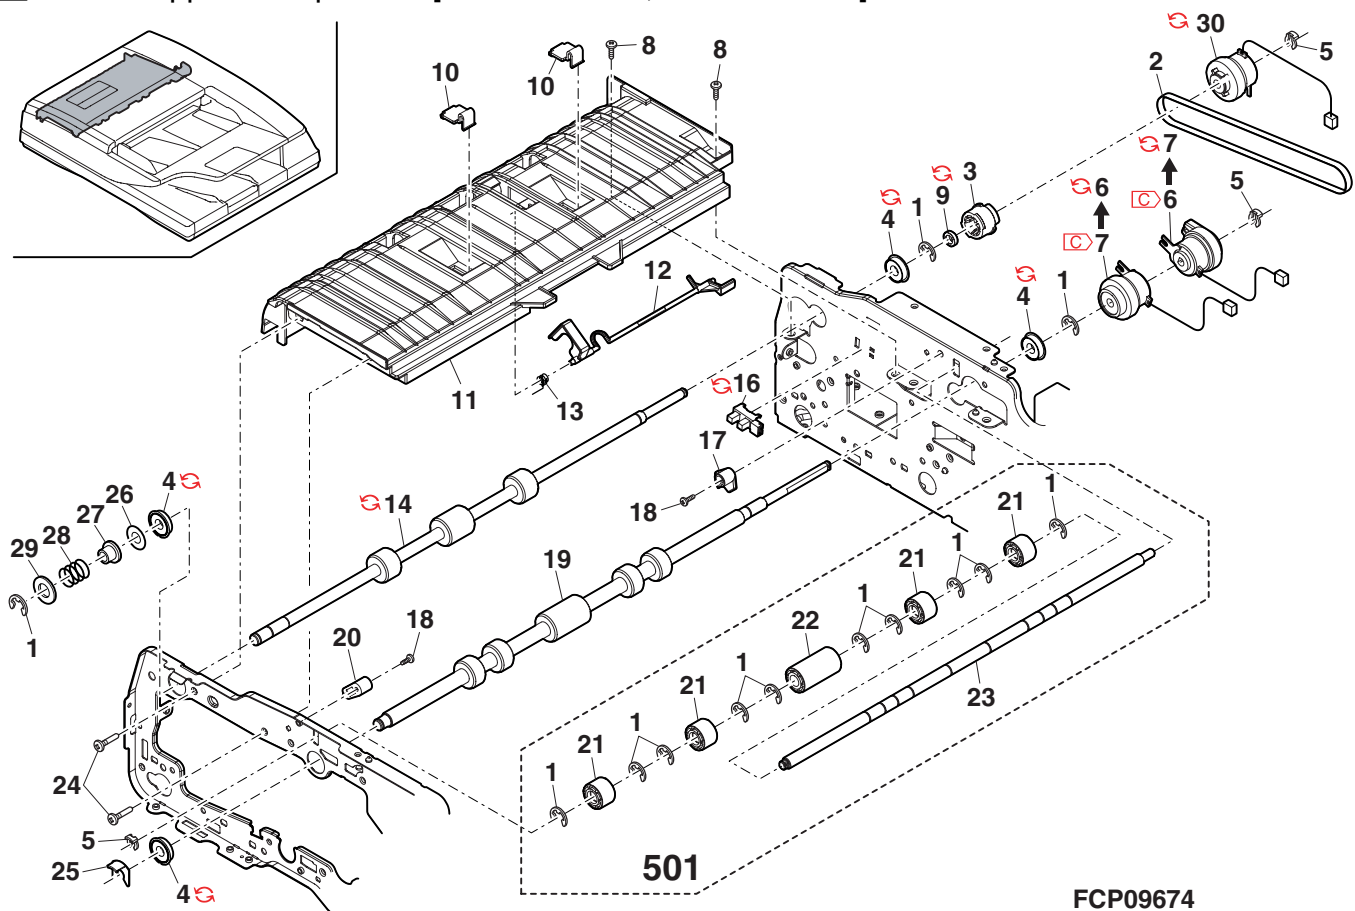


FCP09674

65 DSPF Lower transport unit 1[MX-3501FN/N,MX-4501FN/N]

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	LSTPP0011QSZZ		AC		C	Resin ring(E3)		
2	PCLC-0351FCZZ		AU	N	B	Brake clutch		
	 PCLC-0351FCZ1	1	AU		B	Brake clutch		06/02 R/C
3	PCLC-0352FCZZ		AU	N	B	PS clutch		
	 PCLC-0352FCZ1	1	AU		B	PS clutch		06/02 R/C
4	NBLTH0468FCZZ		AQ		B	PS belt		
5	NPLYZ0466FCZZ		AE		C	Coupling pulley		
6	XRESP70-08000		AA		C	E ring(E7)		
7	NBRGY0809FCZZ		AK	N	C	Bearing		
	 NBRGY0809FCZ1	1	AK	N	C	Bearing		10/03
8	MLEVP0984FCZZ		AC		C	PS front actuator		
9	MSPRD3477FCZZ		AA		C	Paper feed actuator spring		
10	VHPGP1A71L3-1		AG		B	Photo sensor		
	 VHPGP1A71L3-18	3	AG		B	Photo sensor(GP1A71L3) [Unleaded solder correspondence]		06/03
11	XHBS730P06000		AC		C	Screw(3x6)		
12	LPLTP6633FCZZ		AE		C	PS front sensor fixing plate		
13	NBRGC0763FCZZ		AD		C	Bearing(φ8-8)		
14	NROLR1568FCZZ		AS		A	DSPF PS roller		
15	PSHEP5406FCZZ		AA		C	PS front sheet 2(Short)		
16	PSHEP5408FCZZ		AC		C	PS front sheet(Long)		
17	MSPRC3313FCZZ		AD		C	DSPF brake spring		
18	PGiDH2178FCZZ		AK		C	PS front PG		
19	JKNBZ0150FCZZ		AK	N	C	PS knob		
20	PRNGP0090FCZZ		AA		C	Resin ring(E5)		
	 PRNGP0090FCZ1	1	AB		C	Resin ring(E5)		06/10
21	QSW-P0506FCZZ		AP		B	Sensor		
22	LPLTM6641FCZZ		AC		C	Sensor fixing plate		
23	NBRGY0719FCZZ		AR	N	C	Bearing(φ6-10)		
	 NBRGY0934FCZZ	1	AH	N	C	Bearing(φ6-10)		10/03
24	LX-WZ0070FCZZ		AA		C	Poly slider(φ8-17)		
25	XPSSJ20-08000		AA		C	Spring pin(φ2-8)		
26	NROLR1563FCZZ		AQ		A	Platen roller		
27	XRESP50-06000		AA		C	E ring(E5)		
28	PCLR-0259FCZZ		AB		C	Brake collar		
29	NPLYZ0451FCZZ		AC		C	Pulley(20P)		
30	NBRGC0017QSZZ		AC		C	Bearing(φ6-10)		
31	MSPRC3474FCZZ		AB		C	Platen pressure spring		
32	MARMP0346FCZZ		AC		C	Platen arm R		
33	LX-WZ0042FCZ1		AA		C	Washer		
34	NBLTH0465FCZZ		AD		B	Platen drive belt		
35	LPLTM6637FCZZ		AK		C	Reading plate		
	 LPLTM6637FCZ1	3	AK		C	Reading plate [Form change]		06/04 R/C
36	PSHEP5433FCZZ		AC		C	Reading plate sheet		
37	MARMP0345FCZZ		AC		C	Platen arm F		
38	GCAB-1131FCZZ		AK		D	PS cabinet		
39	XHBS740P08000		AA		C	Screw(3x8)		
40	MSPRD3476FCZZ		AA		C	PS follower earth spring		
41	XEBS730P08000		AC		C	Screw(3x8)		
42	LPLTM6638FCZZ		AH		C	PS follower reinforce plate		
	 LPLTM6638FCZ1	1	AH		C	PS follower reinforce plate		08/05 mid
43	MSPRC3475FCZZ		AC		C	Reading plate spring		
44	MSPRT3312FCZZ		AD		C	PS pressure spring		
45	NROLP1477FCZZ		AH		C	PS follower roller		
46	NSFTZ2973FCZZ		AF		C	PS follower roller shaft A		
47	NROLP1487FCZZ		AK		C	PS follower roller B		
48	NSFTZ2974FCZZ		AF		C	PS follower roller shaft B		
49	PGiDM2165FCZZ		AK		C	PS roller outside PG		
50	PSHEP5404FCZZ		AC		C	PT guide sheet 2		
	 PSHEP5404FCZ1	3	AC		C	PT guide sheet 2 [Material change]		06/04 R/C
51	MSPRC2643FCZZ		AB		C	Lift up actuator spring		
52	PSHEP5403FCZZ		AC		C	PT guide sheet 1		
	 PSHEP5403FCZ1	3	AC		C	PT guide sheet 1 [Material change]		06/04 R/C
53	LX-BZ1025FCZZ		AC		C	Step screw(φ3-4)		
54	MSPRT3581FCZZ		AB		C	Platen earth spring		
101	 PSHEZ6395FCZZ	-	AC	N	C	PS clutch damper sheet	CCE950	11/08

65 DSPF Lower transport unit 1[MX-3501FN/N,MX-4501FN/N]

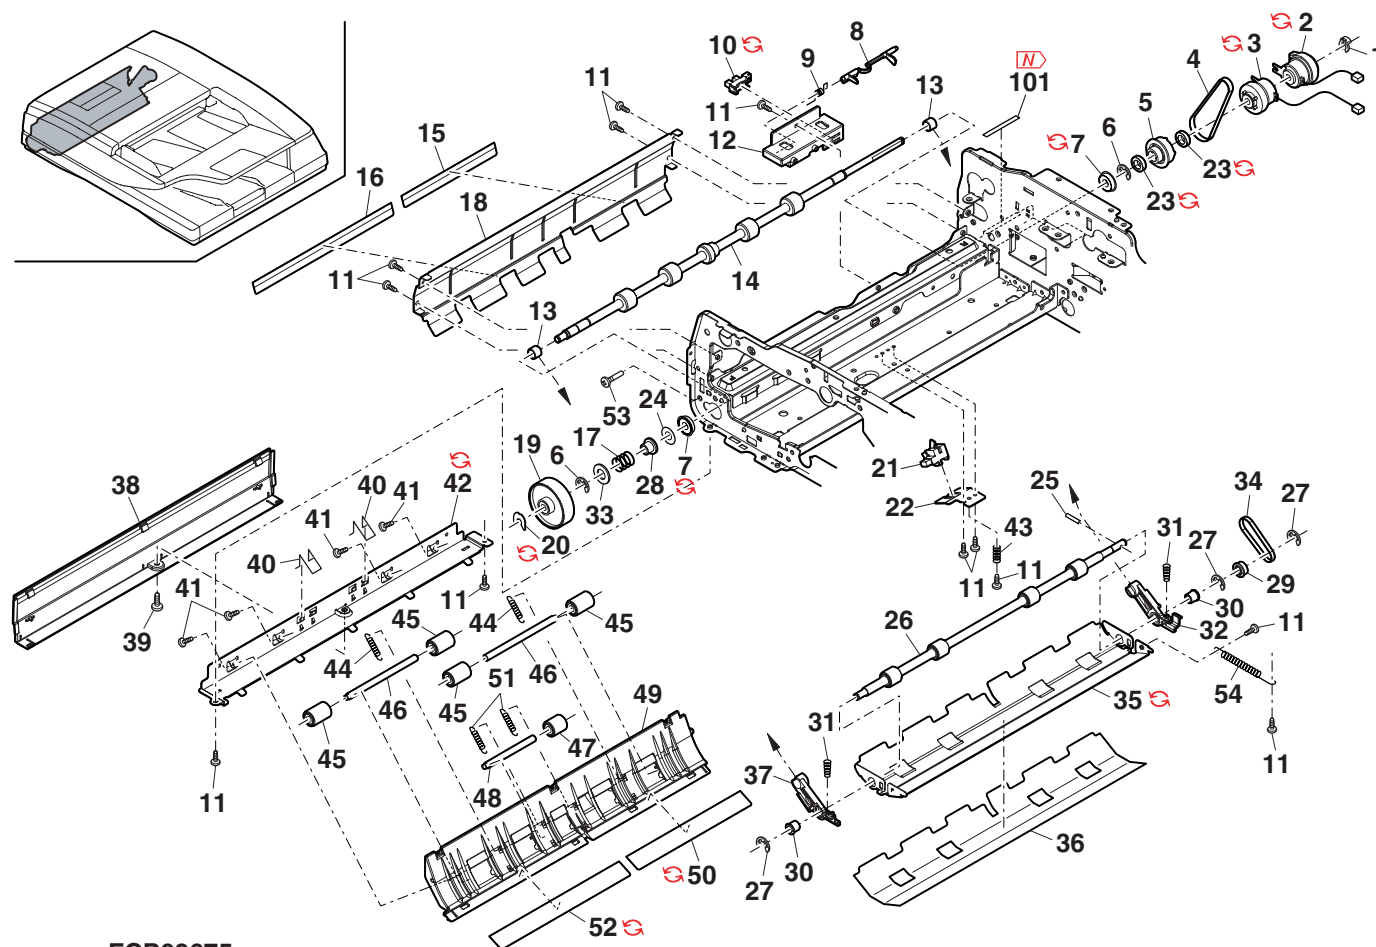


FCP09675

66 DSPF Lower transport unit 2[MX-3501FN/N,MX-4501FN/N]

[illegible]


66 DSPF Lower transport unit 2[MX-3501FN/N,MX-4501FN/N]

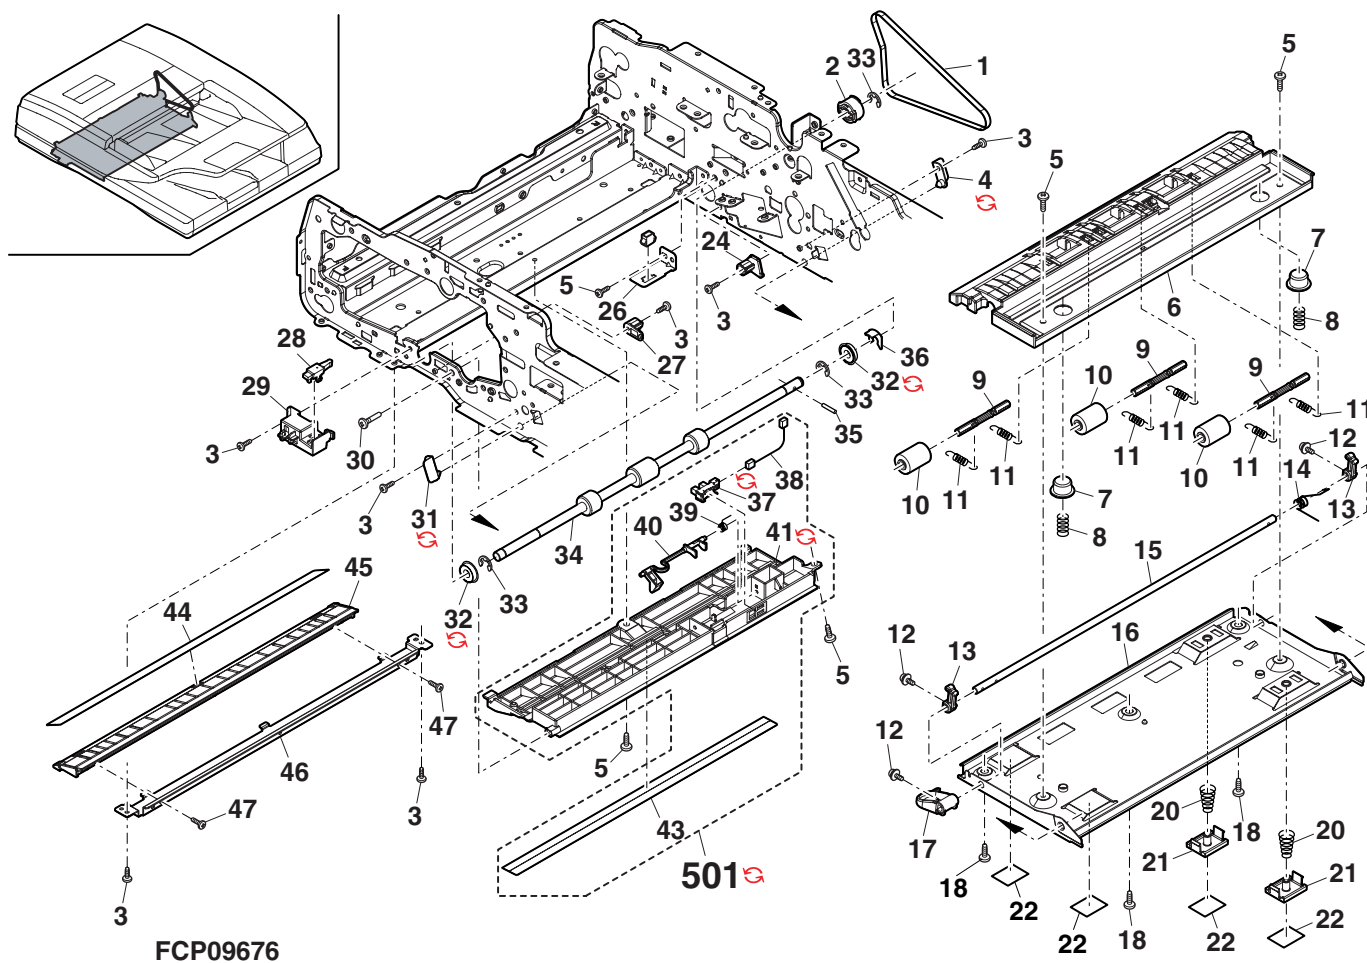

67 DSPF Reduction optical unit[MX-3501FN/N,MX-4501FN/N]

[illegible]


67 DSPF Reduction optical unit[MX-3501FN/N,MX-4501FN/N]

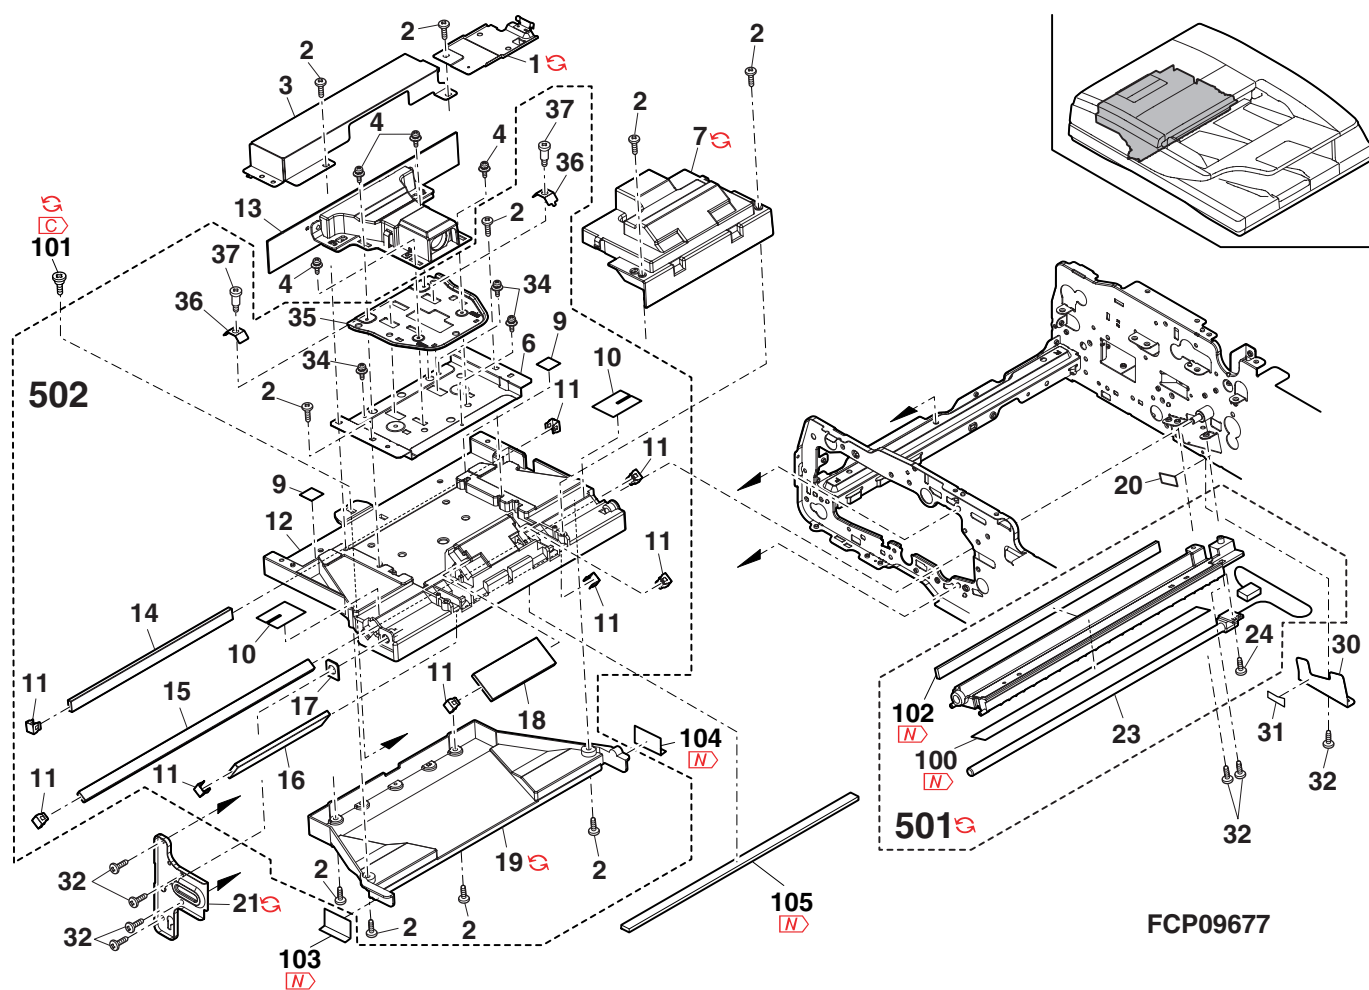

68 DSPF Delivery unit[MX-3501FN/N,MX-4501FN/N]

[illegible]

68 DSPF Delivery unit[MX-3501FN/N,MX-4501FN/N]

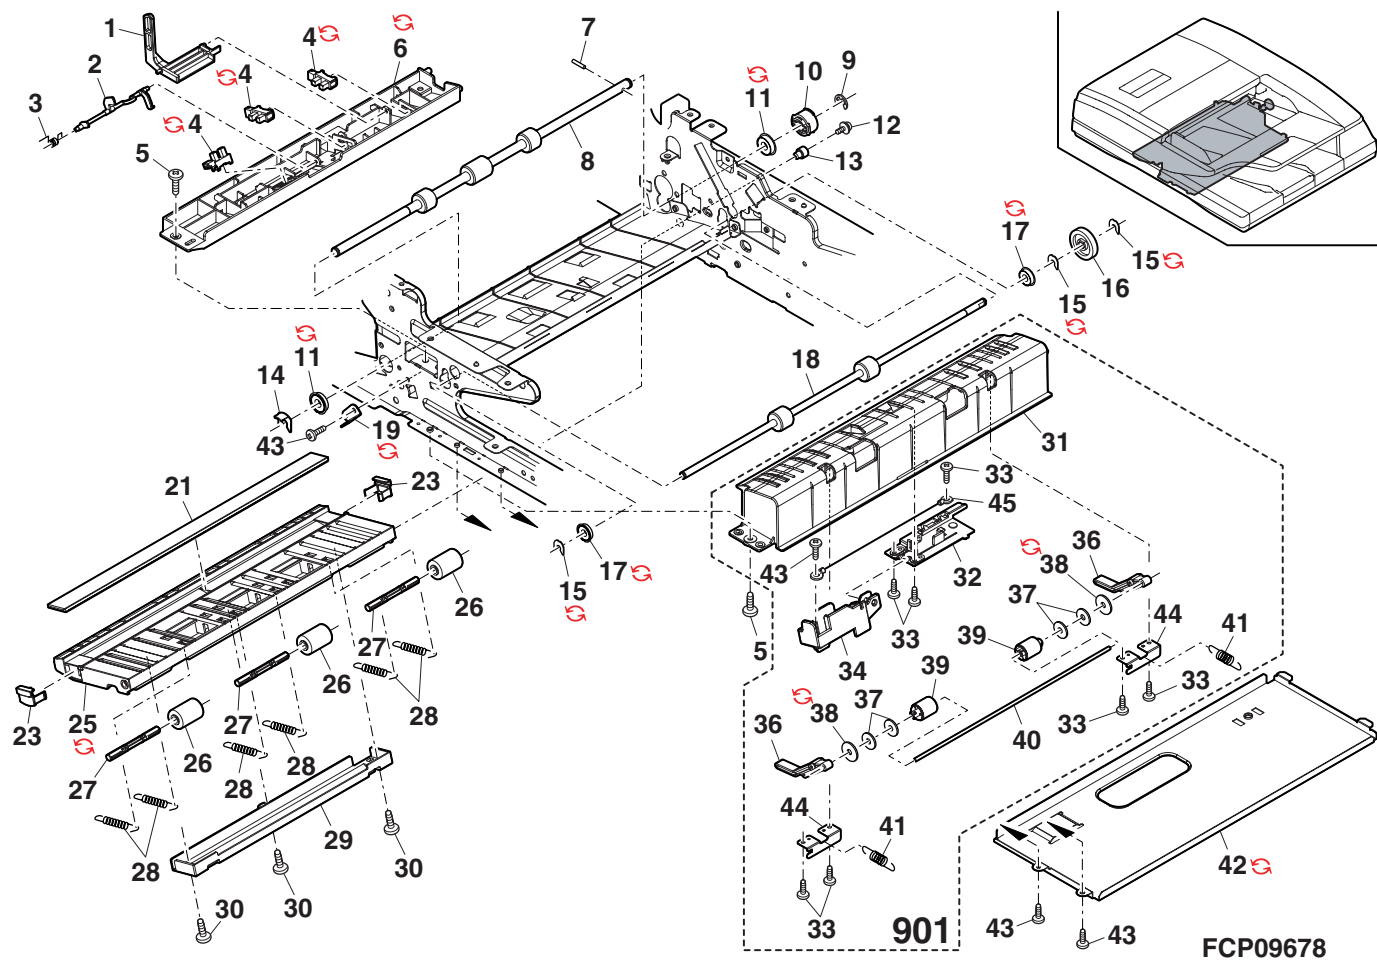


FCP09678

69 DSPF Drive unit[MX-3501FN/N,MX-4501FN/N]


[illegible]

69 DSPF Drive unit[MX-3501FN/N,MX-4501FN/N]

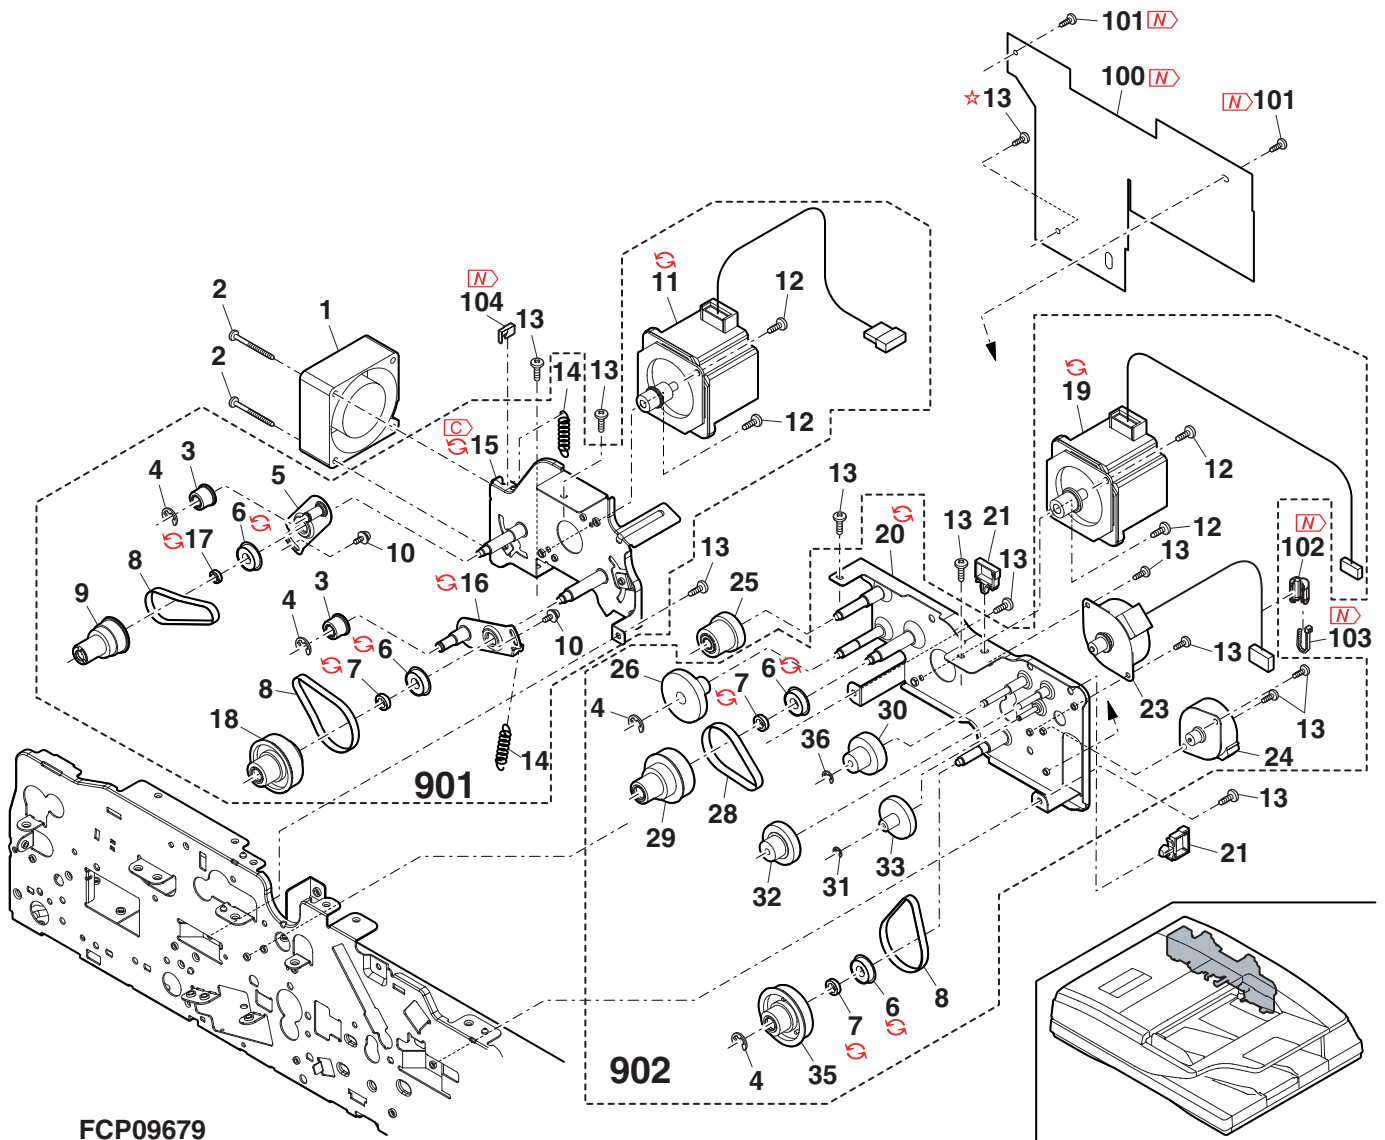

- 101-1 -


70 DSPF Frame section[MX-3501FN/N,MX-4501FN/N]

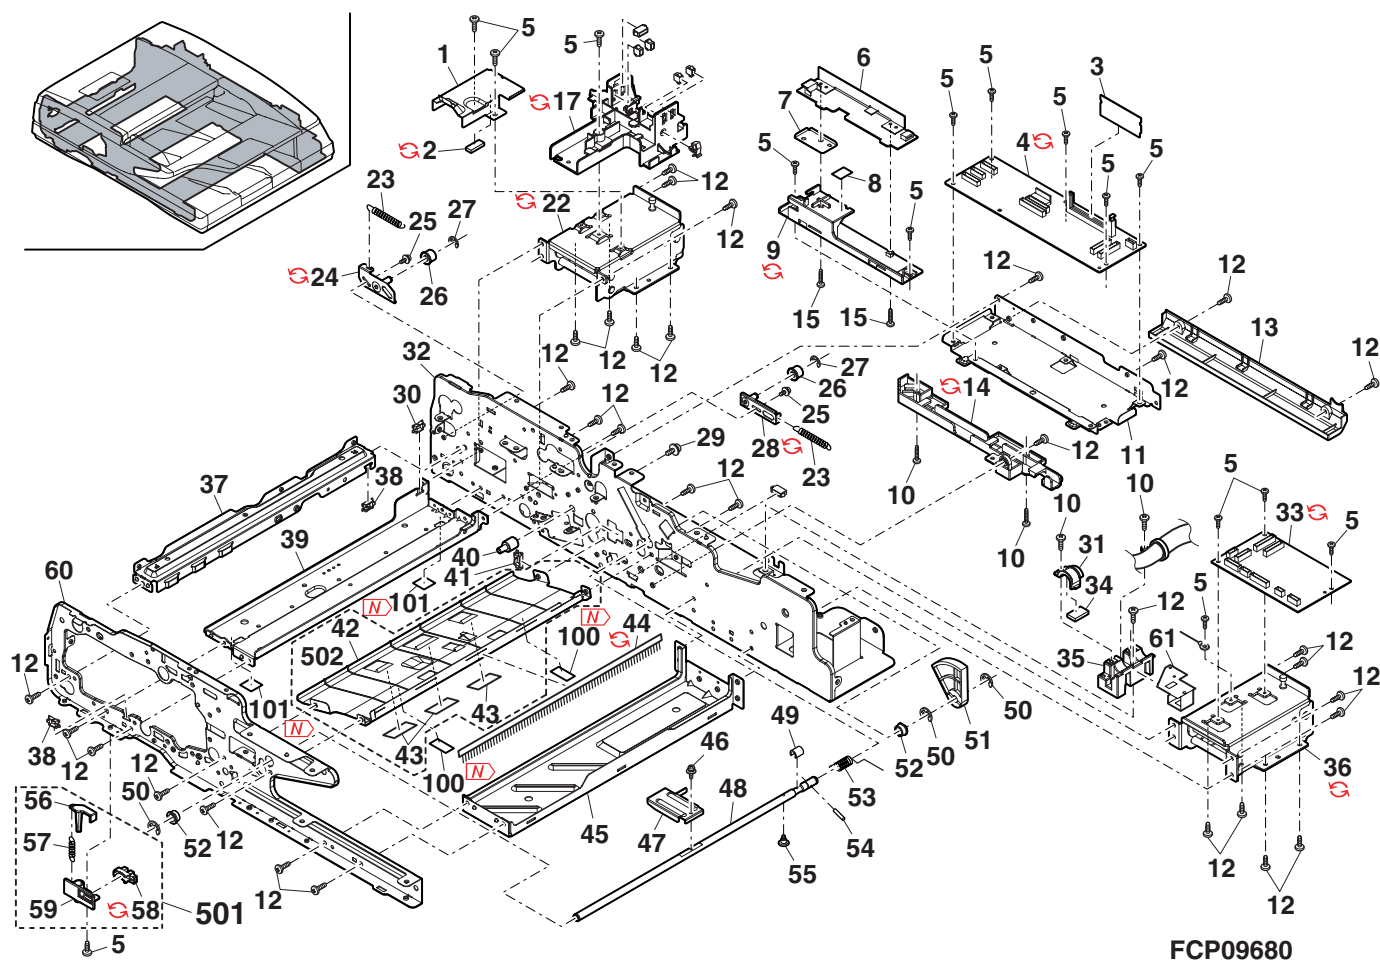

71 DSPF Wiring section[MX-3501FN/N,MX-4501FN/N]

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	DHAi-3807FCZ1		AQ	N	C	Clutch interface harness		
	DHAi-3811FCZ3		BF	N	C	DSPF interface harness		
2	DHAi-3986FCPZ	6	BD		C	DSPF interface harness [EMI countermeasure][South Africa]		06/09
	DHAi-3986FCP1	-	BD		C	DSPF interface harness [Margin up][Taiwan,South Africa]		06/11
3	DHAi-3808FCZ1		AN	N	C	Control sensor harness		
	DHAi-3802FCZ2		BG	N	C	DSPF CCD harness		
4	DHAi-3802FCZ3	1	BE		C	DSPF CCD harness		07/07
5	DHAi-3810FCZZ		AQ	N	C	Driver interface harness		
6	DHAi-3812FCZZ		AC	N	C	DSPF lamp FFC		
7	DHAi-3806FCZ2		AH	N	C	DSPF delivery sensor harness		
8	RCORF0021QSZZ		AK		C	Core		
	RCORF0021QSZZ	-	AK		C	Core [To No.100][South Africa]		06/09
100	RCORF0049FCZZ	-	AF		C	Core [From No.8][South Africa]		06/09
101	RCORF0051FCZZ	-	AH		C	Core [South Africa]		06/09
102	LBNDJ0084FCPZ	-	AC		C	Band [South Africa]		06/09

71 DSPF Wiring section[MX-3501FN/N,MX-4501FN/N]

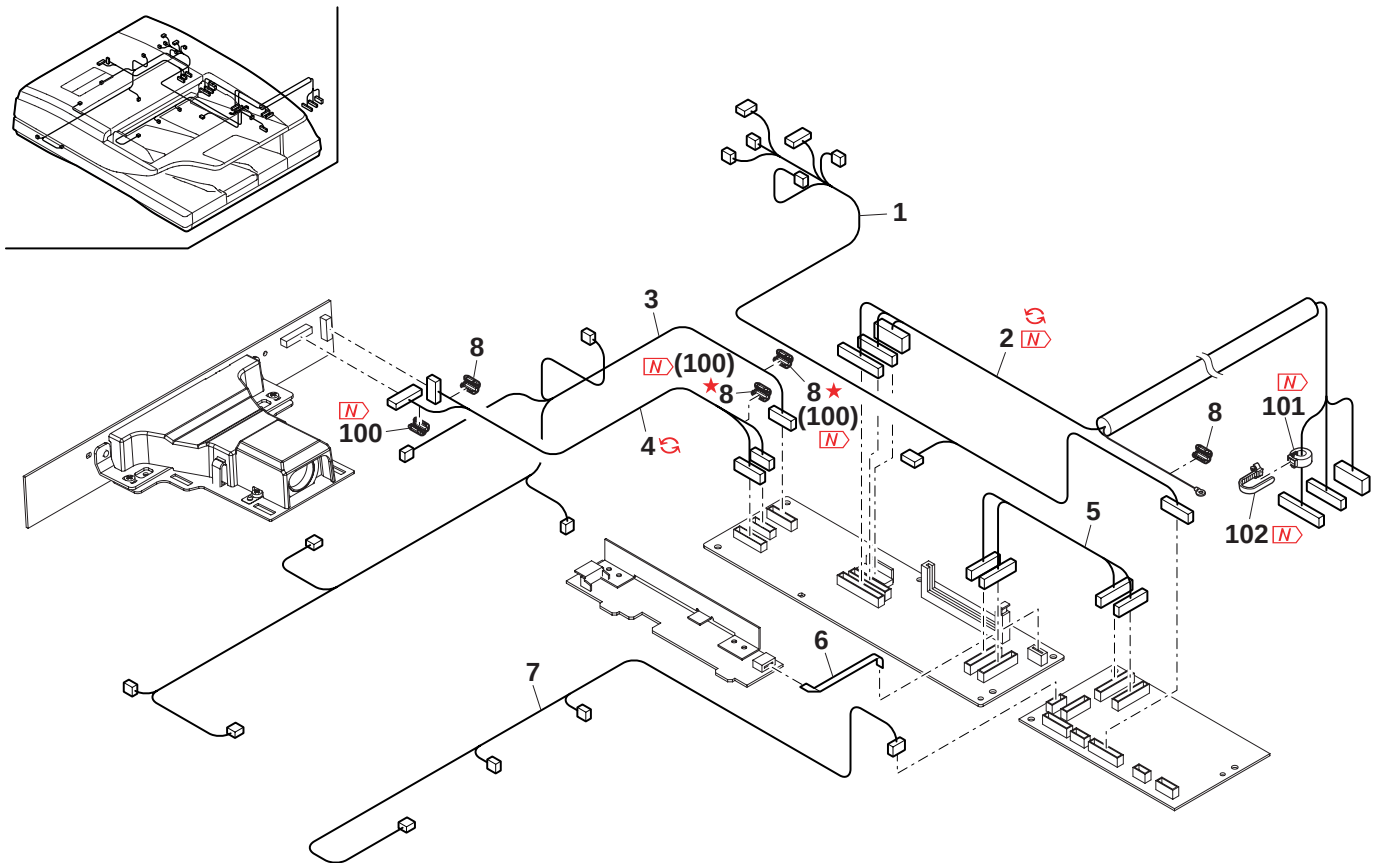


FCP09681

72 Packing material & Accessories

NO.	PARTS CODE	Inter-change	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION	TR No.	Effective time
1	SPAKA6765FCZ1		BN		D	Top case		
2	SPAKA6832FCZZ		BP	N	D	Top add L [MX-3500FN/N,MX-4500FN/N]		
	SPAKA7092FCZZ	3	BW		D	Top add L [Specification change][MX-3500FN/N,MX-4500FN/N]		06/06 mid
3	SPAKA6834FCZZ		BP	N	D	Top add L [MX-3501FN/N,MX-4501FN/N]		
	SPAKA7094FCZZ	3	BW		D	Top add L [Specification change][MX-3501FN/N,MX-4501FN/N]		06/06 mid
3	SPAKA6833FCZZ		BP	N	D	Top add R [MX-3500FN/N,MX-4500FN/N]		
	SPAKA7093FCZZ	3	BW		D	Top add R [Specification change][MX-3500FN/N,MX-4500FN/N]		06/06 mid
3	SPAKA6835FCZZ		BP	N	D	Top add R [MX-3501FN/N,MX-4501FN/N]		
	SPAKA7095FCZZ	3	BW		D	Top add R [Specification change][MX-3501FN/N,MX-4501FN/N]		06/06 mid
4	SPAKC6830DSZZ		BU	N	D	Packing case [MX-3500FN](Japan)		
	SPAKC6830DS11		BU	N	D	Packing case [MX-3501FN](Japan)		
	SPAKC6830DS12		BU	N	D	Packing case [MX-4500FN](Japan)		
	SPAKC6830DS13		BU	N	D	Packing case [MX-4501FN](Japan)		
	SPAKC6830DS14		BU	N	D	Packing case [MX-3500N](Japan)		
	SPAKC6830DS15		BU	N	D	Packing case [MX-3501N](Japan)		
	SPAKC6830DS16		BU	N	D	Packing case [MX-4500N](Japan)		
	SPAKC6830DS17		BU	N	D	Packing case [MX-4501N](Japan)		
5	SPAKA6771FCZZ		BN		D	Reinforce angle		
6	SPAKA0616QSZZ		AA		D	Fixing block		
7	SPAKA7143FCZZ	-	AH		D	Fixing block		06/08
8	SPAKA6800FCZ1		CD	N	D	Bottom case		
9	SPAKA6775FCZ1		BQ		D	Skid (Japan)		
9	LX-BZ0787FCPZ		AD		C	2nd,3rd mirror lock screw		
10	LX-WZ0326FCPZ		AC		C	Washer		
11	TCADZ1178FCZZ		AB		D	Caution card		
12	SPAKA6075FCZZ		AE		D	Protection sheet [Except MX-2300G,MX-2700G]		
13	QACCJ6413QCPA		AY		B	AC cord (Japan)		
	QACCD7713QCPZ		AT		B	AC cord (U.S.A,Canada,Saudi Arabia)		
	QACCB7623QCZZ		AQ		B	AC cord (U.Kingdom,Yemen,Bahrain,Kuwait,Oman)		
	QACCB7623QCPZ	3	BB		B	AC cord [Unleaded correspondence] (U.Kingdom,Yemen,Bahrain,Kuwait,Oman)		06/02
	QACCLR624QCPZ		BA		B	AC cord (Australia,New zealand)		
	QACCLR627QCPZ	1	AV		B	AC cord (Australia,New zealand)		10/06
	QACJ6912QCPZ		AV		B	AC cord (Philippines)		
	QACCJR911QCPZ	1	AV	N	B	AC cord (Philippines)		07/12
	QACCZR626QCPZ	4	BB		B	AC cord [Specification change](Philippines)		08/04
	QACCB9521QCZZ		AW		B	AC cord (Singapore,Maraysia,Hong Kong,India,South Africa)		
	QACCVR621QCPZ		AQ		B	AC cord (Europe except U.Kingdom,Algeria,Tunisia,West Africa, Lebanon,Iran,Morocco,Egypt,Indonesia,Thailand)		
	QACCZR941QCPZ	3	BB		B	AC cord [Specification change](Thailand)		08/06
	QACCZR727QCPZ	-	AZ	N	B	AC cord (Brazil)		09/07
14	SPAKA6847FCZZ		BW		D	Transfer unit fixing add		
15	LSOU-0179FCP5		AV		D	Delivery tray [MX-3501FN,MX-4501FN]		
	LSOU-0177FCP5		AQ		D	Delivery extension tray [MX-3501FN,MX-4501FN]		
16	SPAKA6781FCZZ		BM		D	Delivery tray spacer [MX-3501FN,MX-4501FN]		
17	SPAKC6777FCZZ		BN		D	TN packing case		
18	SPAKA6849FCZZ		AZ		D	Waste toner bottle protect add (Japan)		
20	SSAKA5004CCZZ		AA		D	Vinyl bag (Japan)		
21	LHLDW1226FCZZ		AB		C	Turn fastener		
22	TCADZ1275FCZZ		AB		D	Cassette caution card		
23	TCADZ1807FCZZ	6	AC		D	Cassette caution card [Sake in work inclination]		06/08
24	SPAKA6774FCZZ		BM		D	Scanner reinforce add		
25	SPAKA6848FCZZ		BW		D	Waste toner bottle fixing add (Japan)		
25	LFIX-0627FCZ1		AD		C	Paper fixing (Japan)		
	LFIX-0646FCZZ		AF	N	C	Paper fixer HCT (Japan)		
26	SPAKA6819FCZZ		BP	N	D	Waste toner bottle sleeve (Except Japan)		
27	CYOK-0060DS52		AZ		A	Waste toner bottle		
	CYOK-0060DS54	3	AZ		A	Waste toner bottle	CCE535	07/11 mid
28	SSAKZ0034FCZZ		BQ		D	Vinyl bag A		
29	PCOVP2022FCZZ		AP		D	Manual cover (Japan)		
30	LBND0075FCZZ		AB		C	Band (Australia,New zealand)		
	LBND0075FCZZ	-	AB		C	Band (Thailand)		08/06
31	SSAKA3001CCZZ		AA		D	Vinyl bag(140x360)		
32	SSAKA5003CCZZ	-	AA		D	Vinyl bag(140x260) (Thailand)		08/06
	SSAKZ0037FCZZ	-	BU		D	Vinyl bag(200x400) [Missing parts code]		1st lot
33	SPAKA6557FCZZ		AD		D	DSPF tray fixer [MX-3501FN/N,MX-4501FN/N]		
34	MLEVP0960FCZZ		AC		C	Full detect actuator [MX-3501FN,MX-4501FN]		
35	SSAKA2011KCZZ		AA		D	Vinyl bag(60x100) [MX-3501FN,MX-4501FN]		
38	SPAKA6988FCZZ		BP	N	D	Paper fixing protect add (Japan)		
100	CCADZ1561FC01		AK		D	Maintenance card (Japan)		
	CCADZ1518FC01		AB		D	Maintenance card (Except Japan)		
101	DHAi-3900FCZZ		AK		C	Line cable [MX-3500FN,MX-3501FN,MX-4500FN,MX-4501FN]		
	QCNWG0013QSZZ	1	AF		C	Line cable [MX-3500FN,MX-3501FN,MX-4500FN,MX-4501FN]		06/03
102	RCORF0046FCZZ		AH		C	Core [MX-3500FN,MX-3501FN,MX-4500FN,MX-4501FN]		
103	SSAKA2440QCZZ		AB		D	Vinyl bag(280x410) [MX-3500FN,MX-3501FN,MX-4500FN,MX-4501FN]		
104	SSAKH3013CCZZ		AA		D	Vinyl bag(120x220) [MX-3500FN,MX-3501FN,MX-4500FN,MX-4501FN]		
106	TCADS1693FCZZ		AA		D	Installation card [MX-3500FN,MX-3501FN,MX-4500FN,MX-4501FN]		
	TCADS1511FCZZ	-	AC		D	Installation card (Australia,New zealand)		06/01

- 104 -

72 Packing material & Accessories

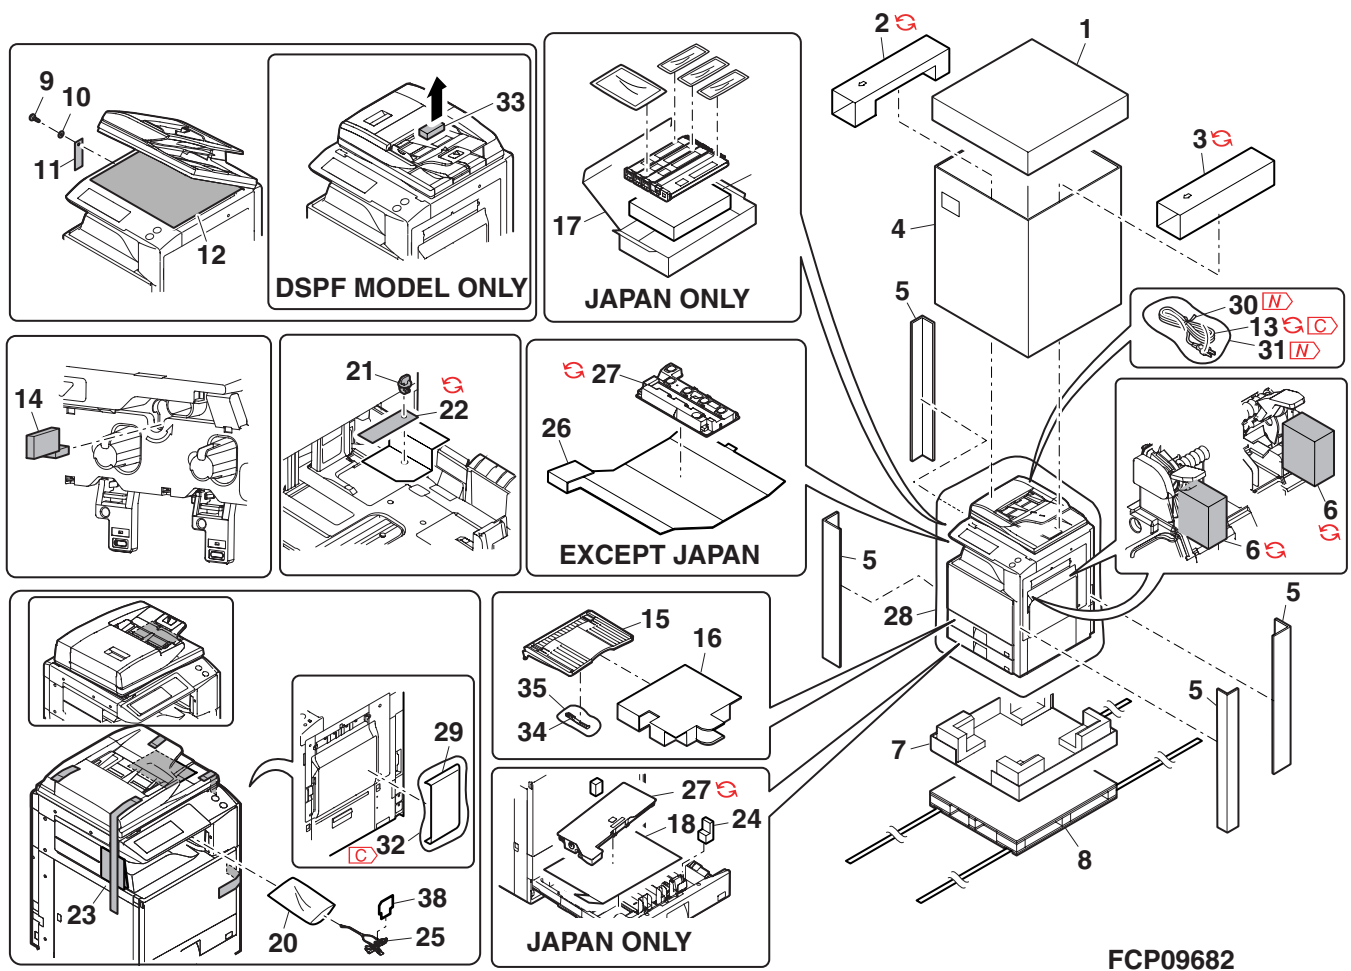

SHARP

COPYRIGHT © 2011 BY SHARP CORPORATION

All rights reserved.

Printed in Japan.

No part of this publication may be reproduced,
stored in a retrieval system, or transmitted.

In any form or by any means,
electronic, mechanical, photocopying, recording, or otherwise,
without prior written permission of the publisher.

SHARP CORPORATION
Document Solutions Group
CS Promotion Center
Yamatokoriyama, Nara 639-1186, Japan
2011 October Printed in Japan ⓘ